

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331722-930

Luminaire Tested: **S122RDIP-S865D725U930-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331722-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIP-S865D725U930-4F0-1E-UDD-F4  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 725 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4767.9 lumens  
Efficiency: N/A  
Efficacy: 87.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 54.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331722-930

CATALOG NUMBER: S122RDIP-S865D725U930-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

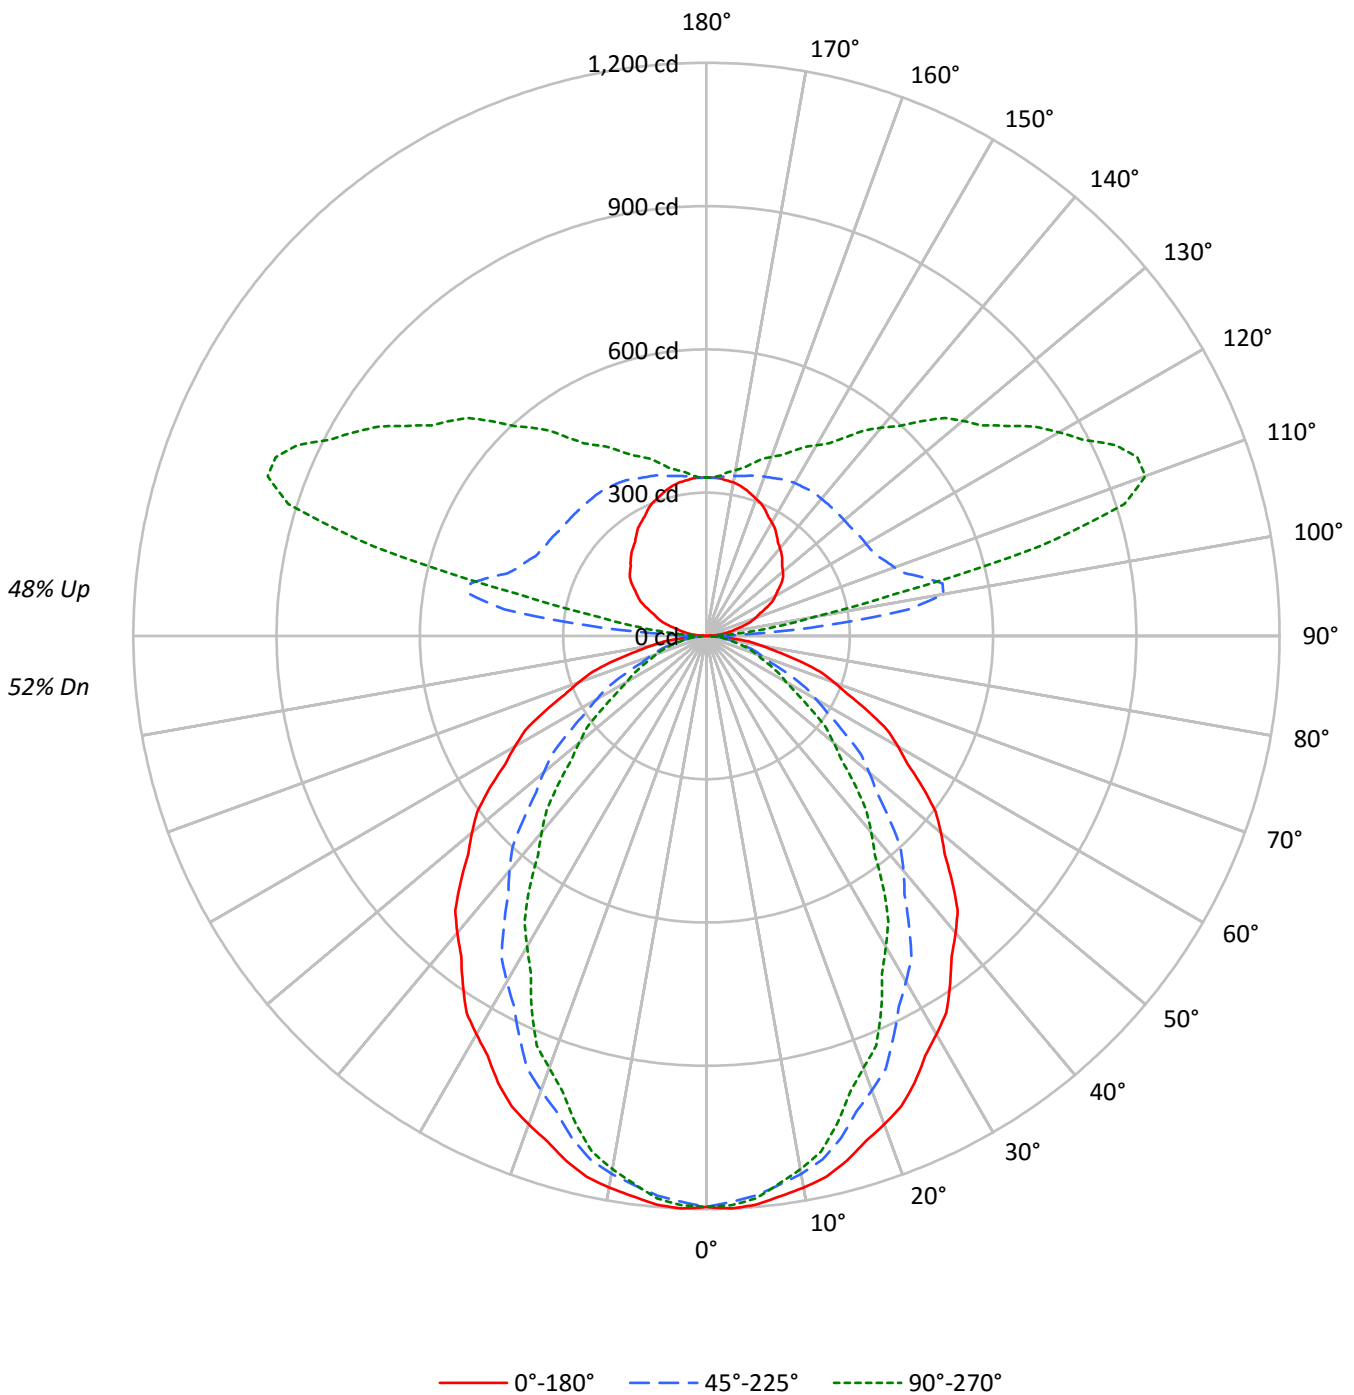



TEST NUMBER: P331722-930

CATALOG NUMBER: S122RDIP-S865D725U930-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58
1	99	94	91	87	91	88	84	81	75	72	70	63	61	60	52	51	50
2	90	83	77	72	83	77	72	68	66	62	59	56	53	51	46	44	43
3	83	73	66	61	76	68	62	57	59	54	50	50	46	43	41	39	37
4	76	65	58	52	70	61	54	49	52	47	43	45	41	38	37	34	32
5	70	58	51	45	64	55	48	42	47	42	38	40	36	33	34	31	28
6	64	53	45	39	60	49	42	37	43	37	33	37	32	29	31	28	25
7	60	48	40	34	55	45	38	33	39	33	29	33	29	26	28	25	23
8	56	43	36	31	51	41	34	29	36	30	26	31	26	23	26	23	20
9	52	40	32	27	48	37	31	26	33	27	24	28	24	21	24	21	19
10	48	37	30	25	45	34	28	24	30	25	21	26	22	19	22	19	17

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	19302	19302	19302
5°	19376	19060	19164
10°	19226	18748	18589
15°	19005	18191	17668
20°	18699	17399	16526
25°	18387	16498	15419
30°	17952	15571	13998
35°	17527	14564	12751
40°	17102	13523	11310
45°	16600	12353	10003
50°	16088	11170	8721
55°	15564	9897	7491
60°	14951	8561	6219
65°	14258	7194	5662
70°	13430	5925	5207
75°	12420	5402	4860
80°	10962	4826	4426
85°	8633	3798	3798



TEST NUMBER: P331722-930

CATALOG NUMBER: S122RDIP-S865D725U930-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	111.9	2.3
10°-20°	307.2	6.4
20°-30°	431.5	9.0
30°-40°	470.5	9.9
40°-50°	432.6	9.1
50°-60°	339.7	7.1
60°-70°	221.5	4.6
70°-80°	114.2	2.4
80°-90°	32.6	0.7
90°-100°	132.5	2.8
100°-110°	449.7	9.4
110°-120°	477.7	10.0
120°-130°	393.2	8.2
130°-140°	315.8	6.6
140°-150°	238.6	5.0
150°-160°	167.7	3.5
160°-170°	98.7	2.1
170°-180°	32.1	0.7
0°-30°	850.6	17.8
0°-40°	1321.1	27.7
0°-60°	2093.4	43.9
0°-90°	2461.7	51.6
90°-120°	1059.9	22.2
90°-150°	2007.6	42.1
90°-180°	2306.0	48.4
0°-180°	4767.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1196	1196	1196	1196	1196	
5°	1196	1190	1176	1185	1182	113
15°	1137	1124	1088	1068	1057	320
25°	1032	995	926	883	866	474
35°	889	832	739	673	647	556
45°	727	652	541	467	438	561
55°	553	467	352	289	266	494
65°	373	285	188	153	148	370
75°	199	126	87	79	78	211
85°	47	25	20	20	20	55
90°	1	9	22	21	21	3
95°	22	55	250	94	73	24
105°	78	117	472	844	718	83
115°	137	173	395	815	945	136
125°	191	226	380	661	767	170
135°	224	268	375	555	635	173
145°	256	294	374	464	507	161
155°	291	314	363	410	426	134
165°	317	327	347	368	374	89
175°	331	331	334	338	337	31
180°	331	331	331	331	331	



TEST NUMBER: P331722-930

CATALOG NUMBER: S122RDIP-S865D725U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5
2.5°	1199.8	1198.8	1197.8	1196.9	1196.0	1194.4	1192.3	1190.2	1188.1	1185.9	1187.9
5°	1195.5	1194.3	1193.0	1191.8	1190.7	1188.5	1185.4	1182.3	1179.1	1176.0	1178.1
7.5°	1183.1	1181.6	1180.1	1178.7	1177.1	1174.6	1170.9	1167.3	1163.6	1159.9	1160.6
10°	1172.7	1171.0	1169.4	1167.7	1166.0	1162.8	1158.0	1153.2	1148.3	1143.5	1142.8
12.5°	1159.8	1157.6	1155.6	1153.6	1151.4	1147.4	1141.2	1135.1	1128.9	1122.7	1121.4
15°	1137.0	1134.4	1131.7	1129.1	1126.4	1121.0	1112.9	1104.7	1096.5	1088.3	1083.8
17.5°	1109.1	1105.1	1101.1	1097.0	1093.0	1085.7	1075.2	1064.7	1054.3	1043.7	1038.4
20°	1088.3	1083.5	1078.7	1073.9	1069.1	1060.7	1048.6	1036.7	1024.7	1012.6	1006.6
22.5°	1065.8	1060.5	1055.1	1049.7	1044.3	1034.9	1021.2	1007.7	994.2	980.6	972.8
25°	1032.1	1024.4	1016.7	1009.0	1001.4	989.5	973.6	957.8	941.9	926.1	916.2
27.5°	991.4	983.0	974.7	966.3	958.0	944.9	926.9	909.1	891.1	873.3	861.8
30°	962.9	953.7	944.6	935.5	926.3	912.2	892.9	873.7	854.4	835.2	823.0
32.5°	935.1	924.5	913.8	903.1	892.4	877.3	857.7	838.0	818.5	798.8	784.9
35°	889.2	877.0	864.8	852.5	840.2	823.5	802.3	781.2	760.1	738.9	723.7
37.5°	843.4	830.0	816.5	803.0	789.5	771.5	749.0	726.4	703.9	681.3	664.6
40°	811.4	797.0	782.5	768.1	753.7	734.8	711.5	688.2	664.9	641.6	624.4
42.5°	778.5	763.3	748.1	733.0	717.7	698.1	674.0	649.9	625.8	601.7	584.1
45°	727.0	710.9	694.8	678.7	662.6	641.9	616.7	591.4	566.1	541.0	523.8
47.5°	676.8	659.7	642.7	625.6	608.5	586.9	560.9	534.8	508.7	482.7	465.8
50°	640.5	623.4	606.3	589.2	572.2	550.4	524.0	497.5	471.1	444.7	428.0
52.5°	605.0	587.1	569.3	551.5	533.6	511.8	485.9	460.0	434.1	408.3	392.2
55°	552.9	534.1	515.4	496.6	477.8	455.4	429.5	403.5	377.6	351.6	337.2
57.5°	499.4	480.1	460.9	441.6	422.5	400.4	375.4	350.4	325.5	300.5	287.3
60°	463.0	443.8	424.6	405.4	386.1	364.1	339.3	314.5	289.8	265.1	252.8
62.5°	427.5	408.3	389.1	369.8	350.6	329.2	305.6	282.0	258.4	234.7	223.1
65°	373.2	353.8	334.3	314.8	295.4	274.8	253.2	231.5	209.9	188.3	180.1
67.5°	320.9	301.6	282.3	262.9	243.5	224.1	204.7	185.2	165.8	146.3	142.5
70°	284.5	265.8	247.0	228.3	209.5	191.8	175.3	158.7	142.1	125.5	123.1
72.5°	249.9	232.0	213.9	196.0	178.0	162.3	149.0	135.7	122.4	109.1	107.0
75°	199.1	182.2	165.4	148.5	131.8	119.3	111.0	102.9	94.7	86.6	84.9
77.5°	149.1	134.3	119.5	104.8	90.0	80.7	76.7	72.8	68.9	64.9	63.9
80°	117.9	105.7	93.4	81.1	68.9	61.6	59.1	56.7	54.3	51.9	51.0
82.5°	89.4	79.8	70.2	60.7	51.1	45.5	43.9	42.2	40.6	39.0	38.4
85°	46.6	41.5	36.4	31.4	26.3	23.5	22.7	22.0	21.3	20.5	20.5
87.5°	13.9	12.8	11.8	10.5	9.2	8.8	9.5	10.4	11.2	11.3	10.9
90°	0.7	2.5	5.1	6.4	7.7	9.5	12.7	17.2	21.0	21.7	21.0
92.5°	7.7	11.3	15.8	18.6	22.9	28.9	43.4	63.6	81.7	82.8	70.0
95°	22.3	24.9	31.2	36.9	47.1	62.5	91.8	147.2	221.2	249.8	218.6
97.5°	36.4	39.8	46.6	55.2	66.9	84.2	121.1	198.4	321.2	426.5	447.4
100°	49.1	51.0	56.7	66.9	79.7	97.5	131.3	209.0	346.7	503.4	595.3
102.5°	60.8	62.2	67.9	78.1	91.4	109.3	140.5	209.5	337.0	506.1	650.3
105°	77.8	80.3	84.8	94.3	108.4	126.2	156.1	212.9	318.0	472.2	641.8
107.5°	96.1	98.2	102.5	111.3	125.1	143.2	172.2	221.7	308.6	436.0	585.8
110°	108.4	110.9	114.7	123.0	136.4	154.9	182.9	228.8	306.6	418.7	550.7



TEST NUMBER: P331722-930

CATALOG NUMBER: S122RDIP-S865D725U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	119.5	122.1	126.5	134.2	147.1	166.1	193.1	236.4	307.0	407.5	526.2
115°	137.1	140.2	144.1	151.6	164.4	181.6	209.0	247.9	309.7	395.2	495.9
117.5°	155.2	157.7	161.5	168.3	180.5	198.4	223.7	260.2	314.3	389.1	476.7
120°	166.3	168.9	172.7	178.5	191.2	209.0	233.9	268.3	317.4	385.6	466.5
122.5°	177.1	179.1	182.9	189.1	201.9	220.3	243.6	275.5	321.0	383.5	457.9
125°	191.2	193.1	196.9	204.6	217.4	235.1	258.1	286.8	326.3	379.8	445.5
127.5°	202.4	205.0	210.3	218.7	231.0	249.3	271.7	297.3	331.8	377.6	434.0
130°	209.0	211.6	217.9	226.9	239.6	257.5	279.8	304.0	335.9	376.7	426.4
132.5°	215.2	218.3	225.1	234.6	247.8	265.6	286.9	310.6	340.0	376.2	420.3
135°	224.4	226.9	234.6	244.1	258.8	276.6	297.0	319.3	344.8	375.4	411.7
137.5°	233.0	236.0	243.7	253.9	268.5	285.0	305.2	326.0	349.1	375.3	405.7
140°	239.6	242.1	249.8	260.0	274.0	290.7	309.7	329.5	351.1	374.7	402.2
142.5°	246.2	248.3	255.4	265.6	279.2	294.7	313.3	332.6	352.7	374.7	398.6
145°	256.2	258.8	265.1	274.7	287.4	301.4	318.7	336.5	354.3	373.5	393.9
147.5°	266.9	268.8	274.9	283.7	294.3	306.8	323.0	338.7	354.9	371.2	389.1
150°	274.0	276.0	281.0	289.3	298.9	310.4	325.1	339.7	354.3	369.7	384.9
152.5°	281.2	282.1	287.1	294.4	303.5	314.0	327.1	340.2	353.4	367.1	381.4
155°	291.2	291.9	295.7	302.7	309.7	319.3	330.1	341.0	351.8	362.6	374.7
157.5°	299.7	300.3	303.4	309.5	315.1	323.1	332.3	341.0	348.9	358.1	368.5
160°	305.2	305.9	308.4	313.6	318.7	325.6	333.3	341.0	347.3	355.0	363.9
162.5°	310.9	310.5	313.1	317.2	321.7	327.2	333.9	340.5	345.8	352.5	359.8
165°	317.4	316.7	318.0	321.9	325.1	328.9	334.6	339.1	342.9	347.3	353.1
167.5°	322.8	322.0	323.1	325.5	327.8	330.3	334.4	338.2	340.0	342.9	346.4
170°	326.3	325.1	325.6	327.6	328.9	330.8	333.9	337.1	338.4	340.3	342.9
172.5°	328.3	327.6	327.2	329.1	329.9	331.3	333.5	335.6	336.4	337.3	339.3
175°	330.8	330.1	329.5	330.8	330.8	331.4	332.6	333.9	333.3	333.9	334.6
177.5°	331.9	330.9	330.4	331.4	331.4	331.4	331.9	333.0	331.9	331.4	331.9
180°	331.4	331.4	331.4	331.4	331.4	331.4	331.4	331.4	331.4	331.4	331.4



TEST NUMBER: P331722-930

CATALOG NUMBER: S122RDIP-S865D725U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5
2.5°	1189.8	1191.7	1193.6	1194.4	1194.0	1193.6	1193.3	1192.9
5°	1180.3	1182.4	1184.6	1185.4	1184.6	1183.9	1183.2	1182.4
7.5°	1161.2	1161.8	1162.5	1162.1	1160.9	1159.7	1158.4	1157.2
10°	1142.1	1141.3	1140.6	1139.5	1138.1	1136.7	1135.2	1133.8
12.5°	1120.1	1118.8	1117.5	1115.7	1113.3	1110.9	1108.5	1106.1
15°	1079.2	1074.6	1070.1	1066.6	1064.2	1061.8	1059.4	1057.0
17.5°	1032.9	1027.4	1022.1	1017.2	1013.1	1009.0	1004.9	1000.7
20°	1000.6	994.6	988.6	982.9	977.6	972.3	967.0	961.8
22.5°	965.2	957.4	949.7	943.8	939.9	935.9	932.0	928.1
25°	906.4	896.5	886.6	879.9	876.3	872.7	869.1	865.5
27.5°	850.3	838.8	827.3	818.7	813.0	807.2	801.5	795.8
30°	810.7	798.4	786.1	776.7	770.3	763.8	757.3	750.8
32.5°	770.9	756.8	742.9	732.8	726.8	720.6	714.5	708.4
35°	708.6	693.5	678.3	668.1	662.8	657.5	652.2	646.9
37.5°	648.0	631.3	614.7	603.2	597.2	591.1	585.1	579.0
40°	607.4	590.4	573.2	561.6	555.4	549.1	542.8	536.6
42.5°	566.5	548.8	531.2	519.3	513.2	507.2	501.1	495.0
45°	506.8	489.8	472.6	461.2	455.4	449.7	443.9	438.1
47.5°	448.7	431.8	414.8	403.7	398.5	393.2	388.0	382.8
50°	411.5	394.8	378.3	367.5	362.4	357.3	352.3	347.2
52.5°	376.3	360.3	344.2	333.9	329.2	324.6	319.9	315.3
55°	322.8	308.3	293.9	284.4	279.8	275.2	270.7	266.1
57.5°	274.1	260.9	247.7	239.1	235.3	231.4	227.6	223.7
60°	240.5	228.3	216.0	208.0	204.1	200.2	196.4	192.6
62.5°	211.4	199.7	188.0	181.0	178.7	176.4	174.1	171.8
65°	171.9	163.7	155.6	151.1	150.3	149.7	149.0	148.2
67.5°	138.8	135.0	131.3	129.0	128.2	127.4	126.7	126.0
70°	120.7	118.3	115.9	114.2	113.2	112.3	111.3	110.3
72.5°	105.0	103.0	100.9	99.7	99.1	98.5	97.9	97.3
75°	83.2	81.5	79.8	78.8	78.6	78.4	78.1	77.9
77.5°	63.0	62.0	61.1	60.4	60.0	59.6	59.3	58.9
80°	50.0	49.1	48.1	47.6	47.6	47.6	47.6	47.6
82.5°	37.8	37.2	36.6	36.4	36.4	36.4	36.4	36.4
85°	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
87.5°	10.6	10.2	10.3	10.3	10.3	10.3	10.3	10.3
90°	20.4	19.2	20.4	21.0	21.0	21.0	21.0	21.0
92.5°	55.6	47.7	42.3	38.4	37.8	35.8	36.4	35.3
95°	167.0	128.1	101.3	87.3	79.0	73.9	72.0	72.6
97.5°	389.6	318.8	249.8	203.8	173.3	157.7	148.4	143.0
100°	581.9	502.9	415.6	338.4	285.5	258.1	239.6	228.1
102.5°	707.8	690.0	626.1	544.4	486.9	440.1	417.0	401.5
105°	774.4	846.4	854.7	833.6	794.1	754.6	727.2	718.3
107.5°	726.4	834.9	901.2	932.1	937.0	934.8	929.4	917.5
110°	685.1	799.2	880.8	933.0	960.4	972.6	978.3	977.6





TEST NUMBER: P331722-930

CATALOG NUMBER: S122RDIP-S865D725U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	647.4	756.8	844.1	904.0	942.1	962.4	973.2	976.6
115°	601.0	699.1	782.6	848.2	893.5	922.8	939.4	945.2
117.5°	566.1	652.2	728.0	789.5	835.7	866.7	884.1	888.9
120°	548.7	627.8	695.3	753.3	797.9	827.9	846.4	852.7
122.5°	535.0	607.4	671.3	723.7	763.8	793.2	809.7	815.0
125°	514.9	580.6	636.7	684.4	721.5	745.7	761.6	766.7
127.5°	495.2	554.6	607.5	651.6	683.9	706.5	720.3	724.4
130°	482.4	537.3	587.6	629.7	660.9	682.6	695.3	700.4
132.5°	470.2	521.0	567.2	606.7	637.5	659.1	670.8	675.4
135°	453.1	495.2	537.3	572.9	600.4	621.4	632.8	635.4
137.5°	439.5	474.7	508.1	539.2	564.2	582.3	592.3	596.1
140°	430.8	461.5	490.7	518.8	539.2	555.7	565.3	569.2
142.5°	423.7	449.7	474.9	498.4	517.8	532.8	541.4	542.1
145°	413.6	434.6	454.4	472.9	488.2	499.0	505.4	507.3
147.5°	405.9	422.4	437.8	451.3	464.0	472.6	477.0	478.1
150°	400.2	414.3	427.6	439.1	448.7	456.3	460.2	460.8
152.5°	394.6	407.6	419.0	428.9	436.4	443.0	445.9	446.0
155°	386.9	397.1	406.6	413.6	420.6	425.1	427.6	426.4
157.5°	377.8	386.4	394.4	399.8	404.8	408.5	409.7	409.7
160°	372.2	379.2	386.2	390.7	395.2	398.4	398.9	398.9
162.5°	366.6	372.6	378.5	382.0	386.5	388.7	389.3	388.7
165°	358.2	362.6	367.1	369.7	372.2	374.7	374.7	374.1
167.5°	350.2	353.6	356.6	359.0	360.1	361.5	361.3	360.6
170°	346.1	348.0	350.5	351.8	352.5	354.3	353.7	352.5
172.5°	341.4	342.9	345.0	345.7	346.3	347.2	346.6	345.8
175°	336.5	337.1	337.8	338.4	338.4	339.1	338.4	337.1
177.5°	333.0	333.0	333.5	333.5	333.5	333.5	333.0	331.9
180°	331.4	331.4	331.4	331.4	331.4	331.4	331.4	331.4

(END OF REPORT)