

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331460

Luminaire Tested: **S122DIP-S1005D1080U835-4F0-1E-UDD-D1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331460
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S1005D1080U835-4F0-1E-UDD-D1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, DROP SATIN WHITE DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7888.6 lumens
Efficiency: N/A
Efficacy: 110.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.32 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.08')
CIE Type: General Diffuse


Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331460

CATALOG NUMBER: S122DIP-S1005D1080U835-4F0-1E-UDD-D1

Luminous Intensity Polar Plot

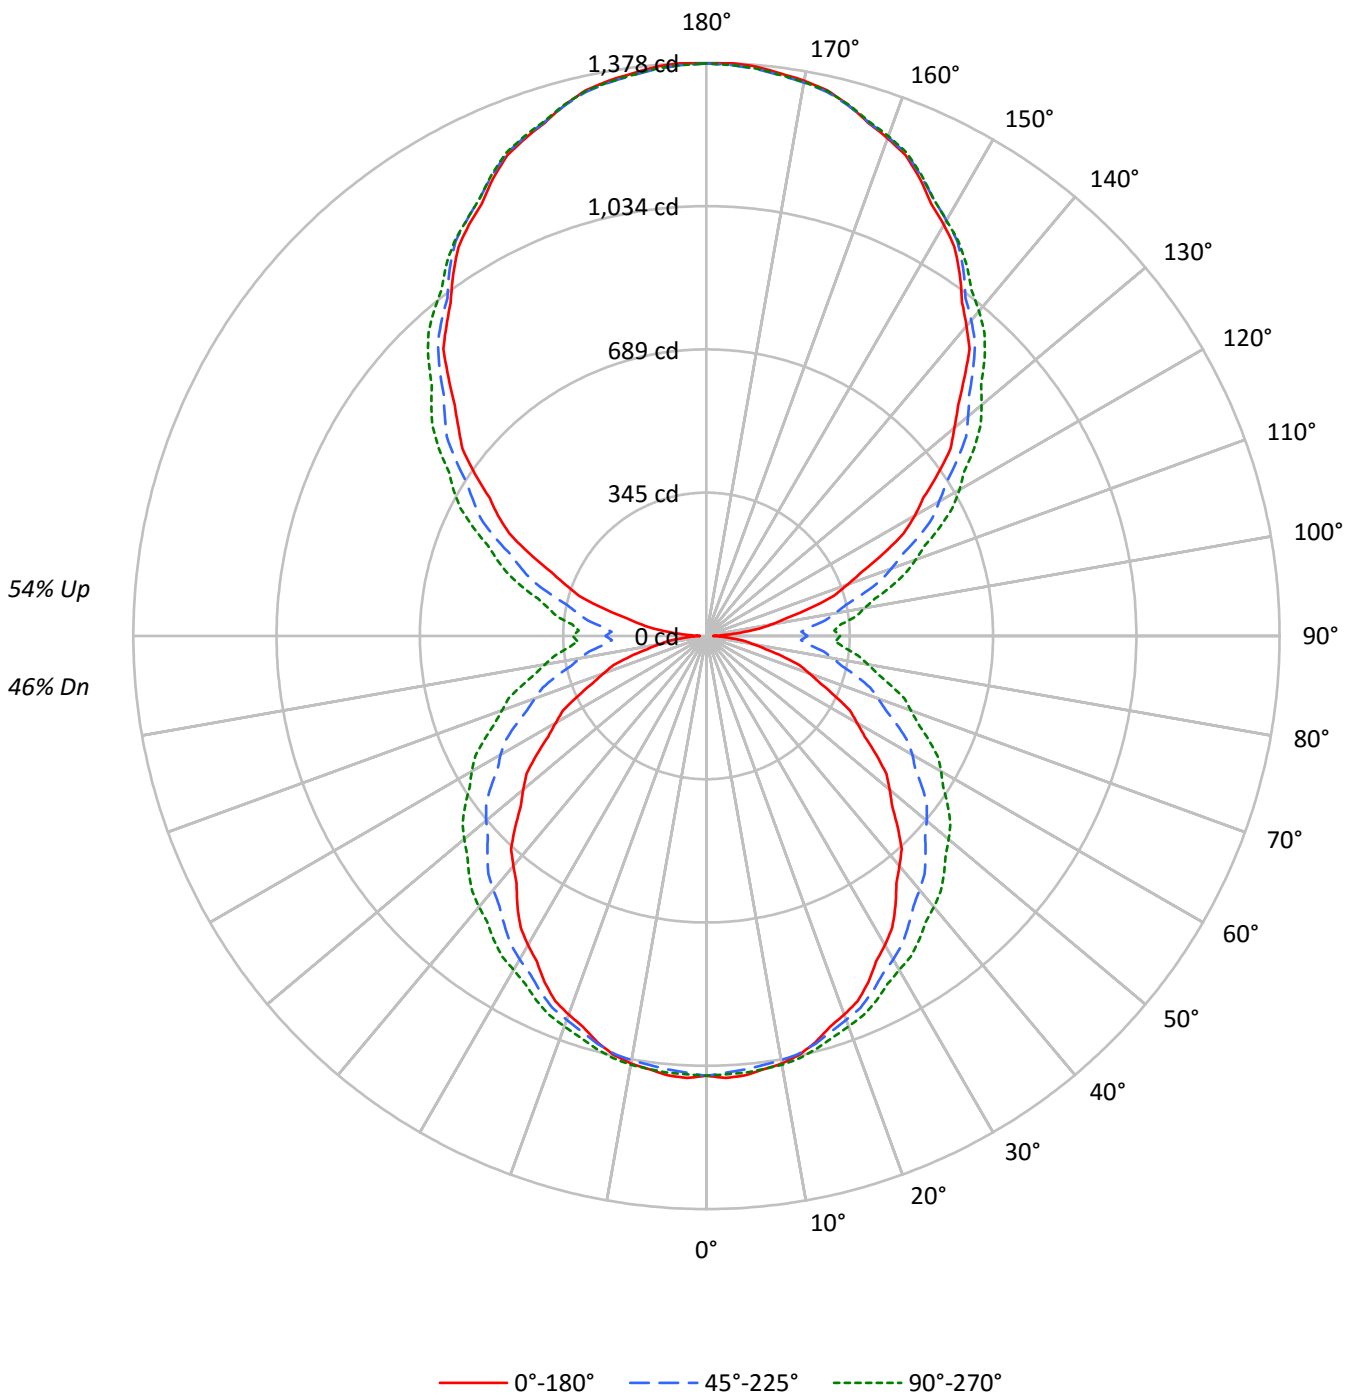



TEST NUMBER: P331460

CATALOG NUMBER: S122DIP-S1005D1080U835-4F0-1E-UDD-D1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	46
1	95	91	86	82	87	83	79	76	69	66	63	56	54	52	44	42	41	35
2	86	78	72	66	79	72	66	61	59	55	51	48	45	42	38	36	34	29
3	78	68	61	54	71	63	56	50	52	47	43	42	38	35	33	30	28	24
4	71	60	52	45	65	55	48	42	46	40	36	37	33	30	29	26	24	20
5	65	53	45	39	60	49	42	36	41	35	31	33	29	25	26	23	20	17
6	60	48	39	33	55	44	36	31	37	31	27	30	26	22	24	20	18	15
7	56	43	35	29	51	40	32	27	33	27	23	27	23	19	21	18	16	13
8	51	39	31	25	47	36	29	24	30	24	20	25	20	17	20	16	14	12
9	48	35	28	23	44	33	26	21	28	22	18	23	18	15	18	15	13	10
10	45	32	25	20	41	30	23	19	25	20	16	21	17	14	17	14	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17073	17073	17073
5°	17157	16435	16373
10°	17049	15949	15770
15°	16814	15435	15136
20°	16517	14884	14525
25°	16223	14353	13970
30°	15810	13808	13414
35°	15392	13280	13021
40°	14952	12831	12629
45°	14535	12429	12294
50°	14086	12066	11964
55°	13616	11675	11627
60°	13040	11269	11271
65°	12441	10795	10850
70°	11770	10285	10393
75°	10911	9784	9973
80°	9555	9272	9549
85°	8259	8830	9217



TEST NUMBER: P331460

CATALOG NUMBER: S122DIP-S1005D1080U835-4F0-1E-UDD-D1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	100.2	1.3
10°-20°	287.3	3.6
20°-30°	435.4	5.5
30°-40°	530.3	6.7
40°-50°	570.5	7.2
50°-60°	554.1	7.0
60°-70°	483.8	6.1
70°-80°	372.4	4.7
80°-90°	255.5	3.2
90°-100°	259.4	3.3
100°-110°	396.6	5.0
110°-120°	546.1	6.9
120°-130°	655.3	8.3
130°-140°	702.9	8.9
140°-150°	673.5	8.5
150°-160°	562.1	7.1
160°-170°	372.8	4.7
170°-180°	130.3	1.7
0°-30°	822.9	10.4
0°-40°	1353.3	17.2
0°-60°	2477.9	31.4
0°-90°	3589.6	45.5
90°-120°	1202.2	15.2
90°-150°	3233.9	41.0
90°-180°	4299.0	54.5
0°-180°	7888.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1057	1057	1057	1057	1057	
5°	1060	1056	1047	1055	1054	101
15°	1012	1014	1014	1028	1027	285
25°	920	930	944	962	967	423
35°	792	819	848	880	892	495
45°	650	692	745	790	808	501
55°	498	555	633	686	708	445
65°	340	416	506	566	588	338
75°	188	275	372	436	458	199
85°	55	150	248	310	334	59
90°	16	120	243	300	322	13
95°	73	157	251	306	325	79
105°	257	307	387	441	460	273
115°	471	497	561	604	619	465
125°	679	692	735	772	786	607
135°	876	889	907	936	946	677
145°	1062	1070	1077	1087	1090	663
155°	1214	1217	1221	1226	1223	558
165°	1321	1320	1320	1327	1322	372
175°	1374	1371	1368	1376	1370	130
180°	1376	1376	1376	1376	1376	



TEST NUMBER: P331460

CATALOG NUMBER: S122DIP-S1005D1080U835-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1057.4	1057.4	1057.4	1057.4	1057.4	1057.4	1057.4	1057.4	1057.4	1057.4	1057.4
2.5°	1063.6	1062.8	1061.9	1061.1	1060.3	1058.9	1057.0	1055.1	1053.2	1051.3	1052.7
5°	1060.5	1059.5	1058.5	1057.4	1056.4	1054.9	1052.9	1050.8	1048.8	1046.7	1048.8
7.5°	1051.0	1050.3	1049.6	1049.0	1048.3	1047.2	1045.6	1044.0	1042.5	1040.9	1043.3
10°	1043.7	1043.0	1042.3	1041.6	1040.9	1040.1	1039.1	1038.0	1037.0	1036.0	1038.7
12.5°	1031.4	1031.5	1031.7	1031.8	1031.9	1031.6	1030.9	1030.1	1029.4	1028.6	1031.4
15°	1011.5	1012.2	1012.8	1013.5	1014.2	1014.5	1014.5	1014.5	1014.5	1014.5	1017.6
17.5°	985.7	987.2	988.6	990.0	991.4	992.7	993.8	994.9	996.0	997.1	1000.3
20°	968.6	970.3	972.0	973.7	975.4	976.9	978.3	979.6	981.0	982.4	986.1
22.5°	950.2	952.1	954.1	956.1	958.1	960.0	961.9	963.8	965.7	967.6	971.4
25°	919.5	921.9	924.3	926.7	929.1	931.8	934.8	937.9	941.0	944.0	948.1
27.5°	882.7	886.6	890.5	894.4	898.3	902.0	905.6	909.2	912.8	916.5	921.6
30°	858.2	862.6	867.1	871.5	875.9	880.4	884.8	889.2	893.6	898.1	903.5
32.5°	831.2	836.2	841.2	846.2	851.1	856.2	861.5	866.7	872.0	877.2	883.5
35°	792.3	798.1	803.9	809.7	815.5	821.6	828.1	834.5	841.0	847.5	855.0
37.5°	750.0	756.7	763.4	770.0	776.7	784.2	792.6	801.0	809.4	817.8	826.1
40°	721.8	729.3	736.8	744.3	751.8	760.1	769.3	778.5	787.7	796.9	805.8
42.5°	694.9	702.3	709.8	717.3	724.8	733.8	744.4	755.0	765.5	776.1	785.7
45°	649.8	659.0	668.2	677.4	686.6	697.1	709.1	721.0	732.9	744.8	755.4
47.5°	605.4	615.4	625.4	635.4	645.4	657.4	671.4	685.3	699.3	713.2	724.3
50°	574.7	585.3	595.8	606.4	616.9	629.9	645.2	660.5	675.8	691.2	702.8
52.5°	545.3	556.4	567.5	578.6	589.7	603.3	619.4	635.6	651.7	667.9	679.7
55°	498.1	510.3	522.6	534.9	547.1	562.1	579.8	597.5	615.2	632.9	645.2
57.5°	451.5	465.3	479.1	493.0	506.8	522.7	540.8	558.8	576.9	594.9	608.1
60°	418.4	433.0	447.7	462.3	477.0	494.0	513.4	532.8	552.2	571.6	584.6
62.5°	389.0	404.1	419.3	434.5	449.7	467.0	486.4	505.8	525.3	544.7	558.4
65°	340.2	356.9	373.6	390.3	407.0	425.4	445.5	465.5	485.6	505.7	519.7
67.5°	295.5	312.9	330.3	347.8	365.2	384.2	404.8	425.4	445.9	466.5	480.6
70°	263.6	281.3	299.0	316.7	334.4	353.8	375.0	396.1	417.2	438.3	452.9
72.5°	234.2	252.4	270.7	288.9	307.2	327.0	348.4	369.8	391.2	412.6	426.9
75°	188.5	207.6	226.6	245.7	264.8	285.2	307.0	328.8	350.6	372.4	387.0
77.5°	144.4	164.3	184.3	204.2	224.2	245.2	267.4	289.5	311.6	333.8	348.4
80°	114.9	135.7	156.5	177.3	198.0	219.5	241.6	263.8	285.9	308.0	322.3
82.5°	90.4	110.9	131.4	151.9	172.4	193.9	216.3	238.7	261.1	283.5	297.8
85°	55.2	76.3	97.4	118.5	139.6	161.1	182.9	204.7	226.5	248.3	262.6
87.5°	30.3	51.2	72.1	93.0	113.9	135.9	158.8	181.7	204.7	227.6	241.4
90°	16.5	39.3	62.2	85.0	107.9	133.1	160.5	188.0	215.5	242.9	256.1
92.5°	34.8	55.4	76.1	96.8	117.4	138.9	161.2	183.6	205.9	228.2	241.7
95°	72.7	91.3	109.8	128.4	147.0	166.8	187.7	208.7	229.6	250.6	263.5
97.5°	121.1	137.6	154.1	170.6	187.1	205.7	226.3	246.9	267.5	288.0	300.6
100°	158.2	172.9	187.6	202.2	216.9	234.2	254.0	273.9	293.7	313.6	326.2
102.5°	196.1	209.2	222.4	235.5	248.7	265.0	284.5	304.1	323.6	343.1	355.6
105°	257.4	268.1	278.7	289.4	300.0	314.4	332.7	350.9	369.1	387.3	399.8
107.5°	320.8	329.8	338.8	347.9	356.9	369.9	386.9	403.8	420.8	437.7	449.4
110°	360.4	368.8	377.1	385.5	393.9	406.4	423.1	439.8	456.4	473.1	484.0



TEST NUMBER: P331460

CATALOG NUMBER: S122DIP-S1005D1080U835-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	405.0	412.3	419.6	426.8	434.1	445.6	461.2	476.9	492.6	508.2	518.5
115°	470.8	476.1	481.4	486.6	491.9	502.0	516.8	531.6	546.4	561.2	571.2
117.5°	534.7	539.3	543.8	548.3	552.8	561.4	574.2	586.9	599.6	612.3	621.8
120°	578.4	581.8	585.3	588.7	592.1	599.6	611.2	622.7	634.3	645.9	655.4
122.5°	618.4	621.4	624.4	627.4	630.5	637.7	649.0	660.4	671.7	683.1	691.7
125°	679.1	681.4	683.8	686.1	688.4	694.6	704.7	714.9	725.0	735.1	743.5
127.5°	739.7	742.3	744.9	747.5	750.1	755.4	763.2	771.1	779.0	786.8	794.3
130°	777.8	780.9	783.9	786.9	789.9	794.7	801.4	808.0	814.6	821.3	828.9
132.5°	820.6	823.0	825.4	827.8	830.2	834.2	839.8	845.4	851.0	856.7	863.4
135°	876.2	879.0	881.9	884.7	887.6	890.9	894.9	898.8	902.7	906.6	913.5
137.5°	936.4	938.6	940.9	943.1	945.4	947.6	949.8	951.9	954.1	956.3	962.3
140°	972.6	974.6	976.6	978.6	980.5	982.5	984.5	986.5	988.4	990.4	995.9
142.5°	1009.8	1011.8	1013.8	1015.7	1017.7	1019.2	1020.2	1021.2	1022.3	1023.3	1027.8
145°	1061.7	1063.5	1065.3	1067.1	1068.9	1070.6	1072.1	1073.7	1075.2	1076.8	1079.1
147.5°	1109.3	1111.5	1113.6	1115.8	1118.0	1119.6	1120.6	1121.7	1122.7	1123.7	1124.6
150°	1141.8	1143.4	1144.9	1146.5	1148.0	1149.3	1150.4	1151.4	1152.4	1153.5	1154.2
152.5°	1170.6	1172.2	1173.7	1175.3	1176.8	1178.2	1179.5	1180.7	1182.0	1183.2	1184.2
155°	1213.9	1214.6	1215.4	1216.2	1217.0	1217.7	1218.5	1219.3	1220.1	1220.8	1222.1
157.5°	1250.8	1251.3	1251.8	1252.3	1252.9	1253.3	1253.8	1254.3	1254.7	1255.2	1257.0
160°	1273.1	1273.6	1274.1	1274.6	1275.2	1275.5	1275.8	1276.1	1276.3	1276.6	1278.1
162.5°	1293.5	1293.6	1293.7	1293.8	1294.0	1294.1	1294.4	1294.6	1294.9	1295.2	1296.9
165°	1320.7	1320.5	1320.2	1319.9	1319.7	1319.6	1319.6	1319.6	1319.6	1319.6	1321.4
167.5°	1343.5	1342.7	1341.9	1341.2	1340.4	1340.0	1339.9	1339.9	1339.8	1339.8	1341.6
170°	1355.6	1354.8	1354.0	1353.2	1352.5	1352.0	1351.7	1351.4	1351.2	1350.9	1352.7
172.5°	1363.9	1363.2	1362.4	1361.6	1360.8	1360.3	1360.1	1359.8	1359.5	1359.3	1361.1
175°	1374.2	1373.4	1372.6	1371.8	1371.1	1370.4	1369.9	1369.4	1368.9	1368.3	1370.2
177.5°	1378.3	1377.7	1377.1	1376.5	1375.9	1375.3	1374.9	1374.5	1374.1	1373.7	1374.9
180°	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5



TEST NUMBER: P331460

CATALOG NUMBER: S122DIP-S1005D1080U835-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1057.4	1057.4	1057.4	1057.4	1057.4	1057.4	1057.4	1057.4
2.5°	1054.0	1055.4	1056.8	1057.2	1056.6	1056.1	1055.5	1055.0
5°	1050.8	1052.9	1054.9	1055.7	1055.4	1055.1	1054.7	1054.4
7.5°	1045.8	1048.3	1050.7	1051.8	1051.4	1051.1	1050.7	1050.4
10°	1041.4	1044.2	1046.9	1048.1	1047.7	1047.4	1047.1	1046.7
12.5°	1034.1	1036.8	1039.5	1040.7	1040.4	1040.0	1039.7	1039.4
15°	1020.7	1023.7	1026.8	1028.2	1027.8	1027.5	1027.1	1026.8
17.5°	1003.5	1006.7	1009.9	1011.5	1011.5	1011.5	1011.5	1011.5
20°	989.8	993.6	997.3	999.2	999.2	999.2	999.2	999.2
22.5°	975.1	978.9	982.6	984.8	985.3	985.9	986.4	987.0
25°	952.2	956.3	960.4	962.9	964.0	965.0	966.0	967.0
27.5°	926.8	932.0	937.2	940.1	940.9	941.6	942.4	943.1
30°	909.0	914.4	919.9	923.1	924.1	925.1	926.2	927.2
32.5°	889.8	896.0	902.3	906.3	908.2	910.0	911.9	913.7
35°	862.5	870.0	877.5	882.4	884.8	887.2	889.6	891.9
37.5°	834.4	842.7	851.0	856.4	858.9	861.5	864.0	866.5
40°	814.6	823.5	832.3	838.3	841.4	844.4	847.5	850.6
42.5°	795.4	805.1	814.8	821.1	824.2	827.3	830.3	833.4
45°	765.9	776.5	787.0	794.0	797.4	800.8	804.2	807.6
47.5°	735.3	746.3	757.4	764.8	768.5	772.3	776.0	779.8
50°	714.3	725.9	737.5	745.2	748.9	752.6	756.4	760.1
52.5°	691.6	703.4	715.3	723.2	727.2	731.3	735.3	739.3
55°	657.5	669.7	682.0	690.3	694.7	699.2	703.6	708.0
57.5°	621.4	634.6	647.8	656.6	661.1	665.6	670.1	674.6
60°	597.5	610.5	623.4	632.3	637.0	641.8	646.6	651.3
62.5°	572.2	585.9	599.7	608.8	613.3	617.8	622.3	626.8
65°	533.7	547.6	561.6	570.8	575.2	579.6	584.1	588.5
67.5°	494.7	508.8	522.9	532.3	536.9	541.5	546.2	550.8
70°	467.6	482.2	496.9	506.2	510.3	514.4	518.5	522.6
72.5°	441.3	455.7	470.0	479.7	484.6	489.5	494.4	499.3
75°	401.7	416.3	431.0	440.5	444.9	449.4	453.8	458.2
77.5°	362.9	377.5	392.1	401.8	406.5	411.3	416.1	420.8
80°	336.6	351.0	365.3	374.8	379.6	384.3	389.1	393.9
82.5°	312.1	326.4	340.7	350.1	354.6	359.1	363.6	368.1
85°	276.9	291.2	305.5	315.0	319.8	324.6	329.3	334.1
87.5°	255.2	269.0	282.8	291.9	296.3	300.7	305.1	309.5
90°	269.2	282.3	295.4	304.1	308.4	312.8	317.1	321.5
92.5°	255.1	268.6	282.0	290.8	294.9	299.1	303.2	307.4
95°	276.5	289.4	302.3	310.6	314.2	317.7	321.3	324.9
97.5°	313.2	325.9	338.5	346.7	350.7	354.7	358.6	362.6
100°	338.8	351.4	364.0	372.0	375.5	379.0	382.5	386.0
102.5°	368.1	380.7	393.2	401.2	404.7	408.2	411.7	415.2
105°	412.2	424.7	437.1	445.2	448.9	452.7	456.4	460.2
107.5°	461.0	472.7	484.3	491.4	494.0	496.6	499.1	501.7
110°	494.9	505.8	516.7	523.7	526.6	529.6	532.6	535.5



TEST NUMBER: P331460

CATALOG NUMBER: S122DIP-S1005D1080U835-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	528.8	539.1	549.3	556.1	559.2	562.4	565.6	568.8
115°	581.1	591.1	601.1	607.5	610.5	613.5	616.4	619.4
117.5°	631.2	640.7	650.2	656.2	658.9	661.6	664.3	667.0
120°	664.9	674.5	684.0	690.2	693.2	696.2	699.2	702.1
122.5°	700.4	709.0	717.7	723.3	725.9	728.6	731.2	733.8
125°	752.0	760.4	768.8	774.4	777.2	780.0	782.8	785.6
127.5°	801.8	809.4	816.9	821.7	823.9	826.1	828.2	830.4
130°	836.6	844.2	851.9	856.6	858.3	860.0	861.6	863.3
132.5°	870.2	877.0	883.7	888.1	890.0	891.8	893.7	895.6
135°	920.4	927.3	934.2	938.6	940.6	942.5	944.5	946.4
137.5°	968.4	974.5	980.5	984.2	985.5	986.8	988.0	989.3
140°	1001.3	1006.8	1012.2	1015.4	1016.4	1017.5	1018.5	1019.5
142.5°	1032.4	1037.0	1041.5	1044.2	1044.9	1045.7	1046.4	1047.1
145°	1081.4	1083.7	1086.0	1087.5	1088.2	1088.8	1089.5	1090.2
147.5°	1125.4	1126.2	1127.1	1127.4	1127.3	1127.1	1126.9	1126.8
150°	1155.0	1155.8	1156.6	1156.6	1155.8	1155.0	1154.2	1153.5
152.5°	1185.2	1186.1	1187.1	1187.1	1186.1	1185.2	1184.2	1183.2
155°	1223.4	1224.7	1226.0	1226.2	1225.5	1224.7	1223.9	1223.1
157.5°	1258.7	1260.5	1262.2	1262.5	1261.2	1260.0	1258.8	1257.5
160°	1279.7	1281.2	1282.8	1283.0	1282.0	1281.0	1279.9	1278.9
162.5°	1298.7	1300.4	1302.2	1302.4	1301.2	1300.0	1298.7	1297.5
165°	1323.2	1325.0	1326.8	1327.0	1325.8	1324.5	1323.2	1321.9
167.5°	1343.4	1345.2	1347.0	1347.2	1345.9	1344.5	1343.2	1341.9
170°	1354.5	1356.3	1358.1	1358.3	1356.7	1355.2	1353.6	1352.1
172.5°	1362.9	1364.7	1366.5	1366.6	1365.1	1363.5	1362.0	1360.4
175°	1372.0	1373.8	1375.6	1375.7	1374.2	1372.6	1371.1	1369.5
177.5°	1376.2	1377.4	1378.6	1378.6	1377.4	1376.2	1374.9	1373.7
180°	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5

(END OF REPORT)