

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331445

Luminaire Tested: **S122DIP-S1005D725U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331445
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S1005D725U835-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 725 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6648.6 lumens
Efficiency: N/A
Efficacy: 109.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331445

CATALOG NUMBER: S122DIP-S1005D725U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

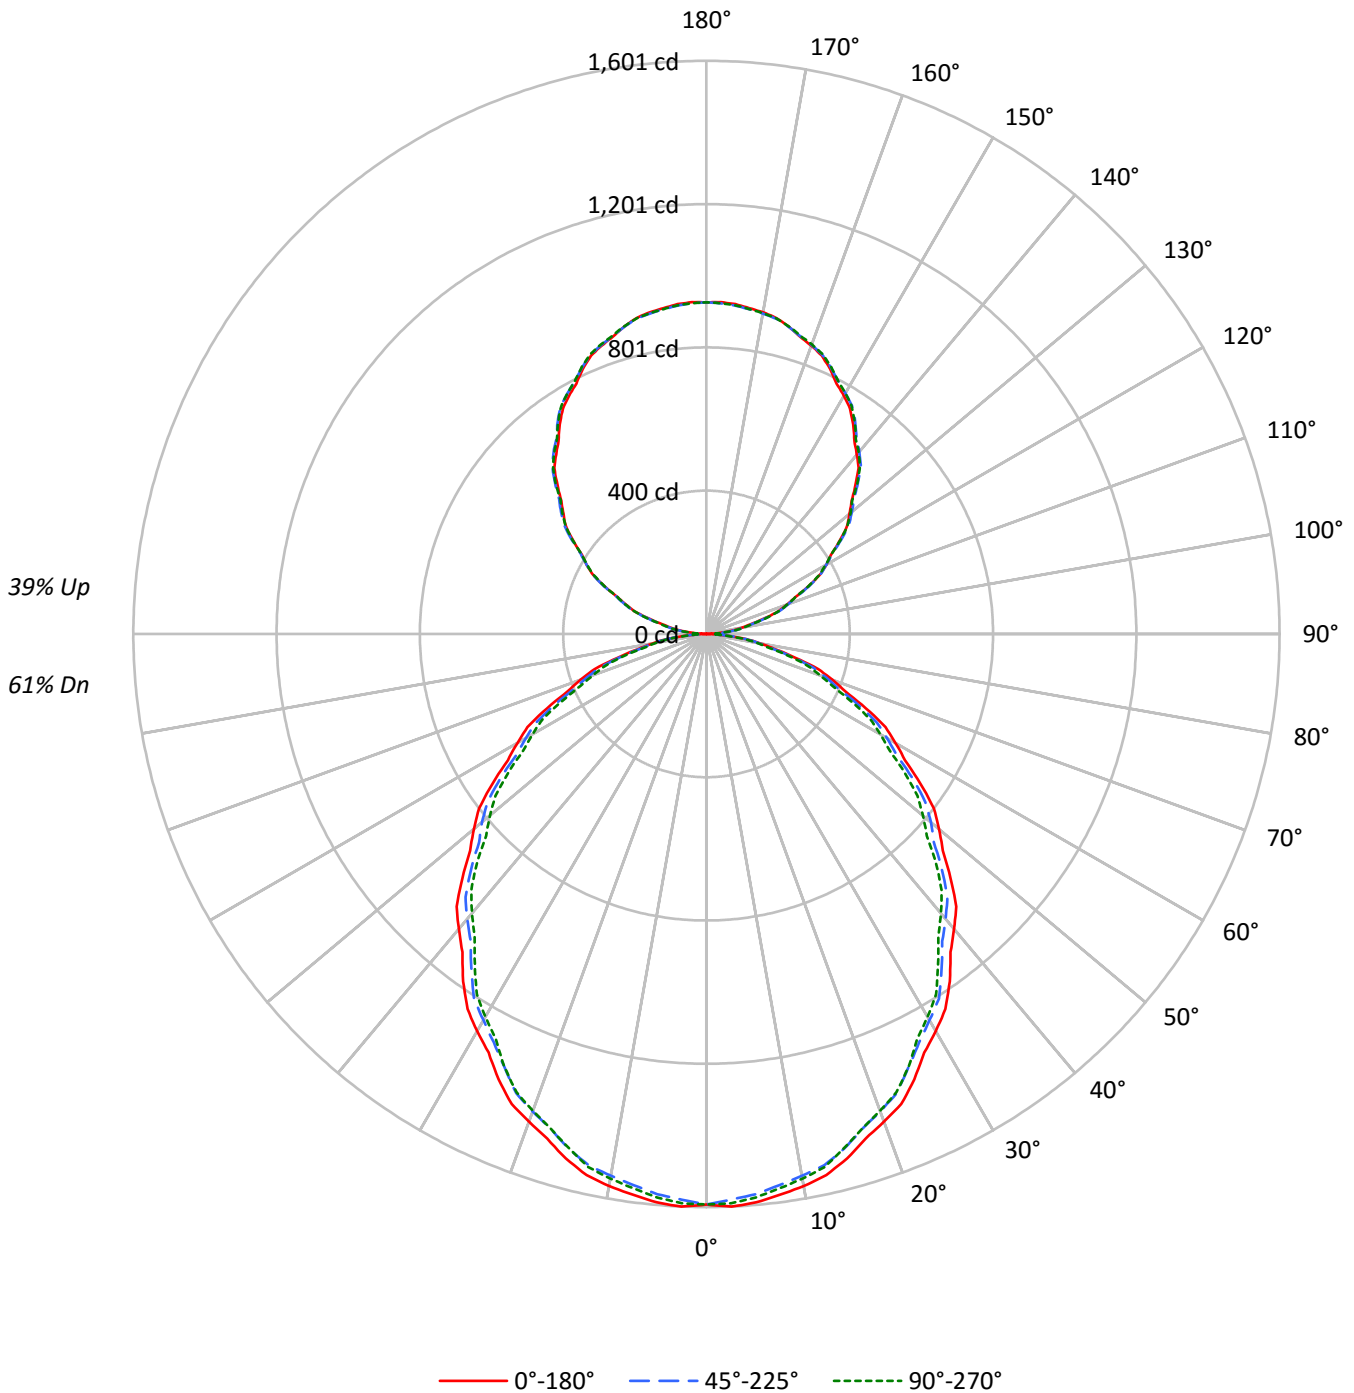



TEST NUMBER: P331445

CATALOG NUMBER: S122DIP-S1005D725U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66	61
1	100	96	92	88	94	90	86	83	79	76	74	68	66	64	59	57	56	51
2	91	84	77	72	85	79	73	68	69	65	61	60	57	54	52	49	47	43
3	83	74	66	60	78	69	63	57	61	56	51	53	49	46	46	43	40	36
4	76	65	57	51	71	61	54	49	54	48	44	47	43	39	41	37	35	31
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30	27
6	65	52	44	38	60	49	42	36	44	38	33	38	34	30	33	30	27	24
7	60	47	39	33	56	45	37	32	40	34	29	35	30	26	31	27	24	21
8	56	43	35	30	52	41	33	28	36	30	26	32	27	24	28	24	21	19
9	52	39	32	27	48	37	30	25	33	27	23	29	25	21	26	22	19	17
10	48	36	29	24	45	34	27	23	31	25	21	27	23	19	24	20	17	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	25733	25733	25733
5°	25832	25459	25608
10°	25678	25201	25327
15°	25361	24874	24849
20°	24911	24383	24357
25°	24464	23779	23779
30°	23886	23228	23029
35°	23349	22565	22231
40°	22675	21901	21479
45°	22012	21240	20717
50°	21288	20557	19826
55°	20535	19758	19023
60°	19695	18807	18112
65°	18793	17857	17039
70°	17651	16711	15918
75°	16064	15390	15009
80°	14254	13826	13110
85°	11634	11078	9930



TEST NUMBER: P331445

CATALOG NUMBER: S122DIP-S1005D725U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	149.9	2.3
10°-20°	421.7	6.3
20°-30°	619.8	9.3
30°-40°	720.0	10.8
40°-50°	719.2	10.8
50°-60°	627.2	9.4
60°-70°	463.8	7.0
70°-80°	262.7	4.0
80°-90°	74.3	1.1
90°-100°	58.7	0.9
100°-110°	182.3	2.7
110°-120°	311.6	4.7
120°-130°	409.8	6.2
130°-140°	459.9	6.9
140°-150°	450.9	6.8
150°-160°	378.2	5.7
160°-170°	250.9	3.8
170°-180°	87.7	1.3
0°-30°	1191.4	17.9
0°-40°	1911.4	28.7
0°-60°	3257.9	49.0
0°-90°	4058.6	61.0
90°-120°	552.6	8.3
90°-150°	1873.2	28.2
90°-180°	2590.0	39.0
0°-180°	6648.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1594	1594	1594	1594	1594	
5°	1594	1587	1571	1582	1580	151
15°	1517	1507	1488	1493	1487	427
25°	1373	1360	1335	1338	1335	631
35°	1185	1169	1145	1136	1128	739
45°	964	953	930	914	907	744
55°	730	720	702	684	676	652
65°	492	482	467	454	446	486
75°	258	254	247	238	241	275
85°	63	61	60	55	54	72
90°	1	11	27	26	27	5
95°	41	48	50	50	48	47
105°	168	170	172	173	174	177
115°	313	317	316	315	313	309
125°	455	461	460	457	456	406
135°	589	597	599	598	596	454
145°	714	720	725	725	722	446
155°	817	819	822	825	823	376
165°	889	888	888	893	890	251
175°	925	922	921	926	922	88
180°	926	926	926	926	926	



TEST NUMBER: P331445

CATALOG NUMBER: S122DIP-S1005D725U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8
2.5°	1601.2	1599.8	1598.5	1597.1	1595.7	1593.6	1590.6	1587.6	1584.6	1581.6	1584.3
5°	1593.8	1592.5	1591.1	1589.7	1588.4	1585.8	1582.1	1578.3	1574.6	1570.8	1573.6
7.5°	1579.7	1577.6	1575.5	1573.4	1571.3	1568.3	1564.5	1560.7	1556.9	1553.1	1555.8
10°	1566.2	1563.9	1561.5	1559.1	1556.7	1553.5	1549.4	1545.3	1541.2	1537.1	1539.9
12.5°	1547.9	1545.7	1543.6	1541.5	1539.4	1536.3	1532.2	1528.1	1524.1	1520.0	1521.9
15°	1517.2	1515.2	1513.1	1511.1	1509.0	1505.8	1501.4	1496.9	1492.5	1488.1	1489.5
17.5°	1478.0	1475.9	1473.9	1471.8	1469.8	1466.5	1462.0	1457.5	1453.0	1448.6	1450.1
20°	1449.8	1447.7	1445.7	1443.6	1441.6	1438.2	1433.4	1428.7	1423.9	1419.1	1420.1
22.5°	1421.6	1418.7	1415.9	1413.0	1410.1	1406.5	1402.0	1397.5	1393.0	1388.5	1388.7
25°	1373.2	1370.4	1367.7	1365.0	1362.3	1358.0	1352.2	1346.4	1340.6	1334.8	1335.5
27.5°	1318.0	1315.5	1313.1	1310.6	1308.2	1304.7	1300.1	1295.5	1291.0	1286.4	1285.4
30°	1281.2	1278.5	1275.7	1273.0	1270.3	1266.4	1261.3	1256.2	1251.1	1245.9	1244.9
32.5°	1242.0	1239.8	1237.6	1235.4	1233.2	1229.5	1224.1	1218.7	1213.3	1207.9	1206.1
35°	1184.6	1181.2	1177.8	1174.4	1171.0	1166.6	1161.1	1155.7	1150.3	1144.8	1142.8
37.5°	1120.0	1117.0	1114.0	1111.0	1108.0	1103.8	1098.3	1092.9	1087.4	1082.0	1079.4
40°	1075.8	1073.1	1070.4	1067.7	1064.9	1060.9	1055.4	1050.0	1044.5	1039.1	1036.0
42.5°	1032.9	1030.2	1027.5	1024.8	1022.0	1017.9	1012.5	1007.0	1001.6	996.1	992.8
45°	964.0	961.6	959.2	956.8	954.4	950.7	945.6	940.5	935.4	930.2	926.5
47.5°	895.3	893.1	890.8	888.6	886.3	882.5	877.2	871.9	866.6	861.3	857.3
50°	847.5	845.8	844.1	842.4	840.7	837.4	832.7	827.9	823.1	818.4	813.6
52.5°	800.9	798.7	796.4	794.2	791.9	788.5	784.0	779.5	775.1	770.6	766.6
55°	729.5	727.4	725.4	723.4	721.3	718.2	714.2	710.1	706.0	701.9	697.8
57.5°	657.8	656.1	654.5	652.9	651.2	648.2	643.7	639.2	634.7	630.2	626.2
60°	609.9	608.6	607.2	605.9	604.5	601.4	596.7	591.9	587.1	582.4	578.6
62.5°	563.4	561.2	559.0	556.8	554.6	551.7	548.0	544.4	540.7	537.0	533.5
65°	491.9	489.9	487.9	485.8	483.8	481.0	477.6	474.2	470.8	467.4	464.4
67.5°	419.3	417.7	416.0	414.4	412.8	410.4	407.3	404.3	401.2	398.2	395.8
70°	373.9	372.6	371.2	369.9	368.5	366.3	363.2	360.1	357.1	354.0	351.6
72.5°	327.3	326.0	324.6	323.3	321.9	320.2	318.3	316.3	314.3	312.3	309.9
75°	257.5	256.8	256.1	255.4	254.7	253.5	251.8	250.1	248.4	246.7	244.7
77.5°	194.9	193.8	192.6	191.5	190.3	189.4	188.7	188.0	187.3	186.7	185.6
80°	153.3	152.9	152.6	152.2	151.9	151.4	150.7	150.0	149.3	148.7	147.6
82.5°	114.0	114.0	113.9	113.8	113.7	113.5	113.1	112.7	112.3	111.9	110.6
85°	62.8	62.5	62.2	61.8	61.5	61.1	60.8	60.4	60.1	59.8	58.7
87.5°	22.2	22.1	22.0	21.8	21.7	21.8	22.0	22.2	22.4	22.6	21.7
90°	0.8	2.9	5.0	7.0	9.1	12.1	15.9	19.7	23.5	27.4	27.0
92.5°	13.9	15.4	17.0	18.5	20.0	21.2	22.1	23.0	24.0	24.9	24.9
95°	40.6	42.4	44.1	45.9	47.6	48.6	49.0	49.3	49.7	50.0	50.0
97.5°	74.3	75.8	77.3	78.8	80.4	81.5	82.1	82.8	83.4	84.1	84.1
100°	99.3	100.7	102.0	103.4	104.8	105.8	106.3	106.8	107.3	107.9	107.9
102.5°	125.5	126.6	127.8	128.9	130.0	130.9	131.5	132.2	132.8	133.5	133.6
105°	168.1	168.6	169.1	169.6	170.1	170.6	170.9	171.3	171.6	172.0	172.3
107.5°	210.9	211.7	212.4	213.2	213.9	214.3	214.3	214.3	214.3	214.3	214.5
110°	238.4	239.4	240.5	241.5	242.6	243.1	243.1	243.1	243.1	243.1	243.1



TEST NUMBER: P331445

CATALOG NUMBER: S122DIP-S1005D725U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	268.4	269.5	270.5	271.5	272.6	273.0	272.9	272.8	272.6	272.5	272.1
115°	312.7	313.7	314.7	315.8	316.8	317.2	316.8	316.5	316.1	315.8	315.6
117.5°	356.7	358.1	359.5	360.9	362.3	362.5	361.5	360.6	359.6	358.6	358.2
120°	386.1	387.5	388.9	390.3	391.7	391.7	390.3	388.9	387.5	386.1	386.1
122.5°	413.0	414.7	416.4	418.0	419.7	420.0	419.1	418.1	417.1	416.1	415.7
125°	454.9	456.5	458.0	459.6	461.2	461.7	461.2	460.6	460.1	459.6	459.1
127.5°	495.7	497.7	499.7	501.7	503.6	504.3	503.7	503.1	502.4	501.8	501.2
130°	521.4	523.6	525.9	528.1	530.4	531.3	531.0	530.6	530.3	530.0	529.6
132.5°	550.1	552.0	553.8	555.6	557.5	558.4	558.5	558.6	558.6	558.7	558.0
135°	588.6	590.5	592.4	594.3	596.2	597.3	597.7	598.0	598.4	598.7	598.6
137.5°	629.1	630.6	632.2	633.8	635.3	636.3	636.8	637.2	637.7	638.1	638.0
140°	653.5	655.0	656.6	658.1	659.7	660.9	661.8	662.7	663.5	664.4	664.4
142.5°	678.5	680.0	681.6	683.2	684.7	685.8	686.4	687.0	687.6	688.2	688.3
145°	714.4	715.6	716.9	718.1	719.3	720.4	721.5	722.5	723.5	724.6	724.8
147.5°	746.5	747.9	749.4	750.8	752.3	753.4	754.1	754.8	755.5	756.2	756.5
150°	768.4	769.4	770.4	771.5	772.5	773.4	774.1	774.8	775.5	776.2	776.7
152.5°	787.7	788.8	789.8	790.9	791.9	792.8	793.7	794.5	795.3	796.2	796.8
155°	816.8	817.3	817.9	818.4	818.9	819.4	819.9	820.5	821.0	821.5	822.4
157.5°	841.7	842.0	842.4	842.7	843.1	843.4	843.7	844.0	844.3	844.6	845.8
160°	856.7	857.0	857.4	857.7	858.1	858.3	858.5	858.7	858.9	859.0	860.1
162.5°	870.4	870.5	870.6	870.6	870.7	870.8	871.0	871.2	871.4	871.5	872.7
165°	888.7	888.6	888.4	888.2	888.0	887.9	887.9	887.9	887.9	887.9	889.2
167.5°	904.0	903.5	903.0	902.5	902.0	901.7	901.7	901.6	901.6	901.5	902.8
170°	912.2	911.7	911.1	910.6	910.1	909.7	909.6	909.4	909.2	909.0	910.3
172.5°	917.8	917.3	916.8	916.2	915.7	915.4	915.2	915.0	914.9	914.7	915.9
175°	924.7	924.2	923.6	923.1	922.6	922.2	921.8	921.5	921.1	920.8	922.0
177.5°	927.5	927.1	926.7	926.2	925.8	925.5	925.2	924.9	924.6	924.4	925.2
180°	926.2	926.2	926.2	926.2	926.2	926.2	926.2	926.2	926.2	926.2	926.2



TEST NUMBER: P331445

CATALOG NUMBER: S122DIP-S1005D725U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8
2.5°	1587.0	1589.7	1592.5	1593.6	1593.0	1592.5	1591.9	1591.4
5°	1576.3	1579.0	1581.7	1582.8	1582.1	1581.4	1580.7	1580.0
7.5°	1558.5	1561.2	1564.0	1565.0	1564.2	1563.5	1562.7	1562.0
10°	1542.6	1545.3	1548.0	1548.9	1547.9	1546.8	1545.8	1544.8
12.5°	1523.8	1525.7	1527.6	1528.2	1527.4	1526.7	1525.9	1525.2
15°	1490.8	1492.2	1493.5	1493.4	1491.7	1490.0	1488.3	1486.6
17.5°	1451.7	1453.3	1454.8	1454.8	1453.1	1451.5	1449.9	1448.2
20°	1421.2	1422.2	1423.2	1423.0	1421.7	1420.3	1419.0	1417.6
22.5°	1388.9	1389.1	1389.3	1389.0	1388.2	1387.4	1386.5	1385.7
25°	1336.2	1336.9	1337.6	1337.6	1336.9	1336.2	1335.5	1334.8
27.5°	1284.4	1283.3	1282.3	1281.0	1279.4	1277.7	1276.1	1274.5
30°	1243.9	1242.9	1241.9	1240.7	1239.3	1237.9	1236.6	1235.2
32.5°	1204.3	1202.4	1200.6	1199.0	1197.6	1196.3	1194.9	1193.5
35°	1140.7	1138.7	1136.6	1134.8	1133.1	1131.4	1129.6	1127.9
37.5°	1076.9	1074.4	1071.9	1069.8	1068.2	1066.5	1064.9	1063.3
40°	1032.9	1029.9	1026.8	1024.6	1023.2	1021.9	1020.5	1019.1
42.5°	989.5	986.1	982.8	980.2	978.3	976.4	974.5	972.5
45°	922.8	919.0	915.3	912.7	911.3	910.0	908.6	907.3
47.5°	853.4	849.4	845.5	842.5	840.5	838.6	836.6	834.6
50°	808.8	804.1	799.3	796.1	794.4	792.7	791.0	789.3
52.5°	762.7	758.7	754.8	751.7	749.4	747.2	744.9	742.7
55°	693.7	689.6	685.6	682.7	681.0	679.3	677.6	675.8
57.5°	622.1	618.1	614.1	611.4	610.2	608.9	607.6	606.3
60°	574.9	571.1	567.4	565.0	564.0	563.0	561.9	560.9
62.5°	530.1	526.6	523.1	520.7	519.4	518.1	516.8	515.5
65°	461.3	458.2	455.2	452.8	451.1	449.4	447.7	446.0
67.5°	393.4	391.0	388.6	386.7	385.4	384.0	382.7	381.3
70°	349.2	346.9	344.5	342.6	341.2	339.9	338.5	337.2
72.5°	307.6	305.2	302.8	301.1	300.0	298.9	297.8	296.7
75°	242.7	240.6	238.6	237.9	238.6	239.2	239.9	240.6
77.5°	184.6	183.6	182.6	181.6	180.6	179.7	178.7	177.8
80°	146.6	145.6	144.6	143.7	143.0	142.4	141.7	141.0
82.5°	109.3	108.0	106.7	106.0	105.8	105.7	105.6	105.4
85°	57.7	56.7	55.7	55.0	54.7	54.3	54.0	53.6
87.5°	20.9	20.0	19.1	18.5	18.3	18.1	17.8	17.6
90°	26.7	26.3	26.0	25.9	26.1	26.2	26.4	26.6
92.5°	25.0	25.1	25.1	25.2	25.2	25.3	25.3	25.3
95°	50.0	50.0	50.0	49.9	49.5	49.2	48.8	48.5
97.5°	84.1	84.1	84.1	84.1	84.1	84.0	84.0	83.9
100°	107.9	107.9	107.9	107.8	107.6	107.4	107.3	107.1
102.5°	133.8	133.9	134.1	134.0	133.9	133.7	133.5	133.3
105°	172.7	173.0	173.4	173.5	173.5	173.5	173.5	173.5
107.5°	214.6	214.7	214.9	214.6	213.8	213.0	212.2	211.4
110°	243.1	243.1	243.1	242.8	242.3	241.8	241.3	240.7



TEST NUMBER: P331445

CATALOG NUMBER: S122DIP-S1005D725U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	271.6	271.2	270.8	270.4	270.0	269.6	269.3	268.9
115°	315.4	315.3	315.1	314.7	314.2	313.7	313.2	312.7
117.5°	357.8	357.4	356.9	356.5	356.0	355.4	354.9	354.4
120°	386.1	386.1	386.1	385.9	385.3	384.8	384.3	383.8
122.5°	415.3	414.9	414.5	414.1	413.7	413.3	412.9	412.6
125°	458.6	458.0	457.5	457.2	457.0	456.8	456.7	456.5
127.5°	500.6	499.9	499.3	498.7	498.2	497.6	497.1	496.5
130°	529.3	528.9	528.6	528.0	527.3	526.7	526.0	525.3
132.5°	557.2	556.4	555.7	555.0	554.4	553.9	553.3	552.8
135°	598.4	598.2	598.0	597.7	597.2	596.7	596.1	595.6
137.5°	637.9	637.7	637.6	637.2	636.5	635.8	635.1	634.4
140°	664.4	664.4	664.4	664.0	663.4	662.7	662.0	661.3
142.5°	688.4	688.6	688.7	688.4	687.7	687.0	686.4	685.7
145°	724.9	725.1	725.3	725.0	724.3	723.6	722.9	722.2
147.5°	756.9	757.3	757.7	757.6	756.9	756.2	755.6	754.9
150°	777.2	777.7	778.3	778.3	777.7	777.2	776.7	776.2
152.5°	797.5	798.2	798.8	798.8	798.2	797.5	796.8	796.2
155°	823.2	824.1	825.0	825.2	824.6	824.1	823.6	823.1
157.5°	847.0	848.2	849.4	849.5	848.7	847.9	847.0	846.2
160°	861.1	862.2	863.2	863.4	862.7	862.0	861.3	860.6
162.5°	873.9	875.1	876.3	876.4	875.6	874.8	873.9	873.1
165°	890.4	891.6	892.8	893.0	892.1	891.2	890.4	889.5
167.5°	904.0	905.2	906.4	906.6	905.7	904.8	903.9	903.0
170°	911.5	912.7	913.9	914.0	913.0	911.9	910.9	909.8
172.5°	917.1	918.3	919.5	919.6	918.6	917.5	916.5	915.5
175°	923.2	924.4	925.6	925.7	924.7	923.6	922.6	921.6
177.5°	926.0	926.9	927.7	927.7	926.9	926.0	925.2	924.4
180°	926.2	926.2	926.2	926.2	926.2	926.2	926.2	926.2

(END OF REPORT)