

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331255

Luminaire Tested: **S122DIP-S290D530U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331255
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S290D530U835-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 530 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3317.3 lumens
Efficiency: N/A
Efficacy: 129.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 25.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331255

CATALOG NUMBER: S122DIP-S290D530U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

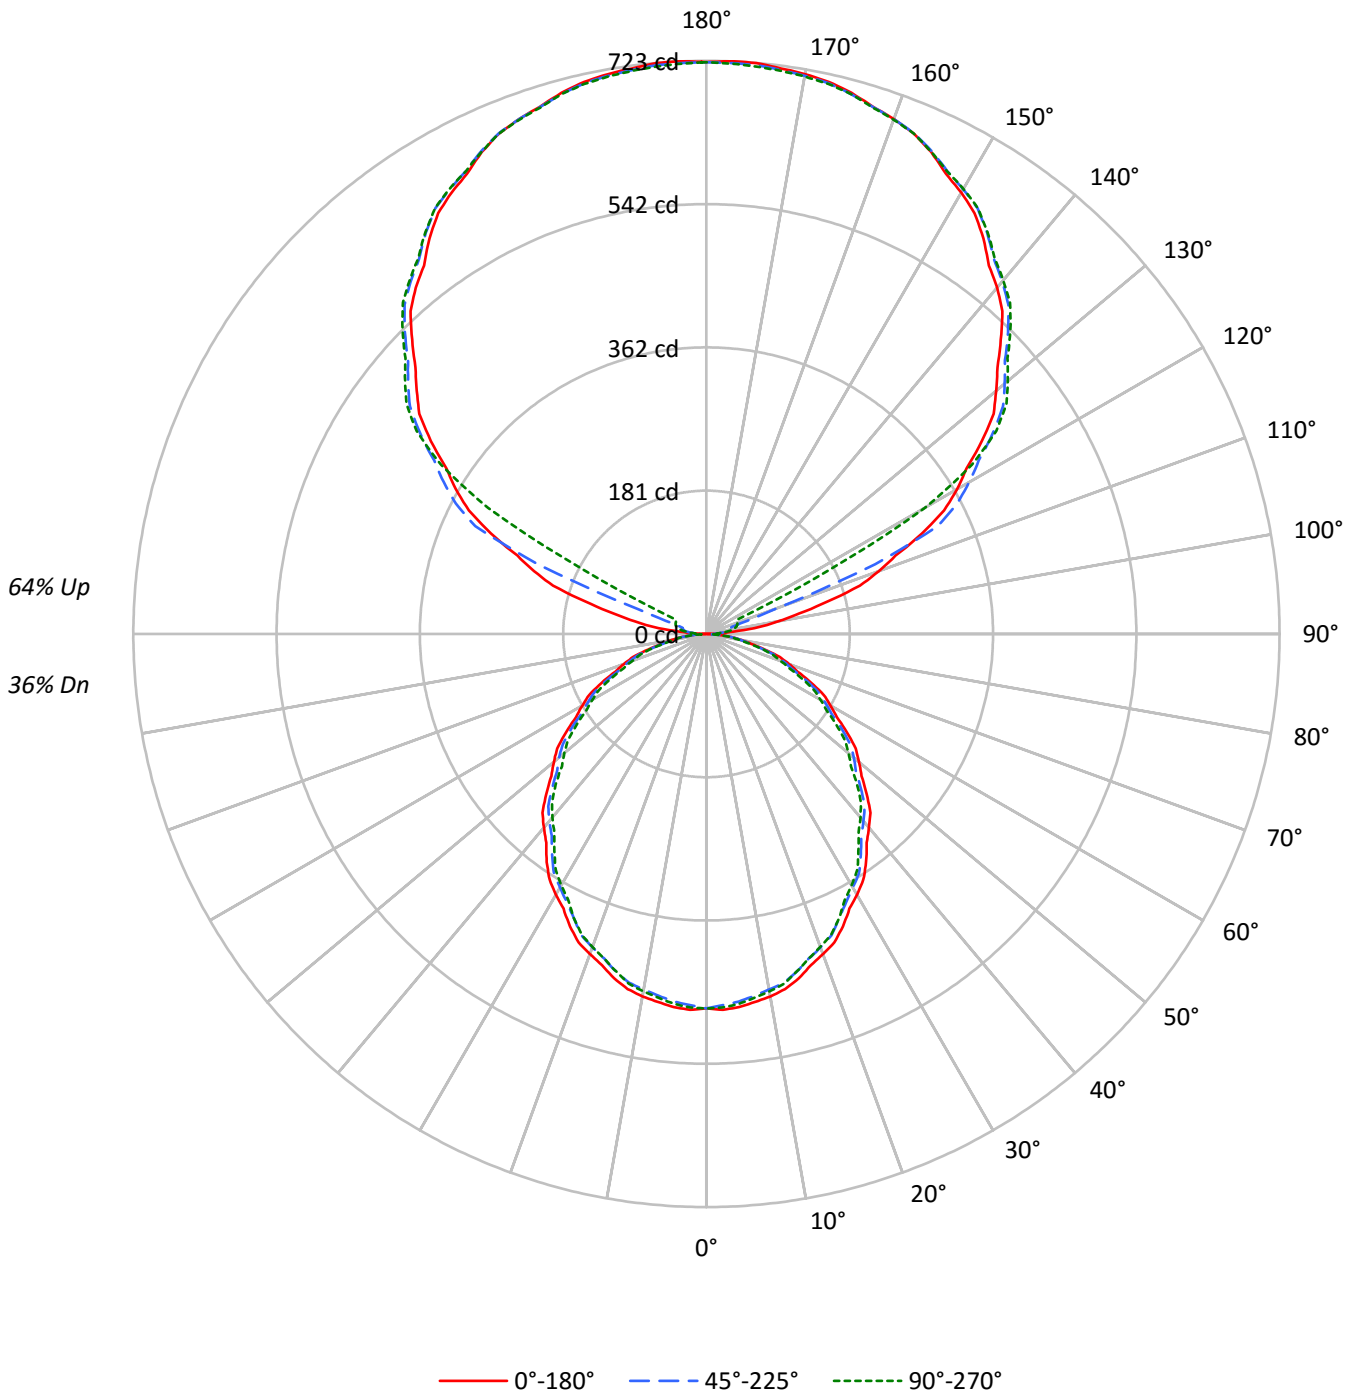



TEST NUMBER: P331255

CATALOG NUMBER: S122DIP-S290D530U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	36
1	95	90	87	83	86	82	79	76	66	64	62	52	50	49	38	38	37	31
2	86	79	73	68	78	72	67	62	58	54	51	45	43	41	34	32	31	26
3	79	69	62	57	71	63	57	52	51	47	43	40	37	35	30	28	26	22
4	72	61	54	48	65	56	49	44	45	41	37	36	32	30	27	25	23	19
5	66	55	47	41	59	50	43	38	41	35	32	32	28	26	24	22	20	16
6	61	49	41	35	55	45	38	33	36	31	27	29	25	22	22	19	17	14
7	56	44	36	31	51	40	33	29	33	28	24	26	23	20	20	17	15	13
8	52	40	32	27	47	36	30	25	30	25	21	24	20	18	18	16	14	11
9	48	36	29	24	44	33	27	22	27	22	19	22	18	16	17	14	12	10
10	45	33	26	21	41	30	24	20	25	20	17	20	17	14	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7627	7627	7627
5°	7656	7546	7592
10°	7612	7470	7507
15°	7517	7373	7366
20°	7383	7228	7220
25°	7251	7049	7049
30°	7081	6885	6825
35°	6922	6688	6589
40°	6721	6492	6367
45°	6524	6295	6140
50°	6310	6094	5878
55°	6086	5858	5638
60°	5838	5574	5370
65°	5570	5295	5051
70°	5231	4952	4716
75°	4760	4560	4448
80°	4221	4100	3887
85°	3446	3279	2946



TEST NUMBER: P331255

CATALOG NUMBER: S122DIP-S290D530U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.4	1.3
10°-20°	125.0	3.8
20°-30°	183.7	5.5
30°-40°	213.4	6.4
40°-50°	213.2	6.4
50°-60°	185.9	5.6
60°-70°	137.5	4.1
70°-80°	77.9	2.3
80°-90°	22.7	0.7
90°-100°	24.1	0.7
100°-110°	88.2	2.7
110°-120°	235.8	7.1
120°-130°	389.3	11.7
130°-140°	414.0	12.5
140°-150°	384.8	11.6
150°-160°	309.4	9.3
160°-170°	199.4	6.0
170°-180°	68.6	2.1
0°-30°	353.2	10.6
0°-40°	566.6	17.1
0°-60°	965.7	29.1
0°-90°	1203.7	36.3
90°-120°	348.1	10.5
90°-150°	1536.2	46.3
90°-180°	2114.0	63.7
0°-180°	3317.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	472	472	472	472	472	
5°	472	470	466	469	468	45
15°	450	447	441	443	441	127
25°	407	403	396	396	396	187
35°	351	346	339	337	334	219
45°	286	282	276	271	269	220
55°	216	213	208	203	200	193
65°	146	143	139	135	132	144
75°	76	75	73	71	71	82
85°	19	18	18	16	16	21
90°	0	6	10	13	14	2
95°	34	18	20	23	22	41
105°	159	166	32	37	40	170
115°	300	309	322	92	43	295
125°	424	431	441	444	446	378
135°	525	533	538	543	542	405
145°	609	609	617	621	618	381
155°	671	666	672	675	671	309
165°	707	704	705	708	705	200
175°	723	719	720	723	719	69
180°	721	721	721	721	721	



TEST NUMBER: P331255

CATALOG NUMBER: S122DIP-S290D530U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	472.4	472.4	472.4	472.4	472.4	472.4	472.4	472.4	472.4	472.4	472.4
2.5°	474.6	474.2	473.8	473.4	473.0	472.4	471.5	470.6	469.7	468.8	469.6
5°	472.4	472.0	471.6	471.2	470.8	470.1	469.0	467.9	466.7	465.6	466.4
7.5°	468.3	467.6	467.0	466.4	465.8	464.9	463.8	462.6	461.5	460.4	461.2
10°	464.3	463.6	462.9	462.2	461.4	460.5	459.3	458.1	456.9	455.6	456.4
12.5°	458.8	458.2	457.6	456.9	456.3	455.4	454.2	453.0	451.8	450.6	451.1
15°	449.7	449.1	448.5	447.9	447.3	446.4	445.0	443.7	442.4	441.1	441.5
17.5°	438.1	437.5	436.9	436.3	435.7	434.7	433.4	432.0	430.7	429.4	429.8
20°	429.7	429.1	428.5	427.9	427.3	426.3	424.9	423.5	422.1	420.7	421.0
22.5°	421.4	420.5	419.7	418.8	418.0	416.9	415.6	414.2	412.9	411.6	411.6
25°	407.0	406.2	405.4	404.6	403.8	402.5	400.8	399.1	397.4	395.7	395.9
27.5°	390.7	390.0	389.2	388.5	387.8	386.7	385.4	384.0	382.7	381.3	381.0
30°	379.8	379.0	378.2	377.4	376.5	375.4	373.9	372.4	370.8	369.3	369.0
32.5°	368.1	367.5	366.9	366.2	365.6	364.4	362.8	361.3	359.7	358.1	357.5
35°	351.2	350.1	349.1	348.1	347.1	345.8	344.2	342.6	341.0	339.3	338.7
37.5°	332.0	331.1	330.2	329.3	328.4	327.2	325.6	324.0	322.3	320.7	320.0
40°	318.9	318.1	317.3	316.5	315.7	314.5	312.8	311.2	309.6	308.0	307.1
42.5°	306.2	305.4	304.6	303.8	303.0	301.7	300.1	298.5	296.9	295.3	294.3
45°	285.7	285.0	284.3	283.6	282.9	281.8	280.3	278.8	277.3	275.7	274.6
47.5°	265.4	264.7	264.1	263.4	262.7	261.6	260.0	258.5	256.9	255.3	254.1
50°	251.2	250.7	250.2	249.7	249.2	248.2	246.8	245.4	244.0	242.6	241.2
52.5°	237.4	236.7	236.1	235.4	234.7	233.7	232.4	231.1	229.7	228.4	227.2
55°	216.2	215.6	215.0	214.4	213.8	212.9	211.7	210.5	209.3	208.1	206.8
57.5°	195.0	194.5	194.0	193.5	193.0	192.1	190.8	189.5	188.1	186.8	185.6
60°	180.8	180.4	180.0	179.6	179.2	178.3	176.9	175.5	174.0	172.6	171.5
62.5°	167.0	166.3	165.7	165.1	164.4	163.5	162.4	161.4	160.3	159.2	158.1
65°	145.8	145.2	144.6	144.0	143.4	142.6	141.6	140.6	139.6	138.6	137.6
67.5°	124.3	123.8	123.3	122.8	122.4	121.7	120.7	119.8	118.9	118.0	117.3
70°	110.8	110.4	110.0	109.6	109.2	108.6	107.7	106.8	105.8	104.9	104.2
72.5°	97.0	96.6	96.2	95.8	95.4	94.9	94.3	93.8	93.2	92.6	91.9
75°	76.3	76.1	75.9	75.7	75.5	75.2	74.7	74.1	73.6	73.1	72.5
77.5°	57.8	57.4	57.1	56.8	56.4	56.1	55.9	55.7	55.5	55.3	55.0
80°	45.4	45.3	45.2	45.1	45.0	44.9	44.7	44.5	44.3	44.1	43.8
82.5°	33.8	33.8	33.8	33.7	33.7	33.6	33.5	33.4	33.3	33.2	32.8
85°	18.6	18.5	18.4	18.3	18.2	18.1	18.0	17.9	17.8	17.7	17.4
87.5°	6.6	6.7	6.8	6.9	7.0	7.1	7.1	7.1	7.2	7.2	7.0
90°	0.5	1.8	3.1	4.3	5.6	6.7	7.7	8.6	9.5	10.4	11.0
92.5°	10.5	10.4	10.3	10.2	10.1	10.3	10.7	11.2	11.6	12.1	12.4
95°	33.9	30.1	26.3	22.4	18.6	17.1	17.9	18.7	19.5	20.4	20.9
97.5°	67.3	56.5	45.8	35.0	24.2	19.7	21.6	23.5	25.4	27.2	27.7
100°	92.4	76.5	60.6	44.7	28.8	21.9	23.8	25.8	27.8	29.7	30.7
102.5°	119.9	116.6	113.2	109.8	106.5	96.5	80.1	63.6	47.1	30.6	31.8
105°	158.6	162.1	165.6	169.1	172.6	158.5	126.8	95.2	63.5	31.8	33.1
107.5°	202.8	205.6	208.4	211.2	214.0	196.4	158.5	120.5	82.5	44.6	43.3
110°	231.2	233.6	236.1	238.5	240.9	225.4	191.9	158.4	124.8	91.3	79.7



TEST NUMBER: P331255

CATALOG NUMBER: S122DIP-S290D530U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	257.9	260.1	262.2	264.4	266.5	263.5	255.2	246.9	238.6	230.4	188.0
115°	300.1	302.0	304.0	306.0	308.0	310.4	313.3	316.2	319.1	322.0	268.3
117.5°	337.8	340.0	342.2	344.4	346.6	348.7	350.7	352.7	354.7	356.6	343.7
120°	365.3	367.0	368.8	370.5	372.3	374.2	376.3	378.4	380.4	382.5	383.9
122.5°	388.7	390.5	392.4	394.2	396.0	398.1	400.3	402.6	404.9	407.2	408.0
125°	424.3	425.8	427.3	428.8	430.3	432.2	434.4	436.6	438.8	441.0	441.8
127.5°	456.5	458.2	459.9	461.5	463.2	464.9	466.5	468.2	469.8	471.5	472.6
130°	477.0	478.8	480.7	482.6	484.4	486.0	487.3	488.5	489.8	491.1	492.4
132.5°	497.9	499.4	501.0	502.6	504.2	505.6	506.9	508.2	509.4	510.7	511.8
135°	525.0	526.9	528.7	530.6	532.4	533.9	534.9	536.0	537.0	538.0	539.2
137.5°	552.5	553.7	555.0	556.3	557.6	558.9	560.1	561.3	562.4	563.6	564.8
140°	570.4	571.3	572.3	573.2	574.1	575.2	576.5	577.8	579.0	580.3	581.4
142.5°	585.4	586.3	587.1	587.9	588.8	589.9	591.4	592.8	594.3	595.8	596.7
145°	609.0	608.9	608.8	608.7	608.6	609.5	611.5	613.4	615.4	617.4	618.2
147.5°	629.6	629.1	628.7	628.3	627.8	628.6	630.5	632.5	634.4	636.4	637.0
150°	642.9	642.1	641.3	640.5	639.7	640.2	642.1	643.9	645.8	647.6	648.3
152.5°	654.2	653.3	652.4	651.5	650.6	651.0	652.8	654.6	656.3	658.1	658.8
155°	670.6	669.6	668.5	667.5	666.4	666.6	668.0	669.4	670.8	672.2	672.9
157.5°	683.4	682.6	681.7	680.8	679.9	680.0	680.9	681.9	682.9	683.9	684.6
160°	691.0	690.3	689.6	688.9	688.2	688.2	688.9	689.6	690.3	691.0	691.7
162.5°	697.6	696.9	696.2	695.5	694.9	694.8	695.4	696.0	696.6	697.2	698.0
165°	706.6	705.9	705.2	704.5	703.8	703.7	704.0	704.3	704.7	705.0	705.9
167.5°	713.3	712.6	711.9	711.2	710.5	710.3	710.6	711.0	711.3	711.6	712.4
170°	717.0	716.4	715.7	715.0	714.3	714.0	714.3	714.5	714.7	715.0	715.8
172.5°	719.6	718.9	718.2	717.5	716.8	716.5	716.8	717.0	717.2	717.5	718.3
175°	722.8	722.0	721.2	720.4	719.5	719.3	719.5	719.7	719.9	720.2	721.0
177.5°	723.3	722.7	722.0	721.4	720.7	720.4	720.5	720.6	720.7	720.8	721.5
180°	721.2	721.2	721.2	721.2	721.2	721.2	721.2	721.2	721.2	721.2	721.2



TEST NUMBER: P331255

CATALOG NUMBER: S122DIP-S290D530U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	472.4	472.4	472.4	472.4	472.4	472.4	472.4	472.4
2.5°	470.4	471.2	472.0	472.4	472.2	472.0	471.9	471.7
5°	467.3	468.1	468.9	469.2	469.0	468.8	468.6	468.4
7.5°	462.0	462.8	463.6	463.9	463.7	463.4	463.2	463.0
10°	457.3	458.1	458.9	459.1	458.8	458.5	458.2	457.9
12.5°	451.7	452.2	452.8	453.0	452.8	452.5	452.3	452.1
15°	441.9	442.3	442.7	442.7	442.2	441.7	441.2	440.7
17.5°	430.3	430.8	431.2	431.2	430.7	430.3	429.8	429.3
20°	421.3	421.6	421.9	421.8	421.4	421.0	420.6	420.2
22.5°	411.7	411.8	411.8	411.7	411.5	411.2	411.0	410.8
25°	396.1	396.3	396.5	396.5	396.3	396.1	395.9	395.7
27.5°	380.7	380.4	380.1	379.7	379.2	378.7	378.3	377.8
30°	368.7	368.4	368.1	367.8	367.4	367.0	366.6	366.1
32.5°	357.0	356.4	355.9	355.4	355.0	354.6	354.2	353.8
35°	338.1	337.5	336.9	336.4	335.9	335.4	334.9	334.3
37.5°	319.2	318.5	317.7	317.1	316.6	316.1	315.7	315.2
40°	306.2	305.3	304.4	303.7	303.3	302.9	302.5	302.1
42.5°	293.3	292.3	291.3	290.5	290.0	289.4	288.9	288.3
45°	273.5	272.4	271.3	270.5	270.1	269.7	269.3	268.9
47.5°	253.0	251.8	250.6	249.7	249.2	248.6	248.0	247.4
50°	239.8	238.3	236.9	236.0	235.5	235.0	234.5	234.0
52.5°	226.1	224.9	223.7	222.8	222.1	221.5	220.8	220.1
55°	205.6	204.4	203.2	202.4	201.9	201.3	200.8	200.3
57.5°	184.4	183.2	182.0	181.2	180.9	180.5	180.1	179.7
60°	170.4	169.3	168.2	167.5	167.2	166.9	166.6	166.3
62.5°	157.1	156.1	155.1	154.4	154.0	153.6	153.2	152.8
65°	136.7	135.8	134.9	134.2	133.7	133.2	132.7	132.2
67.5°	116.6	115.9	115.2	114.6	114.2	113.8	113.4	113.0
70°	103.5	102.8	102.1	101.6	101.2	100.7	100.3	99.9
72.5°	91.2	90.5	89.8	89.2	88.9	88.6	88.3	87.9
75°	71.9	71.3	70.7	70.5	70.7	70.9	71.1	71.3
77.5°	54.7	54.4	54.1	53.8	53.5	53.3	53.0	52.7
80°	43.5	43.2	42.9	42.6	42.4	42.2	42.0	41.8
82.5°	32.4	32.0	31.6	31.4	31.4	31.3	31.3	31.3
85°	17.1	16.8	16.5	16.3	16.2	16.1	16.0	15.9
87.5°	6.9	6.8	6.7	6.6	6.6	6.5	6.5	6.5
90°	11.6	12.2	12.8	13.2	13.4	13.6	13.9	14.1
92.5°	12.7	13.0	13.3	13.5	13.7	13.8	14.0	14.1
95°	21.5	22.1	22.7	22.9	22.8	22.7	22.6	22.4
97.5°	28.2	28.6	29.1	29.4	29.5	29.7	29.8	30.0
100°	31.6	32.5	33.5	34.0	34.3	34.5	34.7	35.0
102.5°	33.0	34.2	35.4	36.2	36.5	36.8	37.1	37.5
105°	34.4	35.7	36.9	37.8	38.3	38.7	39.2	39.7
107.5°	42.0	40.7	39.4	39.0	39.4	39.9	40.3	40.8
110°	68.1	56.5	44.9	39.4	39.8	40.3	40.8	41.2



TEST NUMBER: P331255

CATALOG NUMBER: S122DIP-S290D530U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	145.7	103.4	61.1	40.2	40.5	40.9	41.3	41.6
115°	214.6	160.9	107.2	76.2	67.8	59.5	51.1	42.8
117.5°	330.7	317.7	304.7	284.5	257.0	229.6	202.2	174.7
120°	385.3	386.7	388.1	381.0	365.3	349.7	334.0	318.3
122.5°	408.8	409.7	410.5	409.4	406.4	403.3	400.3	397.2
125°	442.6	443.4	444.2	444.8	445.2	445.5	445.9	446.2
127.5°	473.8	475.0	476.2	476.8	476.9	477.0	477.0	477.1
130°	493.6	494.9	496.2	496.8	496.6	496.5	496.4	496.3
132.5°	512.9	514.0	515.1	515.5	515.4	515.3	515.2	515.1
135°	540.4	541.5	542.7	543.2	542.9	542.7	542.5	542.2
137.5°	565.9	567.0	568.2	568.5	568.1	567.7	567.4	567.0
140°	582.4	583.4	584.5	584.7	584.1	583.6	583.0	582.4
142.5°	597.7	598.6	599.6	599.8	599.2	598.6	598.0	597.4
145°	619.0	619.8	620.6	620.7	620.2	619.6	619.0	618.4
147.5°	637.6	638.2	638.8	638.8	638.4	637.9	637.4	636.9
150°	649.0	649.7	650.4	650.5	649.9	649.3	648.7	648.2
152.5°	659.5	660.2	660.9	660.8	660.1	659.3	658.5	657.8
155°	673.6	674.3	675.0	674.8	673.9	673.0	672.1	671.1
157.5°	685.4	686.2	687.0	687.0	686.0	685.1	684.2	683.3
160°	692.3	693.0	693.7	693.7	692.9	692.1	691.2	690.4
162.5°	698.8	699.6	700.4	700.3	699.3	698.3	697.3	696.3
165°	706.7	707.5	708.3	708.3	707.5	706.7	705.9	705.0
167.5°	713.2	714.1	714.9	714.8	713.7	712.7	711.6	710.6
170°	716.6	717.4	718.2	718.1	717.0	716.0	715.0	713.9
172.5°	719.1	719.9	720.7	720.6	719.6	718.5	717.5	716.4
175°	721.8	722.6	723.4	723.3	722.1	720.9	719.8	718.6
177.5°	722.1	722.8	723.4	723.3	722.5	721.6	720.8	720.0
180°	721.2	721.2	721.2	721.2	721.2	721.2	721.2	721.2

(END OF REPORT)