

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331345

Luminaire Tested: **S122DIP-S675D530U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331345
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S675D530U835-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 530 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4816.5 lumens
Efficiency: N/A
Efficacy: 119.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331345

CATALOG NUMBER: S122DIP-S675D530U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

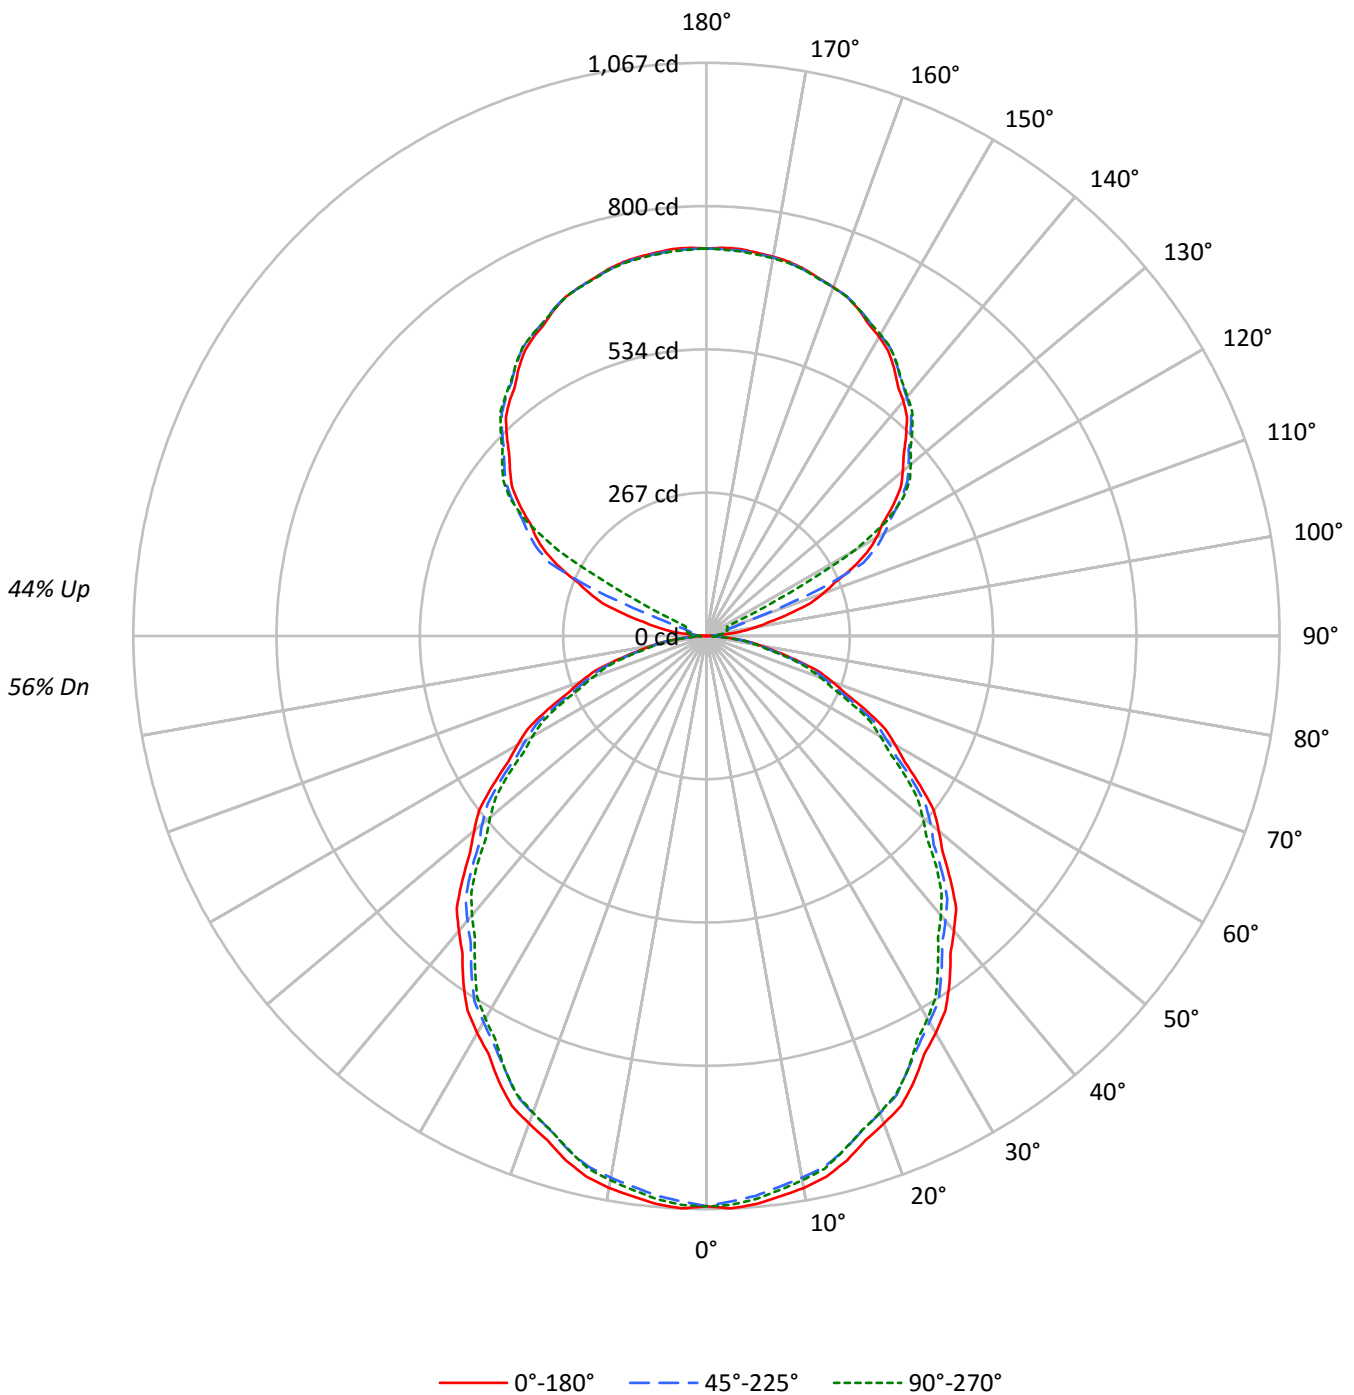



TEST NUMBER: P331345

CATALOG NUMBER: S122DIP-S675D530U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	56
1	99	95	91	87	92	88	85	82	76	74	71	65	63	61	55	53	52	47
2	90	83	77	71	84	77	72	67	67	63	59	57	54	51	48	46	44	40
3	82	73	65	59	76	68	61	56	59	54	50	50	47	43	43	40	37	34
4	75	64	56	50	70	60	53	48	52	47	42	45	41	37	38	35	32	29
5	69	57	49	43	64	54	46	41	47	41	37	40	36	32	34	31	28	25
6	64	52	43	38	59	48	41	36	42	36	32	37	32	28	31	28	25	22
7	59	47	39	33	55	44	36	31	38	32	28	33	29	25	28	25	22	19
8	55	42	35	29	51	40	33	28	35	29	25	30	26	22	26	22	20	17
9	51	39	31	26	47	36	30	25	32	26	22	28	23	20	24	21	18	16
10	48	36	28	23	44	34	27	22	30	24	20	26	21	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17142	17142	17142
5°	17208	16960	17058
10°	17105	16787	16870
15°	16893	16568	16552
20°	16593	16242	16225
25°	16295	15841	15841
30°	15910	15474	15340
35°	15554	15031	14808
40°	15104	14587	14309
45°	14661	14150	13798
50°	14179	13692	13205
55°	13678	13163	12673
60°	13120	12526	12064
65°	12520	11897	11351
70°	11759	11131	10603
75°	10699	10256	10000
80°	9493	9205	8731
85°	7762	7373	6614



TEST NUMBER: P331345

CATALOG NUMBER: S122DIP-S675D530U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	99.8	2.1
10°-20°	280.9	5.8
20°-30°	412.9	8.6
30°-40°	479.6	10.0
40°-50°	479.1	9.9
50°-60°	417.8	8.7
60°-70°	308.9	6.4
70°-80°	175.0	3.6
80°-90°	48.8	1.0
90°-100°	24.1	0.5
100°-110°	88.2	1.8
110°-120°	235.8	4.9
120°-130°	389.3	8.1
130°-140°	414.0	8.6
140°-150°	384.8	8.0
150°-160°	309.4	6.4
160°-170°	199.4	4.1
170°-180°	68.6	1.4
0°-30°	793.6	16.5
0°-40°	1273.2	26.4
0°-60°	2170.1	45.1
0°-90°	2702.9	56.1
90°-120°	348.1	7.2
90°-150°	1536.2	31.9
90°-180°	2114.0	43.9
0°-180°	4816.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1062	1062	1062	1062	1062	
5°	1062	1057	1046	1054	1052	101
15°	1011	1004	991	995	990	284
25°	915	906	889	891	889	421
35°	789	779	763	756	751	492
45°	642	635	620	609	604	495
55°	486	479	468	456	450	434
65°	328	321	311	302	297	324
75°	172	169	164	159	160	183
85°	42	41	40	37	36	48
90°	0	6	10	13	14	4
95°	34	18	20	23	22	41
105°	159	166	32	37	40	170
115°	300	309	322	92	43	295
125°	424	431	441	444	446	378
135°	525	533	538	543	542	405
145°	609	609	617	621	618	381
155°	671	666	672	675	671	309
165°	707	704	705	708	705	200
175°	723	719	720	723	719	69
180°	721	721	721	721	721	



TEST NUMBER: P331345

CATALOG NUMBER: S122DIP-S675D530U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7
2.5°	1066.6	1065.7	1064.8	1063.9	1063.0	1061.5	1059.5	1057.5	1055.5	1053.5	1055.3
5°	1061.7	1060.8	1059.9	1059.0	1058.1	1056.4	1053.9	1051.4	1048.9	1046.4	1048.2
7.5°	1052.3	1050.9	1049.5	1048.1	1046.7	1044.7	1042.2	1039.6	1037.1	1034.5	1036.3
10°	1043.3	1041.7	1040.1	1038.5	1037.0	1034.8	1032.1	1029.4	1026.6	1023.9	1025.7
12.5°	1031.1	1029.7	1028.2	1026.8	1025.4	1023.4	1020.6	1017.9	1015.2	1012.5	1013.8
15°	1010.6	1009.3	1007.9	1006.6	1005.2	1003.0	1000.1	997.1	994.2	991.2	992.2
17.5°	984.5	983.1	981.8	980.4	979.1	976.9	973.9	970.9	967.9	964.9	966.0
20°	965.7	964.4	963.0	961.6	960.3	958.0	954.8	951.7	948.5	945.3	946.0
22.5°	946.9	945.0	943.1	941.2	939.3	936.9	933.9	930.9	927.9	924.9	925.0
25°	914.7	912.9	911.1	909.2	907.4	904.6	900.7	896.9	893.0	889.2	889.6
27.5°	877.9	876.3	874.7	873.0	871.4	869.1	866.0	863.0	859.9	856.9	856.2
30°	853.4	851.6	849.8	848.0	846.2	843.6	840.2	836.8	833.4	830.0	829.3
32.5°	827.3	825.8	824.4	822.9	821.5	819.0	815.4	811.8	808.2	804.6	803.4
35°	789.1	786.9	784.6	782.3	780.0	777.1	773.5	769.8	766.2	762.6	761.2
37.5°	746.0	744.0	742.0	740.0	738.1	735.2	731.6	728.0	724.4	720.7	719.0
40°	716.6	714.8	713.0	711.2	709.4	706.7	703.0	699.4	695.8	692.1	690.1
42.5°	688.1	686.2	684.4	682.6	680.8	678.1	674.4	670.8	667.2	663.6	661.3
45°	642.1	640.5	638.9	637.4	635.8	633.3	629.9	626.5	623.1	619.7	617.2
47.5°	596.4	594.9	593.4	591.9	590.4	587.9	584.3	580.8	577.3	573.7	571.1
50°	564.5	563.4	562.3	561.1	560.0	557.8	554.7	551.5	548.3	545.1	542.0
52.5°	533.5	532.0	530.5	529.0	527.5	525.3	522.3	519.3	516.3	513.3	510.7
55°	485.9	484.6	483.2	481.8	480.5	478.4	475.7	473.0	470.3	467.6	464.8
57.5°	438.1	437.1	436.0	434.9	433.8	431.8	428.8	425.8	422.8	419.8	417.1
60°	406.3	405.4	404.5	403.6	402.7	400.6	397.5	394.3	391.1	387.9	385.4
62.5°	375.3	373.8	372.4	370.9	369.5	367.5	365.1	362.6	360.2	357.7	355.4
65°	327.7	326.3	325.0	323.6	322.2	320.4	318.2	315.9	313.6	311.4	309.3
67.5°	279.3	278.2	277.1	276.0	274.9	273.4	271.3	269.3	267.3	265.2	263.6
70°	249.1	248.2	247.3	246.4	245.5	244.0	241.9	239.9	237.9	235.8	234.2
72.5°	218.1	217.1	216.2	215.3	214.4	213.3	212.0	210.7	209.4	208.0	206.5
75°	171.5	171.0	170.6	170.1	169.7	168.9	167.8	166.6	165.5	164.4	163.0
77.5°	129.9	129.1	128.3	127.5	126.8	126.2	125.7	125.2	124.8	124.3	123.7
80°	102.1	101.9	101.6	101.4	101.2	100.8	100.4	99.9	99.5	99.0	98.3
82.5°	76.0	75.9	75.9	75.8	75.8	75.6	75.3	75.1	74.8	74.5	73.7
85°	41.9	41.6	41.4	41.2	40.9	40.7	40.5	40.3	40.0	39.8	39.1
87.5°	14.8	14.7	14.6	14.5	14.4	14.2	14.1	13.9	13.7	13.5	13.1
90°	0.5	1.8	3.1	4.3	5.6	6.7	7.7	8.6	9.5	10.4	11.0
92.5°	10.5	10.4	10.3	10.2	10.1	10.3	10.7	11.2	11.6	12.1	12.4
95°	33.9	30.1	26.3	22.4	18.6	17.1	17.9	18.7	19.5	20.4	20.9
97.5°	67.3	56.5	45.8	35.0	24.2	19.7	21.6	23.5	25.4	27.2	27.7
100°	92.4	76.5	60.6	44.7	28.8	21.9	23.8	25.8	27.8	29.7	30.7
102.5°	119.9	116.6	113.2	109.8	106.5	96.5	80.1	63.6	47.1	30.6	31.8
105°	158.6	162.1	165.6	169.1	172.6	158.5	126.8	95.2	63.5	31.8	33.1
107.5°	202.8	205.6	208.4	211.2	214.0	196.4	158.5	120.5	82.5	44.6	43.3
110°	231.2	233.6	236.1	238.5	240.9	225.4	191.9	158.4	124.8	91.3	79.7



TEST NUMBER: P331345

CATALOG NUMBER: S122DIP-S675D530U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	257.9	260.1	262.2	264.4	266.5	263.5	255.2	246.9	238.6	230.4	188.0
115°	300.1	302.0	304.0	306.0	308.0	310.4	313.3	316.2	319.1	322.0	268.3
117.5°	337.8	340.0	342.2	344.4	346.6	348.7	350.7	352.7	354.7	356.6	343.7
120°	365.3	367.0	368.8	370.5	372.3	374.2	376.3	378.4	380.4	382.5	383.9
122.5°	388.7	390.5	392.4	394.2	396.0	398.1	400.3	402.6	404.9	407.2	408.0
125°	424.3	425.8	427.3	428.8	430.3	432.2	434.4	436.6	438.8	441.0	441.8
127.5°	456.5	458.2	459.9	461.5	463.2	464.9	466.5	468.2	469.8	471.5	472.6
130°	477.0	478.8	480.7	482.6	484.4	486.0	487.3	488.5	489.8	491.1	492.4
132.5°	497.9	499.4	501.0	502.6	504.2	505.6	506.9	508.2	509.4	510.7	511.8
135°	525.0	526.9	528.7	530.6	532.4	533.9	534.9	536.0	537.0	538.0	539.2
137.5°	552.5	553.7	555.0	556.3	557.6	558.9	560.1	561.3	562.4	563.6	564.8
140°	570.4	571.3	572.3	573.2	574.1	575.2	576.5	577.8	579.0	580.3	581.4
142.5°	585.4	586.3	587.1	587.9	588.8	589.9	591.4	592.8	594.3	595.8	596.7
145°	609.0	608.9	608.8	608.7	608.6	609.5	611.5	613.4	615.4	617.4	618.2
147.5°	629.6	629.1	628.7	628.3	627.8	628.6	630.5	632.5	634.4	636.4	637.0
150°	642.9	642.1	641.3	640.5	639.7	640.2	642.1	643.9	645.8	647.6	648.3
152.5°	654.2	653.3	652.4	651.5	650.6	651.0	652.8	654.6	656.3	658.1	658.8
155°	670.6	669.6	668.5	667.5	666.4	666.6	668.0	669.4	670.8	672.2	672.9
157.5°	683.4	682.6	681.7	680.8	679.9	680.0	680.9	681.9	682.9	683.9	684.6
160°	691.0	690.3	689.6	688.9	688.2	688.2	688.9	689.6	690.3	691.0	691.7
162.5°	697.6	696.9	696.2	695.5	694.9	694.8	695.4	696.0	696.6	697.2	698.0
165°	706.6	705.9	705.2	704.5	703.8	703.7	704.0	704.3	704.7	705.0	705.9
167.5°	713.3	712.6	711.9	711.2	710.5	710.3	710.6	711.0	711.3	711.6	712.4
170°	717.0	716.4	715.7	715.0	714.3	714.0	714.3	714.5	714.7	715.0	715.8
172.5°	719.6	718.9	718.2	717.5	716.8	716.5	716.8	717.0	717.2	717.5	718.3
175°	722.8	722.0	721.2	720.4	719.5	719.3	719.5	719.7	719.9	720.2	721.0
177.5°	723.3	722.7	722.0	721.4	720.7	720.4	720.5	720.6	720.7	720.8	721.5
180°	721.2	721.2	721.2	721.2	721.2	721.2	721.2	721.2	721.2	721.2	721.2



TEST NUMBER: P331345

CATALOG NUMBER: S122DIP-S675D530U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7
2.5°	1057.1	1059.0	1060.8	1061.5	1061.1	1060.8	1060.4	1060.1
5°	1050.0	1051.8	1053.6	1054.3	1053.9	1053.4	1053.0	1052.5
7.5°	1038.2	1040.0	1041.8	1042.4	1041.9	1041.5	1041.0	1040.5
10°	1027.5	1029.4	1031.2	1031.7	1031.1	1030.4	1029.7	1029.0
12.5°	1015.0	1016.3	1017.6	1017.9	1017.4	1017.0	1016.5	1016.0
15°	993.1	994.0	994.9	994.8	993.6	992.5	991.4	990.2
17.5°	967.0	968.0	969.1	969.1	968.0	966.9	965.8	964.7
20°	946.7	947.4	948.0	947.9	947.0	946.1	945.2	944.3
22.5°	925.2	925.3	925.4	925.2	924.7	924.1	923.6	923.1
25°	890.1	890.5	891.0	891.0	890.5	890.1	889.6	889.2
27.5°	855.5	854.9	854.2	853.3	852.2	851.1	850.0	848.9
30°	828.6	827.9	827.2	826.4	825.5	824.6	823.7	822.8
32.5°	802.2	801.0	799.7	798.7	797.8	796.9	795.9	795.0
35°	759.9	758.5	757.1	755.9	754.8	753.6	752.5	751.3
37.5°	717.4	715.7	714.0	712.6	711.5	710.4	709.4	708.3
40°	688.1	686.0	684.0	682.5	681.6	680.7	679.8	678.9
42.5°	659.1	656.9	654.7	652.9	651.6	650.4	649.1	647.8
45°	614.7	612.2	609.7	608.0	607.1	606.2	605.3	604.3
47.5°	568.5	565.8	563.2	561.2	559.9	558.6	557.3	556.0
50°	538.8	535.6	532.4	530.3	529.1	528.0	526.9	525.7
52.5°	508.0	505.4	502.8	500.7	499.2	497.7	496.2	494.7
55°	462.1	459.4	456.7	454.7	453.6	452.5	451.3	450.2
57.5°	414.4	411.7	409.1	407.3	406.4	405.6	404.7	403.8
60°	382.9	380.4	377.9	376.4	375.7	375.0	374.3	373.6
62.5°	353.1	350.8	348.5	346.9	346.0	345.1	344.3	343.4
65°	307.3	305.2	303.2	301.6	300.5	299.3	298.2	297.1
67.5°	262.0	260.5	258.9	257.6	256.7	255.8	254.9	254.0
70°	232.6	231.1	229.5	228.2	227.3	226.4	225.5	224.6
72.5°	204.9	203.3	201.7	200.5	199.8	199.1	198.4	197.6
75°	161.6	160.3	158.9	158.5	158.9	159.4	159.8	160.3
77.5°	123.0	122.3	121.6	121.0	120.3	119.7	119.1	118.4
80°	97.7	97.0	96.3	95.7	95.3	94.8	94.4	93.9
82.5°	72.8	71.9	71.1	70.6	70.5	70.4	70.3	70.2
85°	38.5	37.8	37.1	36.6	36.4	36.2	36.0	35.7
87.5°	12.7	12.2	11.8	11.5	11.4	11.3	11.1	11.0
90°	11.6	12.2	12.8	13.2	13.4	13.6	13.9	14.1
92.5°	12.7	13.0	13.3	13.5	13.7	13.8	14.0	14.1
95°	21.5	22.1	22.7	22.9	22.8	22.7	22.6	22.4
97.5°	28.2	28.6	29.1	29.4	29.5	29.7	29.8	30.0
100°	31.6	32.5	33.5	34.0	34.3	34.5	34.7	35.0
102.5°	33.0	34.2	35.4	36.2	36.5	36.8	37.1	37.5
105°	34.4	35.7	36.9	37.8	38.3	38.7	39.2	39.7
107.5°	42.0	40.7	39.4	39.0	39.4	39.9	40.3	40.8
110°	68.1	56.5	44.9	39.4	39.8	40.3	40.8	41.2



TEST NUMBER: P331345

CATALOG NUMBER: S122DIP-S675D530U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	145.7	103.4	61.1	40.2	40.5	40.9	41.3	41.6
115°	214.6	160.9	107.2	76.2	67.8	59.5	51.1	42.8
117.5°	330.7	317.7	304.7	284.5	257.0	229.6	202.2	174.7
120°	385.3	386.7	388.1	381.0	365.3	349.7	334.0	318.3
122.5°	408.8	409.7	410.5	409.4	406.4	403.3	400.3	397.2
125°	442.6	443.4	444.2	444.8	445.2	445.5	445.9	446.2
127.5°	473.8	475.0	476.2	476.8	476.9	477.0	477.0	477.1
130°	493.6	494.9	496.2	496.8	496.6	496.5	496.4	496.3
132.5°	512.9	514.0	515.1	515.5	515.4	515.3	515.2	515.1
135°	540.4	541.5	542.7	543.2	542.9	542.7	542.5	542.2
137.5°	565.9	567.0	568.2	568.5	568.1	567.7	567.4	567.0
140°	582.4	583.4	584.5	584.7	584.1	583.6	583.0	582.4
142.5°	597.7	598.6	599.6	599.8	599.2	598.6	598.0	597.4
145°	619.0	619.8	620.6	620.7	620.2	619.6	619.0	618.4
147.5°	637.6	638.2	638.8	638.8	638.4	637.9	637.4	636.9
150°	649.0	649.7	650.4	650.5	649.9	649.3	648.7	648.2
152.5°	659.5	660.2	660.9	660.8	660.1	659.3	658.5	657.8
155°	673.6	674.3	675.0	674.8	673.9	673.0	672.1	671.1
157.5°	685.4	686.2	687.0	687.0	686.0	685.1	684.2	683.3
160°	692.3	693.0	693.7	693.7	692.9	692.1	691.2	690.4
162.5°	698.8	699.6	700.4	700.3	699.3	698.3	697.3	696.3
165°	706.7	707.5	708.3	708.3	707.5	706.7	705.9	705.0
167.5°	713.2	714.1	714.9	714.8	713.7	712.7	711.6	710.6
170°	716.6	717.4	718.2	718.1	717.0	716.0	715.0	713.9
172.5°	719.1	719.9	720.7	720.6	719.6	718.5	717.5	716.4
175°	721.8	722.6	723.4	723.3	722.1	720.9	719.8	718.6
177.5°	722.1	722.8	723.4	723.3	722.5	721.6	720.8	720.0
180°	721.2	721.2	721.2	721.2	721.2	721.2	721.2	721.2

(END OF REPORT)