

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331365

Luminaire Tested: **S122DIP-S675D925U835-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331365
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S675D925U835-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 925 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6317.1 lumens
Efficiency: N/A
Efficacy: 121.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331365

CATALOG NUMBER: S122DIP-S675D925U835-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

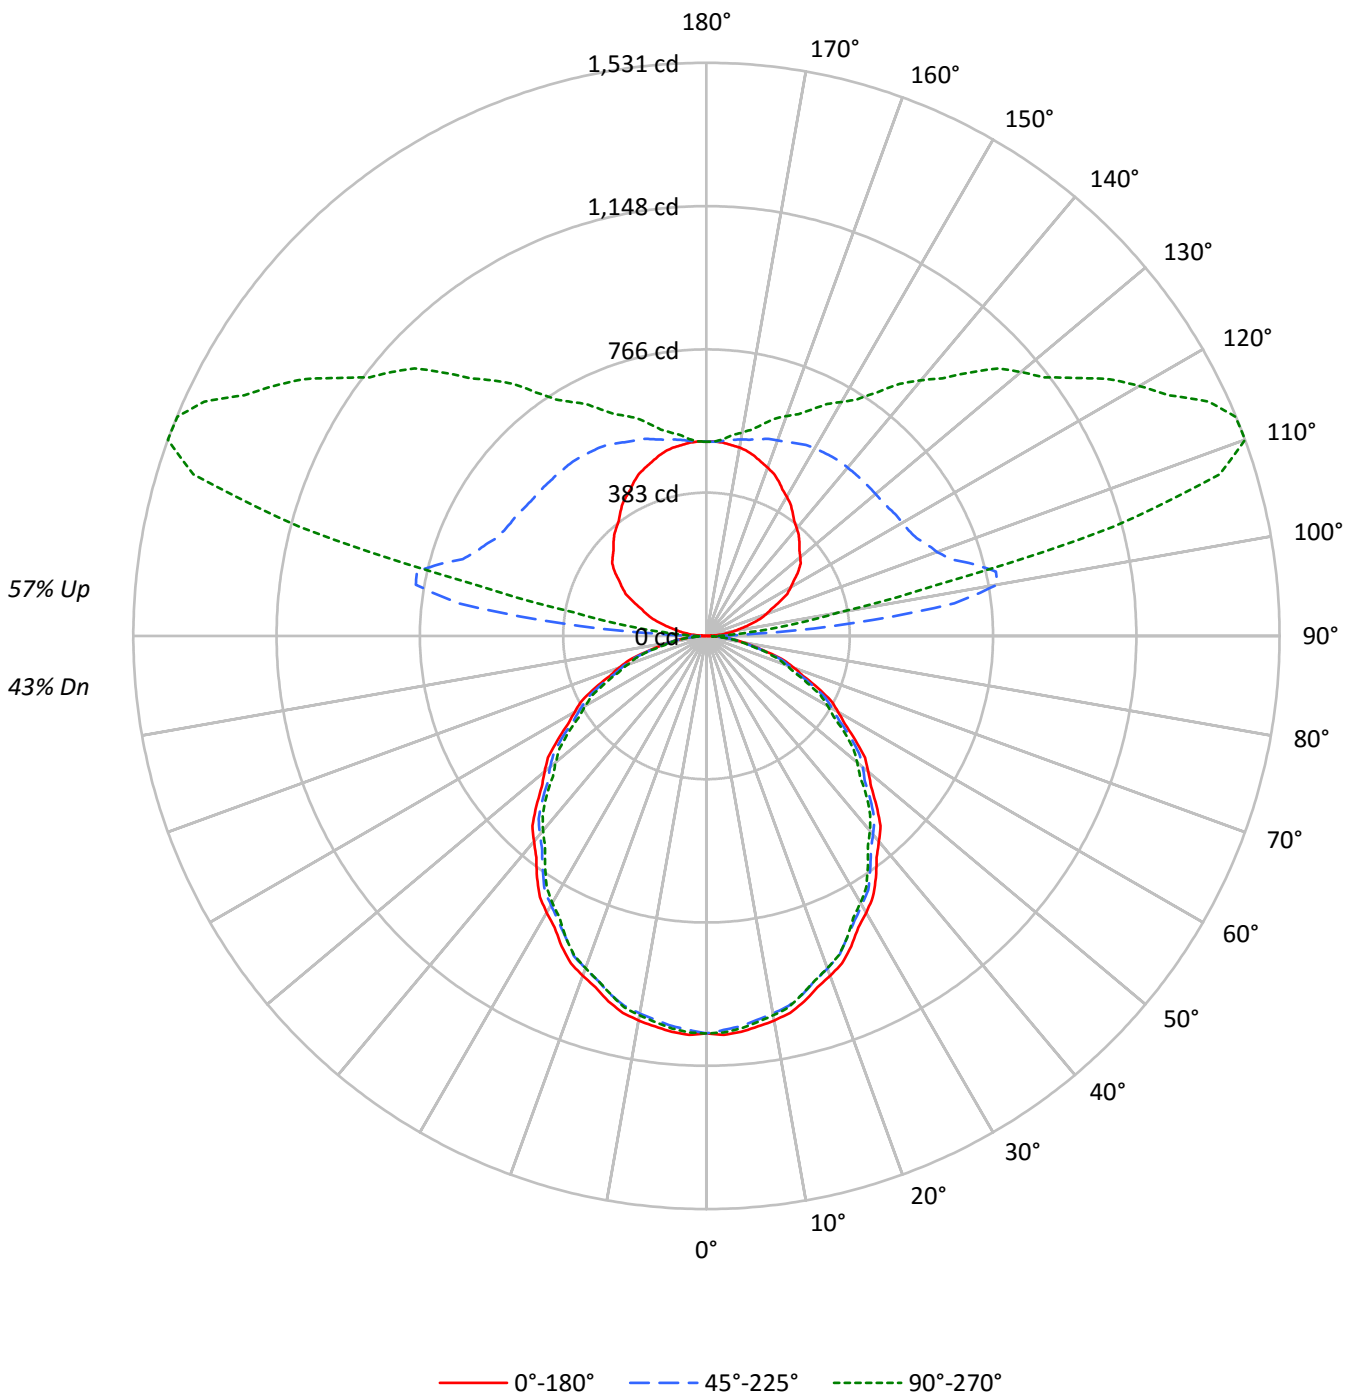



TEST NUMBER: P331365

CATALOG NUMBER: S122DIP-S675D925U835-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	50	50	50	43
1	96	92	88	85	88	84	81	78	69	67	65	56	55	53	44	43	42	36
2	88	80	74	69	80	73	68	64	61	57	54	49	47	44	38	37	35	30
3	80	70	63	57	73	65	58	53	54	49	45	44	40	37	34	32	30	26
4	73	62	55	49	66	57	50	45	48	43	39	39	35	32	30	28	26	22
5	67	55	47	42	61	51	44	39	43	37	33	35	31	28	27	25	22	19
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	25	22	20	17
7	57	45	37	31	52	41	34	29	35	29	25	29	24	21	23	20	18	15
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16	13
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	12
10	46	34	27	22	42	31	25	21	27	22	18	22	18	15	18	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17142	17142	17142
5°	17208	16960	17058
10°	17105	16787	16870
15°	16893	16568	16552
20°	16593	16242	16225
25°	16295	15841	15841
30°	15910	15474	15340
35°	15554	15031	14808
40°	15104	14587	14309
45°	14661	14150	13798
50°	14179	13692	13205
55°	13678	13163	12673
60°	13120	12526	12064
65°	12520	11897	11351
70°	11759	11131	10603
75°	10699	10256	10000
80°	9493	9205	8731
85°	7762	7373	6614



TEST NUMBER: P331365

CATALOG NUMBER: S122DIP-S675D925U835-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	99.8	1.6
10°-20°	280.9	4.4
20°-30°	412.9	6.5
30°-40°	479.6	7.6
40°-50°	479.1	7.6
50°-60°	417.8	6.6
60°-70°	308.9	4.9
70°-80°	175.0	2.8
80°-90°	51.7	0.8
90°-100°	207.5	3.3
100°-110°	704.2	11.1
110°-120°	748.1	11.8
120°-130°	615.8	9.7
130°-140°	494.5	7.8
140°-150°	373.7	5.9
150°-160°	262.6	4.2
160°-170°	154.6	2.4
170°-180°	50.3	0.8
0°-30°	793.6	12.6
0°-40°	1273.2	20.2
0°-60°	2170.1	34.4
0°-90°	2705.8	42.8
90°-120°	1659.8	26.3
90°-150°	3143.8	49.8
90°-180°	3611.0	57.2
0°-180°	6317.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1062	1062	1062	1062	1062	
5°	1062	1057	1046	1054	1052	101
15°	1011	1004	991	995	990	284
25°	915	906	889	891	889	421
35°	789	779	763	756	751	492
45°	642	635	620	609	604	495
55°	486	479	468	456	450	434
65°	328	321	311	302	297	324
75°	172	169	164	159	160	183
85°	42	41	40	37	36	48
90°	1	14	34	32	33	4
95°	35	86	391	148	114	37
105°	122	184	740	1322	1125	129
115°	215	271	619	1277	1480	213
125°	299	354	595	1034	1201	266
135°	351	419	588	869	995	271
145°	401	461	585	726	794	252
155°	456	492	568	642	668	210
165°	497	512	544	577	586	140
175°	518	518	523	530	528	49
180°	519	519	519	519	519	



TEST NUMBER: P331365

CATALOG NUMBER: S122DIP-S675D925U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7
2.5°	1066.6	1065.7	1064.8	1063.9	1063.0	1061.5	1059.5	1057.5	1055.5	1053.5	1055.3
5°	1061.7	1060.8	1059.9	1059.0	1058.1	1056.4	1053.9	1051.4	1048.9	1046.4	1048.2
7.5°	1052.3	1050.9	1049.5	1048.1	1046.7	1044.7	1042.2	1039.6	1037.1	1034.5	1036.3
10°	1043.3	1041.7	1040.1	1038.5	1037.0	1034.8	1032.1	1029.4	1026.6	1023.9	1025.7
12.5°	1031.1	1029.7	1028.2	1026.8	1025.4	1023.4	1020.6	1017.9	1015.2	1012.5	1013.8
15°	1010.6	1009.3	1007.9	1006.6	1005.2	1003.0	1000.1	997.1	994.2	991.2	992.2
17.5°	984.5	983.1	981.8	980.4	979.1	976.9	973.9	970.9	967.9	964.9	966.0
20°	965.7	964.4	963.0	961.6	960.3	958.0	954.8	951.7	948.5	945.3	946.0
22.5°	946.9	945.0	943.1	941.2	939.3	936.9	933.9	930.9	927.9	924.9	925.0
25°	914.7	912.9	911.1	909.2	907.4	904.6	900.7	896.9	893.0	889.2	889.6
27.5°	877.9	876.3	874.7	873.0	871.4	869.1	866.0	863.0	859.9	856.9	856.2
30°	853.4	851.6	849.8	848.0	846.2	843.6	840.2	836.8	833.4	830.0	829.3
32.5°	827.3	825.8	824.4	822.9	821.5	819.0	815.4	811.8	808.2	804.6	803.4
35°	789.1	786.9	784.6	782.3	780.0	777.1	773.5	769.8	766.2	762.6	761.2
37.5°	746.0	744.0	742.0	740.0	738.1	735.2	731.6	728.0	724.4	720.7	719.0
40°	716.6	714.8	713.0	711.2	709.4	706.7	703.0	699.4	695.8	692.1	690.1
42.5°	688.1	686.2	684.4	682.6	680.8	678.1	674.4	670.8	667.2	663.6	661.3
45°	642.1	640.5	638.9	637.4	635.8	633.3	629.9	626.5	623.1	619.7	617.2
47.5°	596.4	594.9	593.4	591.9	590.4	587.9	584.3	580.8	577.3	573.7	571.1
50°	564.5	563.4	562.3	561.1	560.0	557.8	554.7	551.5	548.3	545.1	542.0
52.5°	533.5	532.0	530.5	529.0	527.5	525.3	522.3	519.3	516.3	513.3	510.7
55°	485.9	484.6	483.2	481.8	480.5	478.4	475.7	473.0	470.3	467.6	464.8
57.5°	438.1	437.1	436.0	434.9	433.8	431.8	428.8	425.8	422.8	419.8	417.1
60°	406.3	405.4	404.5	403.6	402.7	400.6	397.5	394.3	391.1	387.9	385.4
62.5°	375.3	373.8	372.4	370.9	369.5	367.5	365.1	362.6	360.2	357.7	355.4
65°	327.7	326.3	325.0	323.6	322.2	320.4	318.2	315.9	313.6	311.4	309.3
67.5°	279.3	278.2	277.1	276.0	274.9	273.4	271.3	269.3	267.3	265.2	263.6
70°	249.1	248.2	247.3	246.4	245.5	244.0	241.9	239.9	237.9	235.8	234.2
72.5°	218.1	217.1	216.2	215.3	214.4	213.3	212.0	210.7	209.4	208.0	206.5
75°	171.5	171.0	170.6	170.1	169.7	168.9	167.8	166.6	165.5	164.4	163.0
77.5°	129.9	129.1	128.3	127.5	126.8	126.2	125.7	125.2	124.8	124.3	123.7
80°	102.1	101.9	101.6	101.4	101.2	100.8	100.4	99.9	99.5	99.0	98.3
82.5°	76.0	75.9	75.9	75.8	75.8	75.6	75.3	75.1	74.8	74.5	73.7
85°	41.9	41.6	41.4	41.2	40.9	40.7	40.5	40.3	40.0	39.8	39.1
87.5°	14.9	15.1	15.6	15.6	15.6	15.9	16.5	17.5	18.4	18.2	17.5
90°	1.0	4.0	8.0	10.0	12.0	15.0	20.0	26.9	32.9	33.9	32.9
92.5°	12.2	17.6	24.8	29.1	35.9	45.3	67.9	99.6	127.9	129.7	109.6
95°	34.9	38.9	48.9	57.9	73.9	97.8	143.7	230.5	346.3	391.2	342.3
97.5°	56.9	62.3	72.9	86.4	104.8	131.9	189.6	310.6	503.0	667.9	700.6
100°	76.8	79.8	88.8	104.8	124.8	152.7	205.6	327.4	542.9	788.4	932.2
102.5°	95.2	97.4	106.4	122.4	143.1	171.1	220.0	328.2	527.8	792.4	1018.4
105°	121.8	125.8	132.7	147.7	169.7	197.6	244.5	333.3	498.0	739.5	1005.0
107.5°	150.5	153.7	160.5	174.3	196.0	224.2	269.7	347.1	483.2	682.9	917.4
110°	169.7	173.7	179.6	192.6	213.6	242.5	286.4	358.3	480.1	655.7	862.3



TEST NUMBER: P331365

CATALOG NUMBER: S122DIP-S675D925U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	187.2	191.2	198.0	210.2	230.3	260.1	302.4	370.3	480.8	638.1	824.0
115°	214.6	219.6	225.6	237.5	257.5	284.4	327.4	388.2	485.0	618.8	776.5
117.5°	242.9	246.9	252.9	263.5	282.6	310.6	350.3	407.4	492.2	609.4	746.5
120°	260.5	264.5	270.5	279.4	299.4	327.4	366.3	420.2	497.0	603.8	730.6
122.5°	277.3	280.4	286.4	296.2	316.2	344.9	381.4	431.3	502.6	600.6	717.0
125°	299.4	302.4	308.4	320.4	340.3	368.3	404.2	449.1	511.0	594.8	697.6
127.5°	317.0	321.0	329.3	342.5	361.7	390.4	425.4	465.7	519.6	591.4	679.7
130°	327.4	331.3	341.3	355.3	375.3	403.2	438.1	476.1	526.0	589.8	667.7
132.5°	336.9	341.7	352.5	367.3	388.0	416.0	449.3	486.4	532.3	589.0	658.1
135°	351.3	355.3	367.3	382.2	405.2	433.1	465.1	500.0	539.9	587.8	644.7
137.5°	364.9	369.7	381.6	397.6	420.4	446.3	477.9	510.4	546.7	587.6	635.3
140°	375.3	379.3	391.2	407.2	429.2	455.1	485.0	516.0	549.9	586.8	629.8
142.5°	385.6	388.8	400.0	416.0	437.1	461.5	490.6	520.8	552.3	586.8	624.2
145°	401.2	405.2	415.2	430.2	450.1	472.1	499.0	527.0	554.9	584.8	616.8
147.5°	418.0	421.0	430.5	444.3	460.9	480.5	505.8	530.4	555.7	581.3	609.2
150°	429.2	432.1	440.1	453.1	468.1	486.0	509.0	531.9	554.9	578.9	602.8
152.5°	440.3	441.7	449.7	461.1	475.3	491.6	512.2	532.7	553.3	574.9	597.2
155°	456.1	457.1	463.1	474.1	485.0	500.0	517.0	533.9	550.9	567.9	586.8
157.5°	469.3	470.3	475.1	484.6	493.4	506.0	520.4	533.9	546.3	560.7	577.1
160°	478.1	479.1	483.0	491.0	499.0	510.0	522.0	533.9	543.9	555.9	569.9
162.5°	486.8	486.2	490.2	496.6	503.8	512.4	522.8	533.1	541.5	551.9	563.5
165°	497.0	496.0	498.0	504.0	509.0	515.0	524.0	531.0	536.9	543.9	552.9
167.5°	505.4	504.2	506.0	509.8	513.4	517.2	523.8	529.6	532.3	536.9	542.5
170°	511.0	509.0	510.0	513.0	515.0	518.0	523.0	528.0	530.0	532.9	536.9
172.5°	514.2	513.0	512.4	515.4	516.6	518.8	522.2	525.6	526.8	528.2	531.4
175°	518.0	517.0	516.0	518.0	518.0	519.0	521.0	523.0	522.0	523.0	524.0
177.5°	519.8	518.2	517.4	519.0	519.0	519.0	519.8	521.4	519.8	519.0	519.8
180°	519.0	519.0	519.0	519.0	519.0	519.0	519.0	519.0	519.0	519.0	519.0



TEST NUMBER: P331365

CATALOG NUMBER: S122DIP-S675D925U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7
2.5°	1057.1	1059.0	1060.8	1061.5	1061.1	1060.8	1060.4	1060.1
5°	1050.0	1051.8	1053.6	1054.3	1053.9	1053.4	1053.0	1052.5
7.5°	1038.2	1040.0	1041.8	1042.4	1041.9	1041.5	1041.0	1040.5
10°	1027.5	1029.4	1031.2	1031.7	1031.1	1030.4	1029.7	1029.0
12.5°	1015.0	1016.3	1017.6	1017.9	1017.4	1017.0	1016.5	1016.0
15°	993.1	994.0	994.9	994.8	993.6	992.5	991.4	990.2
17.5°	967.0	968.0	969.1	969.1	968.0	966.9	965.8	964.7
20°	946.7	947.4	948.0	947.9	947.0	946.1	945.2	944.3
22.5°	925.2	925.3	925.4	925.2	924.7	924.1	923.6	923.1
25°	890.1	890.5	891.0	891.0	890.5	890.1	889.6	889.2
27.5°	855.5	854.9	854.2	853.3	852.2	851.1	850.0	848.9
30°	828.6	827.9	827.2	826.4	825.5	824.6	823.7	822.8
32.5°	802.2	801.0	799.7	798.7	797.8	796.9	795.9	795.0
35°	759.9	758.5	757.1	755.9	754.8	753.6	752.5	751.3
37.5°	717.4	715.7	714.0	712.6	711.5	710.4	709.4	708.3
40°	688.1	686.0	684.0	682.5	681.6	680.7	679.8	678.9
42.5°	659.1	656.9	654.7	652.9	651.6	650.4	649.1	647.8
45°	614.7	612.2	609.7	608.0	607.1	606.2	605.3	604.3
47.5°	568.5	565.8	563.2	561.2	559.9	558.6	557.3	556.0
50°	538.8	535.6	532.4	530.3	529.1	528.0	526.9	525.7
52.5°	508.0	505.4	502.8	500.7	499.2	497.7	496.2	494.7
55°	462.1	459.4	456.7	454.7	453.6	452.5	451.3	450.2
57.5°	414.4	411.7	409.1	407.3	406.4	405.6	404.7	403.8
60°	382.9	380.4	377.9	376.4	375.7	375.0	374.3	373.6
62.5°	353.1	350.8	348.5	346.9	346.0	345.1	344.3	343.4
65°	307.3	305.2	303.2	301.6	300.5	299.3	298.2	297.1
67.5°	262.0	260.5	258.9	257.6	256.7	255.8	254.9	254.0
70°	232.6	231.1	229.5	228.2	227.3	226.4	225.5	224.6
72.5°	204.9	203.3	201.7	200.5	199.8	199.1	198.4	197.6
75°	161.6	160.3	158.9	158.5	158.9	159.4	159.8	160.3
77.5°	123.0	122.3	121.6	121.0	120.3	119.7	119.1	118.4
80°	97.7	97.0	96.3	95.7	95.3	94.8	94.4	93.9
82.5°	72.8	71.9	71.1	70.6	70.5	70.4	70.3	70.2
85°	38.5	37.8	37.1	36.6	36.4	36.2	36.0	35.7
87.5°	16.7	15.8	15.6	15.5	15.3	15.1	14.9	14.8
90°	31.9	29.9	31.9	32.9	32.9	32.9	32.9	32.9
92.5°	87.0	74.7	66.3	60.1	59.3	56.1	56.9	55.3
95°	261.5	200.6	158.7	136.7	123.8	115.8	112.8	113.8
97.5°	610.2	499.2	391.2	319.2	271.5	246.9	232.3	224.0
100°	911.2	787.4	650.7	530.0	447.1	404.2	375.3	357.3
102.5°	1108.4	1080.5	980.5	852.5	762.5	689.2	653.1	628.8
105°	1212.6	1325.4	1338.4	1305.4	1243.5	1181.7	1138.7	1124.8
107.5°	1137.6	1307.4	1411.2	1459.5	1467.3	1463.9	1455.3	1436.8
110°	1072.9	1251.5	1379.3	1461.1	1504.0	1523.0	1532.0	1531.0



TEST NUMBER: P331365

CATALOG NUMBER: S122DIP-S675D925U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1013.8	1185.3	1321.8	1415.6	1475.3	1507.0	1524.0	1529.4
115°	941.1	1094.8	1225.6	1328.4	1399.2	1445.1	1471.1	1480.1
117.5°	886.4	1021.4	1139.9	1236.4	1308.6	1357.1	1384.5	1392.0
120°	859.3	983.1	1088.8	1179.7	1249.5	1296.4	1325.4	1335.4
122.5°	837.7	951.1	1051.3	1133.4	1196.0	1242.1	1267.9	1276.3
125°	806.4	909.2	997.0	1071.9	1129.8	1167.7	1192.6	1200.6
127.5°	775.5	868.5	951.3	1020.4	1070.9	1106.4	1128.0	1134.4
130°	755.5	841.3	920.2	986.1	1035.0	1068.9	1088.8	1096.8
132.5°	736.3	815.8	888.2	950.1	998.2	1032.2	1050.5	1057.7
135°	709.6	775.5	841.3	897.2	940.1	973.1	991.0	995.0
137.5°	688.2	743.3	795.6	844.3	883.5	911.8	927.6	933.6
140°	674.7	722.6	768.5	812.4	844.3	870.3	885.3	891.2
142.5°	663.5	704.2	743.7	780.5	810.8	834.4	847.7	848.9
145°	647.7	680.7	711.6	740.5	764.5	781.5	791.4	794.4
147.5°	635.5	661.5	685.6	706.8	726.6	740.1	746.9	748.7
150°	626.8	648.7	669.7	687.6	702.6	714.6	720.6	721.6
152.5°	618.0	638.3	656.1	671.7	683.4	693.8	698.2	698.4
155°	605.8	621.8	636.7	647.7	658.7	665.7	669.7	667.7
157.5°	591.6	605.0	617.6	626.2	633.9	639.7	641.5	641.5
160°	582.8	593.8	604.8	611.8	618.8	623.8	624.8	624.8
162.5°	574.1	583.4	592.8	598.2	605.2	608.6	609.6	608.8
165°	560.9	567.9	574.9	578.9	582.8	586.8	586.8	585.8
167.5°	548.3	553.7	558.5	562.1	563.9	566.1	565.9	564.7
170°	541.9	544.9	548.9	550.9	551.9	554.9	553.9	551.9
172.5°	534.7	536.9	540.1	541.3	542.3	543.7	542.7	541.5
175°	527.0	528.0	529.0	530.0	530.0	531.0	530.0	528.0
177.5°	521.4	521.4	522.2	522.2	522.2	522.2	521.4	519.8
180°	519.0	519.0	519.0	519.0	519.0	519.0	519.0	519.0

(END OF REPORT)