

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P331415

Luminaire Tested: **S122DIP-S865D1080U835-4F0-1E-UDD-D1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331415
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S865D1080U835-4F0-1E-UDD-D1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, DROP SATIN WHITE DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7347.4 lumens
Efficiency: N/A
Efficacy: 112.3 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.32 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.08')
CIE Type: General Diffuse


Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331415

CATALOG NUMBER: S122DIP-S865D1080U835-4F0-1E-UDD-D1

Luminous Intensity Polar Plot

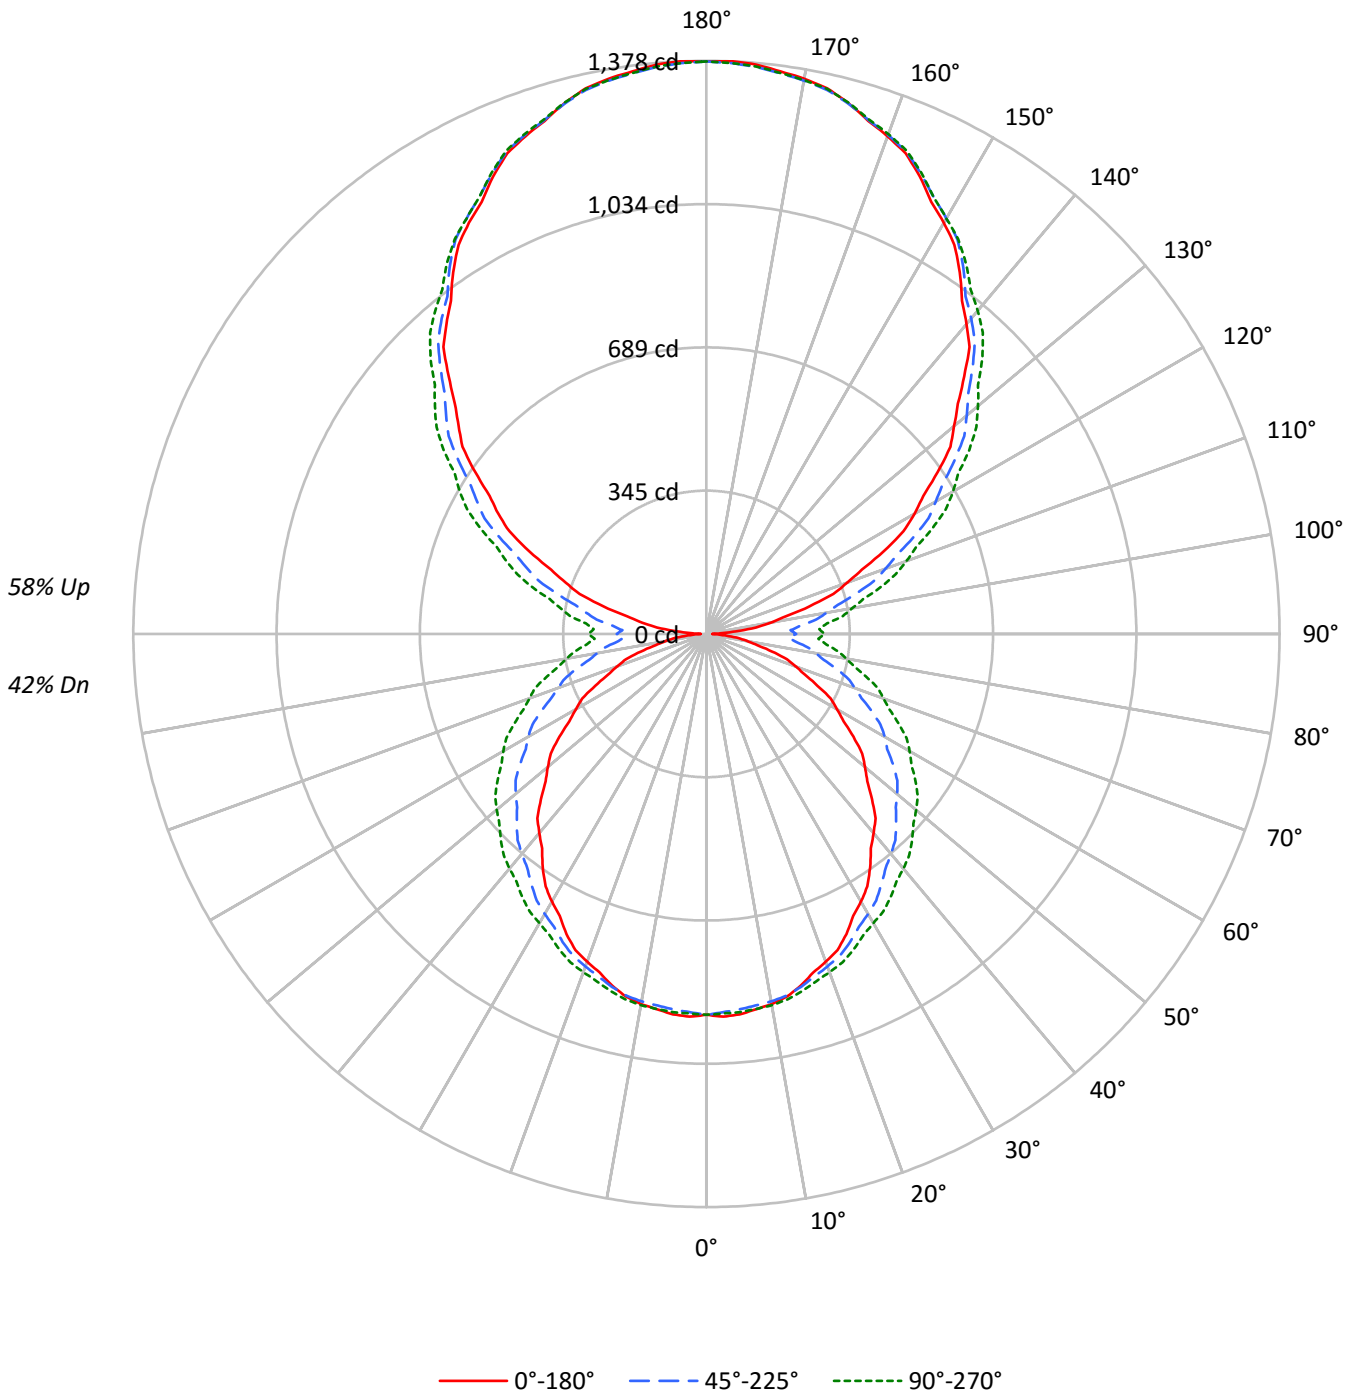



TEST NUMBER: P331415

CATALOG NUMBER: S122DIP-S865D1080U835-4F0-1E-UDD-D1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	42
1	95	90	86	82	86	82	78	75	67	65	62	54	52	50	41	40	39	33
2	86	78	71	66	78	71	65	60	58	54	50	46	43	41	36	34	32	27
3	78	68	60	54	71	62	55	50	51	46	42	41	37	34	31	29	26	22
4	71	60	52	45	64	55	47	42	45	40	35	36	32	29	28	25	22	18
5	65	53	45	38	59	49	41	36	40	34	30	32	28	25	25	22	19	16
6	60	47	39	33	54	43	36	31	36	30	26	29	25	21	22	19	17	14
7	55	43	35	29	50	39	32	27	32	27	23	26	22	19	20	17	15	12
8	51	39	31	25	46	35	28	24	29	24	20	24	20	17	19	16	13	11
9	48	35	28	22	43	32	26	21	27	22	18	22	18	15	17	14	12	10
10	44	32	25	20	40	30	23	19	25	20	16	20	16	13	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14783	14783	14783
5°	14855	14230	14176
10°	14762	13809	13655
15°	14558	13364	13106
20°	14300	12888	12577
25°	14048	12428	12096
30°	13689	11955	11614
35°	13327	11498	11275
40°	12947	11110	10935
45°	12584	10762	10645
50°	12196	10448	10360
55°	11790	10109	10067
60°	11292	9759	9760
65°	10774	9347	9393
70°	10189	8905	8999
75°	9446	8470	8637
80°	8274	8029	8266
85°	7152	7646	7981



TEST NUMBER: P331415

CATALOG NUMBER: S122DIP-S865D1080U835-4F0-1E-UDD-D1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.8	1.2
10°-20°	248.8	3.4
20°-30°	377.0	5.1
30°-40°	459.2	6.2
40°-50°	494.0	6.7
50°-60°	479.7	6.5
60°-70°	418.9	5.7
70°-80°	322.5	4.4
80°-90°	221.9	3.0
90°-100°	236.3	3.2
100°-110°	379.8	5.2
110°-120°	535.0	7.3
120°-130°	649.1	8.8
130°-140°	700.3	9.5
140°-150°	673.1	9.2
150°-160°	562.1	7.7
160°-170°	372.8	5.1
170°-180°	130.3	1.8
0°-30°	712.5	9.7
0°-40°	1171.7	15.9
0°-60°	2145.5	29.2
0°-90°	3108.8	42.3
90°-120°	1151.0	15.7
90°-150°	3173.5	43.2
90°-180°	4239.0	57.7
0°-180°	7347.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	916	916	916	916	916	
5°	918	914	906	914	913	87
15°	876	878	878	890	889	247
25°	796	806	817	833	837	366
35°	686	709	734	762	772	429
45°	563	599	645	684	699	434
55°	431	480	548	594	613	385
65°	295	360	438	490	510	293
75°	163	238	322	377	397	173
85°	48	130	215	269	289	51
90°	14	106	216	265	284	12
95°	71	145	227	275	291	78
105°	256	300	370	417	433	271
115°	470	494	549	586	599	464
125°	679	691	728	759	771	607
135°	876	889	904	930	938	677
145°	1062	1070	1077	1086	1088	663
155°	1214	1217	1221	1226	1223	558
165°	1321	1320	1320	1327	1322	372
175°	1374	1371	1368	1376	1370	130
180°	1376	1376	1376	1376	1376	



TEST NUMBER: P331415

CATALOG NUMBER: S122DIP-S865D1080U835-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	915.6	915.6	915.6	915.6	915.6	915.6	915.6	915.6	915.6	915.6	915.6
2.5°	920.9	920.2	919.5	918.8	918.1	916.9	915.2	913.6	911.9	910.3	911.5
5°	918.2	917.4	916.5	915.6	914.7	913.4	911.6	909.8	908.1	906.3	908.1
7.5°	910.0	909.4	908.8	908.3	907.7	906.7	905.3	904.0	902.6	901.3	903.4
10°	903.7	903.1	902.5	901.9	901.3	900.6	899.7	898.8	897.9	897.0	899.4
12.5°	893.0	893.2	893.3	893.4	893.5	893.2	892.6	891.9	891.3	890.6	893.0
15°	875.8	876.4	877.0	877.6	878.1	878.4	878.4	878.4	878.4	878.4	881.1
17.5°	853.5	854.7	856.0	857.2	858.4	859.5	860.5	861.4	862.4	863.3	866.1
20°	838.6	840.1	841.6	843.1	844.5	845.9	847.0	848.2	849.4	850.6	853.8
22.5°	822.7	824.4	826.1	827.8	829.5	831.2	832.9	834.5	836.2	837.8	841.1
25°	796.2	798.2	800.3	802.4	804.4	806.8	809.4	812.1	814.7	817.4	820.9
27.5°	764.3	767.7	771.0	774.4	777.8	781.0	784.1	787.3	790.4	793.5	798.0
30°	743.1	746.9	750.8	754.6	758.4	762.3	766.1	769.9	773.8	777.6	782.3
32.5°	719.7	724.0	728.3	732.7	737.0	741.4	745.9	750.5	755.0	759.5	765.0
35°	686.0	691.0	696.1	701.1	706.1	711.4	717.0	722.6	728.2	733.8	740.3
37.5°	649.4	655.2	661.0	666.7	672.5	679.0	686.3	693.6	700.8	708.1	715.3
40°	625.0	631.5	638.0	644.5	650.9	658.2	666.1	674.1	682.1	690.0	697.7
42.5°	601.6	608.1	614.6	621.1	627.6	635.4	644.5	653.7	662.8	672.0	680.3
45°	562.6	570.6	578.5	586.5	594.5	603.6	613.9	624.3	634.6	644.9	654.0
47.5°	524.1	532.8	541.5	550.2	558.8	569.2	581.3	593.4	605.5	617.6	627.1
50°	497.6	506.7	515.9	525.0	534.2	545.4	558.6	571.9	585.2	598.5	608.5
52.5°	472.1	481.7	491.4	501.0	510.6	522.4	536.4	550.3	564.3	578.3	588.5
55°	431.3	441.9	452.5	463.1	473.7	486.7	502.0	517.4	532.7	548.0	558.6
57.5°	390.9	402.9	414.9	426.8	438.8	452.6	468.2	483.9	499.5	515.1	526.6
60°	362.3	374.9	387.6	400.3	413.0	427.7	444.5	461.3	478.1	495.0	506.2
62.5°	336.8	349.9	363.1	376.2	389.4	404.4	421.2	438.0	454.8	471.6	483.5
65°	294.6	309.0	323.5	337.9	352.4	368.3	385.7	403.1	420.5	437.9	450.0
67.5°	255.8	270.9	286.0	301.1	316.2	332.7	350.5	368.3	386.1	403.9	416.1
70°	228.2	243.6	258.9	274.2	289.6	306.4	324.7	342.9	361.2	379.5	392.2
72.5°	202.8	218.6	234.4	250.2	266.0	283.1	301.7	320.2	338.7	357.2	369.7
75°	163.2	179.7	196.2	212.8	229.3	247.0	265.8	284.7	303.6	322.4	335.1
77.5°	125.0	142.3	159.6	176.8	194.1	212.3	231.5	250.7	269.8	289.0	301.6
80°	99.5	117.5	135.5	153.5	171.5	190.0	209.2	228.4	247.5	266.7	279.1
82.5°	78.3	96.0	113.8	131.5	149.3	167.9	187.3	206.7	226.1	245.5	257.9
85°	47.8	66.1	84.3	102.6	120.9	139.5	158.3	177.2	196.1	215.0	227.4
87.5°	26.2	44.4	62.6	80.8	99.0	118.1	138.1	158.1	178.1	198.1	210.1
90°	14.4	34.6	54.8	75.0	95.2	117.6	142.2	166.7	191.3	215.8	227.1
92.5°	32.9	51.1	69.3	87.5	105.7	124.5	144.0	163.5	183.0	202.5	214.2
95°	71.0	87.5	103.9	120.3	136.8	154.1	172.3	190.5	208.7	226.9	238.1
97.5°	119.6	134.2	148.8	163.4	178.0	194.3	212.3	230.2	248.2	266.2	277.1
100°	156.8	169.8	182.8	195.7	208.7	223.8	241.1	258.4	275.7	293.0	303.9
102.5°	194.8	206.4	218.0	229.6	241.3	255.6	272.6	289.6	306.6	323.7	334.5
105°	256.4	265.7	275.0	284.4	293.7	306.3	322.1	338.0	353.8	369.7	380.5
107.5°	319.8	327.7	335.7	343.7	351.7	363.0	377.7	392.4	407.1	421.7	431.9
110°	359.6	367.0	374.5	381.9	389.4	400.3	414.8	429.2	443.7	458.1	467.6



TEST NUMBER: P331415

CATALOG NUMBER: S122DIP-S865D1080U835-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	404.2	410.7	417.2	423.7	430.2	440.2	453.8	467.3	480.8	494.4	503.2
115°	469.9	474.7	479.5	484.3	489.1	497.9	510.6	523.4	536.1	548.9	557.5
117.5°	534.1	538.3	542.5	546.7	550.9	558.4	569.2	580.0	590.8	601.7	609.8
120°	577.8	581.0	584.3	587.5	590.8	597.3	607.0	616.7	626.5	636.2	644.4
122.5°	617.8	620.7	623.7	626.6	629.6	635.9	645.5	655.1	664.8	674.4	681.8
125°	678.7	681.0	683.3	685.7	688.0	693.5	702.1	710.8	719.5	728.1	735.3
127.5°	739.3	742.0	744.6	747.3	749.9	754.6	761.3	767.9	774.6	781.3	787.7
130°	777.4	780.5	783.6	786.6	789.7	794.0	799.7	805.4	811.1	816.7	823.3
132.5°	820.2	822.6	825.1	827.5	829.9	833.6	838.5	843.4	848.2	853.1	858.8
135°	876.0	878.8	881.7	884.5	887.4	890.5	894.0	897.4	900.9	904.4	910.3
137.5°	936.2	938.4	940.7	943.0	945.2	947.3	949.3	951.3	953.2	955.2	960.4
140°	972.4	974.4	976.5	978.5	980.5	982.5	984.4	986.2	988.1	990.0	994.7
142.5°	1009.6	1011.6	1013.6	1015.7	1017.7	1019.2	1020.2	1021.2	1022.2	1023.2	1027.2
145°	1061.7	1063.5	1065.3	1067.1	1068.9	1070.6	1072.1	1073.7	1075.2	1076.8	1078.8
147.5°	1109.3	1111.5	1113.6	1115.8	1118.0	1119.6	1120.6	1121.7	1122.7	1123.7	1124.5
150°	1141.8	1143.4	1144.9	1146.5	1148.0	1149.3	1150.4	1151.4	1152.4	1153.5	1154.2
152.5°	1170.6	1172.2	1173.7	1175.3	1176.8	1178.2	1179.5	1180.7	1182.0	1183.2	1184.2
155°	1213.9	1214.6	1215.4	1216.2	1217.0	1217.7	1218.5	1219.3	1220.1	1220.8	1222.1
157.5°	1250.8	1251.3	1251.8	1252.3	1252.9	1253.3	1253.8	1254.3	1254.7	1255.2	1257.0
160°	1273.1	1273.6	1274.1	1274.6	1275.2	1275.5	1275.8	1276.1	1276.3	1276.6	1278.1
162.5°	1293.5	1293.6	1293.7	1293.8	1294.0	1294.1	1294.4	1294.6	1294.9	1295.2	1296.9
165°	1320.7	1320.5	1320.2	1319.9	1319.7	1319.6	1319.6	1319.6	1319.6	1319.6	1321.4
167.5°	1343.5	1342.7	1341.9	1341.2	1340.4	1340.0	1339.9	1339.9	1339.8	1339.8	1341.6
170°	1355.6	1354.8	1354.0	1353.2	1352.5	1352.0	1351.7	1351.4	1351.2	1350.9	1352.7
172.5°	1363.9	1363.2	1362.4	1361.6	1360.8	1360.3	1360.1	1359.8	1359.5	1359.3	1361.1
175°	1374.2	1373.4	1372.6	1371.8	1371.1	1370.4	1369.9	1369.4	1368.9	1368.3	1370.2
177.5°	1378.3	1377.7	1377.1	1376.5	1375.9	1375.3	1374.9	1374.5	1374.1	1373.7	1374.9
180°	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5



TEST NUMBER: P331415

CATALOG NUMBER: S122DIP-S865D1080U835-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	915.6	915.6	915.6	915.6	915.6	915.6	915.6	915.6
2.5°	912.6	913.8	915.0	915.4	914.9	914.4	913.9	913.5
5°	909.8	911.6	913.4	914.1	913.8	913.5	913.2	912.9
7.5°	905.5	907.6	909.8	910.7	910.4	910.1	909.8	909.5
10°	901.7	904.1	906.5	907.5	907.2	906.9	906.6	906.3
12.5°	895.4	897.7	900.1	901.1	900.8	900.5	900.2	899.9
15°	883.7	886.4	889.1	890.2	889.9	889.6	889.3	889.1
17.5°	868.9	871.6	874.4	875.8	875.8	875.8	875.8	875.8
20°	857.1	860.3	863.5	865.2	865.2	865.2	865.2	865.2
22.5°	844.3	847.6	850.8	852.7	853.1	853.6	854.1	854.6
25°	824.5	828.0	831.6	833.8	834.6	835.5	836.4	837.3
27.5°	802.5	807.0	811.4	814.0	814.7	815.3	816.0	816.6
30°	787.0	791.7	796.5	799.3	800.1	801.0	801.9	802.8
32.5°	770.4	775.8	781.2	784.8	786.3	787.9	789.5	791.1
35°	746.8	753.3	759.8	764.0	766.1	768.2	770.2	772.3
37.5°	722.4	729.6	736.8	741.5	743.7	745.9	748.1	750.3
40°	705.3	713.0	720.7	725.8	728.5	731.1	733.8	736.5
42.5°	688.7	697.1	705.5	711.0	713.6	716.3	718.9	721.6
45°	663.2	672.3	681.5	687.5	690.5	693.4	696.4	699.3
47.5°	636.7	646.2	655.8	662.2	665.4	668.7	671.9	675.2
50°	618.5	628.5	638.6	645.2	648.4	651.7	654.9	658.2
52.5°	598.8	609.1	619.3	626.2	629.7	633.2	636.6	640.1
55°	569.3	579.9	590.5	597.7	601.5	605.4	609.2	613.0
57.5°	538.0	549.4	560.9	568.6	572.4	576.3	580.2	584.1
60°	517.4	528.6	539.8	547.4	551.6	555.7	559.8	564.0
62.5°	495.4	507.3	519.2	527.2	531.0	534.9	538.8	542.7
65°	462.1	474.2	486.3	494.2	498.0	501.9	505.7	509.5
67.5°	428.3	440.5	452.8	460.9	464.9	468.9	472.9	476.9
70°	404.9	417.5	430.2	438.3	441.9	445.4	449.0	452.5
72.5°	382.1	394.5	407.0	415.3	419.6	423.8	428.1	432.3
75°	347.8	360.5	373.2	381.4	385.3	389.1	392.9	396.8
77.5°	314.3	326.9	339.5	347.9	352.0	356.1	360.3	364.4
80°	291.5	303.9	316.3	324.5	328.6	332.8	336.9	341.0
82.5°	270.3	282.6	295.0	303.2	307.1	310.9	314.8	318.7
85°	239.7	252.1	264.5	272.8	276.9	281.0	285.1	289.3
87.5°	222.0	233.9	245.9	253.7	257.6	261.4	265.2	269.0
90°	238.4	249.6	260.9	268.5	272.3	276.1	279.9	283.7
92.5°	225.9	237.5	249.2	256.8	260.4	264.0	267.6	271.2
95°	249.4	260.6	271.8	278.9	281.9	284.9	287.9	291.0
97.5°	288.0	298.9	309.8	317.0	320.4	323.8	327.3	330.7
100°	314.8	325.7	336.6	343.6	346.6	349.6	352.5	355.5
102.5°	345.4	356.3	367.2	374.1	377.1	380.1	383.1	386.1
105°	391.3	402.2	413.0	420.1	423.3	426.5	429.8	433.0
107.5°	442.0	452.1	462.2	468.3	470.3	472.4	474.5	476.5
110°	477.0	486.4	495.9	501.8	504.3	506.8	509.2	511.7



TEST NUMBER: P331415

CATALOG NUMBER: S122DIP-S865D1080U835-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	512.0	520.8	529.6	535.4	538.1	540.7	543.4	546.1
115°	566.1	574.7	583.2	588.8	591.2	593.7	596.2	598.7
117.5°	617.9	626.0	634.1	639.3	641.5	643.7	646.0	648.2
120°	652.7	661.0	669.2	674.6	677.0	679.5	682.0	684.5
122.5°	689.2	696.6	704.0	708.8	711.0	713.2	715.4	717.6
125°	742.5	749.7	756.9	761.7	764.1	766.5	768.9	771.3
127.5°	794.1	800.4	806.8	810.9	812.7	814.4	816.2	818.0
130°	829.9	836.4	843.0	846.9	848.3	849.6	850.9	852.2
132.5°	864.5	870.2	875.9	879.6	881.1	882.6	884.2	885.7
135°	916.2	922.2	928.1	931.9	933.5	935.0	936.6	938.2
137.5°	965.7	970.9	976.1	979.2	980.2	981.1	982.1	983.1
140°	999.4	1004.2	1008.9	1011.6	1012.3	1013.1	1013.8	1014.5
142.5°	1031.2	1035.1	1039.1	1041.4	1041.9	1042.4	1042.9	1043.4
145°	1080.8	1082.9	1084.9	1086.1	1086.6	1087.0	1087.5	1087.9
147.5°	1125.3	1126.1	1126.9	1127.2	1126.9	1126.7	1126.4	1126.1
150°	1155.0	1155.8	1156.6	1156.6	1155.8	1155.0	1154.2	1153.5
152.5°	1185.2	1186.1	1187.1	1187.1	1186.1	1185.2	1184.2	1183.2
155°	1223.4	1224.7	1226.0	1226.2	1225.5	1224.7	1223.9	1223.1
157.5°	1258.7	1260.5	1262.2	1262.5	1261.2	1260.0	1258.8	1257.5
160°	1279.7	1281.2	1282.8	1283.0	1282.0	1281.0	1279.9	1278.9
162.5°	1298.7	1300.4	1302.2	1302.4	1301.2	1300.0	1298.7	1297.5
165°	1323.2	1325.0	1326.8	1327.0	1325.8	1324.5	1323.2	1321.9
167.5°	1343.4	1345.2	1347.0	1347.2	1345.9	1344.5	1343.2	1341.9
170°	1354.5	1356.3	1358.1	1358.3	1356.7	1355.2	1353.6	1352.1
172.5°	1362.9	1364.7	1366.5	1366.6	1365.1	1363.5	1362.0	1360.4
175°	1372.0	1373.8	1375.6	1375.7	1374.2	1372.6	1371.1	1369.5
177.5°	1376.2	1377.4	1378.6	1378.6	1377.4	1376.2	1374.9	1373.7
180°	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5

(END OF REPORT)