

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P331637

Luminaire Tested: **S122RDIP-S290D925U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331637
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIP-S290D925U835-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 925 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4343.8 lumens
Efficiency: N/A
Efficacy: 116.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 37.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331637

CATALOG NUMBER: S122RDIP-S290D925U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

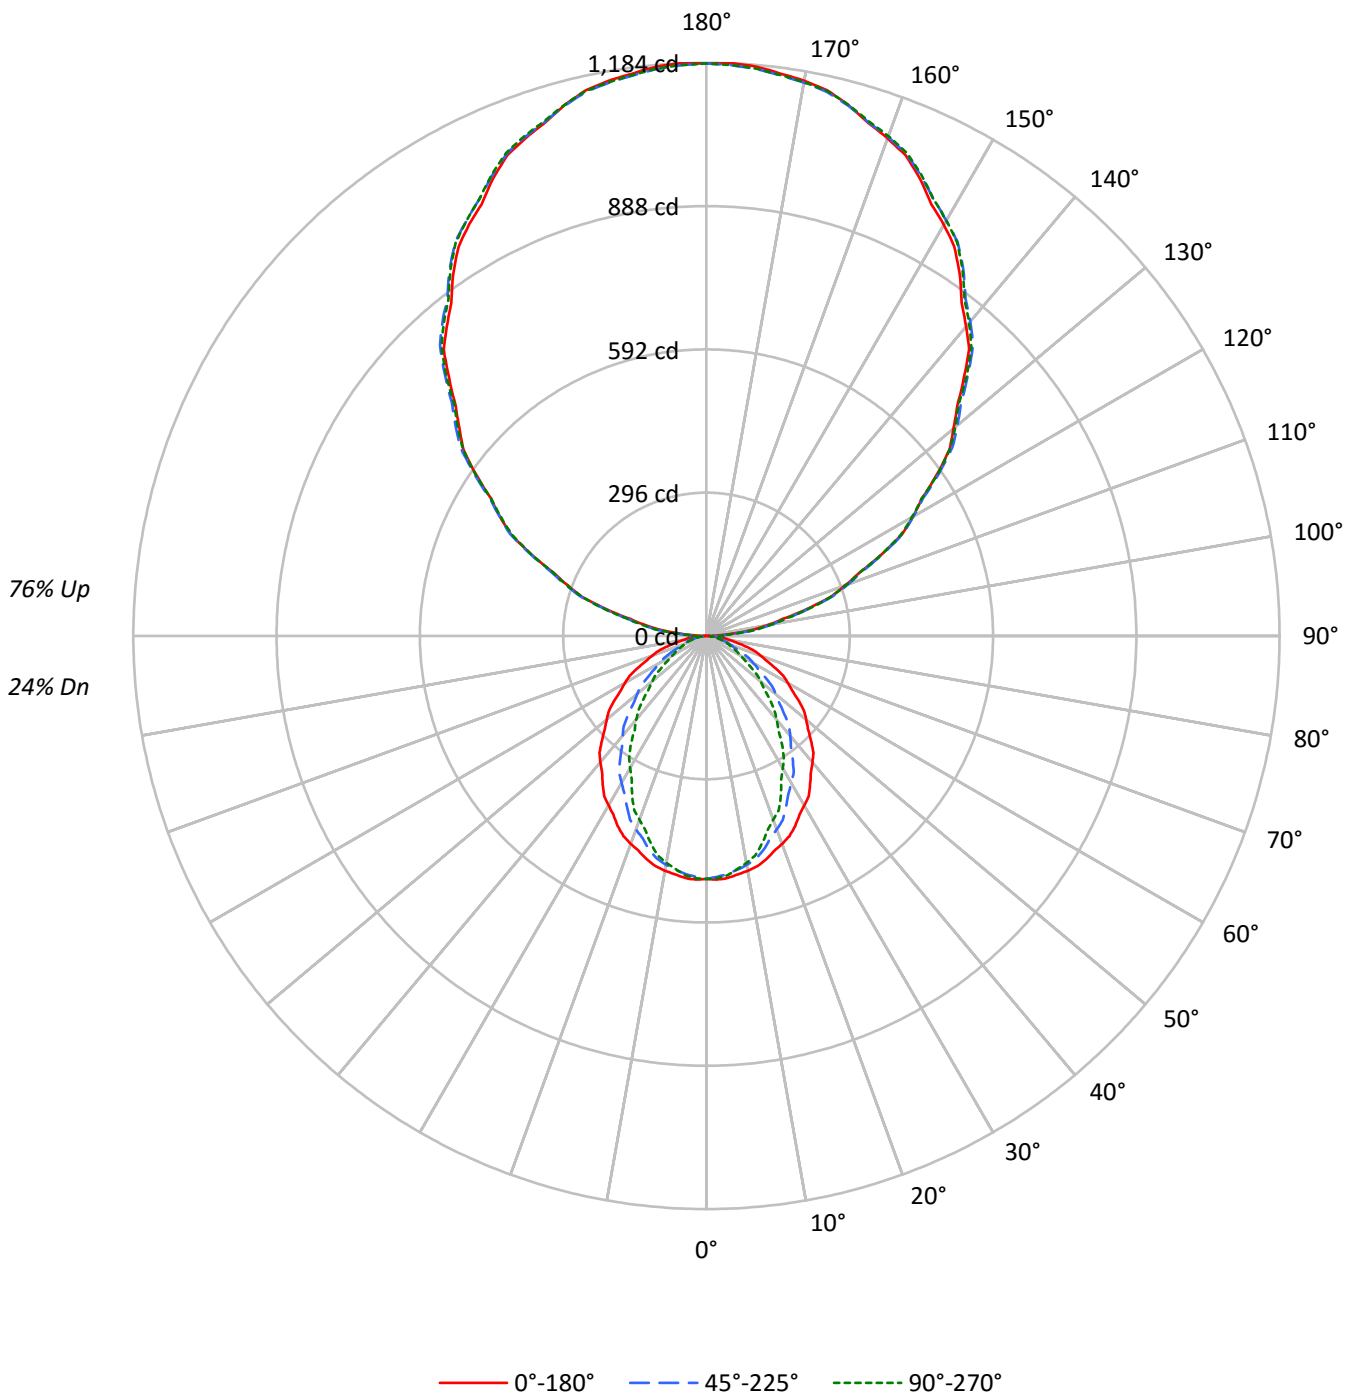



TEST NUMBER: P331637

CATALOG NUMBER: S122RDIP-S290D925U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	32	32	32	24
1	92	88	84	81	82	78	75	73	60	58	57	44	43	42	29	28	27	20
2	84	77	71	67	75	69	64	60	53	50	47	39	37	35	25	24	23	18
3	77	68	61	56	68	61	55	50	47	43	40	34	32	30	23	21	20	15
4	70	60	53	47	62	54	47	43	42	37	34	31	28	26	20	19	18	13
5	64	53	46	40	57	48	41	37	37	33	29	28	25	22	19	17	15	12
6	59	48	40	35	53	43	36	32	34	29	26	25	22	20	17	15	14	10
7	55	43	36	30	49	39	32	28	30	26	22	23	20	17	15	14	12	9
8	51	39	32	27	45	35	29	24	28	23	20	21	18	15	14	12	11	8
9	47	36	28	24	42	32	26	22	25	21	18	19	16	14	13	11	10	8
10	44	32	26	21	39	29	23	19	23	19	16	18	15	12	12	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8105	8105	8105
5°	8136	8003	8047
10°	8073	7873	7806
15°	7980	7639	7418
20°	7852	7306	6940
25°	7721	6928	6474
30°	7538	6538	5878
35°	7360	6116	5355
40°	7181	5678	4749
45°	6971	5186	4201
50°	6754	4690	3662
55°	6533	4155	3147
60°	6278	3594	2612
65°	5987	3018	2376
70°	5641	2488	2186
75°	5215	2264	2040
80°	4603	2027	1860
85°	3612	1593	1593



TEST NUMBER: P331637

CATALOG NUMBER: S122RDIP-S290D925U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.0	1.1
10°-20°	129.0	3.0
20°-30°	181.2	4.2
30°-40°	197.6	4.5
40°-50°	181.6	4.2
50°-60°	142.7	3.3
60°-70°	93.0	2.1
70°-80°	48.0	1.1
80°-90°	17.2	0.4
90°-100°	74.9	1.7
100°-110°	232.7	5.4
110°-120°	397.8	9.2
120°-130°	523.2	12.0
130°-140°	587.2	13.5
140°-150°	575.7	13.3
150°-160°	482.9	11.1
160°-170°	320.3	7.4
170°-180°	111.9	2.6
0°-30°	357.2	8.2
0°-40°	554.7	12.8
0°-60°	879.0	20.2
0°-90°	1037.1	23.9
90°-120°	705.5	16.2
90°-150°	2391.6	55.1
90°-180°	3307.0	76.1
0°-180°	4343.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	502	502	502	502	502	
5°	502	500	494	498	496	48
15°	477	472	457	449	444	134
25°	433	418	389	371	363	199
35°	373	349	310	283	272	234
45°	305	274	227	196	184	236
55°	232	196	148	121	112	207
65°	157	120	79	64	62	155
75°	84	53	36	33	33	88
85°	20	10	9	9	9	23
90°	1	14	35	33	34	4
95°	52	61	64	64	62	60
105°	215	218	220	221	222	227
115°	399	405	403	402	399	395
125°	581	589	587	584	583	519
135°	752	762	764	763	760	580
145°	912	919	925	926	922	570
155°	1043	1046	1049	1053	1051	480
165°	1135	1134	1134	1140	1136	320
175°	1181	1178	1176	1182	1177	112
180°	1183	1183	1183	1183	1183	



TEST NUMBER: P331637

CATALOG NUMBER: S122RDIP-S290D925U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	502.0	502.0	502.0	502.0	502.0	502.0	502.0	502.0	502.0	502.0	502.0
2.5°	503.8	503.4	503.0	502.6	502.2	501.5	500.6	499.8	498.9	498.0	498.8
5°	502.0	501.5	501.0	500.5	500.0	499.0	497.7	496.4	495.1	493.8	494.7
7.5°	496.8	496.2	495.5	494.9	494.3	493.2	491.7	490.1	488.6	487.1	487.3
10°	492.4	491.7	491.0	490.3	489.6	488.2	486.2	484.2	482.2	480.2	479.9
12.5°	487.0	486.1	485.2	484.4	483.5	481.8	479.2	476.6	474.0	471.4	470.9
15°	477.4	476.3	475.2	474.1	473.0	470.7	467.3	463.9	460.4	457.0	455.1
17.5°	465.7	464.0	462.3	460.6	458.9	455.9	451.5	447.1	442.7	438.3	436.0
20°	457.0	455.0	453.0	450.9	448.9	445.4	440.3	435.3	430.3	425.2	422.7
22.5°	447.6	445.3	443.0	440.8	438.5	434.5	428.8	423.1	417.5	411.8	408.5
25°	433.4	430.1	426.9	423.7	420.5	415.5	408.8	402.2	395.5	388.9	384.7
27.5°	416.3	412.8	409.3	405.8	402.2	396.7	389.2	381.7	374.2	366.7	361.9
30°	404.3	400.5	396.6	392.8	389.0	383.0	374.9	366.9	358.8	350.7	345.6
32.5°	392.7	388.2	383.7	379.2	374.7	368.4	360.2	351.9	343.7	335.4	329.6
35°	373.4	368.3	363.1	358.0	352.8	345.8	336.9	328.0	319.2	310.3	303.9
37.5°	354.2	348.5	342.8	337.2	331.5	324.0	314.5	305.0	295.6	286.1	279.1
40°	340.7	334.7	328.6	322.5	316.5	308.6	298.8	289.0	279.2	269.4	262.2
42.5°	326.9	320.5	314.1	307.8	301.4	293.1	283.0	272.9	262.8	252.7	245.3
45°	305.3	298.5	291.7	285.0	278.2	269.5	258.9	248.3	237.7	227.1	220.0
47.5°	284.2	277.0	269.9	262.7	255.5	246.5	235.5	224.6	213.6	202.7	195.6
50°	268.9	261.8	254.6	247.4	240.3	231.1	220.0	208.9	197.8	186.7	179.7
52.5°	254.0	246.5	239.1	231.6	224.1	214.9	204.0	193.2	182.3	171.4	164.7
55°	232.1	224.3	216.4	208.5	200.6	191.3	180.3	169.4	158.5	147.6	141.6
57.5°	209.7	201.6	193.5	185.5	177.4	168.1	157.6	147.2	136.7	126.2	120.6
60°	194.4	186.4	178.3	170.2	162.1	152.9	142.5	132.1	121.7	111.3	106.1
62.5°	179.5	171.5	163.4	155.3	147.2	138.2	128.3	118.4	108.5	98.6	93.7
65°	156.7	148.5	140.4	132.2	124.0	115.4	106.3	97.2	88.1	79.0	75.6
67.5°	134.7	126.6	118.5	110.4	102.3	94.1	85.9	77.8	69.6	61.4	59.8
70°	119.5	111.6	103.7	95.9	88.0	80.6	73.6	66.6	59.7	52.7	51.7
72.5°	104.9	97.4	89.8	82.3	74.7	68.2	62.6	57.0	51.4	45.8	44.9
75°	83.6	76.5	69.5	62.4	55.3	50.1	46.6	43.2	39.8	36.3	35.6
77.5°	62.6	56.4	50.2	44.0	37.8	33.9	32.2	30.6	28.9	27.3	26.9
80°	49.5	44.4	39.2	34.1	28.9	25.8	24.8	23.8	22.8	21.8	21.4
82.5°	37.5	33.5	29.5	25.5	21.5	19.1	18.4	17.7	17.0	16.4	16.1
85°	19.5	17.4	15.3	13.2	11.1	9.8	9.5	9.2	8.9	8.6	8.6
87.5°	6.0	5.9	5.8	5.7	5.6	6.0	7.0	7.9	8.9	9.9	9.7
90°	1.0	3.7	6.3	9.0	11.6	15.4	20.3	25.2	30.0	34.9	34.5
92.5°	17.8	19.7	21.7	23.6	25.6	27.1	28.3	29.4	30.6	31.7	31.8
95°	51.9	54.1	56.3	58.5	60.8	62.1	62.5	63.0	63.4	63.9	63.9
97.5°	94.8	96.8	98.7	100.7	102.6	104.0	104.9	105.7	106.5	107.4	107.4
100°	126.7	128.5	130.3	132.1	133.8	135.1	135.7	136.4	137.1	137.7	137.7
102.5°	160.3	161.7	163.1	164.5	165.9	167.1	167.9	168.8	169.6	170.5	170.6
105°	214.6	215.2	215.9	216.6	217.2	217.8	218.2	218.7	219.1	219.5	220.0
107.5°	269.2	270.2	271.2	272.2	273.2	273.6	273.6	273.6	273.6	273.6	273.8
110°	304.4	305.7	307.0	308.4	309.7	310.4	310.4	310.4	310.4	310.4	310.4



TEST NUMBER: P331637

CATALOG NUMBER: S122RDIP-S290D925U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	342.7	344.0	345.4	346.7	348.0	348.6	348.4	348.2	348.1	347.9	347.4
115°	399.2	400.5	401.8	403.2	404.5	404.9	404.5	404.1	403.6	403.2	403.0
117.5°	455.5	457.2	459.0	460.8	462.6	462.8	461.6	460.3	459.1	457.9	457.3
120°	493.0	494.8	496.5	498.3	500.1	500.1	498.3	496.5	494.8	493.0	493.0
122.5°	527.3	529.4	531.6	533.7	535.8	536.3	535.0	533.8	532.6	531.3	530.8
125°	580.8	582.8	584.8	586.8	588.8	589.5	588.8	588.1	587.5	586.8	586.1
127.5°	632.9	635.4	638.0	640.5	643.0	643.9	643.1	642.3	641.5	640.7	639.9
130°	665.6	668.5	671.4	674.3	677.2	678.4	677.9	677.5	677.1	676.6	676.2
132.5°	702.4	704.7	707.1	709.4	711.8	713.0	713.1	713.2	713.2	713.3	712.4
135°	751.5	753.9	756.3	758.8	761.2	762.7	763.1	763.5	764.0	764.4	764.2
137.5°	803.2	805.1	807.1	809.1	811.1	812.4	813.0	813.6	814.2	814.7	814.6
140°	834.3	836.3	838.3	840.3	842.3	843.8	844.9	846.0	847.2	848.3	848.3
142.5°	866.2	868.2	870.2	872.2	874.2	875.6	876.3	877.1	877.8	878.6	878.8
145°	912.1	913.7	915.2	916.8	918.3	919.8	921.1	922.4	923.8	925.1	925.3
147.5°	953.0	954.9	956.8	958.6	960.5	961.9	962.8	963.6	964.5	965.4	965.9
150°	981.0	982.3	983.6	985.0	986.3	987.4	988.3	989.2	990.1	991.0	991.6
152.5°	1005.7	1007.1	1008.4	1009.7	1011.1	1012.3	1013.3	1014.4	1015.4	1016.5	1017.4
155°	1042.9	1043.5	1044.2	1044.9	1045.5	1046.2	1046.9	1047.5	1048.2	1048.8	1050.0
157.5°	1074.6	1075.0	1075.5	1075.9	1076.4	1076.8	1077.2	1077.6	1078.0	1078.4	1079.9
160°	1093.8	1094.2	1094.6	1095.1	1095.5	1095.9	1096.1	1096.3	1096.5	1096.7	1098.1
162.5°	1111.3	1111.4	1111.5	1111.6	1111.7	1111.8	1112.1	1112.3	1112.5	1112.7	1114.2
165°	1134.7	1134.5	1134.2	1134.0	1133.8	1133.7	1133.7	1133.7	1133.7	1133.7	1135.2
167.5°	1154.2	1153.6	1152.9	1152.2	1151.6	1151.2	1151.2	1151.1	1151.1	1151.0	1152.6
170°	1164.6	1163.9	1163.3	1162.6	1161.9	1161.5	1161.3	1161.1	1160.8	1160.6	1162.2
172.5°	1171.8	1171.1	1170.5	1169.8	1169.1	1168.7	1168.5	1168.2	1168.0	1167.8	1169.4
175°	1180.6	1179.9	1179.2	1178.6	1177.9	1177.4	1176.9	1176.5	1176.0	1175.6	1177.1
177.5°	1184.2	1183.6	1183.1	1182.6	1182.0	1181.6	1181.2	1180.9	1180.5	1180.2	1181.2
180°	1182.6	1182.6	1182.6	1182.6	1182.6	1182.6	1182.6	1182.6	1182.6	1182.6	1182.6



TEST NUMBER: P331637

CATALOG NUMBER: S122RDIP-S290D925U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	502.0	502.0	502.0	502.0	502.0	502.0	502.0	502.0
2.5°	499.6	500.4	501.2	501.5	501.4	501.2	501.0	500.9
5°	495.6	496.5	497.4	497.7	497.4	497.1	496.8	496.5
7.5°	487.6	487.9	488.1	488.0	487.5	486.9	486.4	485.9
10°	479.6	479.3	479.0	478.5	477.9	477.3	476.7	476.1
12.5°	470.4	469.8	469.3	468.5	467.5	466.5	465.5	464.5
15°	453.2	451.2	449.3	447.9	446.9	445.8	444.8	443.8
17.5°	433.7	431.4	429.2	427.2	425.4	423.7	421.9	420.2
20°	420.2	417.6	415.1	412.7	410.5	408.3	406.1	403.9
22.5°	405.3	402.0	398.8	396.3	394.6	393.0	391.3	389.7
25°	380.6	376.4	372.3	369.5	368.0	366.4	364.9	363.4
27.5°	357.0	352.2	347.4	343.8	341.4	339.0	336.6	334.2
30°	340.4	335.3	330.1	326.2	323.4	320.7	318.0	315.3
32.5°	323.7	317.8	311.9	307.7	305.2	302.6	300.0	297.5
35°	297.6	291.2	284.8	280.5	278.3	276.1	273.9	271.7
37.5°	272.1	265.1	258.1	253.3	250.8	248.2	245.7	243.1
40°	255.1	247.9	240.7	235.8	233.2	230.6	227.9	225.3
42.5°	237.8	230.4	223.0	218.1	215.5	213.0	210.4	207.9
45°	212.8	205.6	198.5	193.7	191.3	188.8	186.4	184.0
47.5°	188.4	181.3	174.2	169.5	167.3	165.1	162.9	160.7
50°	172.8	165.8	158.8	154.3	152.2	150.1	147.9	145.8
52.5°	158.0	151.3	144.6	140.2	138.3	136.3	134.3	132.4
55°	135.5	129.5	123.4	119.4	117.5	115.6	113.7	111.8
57.5°	115.1	109.5	104.0	100.4	98.8	97.2	95.6	93.9
60°	101.0	95.9	90.7	87.3	85.7	84.1	82.5	80.9
62.5°	88.8	83.9	79.0	76.0	75.0	74.1	73.1	72.1
65°	72.2	68.7	65.3	63.4	63.1	62.8	62.5	62.2
67.5°	58.3	56.7	55.1	54.2	53.8	53.5	53.2	52.9
70°	50.7	49.7	48.7	48.0	47.5	47.1	46.7	46.3
72.5°	44.1	43.2	42.4	41.9	41.6	41.4	41.1	40.9
75°	34.9	34.2	33.5	33.1	33.0	32.9	32.8	32.7
77.5°	26.4	26.0	25.6	25.4	25.2	25.0	24.9	24.7
80°	21.0	20.6	20.2	20.0	20.0	20.0	20.0	20.0
82.5°	15.9	15.6	15.4	15.3	15.3	15.3	15.3	15.3
85°	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6
87.5°	9.6	9.4	9.2	9.2	9.2	9.2	9.3	9.3
90°	34.0	33.6	33.2	33.0	33.3	33.5	33.7	33.9
92.5°	31.9	32.0	32.1	32.2	32.2	32.2	32.3	32.3
95°	63.9	63.9	63.9	63.6	63.2	62.8	62.3	61.9
97.5°	107.4	107.4	107.4	107.4	107.3	107.3	107.2	107.2
100°	137.7	137.7	137.7	137.6	137.4	137.2	136.9	136.7
102.5°	170.8	171.0	171.2	171.1	170.9	170.7	170.5	170.3
105°	220.4	220.9	221.3	221.5	221.5	221.5	221.5	221.5
107.5°	274.0	274.2	274.3	273.9	272.9	271.9	270.9	269.8
110°	310.4	310.4	310.4	310.0	309.4	308.7	308.0	307.4



TEST NUMBER: P331637

CATALOG NUMBER: S122RDIP-S290D925U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	346.8	346.3	345.8	345.2	344.8	344.3	343.8	343.3
115°	402.7	402.5	402.3	401.8	401.2	400.5	399.8	399.2
117.5°	456.8	456.3	455.7	455.1	454.5	453.8	453.1	452.5
120°	493.0	493.0	493.0	492.7	492.0	491.3	490.7	490.0
122.5°	530.2	529.7	529.2	528.7	528.2	527.7	527.2	526.7
125°	585.5	584.8	584.1	583.7	583.5	583.2	583.0	582.8
127.5°	639.1	638.3	637.5	636.7	636.0	635.3	634.6	633.9
130°	675.7	675.3	674.8	674.2	673.3	672.4	671.5	670.6
132.5°	711.4	710.4	709.4	708.6	707.9	707.2	706.5	705.8
135°	764.0	763.8	763.5	763.1	762.4	761.8	761.1	760.4
137.5°	814.4	814.2	814.0	813.5	812.6	811.7	810.8	809.9
140°	848.3	848.3	848.3	847.8	846.9	846.0	845.2	844.3
142.5°	879.0	879.1	879.3	879.0	878.1	877.2	876.3	875.4
145°	925.5	925.8	926.0	925.7	924.8	923.9	923.0	922.1
147.5°	966.4	966.9	967.4	967.2	966.4	965.5	964.7	963.8
150°	992.3	993.0	993.6	993.6	993.0	992.3	991.6	991.0
152.5°	1018.2	1019.0	1019.9	1019.9	1019.0	1018.2	1017.4	1016.5
155°	1051.1	1052.2	1053.3	1053.5	1052.8	1052.2	1051.5	1050.8
157.5°	1081.4	1082.9	1084.4	1084.6	1083.6	1082.5	1081.4	1080.4
160°	1099.4	1100.7	1102.1	1102.3	1101.4	1100.5	1099.6	1098.7
162.5°	1115.7	1117.2	1118.7	1119.0	1117.9	1116.8	1115.8	1114.7
165°	1136.8	1138.3	1139.9	1140.1	1139.0	1137.9	1136.8	1135.7
167.5°	1154.1	1155.7	1157.2	1157.4	1156.3	1155.1	1154.0	1152.8
170°	1163.7	1165.3	1166.8	1166.9	1165.6	1164.3	1162.9	1161.6
172.5°	1170.9	1172.5	1174.0	1174.1	1172.8	1171.5	1170.1	1168.8
175°	1178.7	1180.2	1181.8	1181.9	1180.6	1179.2	1177.9	1176.6
177.5°	1182.3	1183.4	1184.4	1184.4	1183.4	1182.3	1181.2	1180.2
180°	1182.6	1182.6	1182.6	1182.6	1182.6	1182.6	1182.6	1182.6

(END OF REPORT)