

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331703

Luminaire Tested: **S122RDIP-S675D1080U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331703
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIP-S675D1080U835-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1080 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6174.5 lumens
Efficiency: N/A
Efficacy: 108.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331703

CATALOG NUMBER: S122RDIP-S675D1080U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

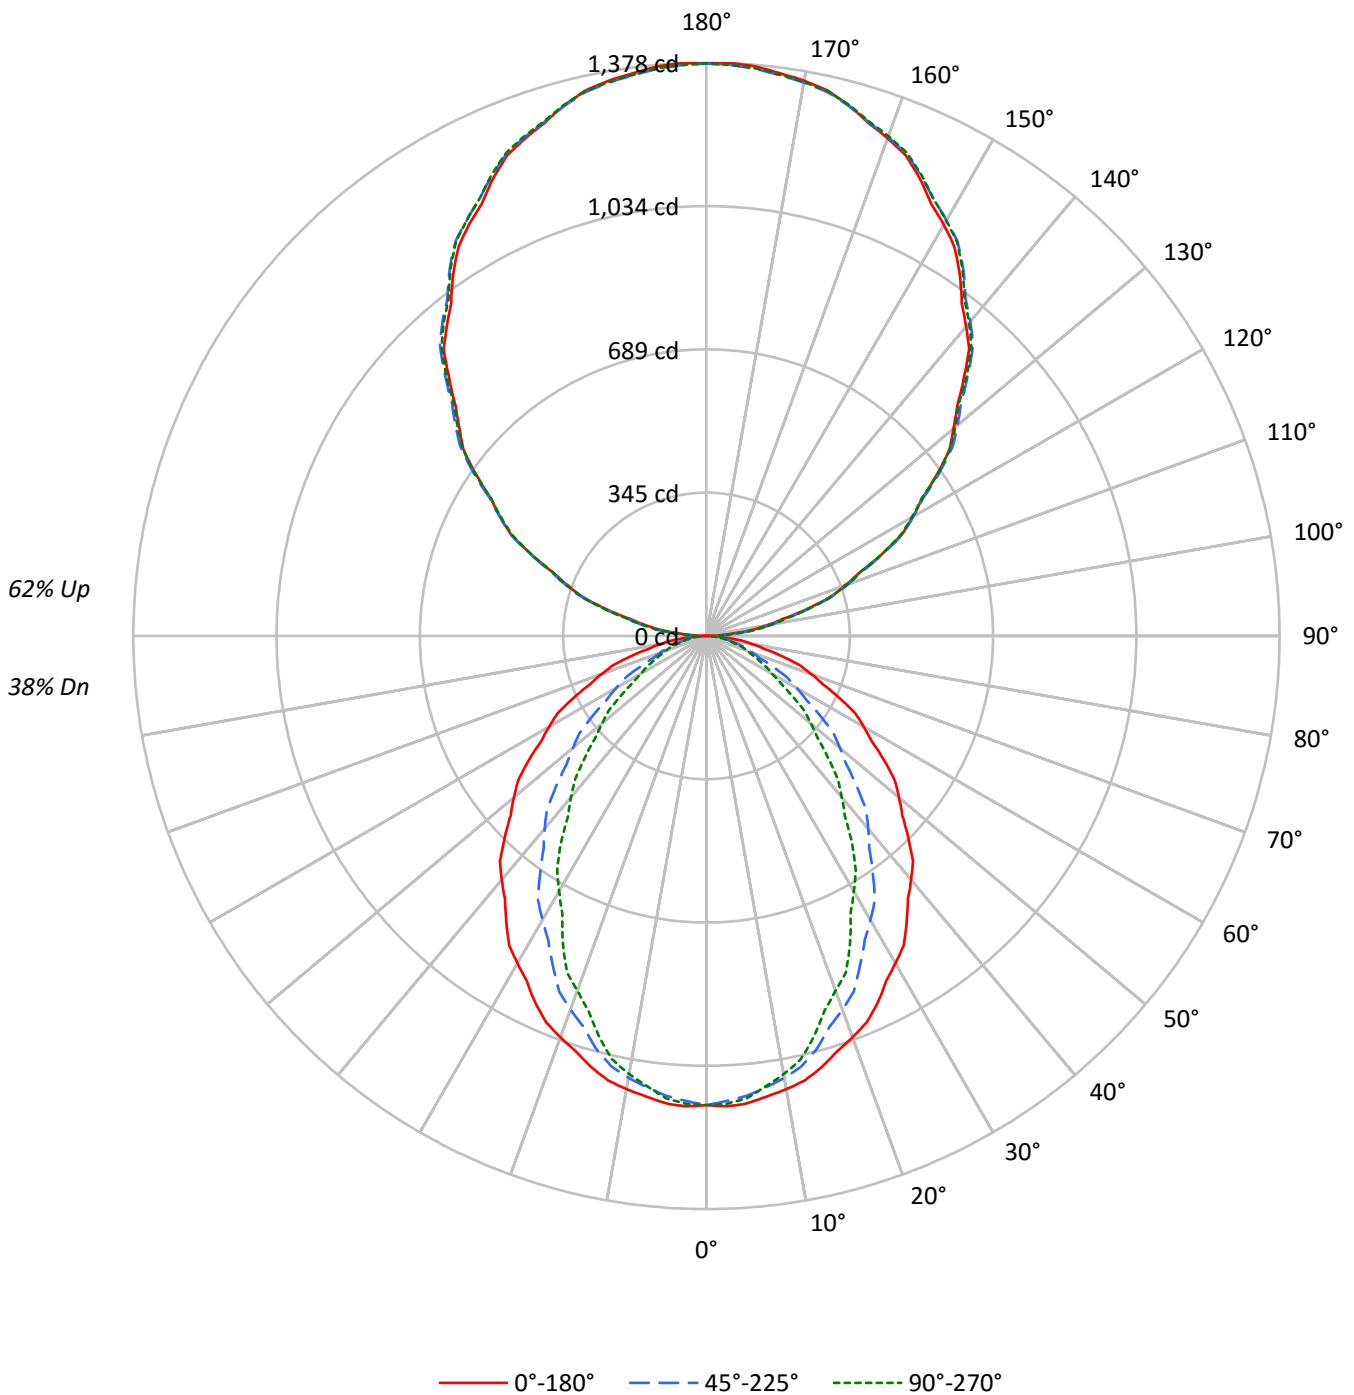



TEST NUMBER: P331703

CATALOG NUMBER: S122RDIP-S675D1080U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	95	95	95	95	76	76	76	60	60	60	45	45	45	38				
1	95	91	88	84	86	83	80	77	67	65	63	53	52	51	40	39	38	32				
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	34	33	28				
3	80	71	64	58	72	64	58	54	53	48	45	42	39	37	32	30	28	24				
4	73	63	55	49	66	57	51	46	47	42	39	38	34	32	29	27	25	21				
5	67	56	48	42	61	51	44	39	42	37	33	34	30	28	26	24	22	18				
6	62	50	42	37	56	46	39	34	38	33	29	31	27	24	24	21	19	16				
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	17	15				
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	18	16	13				
9	49	38	30	26	45	35	28	24	29	24	21	24	20	17	19	16	14	12				
10	46	35	28	23	42	32	26	21	27	22	19	22	18	16	17	15	13	11				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	18213	18213	18213
5°	18282	17985	18084
10°	18143	17690	17539
15°	17934	17167	16672
20°	17646	16417	15593
25°	17350	15567	14549
30°	16940	14693	13209
35°	16539	13742	12033
40°	16136	12760	10671
45°	15664	11654	9439
50°	15179	10540	8231
55°	14686	9340	7068
60°	14108	8076	5867
65°	13456	6785	5345
70°	12675	5589	4914
75°	11715	5097	4585
80°	10349	4556	4175
85°	8133	3594	3594



TEST NUMBER: P331703

CATALOG NUMBER: S122RDIP-S675D1080U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	105.6	1.7
10°-20°	289.9	4.7
20°-30°	407.1	6.6
30°-40°	443.9	7.2
40°-50°	408.2	6.6
50°-60°	320.6	5.2
60°-70°	209.0	3.4
70°-80°	107.8	1.7
80°-90°	33.5	0.5
90°-100°	87.2	1.4
100°-110°	270.9	4.4
110°-120°	463.1	7.5
120°-130°	608.9	9.9
130°-140°	683.5	11.1
140°-150°	670.1	10.9
150°-160°	562.1	9.1
160°-170°	372.8	6.0
170°-180°	130.3	2.1
0°-30°	802.6	13.0
0°-40°	1246.6	20.2
0°-60°	1975.3	32.0
0°-90°	2325.6	37.7
90°-120°	821.2	13.3
90°-150°	2783.7	45.1
90°-180°	3849.0	62.3
0°-180°	6174.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1128	1128	1128	1128	1128	
5°	1128	1122	1110	1118	1116	107
15°	1073	1060	1027	1008	997	302
25°	974	939	874	833	817	448
35°	839	785	697	635	610	525
45°	686	615	510	441	413	529
55°	522	440	332	273	251	466
65°	352	269	178	145	140	349
75°	188	118	82	75	74	199
85°	44	23	19	19	19	52
90°	1	16	41	39	40	5
95°	60	72	74	74	72	69
105°	250	253	256	258	258	264
115°	465	471	469	468	465	459
125°	676	686	683	680	678	604
135°	875	887	890	888	885	675
145°	1062	1070	1077	1078	1073	663
155°	1214	1217	1221	1226	1223	558
165°	1321	1320	1320	1327	1322	372
175°	1374	1371	1368	1376	1370	130
180°	1376	1376	1376	1376	1376	



TEST NUMBER: P331703

CATALOG NUMBER: S122RDIP-S675D1080U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1128.0	1128.0	1128.0	1128.0	1128.0	1128.0	1128.0	1128.0	1128.0	1128.0	1128.0
2.5°	1132.1	1131.2	1130.3	1129.4	1128.5	1127.0	1125.0	1123.0	1121.1	1119.1	1120.9
5°	1128.0	1126.9	1125.8	1124.6	1123.5	1121.5	1118.5	1115.6	1112.6	1109.7	1111.7
7.5°	1116.4	1115.0	1113.6	1112.2	1110.8	1108.3	1104.9	1101.5	1098.0	1094.6	1095.1
10°	1106.6	1105.0	1103.4	1101.8	1100.2	1097.2	1092.6	1088.1	1083.6	1079.0	1078.4
12.5°	1094.3	1092.4	1090.4	1088.5	1086.5	1082.7	1076.9	1071.1	1065.2	1059.4	1058.2
15°	1072.9	1070.4	1067.9	1065.4	1062.9	1057.8	1050.1	1042.4	1034.7	1027.0	1022.7
17.5°	1046.6	1042.8	1039.0	1035.1	1031.3	1024.5	1014.6	1004.7	994.8	984.9	979.8
20°	1027.0	1022.4	1017.9	1013.4	1008.8	1000.9	989.5	978.2	966.9	955.5	949.8
22.5°	1005.7	1000.7	995.6	990.5	985.4	976.5	963.7	950.9	938.1	925.3	918.0
25°	973.9	966.6	959.4	952.1	944.9	933.7	918.8	903.8	888.8	873.8	864.5
27.5°	935.5	927.6	919.7	911.8	903.9	891.5	874.7	857.8	840.9	824.0	813.2
30°	908.6	899.9	891.3	882.7	874.1	860.7	842.5	824.4	806.2	788.1	776.5
32.5°	882.4	872.3	862.3	852.2	842.1	827.8	809.3	790.8	772.3	753.8	740.6
35°	839.1	827.6	816.0	804.4	792.9	777.1	757.1	737.2	717.2	697.2	682.9
37.5°	795.9	783.1	770.4	757.7	745.0	728.0	706.8	685.5	664.2	642.9	627.2
40°	765.6	752.0	738.4	724.8	711.2	693.4	671.4	649.4	627.4	605.4	589.3
42.5°	734.6	720.3	705.9	691.6	677.3	658.7	636.0	613.3	590.5	567.8	551.1
45°	686.0	670.8	655.6	640.4	625.2	605.7	581.9	558.1	534.2	510.4	494.3
47.5°	638.6	622.5	606.4	590.3	574.2	553.9	529.3	504.7	480.1	455.5	439.5
50°	604.3	588.2	572.1	556.0	539.9	519.4	494.4	469.5	444.5	419.6	403.9
52.5°	570.9	554.0	537.2	520.4	503.5	482.9	458.5	434.1	409.7	385.3	370.2
55°	521.7	504.0	486.3	468.6	450.9	429.8	405.3	380.8	356.3	331.8	318.2
57.5°	471.2	453.1	434.9	416.8	398.6	377.8	354.2	330.7	307.1	283.6	271.1
60°	436.9	418.8	400.6	382.5	364.3	343.6	320.2	296.8	273.5	250.1	238.5
62.5°	403.4	385.3	367.1	349.0	330.8	310.6	288.4	266.1	243.8	221.5	210.5
65°	352.2	333.8	315.4	297.1	278.7	259.3	238.9	218.5	198.0	177.6	169.9
67.5°	302.8	284.5	266.3	248.1	229.8	211.5	193.1	174.8	156.4	138.0	134.5
70°	268.5	250.8	233.1	215.4	197.7	181.0	165.4	149.7	134.1	118.4	116.1
72.5°	235.8	218.8	201.9	184.9	167.9	153.2	140.6	128.0	115.5	102.9	101.0
75°	187.8	172.0	156.1	140.2	124.3	112.5	104.8	97.1	89.4	81.7	80.1
77.5°	140.7	126.7	112.8	98.9	85.0	76.1	72.4	68.7	65.0	61.3	60.3
80°	111.3	99.7	88.1	76.6	65.0	58.1	55.8	53.5	51.3	49.0	48.1
82.5°	84.3	75.3	66.3	57.2	48.2	42.9	41.4	39.8	38.3	36.8	36.2
85°	43.9	39.1	34.4	29.6	24.8	22.1	21.4	20.8	20.1	19.4	19.4
87.5°	13.3	12.5	11.6	10.8	10.0	10.1	11.3	12.4	13.5	14.7	14.4
90°	1.2	4.3	7.4	10.5	13.6	17.9	23.6	29.3	35.0	40.7	40.1
92.5°	20.7	22.9	25.2	27.5	29.8	31.6	32.9	34.3	35.6	36.9	37.0
95°	60.4	63.0	65.6	68.1	70.7	72.3	72.8	73.3	73.8	74.3	74.3
97.5°	110.4	112.6	114.9	117.2	119.4	121.1	122.0	123.0	124.0	125.0	125.0
100°	147.5	149.6	151.7	153.7	155.8	157.2	158.0	158.7	159.5	160.3	160.3
102.5°	186.6	188.2	189.9	191.5	193.2	194.5	195.5	196.4	197.4	198.4	198.6
105°	249.7	250.5	251.3	252.1	252.8	253.5	254.0	254.5	255.0	255.5	256.1
107.5°	313.4	314.5	315.7	316.8	317.9	318.5	318.5	318.5	318.5	318.5	318.7
110°	354.3	355.8	357.4	358.9	360.5	361.3	361.3	361.3	361.3	361.3	361.3



TEST NUMBER: P331703

CATALOG NUMBER: S122RDIP-S675D1080U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	398.9	400.4	402.0	403.5	405.1	405.8	405.5	405.3	405.1	404.9	404.3
115°	464.6	466.2	467.7	469.3	470.8	471.3	470.8	470.3	469.8	469.3	469.0
117.5°	530.1	532.2	534.3	536.3	538.4	538.7	537.3	535.8	534.4	532.9	532.3
120°	573.8	575.9	578.0	580.0	582.1	582.1	580.0	578.0	575.9	573.8	573.8
122.5°	613.8	616.3	618.7	621.2	623.7	624.2	622.8	621.3	619.9	618.4	617.8
125°	676.0	678.4	680.7	683.0	685.3	686.1	685.3	684.6	683.8	683.0	682.2
127.5°	736.7	739.6	742.6	745.5	748.4	749.5	748.5	747.6	746.7	745.7	744.8
130°	774.8	778.1	781.5	784.8	788.2	789.6	789.1	788.6	788.1	787.6	787.0
132.5°	817.5	820.3	823.0	825.7	828.5	829.9	830.0	830.1	830.2	830.3	829.2
135°	874.7	877.5	880.4	883.2	886.0	887.7	888.2	888.7	889.3	889.8	889.5
137.5°	934.8	937.2	939.5	941.8	944.1	945.6	946.3	947.0	947.6	948.3	948.1
140°	971.1	973.4	975.7	978.1	980.4	982.2	983.5	984.8	986.1	987.3	987.3
142.5°	1008.3	1010.6	1012.9	1015.2	1017.5	1019.1	1020.0	1020.9	1021.8	1022.7	1022.9
145°	1061.7	1063.5	1065.3	1067.1	1068.9	1070.6	1072.1	1073.7	1075.2	1076.8	1077.0
147.5°	1109.3	1111.5	1113.6	1115.8	1118.0	1119.6	1120.6	1121.7	1122.7	1123.7	1124.3
150°	1141.8	1143.4	1144.9	1146.5	1148.0	1149.3	1150.4	1151.4	1152.4	1153.5	1154.2
152.5°	1170.6	1172.2	1173.7	1175.3	1176.8	1178.2	1179.5	1180.7	1182.0	1183.2	1184.2
155°	1213.9	1214.6	1215.4	1216.2	1217.0	1217.7	1218.5	1219.3	1220.1	1220.8	1222.1
157.5°	1250.8	1251.3	1251.8	1252.3	1252.9	1253.3	1253.8	1254.3	1254.7	1255.2	1257.0
160°	1273.1	1273.6	1274.1	1274.6	1275.2	1275.5	1275.8	1276.1	1276.3	1276.6	1278.1
162.5°	1293.5	1293.6	1293.7	1293.8	1294.0	1294.1	1294.4	1294.6	1294.9	1295.2	1296.9
165°	1320.7	1320.5	1320.2	1319.9	1319.7	1319.6	1319.6	1319.6	1319.6	1319.6	1321.4
167.5°	1343.5	1342.7	1341.9	1341.2	1340.4	1340.0	1339.9	1339.9	1339.8	1339.8	1341.6
170°	1355.6	1354.8	1354.0	1353.2	1352.5	1352.0	1351.7	1351.4	1351.2	1350.9	1352.7
172.5°	1363.9	1363.2	1362.4	1361.6	1360.8	1360.3	1360.1	1359.8	1359.5	1359.3	1361.1
175°	1374.2	1373.4	1372.6	1371.8	1371.1	1370.4	1369.9	1369.4	1368.9	1368.3	1370.2
177.5°	1378.3	1377.7	1377.1	1376.5	1375.9	1375.3	1374.9	1374.5	1374.1	1373.7	1374.9
180°	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5



TEST NUMBER: P331703

CATALOG NUMBER: S122RDIP-S675D1080U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1128.0	1128.0	1128.0	1128.0	1128.0	1128.0	1128.0	1128.0
2.5°	1122.7	1124.5	1126.3	1127.0	1126.7	1126.3	1126.0	1125.6
5°	1113.7	1115.8	1117.8	1118.5	1117.8	1117.1	1116.5	1115.8
7.5°	1095.7	1096.3	1096.9	1096.6	1095.4	1094.3	1093.1	1091.9
10°	1077.7	1077.0	1076.3	1075.3	1073.9	1072.6	1071.2	1069.8
12.5°	1057.0	1055.8	1054.5	1052.8	1050.5	1048.3	1046.0	1043.7
15°	1018.4	1014.0	1009.7	1006.4	1004.2	1001.9	999.6	997.4
17.5°	974.7	969.5	964.4	959.9	956.0	952.1	948.2	944.3
20°	944.2	938.5	932.8	927.5	922.5	917.5	912.5	907.5
22.5°	910.7	903.4	896.1	890.6	886.8	883.1	879.4	875.7
25°	855.2	845.9	836.6	830.3	826.9	823.5	820.1	816.7
27.5°	802.3	791.5	780.7	772.5	767.1	761.7	756.3	750.9
30°	765.0	753.4	741.8	733.0	726.8	720.7	714.6	708.5
32.5°	727.4	714.2	701.0	691.5	685.7	680.0	674.2	668.5
35°	668.7	654.4	640.1	630.4	625.4	620.4	615.5	610.5
37.5°	611.4	595.7	580.0	569.2	563.5	557.8	552.1	546.4
40°	573.1	557.0	540.9	529.9	524.0	518.1	512.2	506.3
42.5°	534.5	517.8	501.2	490.0	484.3	478.6	472.9	467.1
45°	478.2	462.1	446.0	435.2	429.8	424.3	418.9	413.4
47.5°	423.5	407.5	391.4	381.0	376.0	371.1	366.1	361.2
50°	388.3	372.6	357.0	346.7	342.0	337.2	332.5	327.7
52.5°	355.1	339.9	324.8	315.1	310.7	306.3	301.9	297.5
55°	304.6	290.9	277.3	268.4	264.1	259.7	255.4	251.1
57.5°	258.6	246.2	233.7	225.6	222.0	218.4	214.7	211.1
60°	227.0	215.4	203.8	196.2	192.6	189.0	185.3	181.7
62.5°	199.5	188.4	177.4	170.8	168.6	166.5	164.3	162.1
65°	162.2	154.5	146.8	142.6	141.9	141.2	140.5	139.9
67.5°	130.9	127.4	123.9	121.7	121.0	120.3	119.6	118.8
70°	113.9	111.6	109.3	107.8	106.8	105.9	105.0	104.1
72.5°	99.1	97.2	95.3	94.1	93.5	93.0	92.4	91.9
75°	78.5	76.9	75.3	74.4	74.2	74.0	73.7	73.5
77.5°	59.4	58.5	57.6	57.0	56.6	56.3	55.9	55.5
80°	47.2	46.3	45.4	44.9	44.9	44.9	44.9	44.9
82.5°	35.7	35.1	34.6	34.3	34.3	34.3	34.3	34.3
85°	19.4	19.4	19.4	19.4	19.4	19.4	19.4	19.4
87.5°	14.1	13.8	13.5	13.4	13.5	13.5	13.6	13.6
90°	39.6	39.1	38.6	38.5	38.7	39.0	39.2	39.5
92.5°	37.1	37.2	37.4	37.4	37.5	37.5	37.6	37.6
95°	74.3	74.3	74.3	74.1	73.6	73.1	72.5	72.0
97.5°	125.0	125.0	125.0	125.0	124.9	124.9	124.8	124.8
100°	160.3	160.3	160.3	160.2	159.9	159.7	159.4	159.1
102.5°	198.8	199.0	199.2	199.2	198.9	198.7	198.4	198.2
105°	256.6	257.1	257.6	257.9	257.9	257.9	257.9	257.9
107.5°	318.9	319.1	319.3	318.8	317.7	316.5	315.3	314.1
110°	361.3	361.3	361.3	360.9	360.1	359.3	358.5	357.8



TEST NUMBER: P331703

CATALOG NUMBER: S122RDIP-S675D1080U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	403.7	403.1	402.5	401.9	401.3	400.7	400.2	399.6
115°	468.8	468.5	468.2	467.7	467.0	466.2	465.4	464.6
117.5°	531.7	531.1	530.5	529.8	529.0	528.2	527.4	526.7
120°	573.8	573.8	573.8	573.4	572.7	571.9	571.1	570.3
122.5°	617.2	616.6	615.9	615.4	614.8	614.2	613.7	613.1
125°	681.5	680.7	679.9	679.4	679.1	678.9	678.6	678.4
127.5°	743.9	742.9	742.0	741.1	740.3	739.5	738.7	737.8
130°	786.5	786.0	785.5	784.7	783.7	782.6	781.6	780.6
132.5°	828.0	826.9	825.8	824.8	824.0	823.1	822.3	821.5
135°	889.3	889.0	888.7	888.2	887.4	886.7	885.9	885.1
137.5°	947.9	947.7	947.5	946.9	945.8	944.8	943.8	942.7
140°	987.3	987.3	987.3	986.8	985.8	984.8	983.7	982.7
142.5°	1023.1	1023.3	1023.5	1023.1	1022.0	1021.0	1020.0	1018.9
145°	1077.3	1077.6	1077.8	1077.4	1076.4	1075.4	1074.3	1073.3
147.5°	1124.9	1125.4	1126.0	1125.8	1124.8	1123.8	1122.8	1121.9
150°	1155.0	1155.8	1156.6	1156.6	1155.8	1155.0	1154.2	1153.5
152.5°	1185.2	1186.1	1187.1	1187.1	1186.1	1185.2	1184.2	1183.2
155°	1223.4	1224.7	1226.0	1226.2	1225.5	1224.7	1223.9	1223.1
157.5°	1258.7	1260.5	1262.2	1262.5	1261.2	1260.0	1258.8	1257.5
160°	1279.7	1281.2	1282.8	1283.0	1282.0	1281.0	1279.9	1278.9
162.5°	1298.7	1300.4	1302.2	1302.4	1301.2	1300.0	1298.7	1297.5
165°	1323.2	1325.0	1326.8	1327.0	1325.8	1324.5	1323.2	1321.9
167.5°	1343.4	1345.2	1347.0	1347.2	1345.9	1344.5	1343.2	1341.9
170°	1354.5	1356.3	1358.1	1358.3	1356.7	1355.2	1353.6	1352.1
172.5°	1362.9	1364.7	1366.5	1366.6	1365.1	1363.5	1362.0	1360.4
175°	1372.0	1373.8	1375.6	1375.7	1374.2	1372.6	1371.1	1369.5
177.5°	1376.2	1377.4	1378.6	1378.6	1377.4	1376.2	1374.9	1373.7
180°	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5

(END OF REPORT)