

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331721

Luminaire Tested: **S122RDIP-S865D725U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331721
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIP-S865D725U835-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 725 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5609.4 lumens
Efficiency: N/A
Efficacy: 103.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331721

CATALOG NUMBER: S122RDIP-S865D725U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

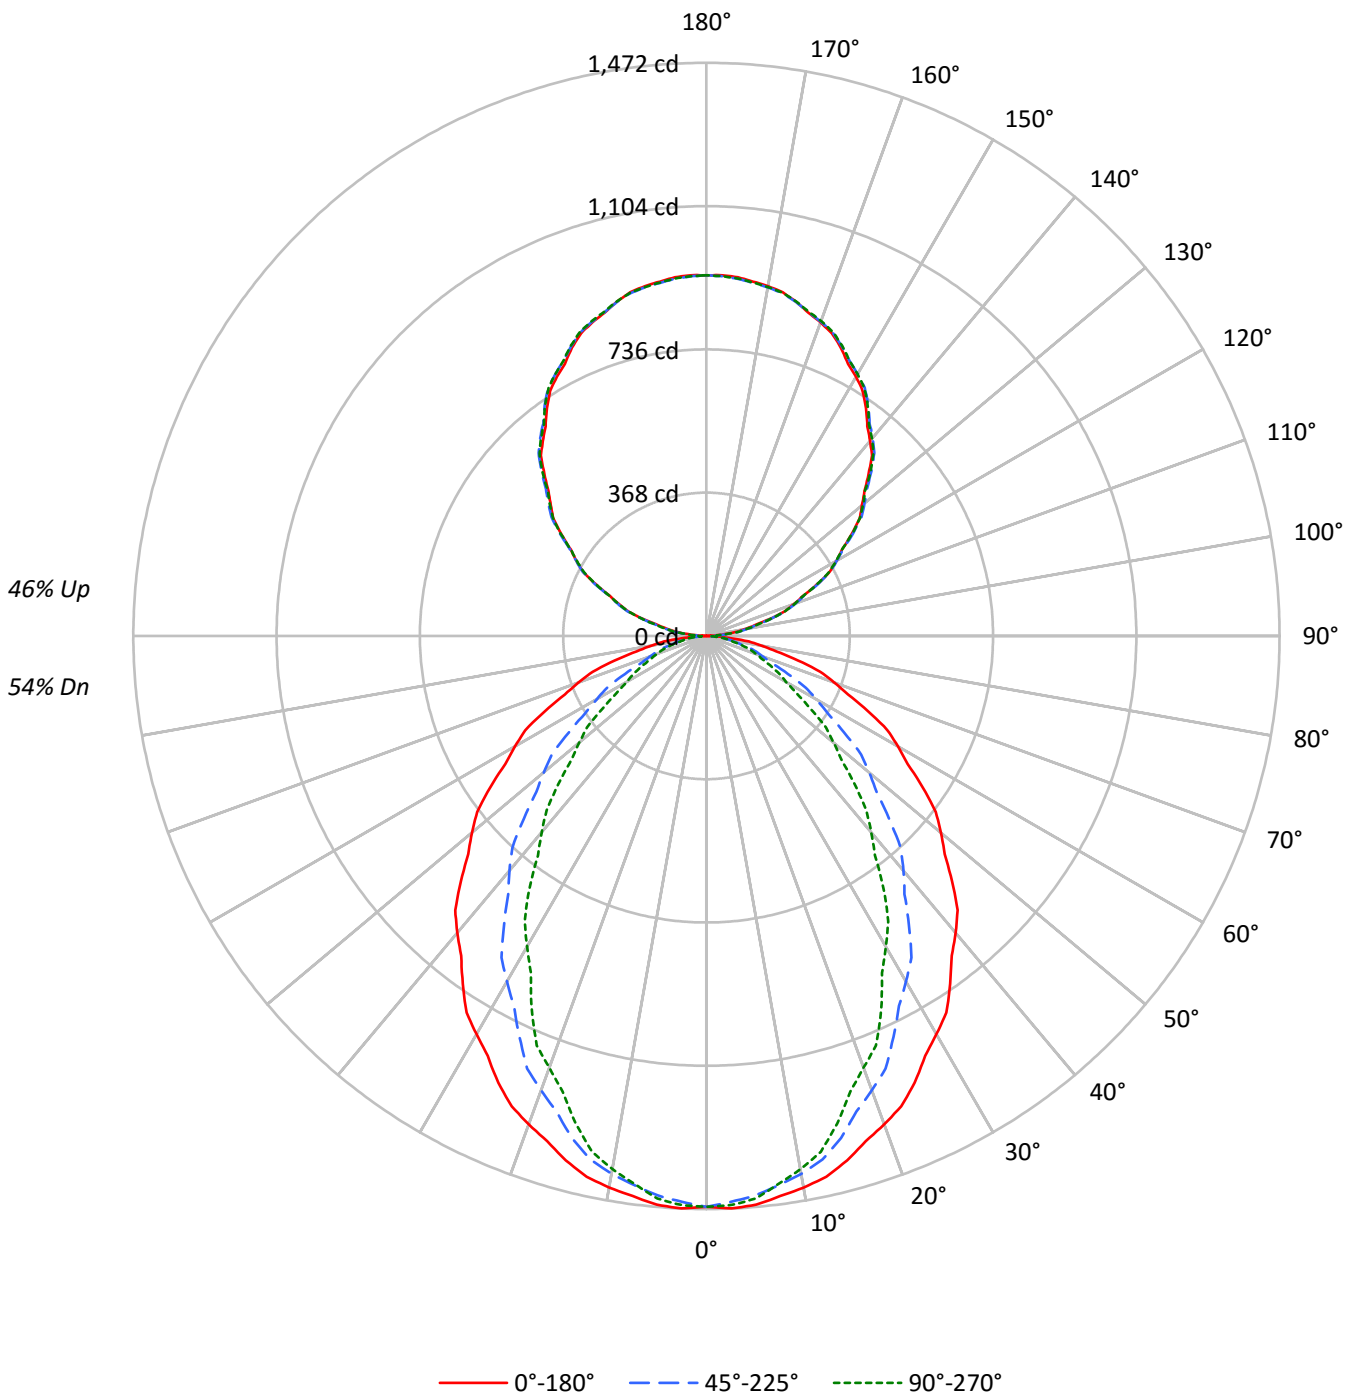



TEST NUMBER: P331721

CATALOG NUMBER: S122RDIP-S865D725U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	60	60	60	54
1	99	95	91	88	92	88	85	82	76	73	71	64	62	61	53	52	51	46
2	91	84	78	73	84	78	73	68	67	63	60	57	54	52	48	46	44	40
3	83	74	67	61	77	69	63	58	60	55	51	51	47	44	43	40	38	34
4	76	66	58	52	71	61	55	49	53	48	44	46	42	38	39	36	33	30
5	70	59	51	45	65	55	48	43	48	42	38	41	37	34	35	32	29	26
6	65	53	45	39	60	50	43	37	43	38	34	37	33	30	32	29	26	23
7	60	48	40	35	56	45	38	33	40	34	30	34	30	27	29	26	23	21
8	56	44	36	31	52	41	34	30	36	31	27	31	27	24	27	24	21	19
9	52	40	33	28	48	38	31	27	33	28	24	29	25	22	25	22	19	17
10	49	37	30	25	45	35	28	24	31	25	22	27	23	20	23	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	23675	23675	23675
5°	23765	23378	23506
10°	23582	22996	22799
15°	23311	22313	21670
20°	22936	21340	20270
25°	22552	20236	18912
30°	22018	19099	17169
35°	21498	17864	15640
40°	20976	16585	13873
45°	20361	15150	12271
50°	19733	13700	10698
55°	19088	12141	9188
60°	18338	10498	7627
65°	17490	8821	6946
70°	16475	7265	6387
75°	15234	6625	5958
80°	13445	5923	5430
85°	10578	4668	4668



TEST NUMBER: P331721

CATALOG NUMBER: S122RDIP-S865D725U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	137.2	2.4
10°-20°	376.8	6.7
20°-30°	529.2	9.4
30°-40°	577.1	10.3
40°-50°	530.6	9.5
50°-60°	416.7	7.4
60°-70°	271.7	4.8
70°-80°	140.1	2.5
80°-90°	40.0	0.7
90°-100°	58.7	1.0
100°-110°	182.3	3.2
110°-120°	311.6	5.6
120°-130°	409.8	7.3
130°-140°	459.9	8.2
140°-150°	450.9	8.0
150°-160°	378.2	6.7
160°-170°	250.9	4.5
170°-180°	87.7	1.6
0°-30°	1043.3	18.6
0°-40°	1620.3	28.9
0°-60°	2567.6	45.8
0°-90°	3019.4	53.8
90°-120°	552.6	9.9
90°-150°	1873.2	33.4
90°-180°	2590.0	46.2
0°-180°	5609.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1466	1466	1466	1466	1466	
5°	1466	1459	1442	1453	1450	139
15°	1395	1378	1335	1310	1296	393
25°	1266	1221	1136	1083	1062	582
35°	1091	1020	906	826	794	682
45°	892	800	664	573	537	688
55°	678	572	431	355	326	606
65°	458	350	231	188	182	454
75°	244	154	106	97	96	258
85°	57	31	25	25	25	67
90°	1	11	27	26	27	4
95°	41	48	50	50	48	47
105°	168	170	172	173	174	177
115°	313	317	316	315	313	309
125°	455	461	460	457	456	406
135°	589	597	599	598	596	454
145°	714	720	725	725	722	446
155°	817	819	822	825	823	376
165°	889	888	888	893	890	251
175°	925	922	921	926	922	88
180°	926	926	926	926	926	



TEST NUMBER: P331721

CATALOG NUMBER: S122RDIP-S865D725U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3
2.5°	1471.6	1470.4	1469.2	1468.0	1466.9	1465.0	1462.4	1459.8	1457.2	1454.6	1457.0
5°	1466.3	1464.8	1463.3	1461.8	1460.4	1457.7	1453.9	1450.1	1446.2	1442.4	1445.0
7.5°	1451.1	1449.3	1447.5	1445.7	1443.8	1440.7	1436.2	1431.7	1427.2	1422.7	1423.5
10°	1438.4	1436.3	1434.3	1432.2	1430.1	1426.2	1420.3	1414.4	1408.5	1402.6	1401.7
12.5°	1422.5	1419.9	1417.4	1414.9	1412.3	1407.3	1399.7	1392.2	1384.6	1377.1	1375.5
15°	1394.6	1391.4	1388.1	1384.9	1381.6	1375.0	1365.0	1355.0	1344.9	1334.9	1329.3
17.5°	1360.4	1355.4	1350.5	1345.5	1340.6	1331.7	1318.8	1305.9	1293.1	1280.2	1273.6
20°	1334.9	1329.0	1323.1	1317.2	1311.3	1301.0	1286.2	1271.5	1256.8	1242.0	1234.6
22.5°	1307.3	1300.7	1294.1	1287.5	1280.9	1269.3	1252.6	1236.0	1219.4	1202.7	1193.2
25°	1265.9	1256.5	1247.0	1237.6	1228.2	1213.7	1194.2	1174.8	1155.3	1135.9	1123.8
27.5°	1216.0	1205.7	1195.5	1185.2	1175.0	1158.9	1136.9	1115.0	1093.0	1071.1	1057.0
30°	1181.0	1169.8	1158.6	1147.4	1136.2	1118.8	1095.2	1071.6	1048.0	1024.4	1009.4
32.5°	1147.0	1133.9	1120.8	1107.7	1094.6	1076.1	1052.0	1027.9	1003.9	979.8	962.7
35°	1090.7	1075.7	1060.7	1045.6	1030.6	1010.1	984.1	958.2	932.3	906.3	887.7
37.5°	1034.5	1018.0	1001.5	984.9	968.4	946.3	918.7	891.0	863.4	835.7	815.2
40°	995.2	977.5	959.8	942.1	924.4	901.3	872.7	844.1	815.5	786.9	765.9
42.5°	954.9	936.2	917.6	899.0	880.3	856.2	826.7	797.1	767.6	738.0	716.4
45°	891.7	871.9	852.2	832.4	812.7	787.3	756.4	725.4	694.4	663.5	642.5
47.5°	830.1	809.2	788.3	767.3	746.4	719.9	688.0	656.0	624.0	592.1	571.3
50°	785.6	764.6	743.7	722.7	701.8	675.1	642.7	610.2	577.8	545.4	525.0
52.5°	742.0	720.1	698.3	676.4	654.5	627.7	596.0	564.2	532.5	500.8	481.1
55°	678.1	655.1	632.1	609.1	586.1	558.6	526.8	494.9	463.1	431.3	413.6
57.5°	612.5	588.9	565.3	541.7	518.2	491.1	460.4	429.8	399.2	368.6	352.4
60°	567.9	544.3	520.8	497.2	473.6	446.6	416.2	385.8	355.5	325.1	310.1
62.5°	524.4	500.8	477.2	453.6	430.0	403.8	374.8	345.9	316.9	287.9	273.6
65°	457.8	433.9	410.0	386.1	362.3	337.0	310.5	284.0	257.4	230.9	220.9
67.5°	393.6	369.9	346.2	322.4	298.7	274.9	251.1	227.2	203.3	179.4	174.8
70°	349.0	326.0	303.0	280.0	257.0	235.3	215.0	194.6	174.3	153.9	151.0
72.5°	306.5	284.5	262.4	240.4	218.3	199.1	182.8	166.4	150.1	133.8	131.3
75°	244.2	223.5	202.9	182.2	161.6	146.3	136.2	126.2	116.2	106.2	104.1
77.5°	182.9	164.7	146.6	128.5	110.4	99.0	94.1	89.3	84.5	79.6	78.4
80°	144.6	129.6	114.6	99.5	84.5	75.5	72.5	69.6	66.6	63.7	62.5
82.5°	109.6	97.9	86.1	74.4	62.7	55.8	53.8	51.8	49.8	47.8	47.1
85°	57.1	50.9	44.7	38.5	32.3	28.8	27.9	27.0	26.1	25.2	25.2
87.5°	17.1	15.7	14.2	12.7	11.3	10.9	11.7	12.4	13.2	14.0	13.7
90°	0.8	2.9	5.0	7.0	9.1	12.1	15.9	19.7	23.5	27.4	27.0
92.5°	13.9	15.4	17.0	18.5	20.0	21.2	22.1	23.0	24.0	24.9	24.9
95°	40.6	42.4	44.1	45.9	47.6	48.6	49.0	49.3	49.7	50.0	50.0
97.5°	74.3	75.8	77.3	78.8	80.4	81.5	82.1	82.8	83.4	84.1	84.1
100°	99.3	100.7	102.0	103.4	104.8	105.8	106.3	106.8	107.3	107.9	107.9
102.5°	125.5	126.6	127.8	128.9	130.0	130.9	131.5	132.2	132.8	133.5	133.6
105°	168.1	168.6	169.1	169.6	170.1	170.6	170.9	171.3	171.6	172.0	172.3
107.5°	210.9	211.7	212.4	213.2	213.9	214.3	214.3	214.3	214.3	214.3	214.5
110°	238.4	239.4	240.5	241.5	242.6	243.1	243.1	243.1	243.1	243.1	243.1



TEST NUMBER: P331721

CATALOG NUMBER: S122RDIP-S865D725U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	268.4	269.5	270.5	271.5	272.6	273.0	272.9	272.8	272.6	272.5	272.1
115°	312.7	313.7	314.7	315.8	316.8	317.2	316.8	316.5	316.1	315.8	315.6
117.5°	356.7	358.1	359.5	360.9	362.3	362.5	361.5	360.6	359.6	358.6	358.2
120°	386.1	387.5	388.9	390.3	391.7	391.7	390.3	388.9	387.5	386.1	386.1
122.5°	413.0	414.7	416.4	418.0	419.7	420.0	419.1	418.1	417.1	416.1	415.7
125°	454.9	456.5	458.0	459.6	461.2	461.7	461.2	460.6	460.1	459.6	459.1
127.5°	495.7	497.7	499.7	501.7	503.6	504.3	503.7	503.1	502.4	501.8	501.2
130°	521.4	523.6	525.9	528.1	530.4	531.3	531.0	530.6	530.3	530.0	529.6
132.5°	550.1	552.0	553.8	555.6	557.5	558.4	558.5	558.6	558.6	558.7	558.0
135°	588.6	590.5	592.4	594.3	596.2	597.3	597.7	598.0	598.4	598.7	598.6
137.5°	629.1	630.6	632.2	633.8	635.3	636.3	636.8	637.2	637.7	638.1	638.0
140°	653.5	655.0	656.6	658.1	659.7	660.9	661.8	662.7	663.5	664.4	664.4
142.5°	678.5	680.0	681.6	683.2	684.7	685.8	686.4	687.0	687.6	688.2	688.3
145°	714.4	715.6	716.9	718.1	719.3	720.4	721.5	722.5	723.5	724.6	724.8
147.5°	746.5	747.9	749.4	750.8	752.3	753.4	754.1	754.8	755.5	756.2	756.5
150°	768.4	769.4	770.4	771.5	772.5	773.4	774.1	774.8	775.5	776.2	776.7
152.5°	787.7	788.8	789.8	790.9	791.9	792.8	793.7	794.5	795.3	796.2	796.8
155°	816.8	817.3	817.9	818.4	818.9	819.4	819.9	820.5	821.0	821.5	822.4
157.5°	841.7	842.0	842.4	842.7	843.1	843.4	843.7	844.0	844.3	844.6	845.8
160°	856.7	857.0	857.4	857.7	858.1	858.3	858.5	858.7	858.9	859.0	860.1
162.5°	870.4	870.5	870.6	870.6	870.7	870.8	871.0	871.2	871.4	871.5	872.7
165°	888.7	888.6	888.4	888.2	888.0	887.9	887.9	887.9	887.9	887.9	889.2
167.5°	904.0	903.5	903.0	902.5	902.0	901.7	901.7	901.6	901.6	901.5	902.8
170°	912.2	911.7	911.1	910.6	910.1	909.7	909.6	909.4	909.2	909.0	910.3
172.5°	917.8	917.3	916.8	916.2	915.7	915.4	915.2	915.0	914.9	914.7	915.9
175°	924.7	924.2	923.6	923.1	922.6	922.2	921.8	921.5	921.1	920.8	922.0
177.5°	927.5	927.1	926.7	926.2	925.8	925.5	925.2	924.9	924.6	924.4	925.2
180°	926.2	926.2	926.2	926.2	926.2	926.2	926.2	926.2	926.2	926.2	926.2



TEST NUMBER: P331721

CATALOG NUMBER: S122RDIP-S865D725U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3
2.5°	1459.3	1461.7	1464.0	1465.0	1464.5	1464.0	1463.6	1463.1
5°	1447.7	1450.3	1453.0	1453.9	1453.0	1452.1	1451.2	1450.3
7.5°	1424.3	1425.0	1425.8	1425.4	1423.9	1422.4	1420.8	1419.3
10°	1400.8	1399.9	1399.0	1397.7	1395.9	1394.2	1392.4	1390.6
12.5°	1373.9	1372.3	1370.7	1368.5	1365.5	1362.6	1359.6	1356.7
15°	1323.7	1318.1	1312.5	1308.2	1305.3	1302.3	1299.4	1296.4
17.5°	1266.9	1260.2	1253.6	1247.7	1242.6	1237.6	1232.5	1227.4
20°	1227.3	1219.9	1212.5	1205.6	1199.1	1192.6	1186.1	1179.7
22.5°	1183.8	1174.3	1164.8	1157.6	1152.8	1147.9	1143.1	1138.3
25°	1111.7	1099.6	1087.5	1079.2	1074.8	1070.4	1066.0	1061.6
27.5°	1042.9	1028.8	1014.7	1004.2	997.2	990.1	983.1	976.1
30°	994.3	979.3	964.2	952.7	944.8	936.8	928.9	920.9
32.5°	945.5	928.3	911.2	898.8	891.4	883.9	876.4	868.9
35°	869.1	850.6	832.0	819.5	813.0	806.5	800.0	793.5
37.5°	794.8	774.3	753.9	739.9	732.5	725.0	717.6	710.2
40°	745.0	724.1	703.1	688.8	681.2	673.5	665.8	658.2
42.5°	694.8	673.1	651.5	636.9	629.5	622.1	614.6	607.2
45°	621.6	600.7	579.7	565.7	558.6	551.6	544.5	537.4
47.5°	550.4	529.6	508.8	495.2	488.8	482.3	475.9	469.5
50°	504.7	484.3	464.0	450.7	444.5	438.3	432.1	425.9
52.5°	461.5	441.9	422.2	409.6	403.8	398.1	392.4	386.7
55°	395.9	378.2	360.5	348.8	343.2	337.6	332.0	326.4
57.5°	336.2	320.0	303.8	293.3	288.6	283.8	279.1	274.4
60°	295.0	280.0	264.9	255.1	250.3	245.6	240.9	236.2
62.5°	259.3	245.0	230.6	222.0	219.2	216.4	213.5	210.7
65°	210.8	200.8	190.8	185.3	184.4	183.6	182.7	181.8
67.5°	170.2	165.6	161.0	158.2	157.3	156.3	155.4	154.5
70°	148.0	145.1	142.1	140.1	138.9	137.7	136.5	135.3
72.5°	128.8	126.3	123.8	122.3	121.5	120.8	120.1	119.4
75°	102.0	100.0	97.9	96.7	96.4	96.1	95.8	95.5
77.5°	77.3	76.1	74.9	74.1	73.6	73.1	72.7	72.2
80°	61.3	60.2	59.0	58.4	58.4	58.4	58.4	58.4
82.5°	46.4	45.6	44.9	44.6	44.6	44.6	44.6	44.6
85°	25.2	25.2	25.2	25.2	25.2	25.2	25.2	25.2
87.5°	13.4	13.0	12.7	12.6	12.6	12.7	12.7	12.7
90°	26.7	26.3	26.0	25.9	26.1	26.2	26.4	26.6
92.5°	25.0	25.1	25.1	25.2	25.2	25.3	25.3	25.3
95°	50.0	50.0	50.0	49.9	49.5	49.2	48.8	48.5
97.5°	84.1	84.1	84.1	84.1	84.1	84.0	84.0	83.9
100°	107.9	107.9	107.9	107.8	107.6	107.4	107.3	107.1
102.5°	133.8	133.9	134.1	134.0	133.9	133.7	133.5	133.3
105°	172.7	173.0	173.4	173.5	173.5	173.5	173.5	173.5
107.5°	214.6	214.7	214.9	214.6	213.8	213.0	212.2	211.4
110°	243.1	243.1	243.1	242.8	242.3	241.8	241.3	240.7



TEST NUMBER: P331721

CATALOG NUMBER: S122RDIP-S865D725U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	271.6	271.2	270.8	270.4	270.0	269.6	269.3	268.9
115°	315.4	315.3	315.1	314.7	314.2	313.7	313.2	312.7
117.5°	357.8	357.4	356.9	356.5	356.0	355.4	354.9	354.4
120°	386.1	386.1	386.1	385.9	385.3	384.8	384.3	383.8
122.5°	415.3	414.9	414.5	414.1	413.7	413.3	412.9	412.6
125°	458.6	458.0	457.5	457.2	457.0	456.8	456.7	456.5
127.5°	500.6	499.9	499.3	498.7	498.2	497.6	497.1	496.5
130°	529.3	528.9	528.6	528.0	527.3	526.7	526.0	525.3
132.5°	557.2	556.4	555.7	555.0	554.4	553.9	553.3	552.8
135°	598.4	598.2	598.0	597.7	597.2	596.7	596.1	595.6
137.5°	637.9	637.7	637.6	637.2	636.5	635.8	635.1	634.4
140°	664.4	664.4	664.4	664.0	663.4	662.7	662.0	661.3
142.5°	688.4	688.6	688.7	688.4	687.7	687.0	686.4	685.7
145°	724.9	725.1	725.3	725.0	724.3	723.6	722.9	722.2
147.5°	756.9	757.3	757.7	757.6	756.9	756.2	755.6	754.9
150°	777.2	777.7	778.3	778.3	777.7	777.2	776.7	776.2
152.5°	797.5	798.2	798.8	798.8	798.2	797.5	796.8	796.2
155°	823.2	824.1	825.0	825.2	824.6	824.1	823.6	823.1
157.5°	847.0	848.2	849.4	849.5	848.7	847.9	847.0	846.2
160°	861.1	862.2	863.2	863.4	862.7	862.0	861.3	860.6
162.5°	873.9	875.1	876.3	876.4	875.6	874.8	873.9	873.1
165°	890.4	891.6	892.8	893.0	892.1	891.2	890.4	889.5
167.5°	904.0	905.2	906.4	906.6	905.7	904.8	903.9	903.0
170°	911.5	912.7	913.9	914.0	913.0	911.9	910.9	909.8
172.5°	917.1	918.3	919.5	919.6	918.6	917.5	916.5	915.5
175°	923.2	924.4	925.6	925.7	924.7	923.6	922.6	921.6
177.5°	926.0	926.9	927.7	927.7	926.9	926.0	925.2	924.4
180°	926.2	926.2	926.2	926.2	926.2	926.2	926.2	926.2

(END OF REPORT)