

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331450-935

Luminaire Tested: **S122DIP-S1005D925U935-4F0-1E-UDD-D**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331450-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S1005D925U935-4F0-1E-UDD-D
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, DROP SATIN WHITE DIFFUSER
UPLIGHT 925 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6660.9 lumens
Efficiency: N/A
Efficacy: 99.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.32 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.08')
CIE Type: General Diffuse


Input Watts (W): 66.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331450-935

CATALOG NUMBER: S122DIP-S1005D925U935-4F0-1E-UDD-D

Luminous Intensity Polar Plot

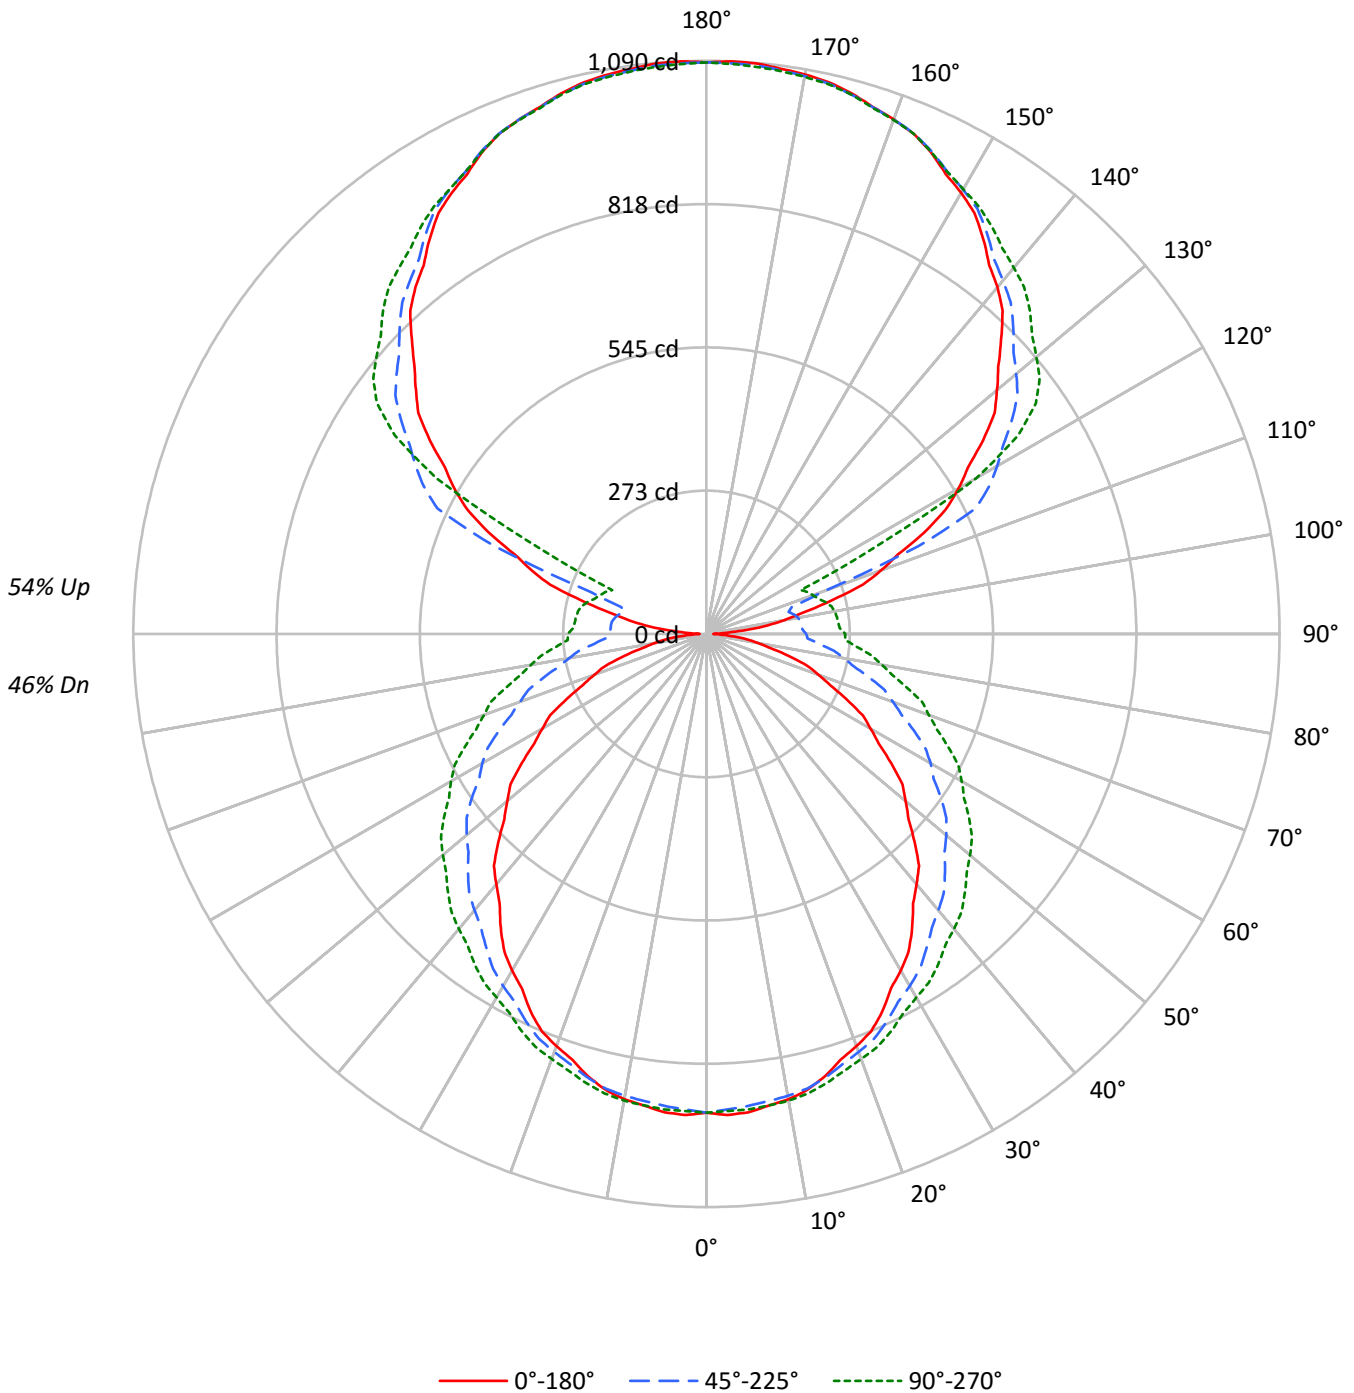



TEST NUMBER: P331450-935

CATALOG NUMBER: S122DIP-S1005D925U935-4F0-1E-UDD-D

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20			20			20			20
RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53	46
1	96	91	86	82	87	83	79	76	69	66	64	56	54	52	44	43	42	36
2	86	78	72	66	79	72	66	61	60	55	52	49	45	43	38	36	34	29
3	79	68	61	54	72	63	56	50	52	47	43	43	39	36	33	31	28	24
4	72	60	52	46	65	55	48	42	46	41	36	38	33	30	30	27	24	20
5	66	53	45	39	60	49	42	36	41	35	31	34	29	26	27	23	21	17
6	60	48	39	33	55	44	37	31	37	31	27	30	26	22	24	21	18	15
7	56	43	35	29	51	40	32	27	33	28	23	27	23	20	22	18	16	13
8	52	39	31	26	47	36	29	24	30	25	21	25	21	17	20	17	14	12
9	48	35	28	23	44	33	26	21	28	22	18	23	19	16	18	15	13	11
10	45	32	25	20	41	30	23	19	25	20	16	21	17	14	17	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14699	14699	14699
5°	14772	14150	14097
10°	14679	13733	13578
15°	14477	13289	13032
20°	14222	12815	12506
25°	13968	12358	12028
30°	13612	11889	11549
35°	13253	11434	11211
40°	12874	11047	10874
45°	12515	10702	10584
50°	12128	10388	10300
55°	11724	10052	10011
60°	11226	9702	9705
65°	10711	9294	9342
70°	10136	8856	8949
75°	9394	8423	8587
80°	8224	7984	8220
85°	7107	7603	7937



TEST NUMBER: P331450-935

CATALOG NUMBER: S122DIP-S1005D925U935-4F0-1E-UDD-D

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.3	1.3
10°-20°	247.4	3.7
20°-30°	374.9	5.6
30°-40°	456.6	6.9
40°-50°	491.2	7.4
50°-60°	477.0	7.2
60°-70°	416.5	6.3
70°-80°	320.7	4.8
80°-90°	217.9	3.3
90°-100°	184.5	2.8
100°-110°	241.2	3.6
110°-120°	426.9	6.4
120°-130°	626.5	9.4
130°-140°	640.6	9.6
140°-150°	582.7	8.7
150°-160°	466.2	7.0
160°-170°	300.4	4.5
170°-180°	103.4	1.6
0°-30°	708.5	10.6
0°-40°	1165.2	17.5
0°-60°	2133.4	32.0
0°-90°	3088.5	46.4
90°-120°	852.6	12.8
90°-150°	2702.3	40.6
90°-180°	3572.0	53.6
0°-180°	6660.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	910	910	910	910	910	
5°	913	909	901	909	908	87
15°	871	873	874	885	884	245
25°	792	801	813	828	833	364
35°	682	705	730	758	768	426
45°	560	596	641	681	695	432
55°	429	478	545	591	610	383
65°	293	358	435	488	507	291
75°	162	237	321	375	394	172
85°	48	129	214	267	288	51
90°	14	100	190	244	264	11
95°	62	100	182	234	252	71
105°	246	296	161	214	234	263
115°	457	488	564	256	198	450
125°	642	655	709	749	765	573
135°	792	805	825	859	870	612
145°	918	918	930	943	946	574
155°	1010	1004	1013	1017	1011	465
165°	1065	1060	1062	1067	1062	301
175°	1089	1084	1085	1090	1083	104
180°	1087	1087	1087	1087	1087	



TEST NUMBER: P331450-935

CATALOG NUMBER: S122DIP-S1005D925U935-4F0-1E-UDD-D

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	910.4	910.4	910.4	910.4	910.4	910.4	910.4	910.4	910.4	910.4	910.4
2.5°	915.8	915.1	914.3	913.6	912.9	911.7	910.1	908.4	906.8	905.2	906.4
5°	913.1	912.2	911.4	910.4	909.6	908.3	906.5	904.7	903.0	901.2	903.0
7.5°	904.9	904.3	903.7	903.2	902.6	901.6	900.3	898.9	897.6	896.2	898.3
10°	898.6	898.0	897.4	896.8	896.2	895.5	894.7	893.7	892.9	892.0	894.3
12.5°	888.0	888.1	888.3	888.4	888.5	888.2	887.6	886.9	886.3	885.6	888.0
15°	870.9	871.5	872.0	872.6	873.2	873.5	873.5	873.5	873.5	873.5	876.2
17.5°	848.7	850.0	851.2	852.4	853.6	854.7	855.7	856.6	857.6	858.5	861.3
20°	834.0	835.4	836.9	838.4	839.8	841.1	842.3	843.4	844.6	845.8	849.0
22.5°	818.1	819.8	821.5	823.2	824.9	826.6	828.2	829.8	831.5	833.1	836.4
25°	791.7	793.8	795.8	797.9	800.0	802.3	804.9	807.5	810.2	812.8	816.3
27.5°	760.0	763.4	766.7	770.1	773.4	776.6	779.7	782.8	785.9	789.1	793.5
30°	738.9	742.7	746.6	750.4	754.1	758.0	761.8	765.6	769.4	773.3	777.9
32.5°	715.7	720.0	724.3	728.6	732.8	737.2	741.8	746.2	750.8	755.3	760.7
35°	682.2	687.2	692.2	697.2	702.1	707.4	713.0	718.5	724.1	729.7	736.2
37.5°	645.8	651.5	657.3	663.0	668.7	675.2	682.4	689.7	696.9	704.1	711.3
40°	621.5	627.9	634.4	640.8	647.3	654.4	662.4	670.3	678.2	686.1	693.8
42.5°	598.3	604.7	611.1	617.6	624.1	631.8	640.9	650.1	659.1	668.2	676.5
45°	559.5	567.4	575.3	583.2	591.2	600.2	610.5	620.8	631.0	641.3	650.4
47.5°	521.2	529.9	538.5	547.1	555.7	566.0	578.1	590.0	602.1	614.1	623.6
50°	494.8	503.9	513.0	522.1	531.2	542.3	555.5	568.7	581.9	595.1	605.1
52.5°	469.5	479.1	488.6	498.2	507.7	519.4	533.3	547.3	561.1	575.1	585.2
55°	428.9	439.4	450.0	460.5	471.1	484.0	499.2	514.4	529.7	544.9	555.5
57.5°	388.7	400.6	412.5	424.5	436.4	450.0	465.6	481.1	496.7	512.2	523.6
60°	360.2	372.8	385.5	398.0	410.7	425.3	442.0	458.7	475.4	492.1	503.3
62.5°	334.9	347.9	361.0	374.1	387.2	402.1	418.8	435.5	452.3	469.0	480.8
65°	292.9	307.3	321.7	336.0	350.4	366.3	383.6	400.8	418.1	435.4	447.5
67.5°	254.4	269.4	284.4	299.5	314.4	330.8	348.5	366.3	383.9	401.7	413.8
70°	227.0	242.2	257.4	272.7	287.9	304.6	322.9	341.0	359.2	377.4	389.9
72.5°	201.6	217.3	233.1	248.7	264.5	281.5	300.0	318.4	336.8	355.2	367.6
75°	162.3	178.7	195.1	211.5	228.0	245.6	264.3	283.1	301.9	320.6	333.2
77.5°	124.3	141.5	158.7	175.8	193.0	211.1	230.2	249.3	268.3	287.4	300.0
80°	98.9	116.8	134.7	152.7	170.5	189.0	208.0	227.1	246.2	265.2	277.5
82.5°	77.8	95.5	113.1	130.8	148.4	166.9	186.2	205.5	224.8	244.1	256.4
85°	47.5	65.7	83.9	102.0	120.2	138.7	157.5	176.2	195.0	213.8	226.1
87.5°	26.0	43.9	61.7	79.6	97.5	115.9	134.9	154.0	173.1	192.1	204.2
90°	13.9	32.9	51.8	70.8	89.7	109.3	129.4	149.6	169.7	189.9	202.5
92.5°	28.0	43.7	59.3	75.0	90.7	107.9	126.7	145.4	164.2	182.9	194.8
95°	61.6	69.7	77.7	85.8	93.8	107.1	126.0	144.8	163.6	182.4	194.4
97.5°	110.6	106.7	102.7	98.7	94.7	102.5	122.3	142.0	161.7	181.4	193.0
100°	148.4	135.3	122.3	109.2	96.1	99.2	118.6	138.0	157.4	176.8	189.0
102.5°	188.9	193.7	198.5	203.5	208.3	206.2	197.3	188.5	179.5	170.7	183.0
105°	245.6	259.4	273.1	286.9	300.7	291.3	258.8	226.4	193.9	161.4	173.7
107.5°	311.9	323.0	334.0	345.0	356.0	340.3	297.6	255.0	212.4	169.8	177.7
110°	353.6	363.2	372.7	382.2	391.8	378.5	342.3	306.2	270.1	233.9	225.8



TEST NUMBER: P331450-935

CATALOG NUMBER: S122DIP-S1005D925U935-4F0-1E-UDD-D

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	393.9	402.1	410.3	418.4	426.6	431.3	432.5	433.7	434.8	436.0	381.7
115°	457.4	463.6	469.8	476.0	482.2	494.1	511.7	529.3	546.8	564.4	492.2
117.5°	512.9	518.3	523.7	529.2	534.6	544.9	560.2	575.3	590.6	605.7	594.9
120°	554.4	558.2	562.0	565.8	569.6	578.9	593.7	608.6	623.5	638.4	648.7
122.5°	589.6	592.9	596.1	599.3	602.5	611.4	625.9	640.3	654.7	669.2	678.4
125°	642.0	644.2	646.4	648.8	651.0	658.5	671.2	683.9	696.6	709.3	718.5
127.5°	690.5	692.8	695.0	697.2	699.4	705.6	715.6	725.7	735.7	745.7	754.8
130°	721.3	723.8	726.3	728.8	731.3	736.7	744.8	752.9	760.9	769.0	777.9
132.5°	752.8	754.9	757.0	759.1	761.1	765.5	772.2	778.9	785.6	792.2	800.6
135°	792.4	795.2	798.0	800.7	803.6	807.2	811.8	816.2	820.7	825.3	833.1
137.5°	833.7	835.7	837.6	839.5	841.4	843.9	846.9	850.0	853.1	856.1	863.2
140°	860.8	861.9	863.0	864.1	865.2	867.0	869.5	872.0	874.5	877.0	883.3
142.5°	883.5	884.4	885.4	886.3	887.3	889.0	891.2	893.5	895.9	898.2	903.4
145°	917.7	917.5	917.3	917.1	917.0	918.3	921.4	924.3	927.3	930.2	933.2
147.5°	948.6	948.0	947.4	946.7	946.0	947.1	950.0	953.0	956.0	958.9	960.0
150°	968.8	967.6	966.3	965.1	963.9	964.7	967.5	970.3	973.1	975.9	976.9
152.5°	985.8	984.4	983.0	981.7	980.3	980.9	983.6	986.3	988.9	991.6	992.6
155°	1010.5	1008.9	1007.3	1005.7	1004.2	1004.4	1006.5	1008.7	1010.7	1012.8	1013.8
157.5°	1029.8	1028.5	1027.2	1025.8	1024.5	1024.6	1026.1	1027.5	1029.0	1030.4	1031.7
160°	1041.1	1040.1	1039.1	1037.9	1036.9	1036.9	1037.9	1039.1	1040.1	1041.1	1042.2
162.5°	1051.2	1050.2	1049.1	1048.0	1047.0	1046.9	1047.8	1048.7	1049.6	1050.6	1051.7
165°	1064.7	1063.7	1062.6	1061.5	1060.5	1060.2	1060.8	1061.3	1061.9	1062.4	1063.6
167.5°	1074.8	1073.8	1072.7	1071.6	1070.6	1070.3	1070.8	1071.3	1071.8	1072.3	1073.5
170°	1080.5	1079.3	1078.3	1077.3	1076.2	1075.9	1076.2	1076.6	1076.9	1077.3	1078.5
172.5°	1084.2	1083.1	1082.1	1081.1	1080.0	1079.7	1080.0	1080.4	1080.7	1081.1	1082.3
175°	1089.1	1087.9	1086.7	1085.4	1084.2	1083.7	1084.1	1084.4	1084.8	1085.1	1086.4
177.5°	1089.9	1088.9	1088.0	1086.9	1086.0	1085.5	1085.7	1085.8	1086.0	1086.1	1087.1
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8



TEST NUMBER: P331450-935

CATALOG NUMBER: S122DIP-S1005D925U935-4F0-1E-UDD-D

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	910.4	910.4	910.4	910.4	910.4	910.4	910.4	910.4
2.5°	907.5	908.7	909.9	910.2	909.7	909.3	908.8	908.4
5°	904.7	906.5	908.3	909.0	908.7	908.4	908.1	907.8
7.5°	900.4	902.6	904.7	905.6	905.3	905.0	904.7	904.4
10°	896.6	899.1	901.4	902.4	902.1	901.8	901.6	901.2
12.5°	890.4	892.7	895.0	896.0	895.8	895.4	895.2	894.9
15°	878.8	881.4	884.1	885.3	884.9	884.7	884.3	884.1
17.5°	864.0	866.8	869.5	870.9	870.9	870.9	870.9	870.9
20°	852.2	855.5	858.7	860.3	860.3	860.3	860.3	860.3
22.5°	839.6	842.8	846.0	847.9	848.3	848.9	849.3	849.8
25°	819.8	823.4	826.9	829.1	830.0	830.9	831.7	832.6
27.5°	798.0	802.5	806.9	809.4	810.1	810.7	811.4	812.0
30°	782.6	787.3	792.0	794.8	795.7	796.5	797.5	798.3
32.5°	766.1	771.5	776.9	780.3	782.0	783.5	785.1	786.7
35°	742.6	749.1	755.5	759.7	761.8	763.9	765.9	767.9
37.5°	718.4	725.6	732.7	737.4	739.5	741.8	743.9	746.1
40°	701.4	709.0	716.6	721.8	724.4	727.0	729.7	732.4
42.5°	684.8	693.2	701.5	707.0	709.6	712.3	714.9	717.6
45°	659.4	668.6	677.6	683.6	686.6	689.5	692.4	695.3
47.5°	633.1	642.6	652.1	658.5	661.7	665.0	668.1	671.4
50°	615.0	625.0	635.0	641.6	644.8	648.0	651.3	654.4
52.5°	595.5	605.6	615.9	622.7	626.1	629.6	633.1	636.5
55°	566.1	576.6	587.2	594.3	598.1	602.0	605.8	609.6
57.5°	535.0	546.4	557.8	565.3	569.2	573.1	577.0	580.8
60°	514.4	525.6	536.7	544.4	548.5	552.6	556.7	560.8
62.5°	492.7	504.5	516.3	524.2	528.1	531.9	535.8	539.7
65°	459.5	471.5	483.5	491.5	495.2	499.0	502.9	506.7
67.5°	425.9	438.1	450.2	458.3	462.3	466.2	470.3	474.2
70°	402.6	415.2	427.8	435.8	439.4	442.9	446.4	450.0
72.5°	380.0	392.4	404.7	413.0	417.2	421.5	425.7	429.9
75°	345.9	358.4	371.1	379.3	383.1	386.9	390.7	394.5
77.5°	312.5	325.0	337.6	345.9	350.0	354.1	358.3	362.3
80°	289.8	302.2	314.5	322.7	326.8	330.9	335.0	339.1
82.5°	268.7	281.0	293.3	301.4	305.3	309.2	313.1	316.9
85°	238.4	250.7	263.0	271.2	275.3	279.5	283.5	287.7
87.5°	216.4	228.5	240.6	248.7	252.4	256.3	260.1	263.9
90°	215.1	227.7	240.3	248.6	252.4	256.3	260.2	264.0
92.5°	206.8	218.8	230.7	238.6	242.3	246.0	249.8	253.5
95°	206.5	218.4	230.5	238.2	241.5	244.9	248.2	251.5
97.5°	204.6	216.1	227.6	235.2	238.9	242.5	246.2	249.9
100°	201.3	213.5	225.8	233.7	237.2	240.8	244.4	248.0
102.5°	195.5	207.9	220.3	228.4	232.1	235.9	239.6	243.3
105°	185.8	198.0	210.2	218.3	222.1	226.1	230.0	233.9
107.5°	185.6	193.5	201.4	207.3	211.2	215.2	219.0	223.0
110°	217.7	209.7	201.6	199.5	203.4	207.3	211.3	215.2



TEST NUMBER: P331450-935

CATALOG NUMBER: S122DIP-S1005D925U935-4F0-1E-UDD-D

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	327.3	272.9	218.6	193.3	197.1	200.9	204.7	208.4
115°	420.2	348.0	276.0	235.1	225.8	216.5	207.1	197.8
117.5°	583.9	573.1	562.1	537.5	499.2	460.8	422.5	384.2
120°	659.0	669.3	679.7	674.6	654.3	633.9	613.5	593.1
122.5°	687.7	696.9	706.1	709.8	708.0	706.2	704.4	702.6
125°	727.6	736.8	745.9	752.0	755.2	758.4	761.6	764.7
127.5°	763.9	772.9	782.0	787.8	790.5	793.2	795.9	798.6
130°	786.9	795.8	804.8	810.4	812.5	814.8	816.9	819.1
132.5°	809.1	817.5	826.0	831.3	833.4	835.7	837.8	840.0
135°	841.0	848.9	856.9	861.8	863.8	865.8	867.8	869.8
137.5°	870.3	877.4	884.5	888.8	890.2	891.6	893.0	894.4
140°	889.6	895.9	902.2	905.7	906.5	907.5	908.4	909.2
142.5°	908.6	913.8	918.9	921.9	922.6	923.2	923.9	924.5
145°	936.3	939.2	942.2	944.0	944.5	945.1	945.7	946.3
147.5°	961.1	962.3	963.5	964.0	964.0	964.0	963.9	963.9
150°	977.9	979.0	980.1	980.2	979.3	978.4	977.5	976.6
152.5°	993.7	994.7	995.7	995.7	994.5	993.4	992.3	991.1
155°	1014.9	1016.0	1017.0	1016.8	1015.5	1014.0	1012.6	1011.2
157.5°	1032.8	1034.0	1035.2	1035.1	1033.7	1032.3	1031.0	1029.7
160°	1043.2	1044.3	1045.3	1045.3	1044.0	1042.8	1041.6	1040.3
162.5°	1052.9	1054.1	1055.3	1055.2	1053.7	1052.1	1050.7	1049.1
165°	1064.8	1066.0	1067.2	1067.2	1066.0	1064.8	1063.6	1062.4
167.5°	1074.7	1075.9	1077.2	1076.9	1075.4	1073.8	1072.3	1070.7
170°	1079.8	1081.0	1082.2	1082.0	1080.5	1078.8	1077.3	1075.7
172.5°	1083.5	1084.8	1086.0	1085.8	1084.2	1082.6	1081.1	1079.5
175°	1087.6	1088.8	1090.0	1089.8	1088.0	1086.3	1084.5	1082.8
177.5°	1088.0	1089.1	1090.0	1089.9	1088.6	1087.4	1086.1	1084.9
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8

(END OF REPORT)