

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331262-935

Luminaire Tested: **S122DIP-S290D725U935-4F0-1E-UDD-D1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331262-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S290D725U935-4F0-1E-UDD-D1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, DROP SATIN WHITE DIFFUSER
UPLIGHT 725 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3262.7 lumens
Efficiency: N/A
Efficacy: 104.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.32 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.08')
CIE Type: Semi-Indirect


Input Watts (W): 31.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331262-935

CATALOG NUMBER: S122DIP-S290D725U935-4F0-1E-UDD-D1

Luminous Intensity Polar Plot

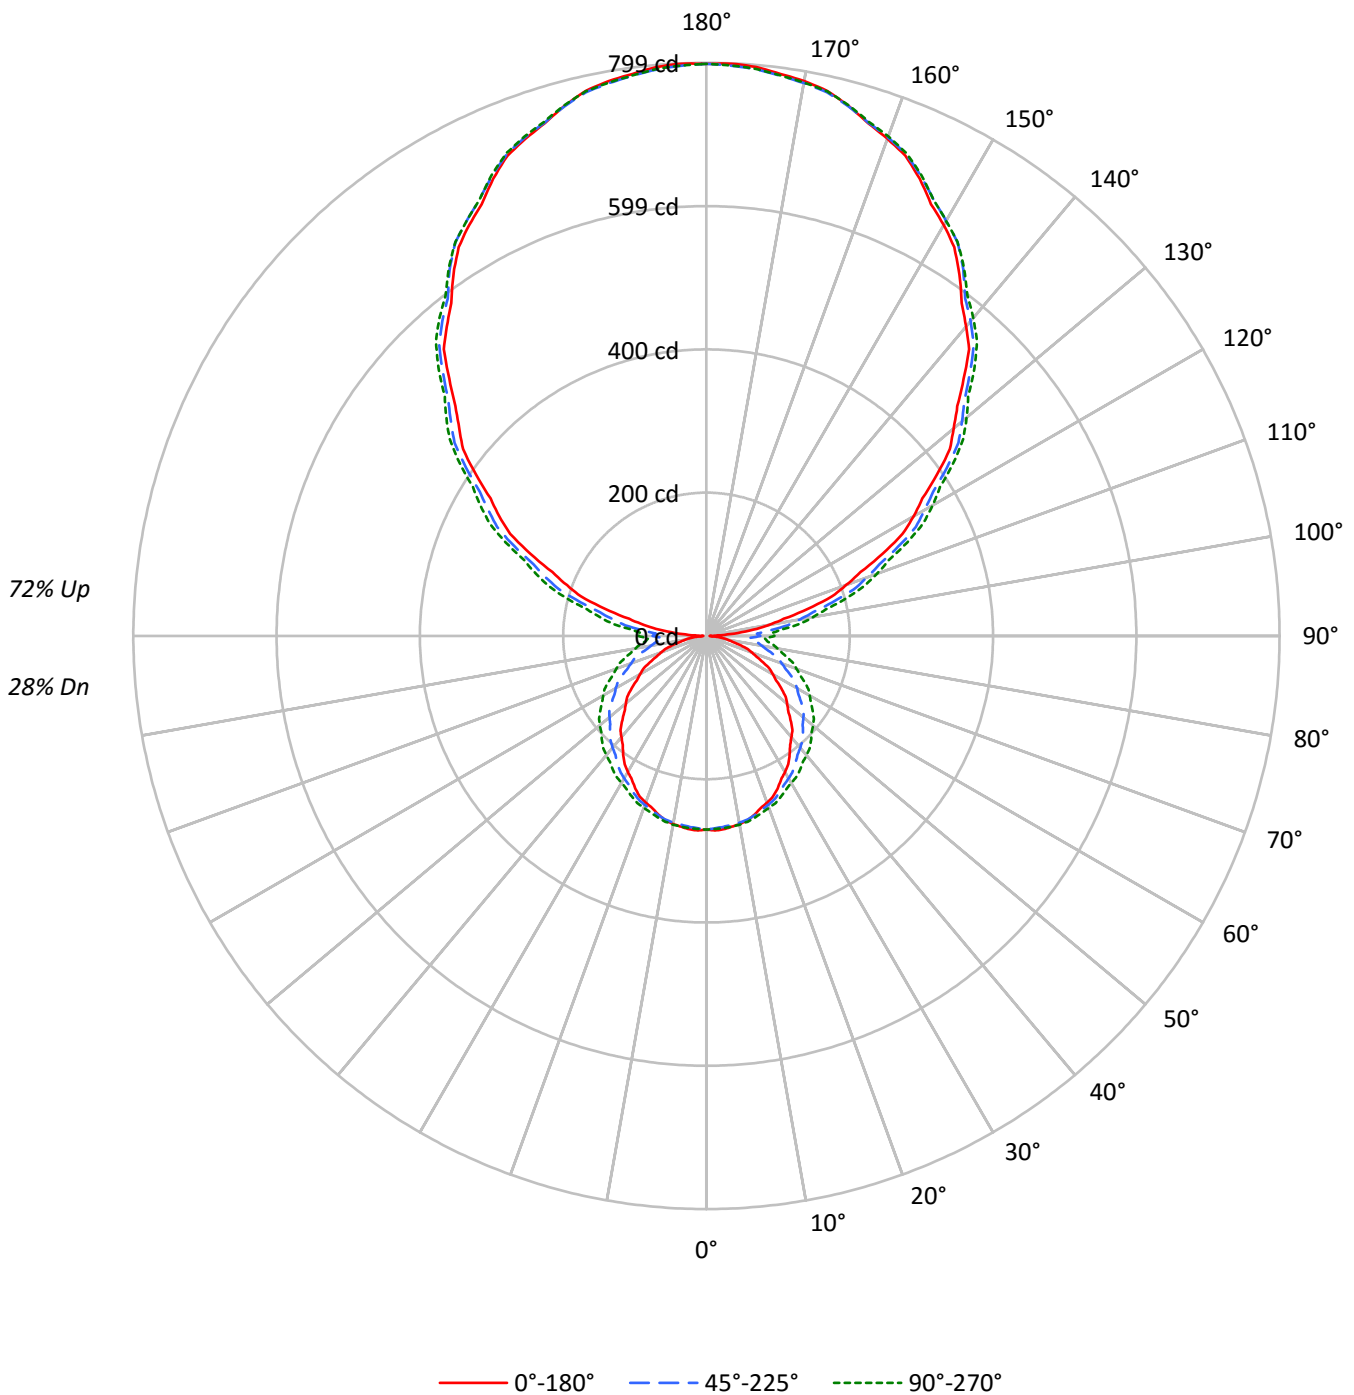



TEST NUMBER: P331262-935

CATALOG NUMBER: S122DIP-S290D725U935-4F0-1E-UDD-D1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	28
1	92	87	83	80	82	78	75	72	61	59	56	45	44	42	30	30	29	22
2	83	76	70	64	74	68	63	58	53	49	46	39	37	34	26	25	23	18
3	76	66	59	53	67	59	53	48	46	42	38	34	31	29	23	21	20	15
4	69	58	51	44	61	52	46	40	41	36	32	30	27	24	20	18	17	12
5	63	52	44	38	56	46	39	34	36	31	27	27	24	21	18	16	14	11
6	58	46	38	32	52	41	35	29	33	27	24	24	21	18	16	14	12	9
7	54	41	34	28	48	37	30	26	29	24	21	22	18	16	15	13	11	8
8	50	37	30	25	44	34	27	22	27	22	18	20	16	14	14	11	10	7
9	46	34	27	22	41	31	24	20	24	19	16	18	15	12	13	10	9	6
10	43	31	24	19	38	28	22	18	22	18	14	17	13	11	12	9	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4358	4358	4358
5°	4379	4195	4179
10°	4352	4070	4026
15°	4290	3939	3863
20°	4215	3798	3707
25°	4141	3663	3565
30°	4034	3524	3423
35°	3928	3389	3323
40°	3818	3275	3223
45°	3709	3172	3137
50°	3596	3079	3053
55°	3474	2979	2968
60°	3329	2876	2878
65°	3174	2756	2769
70°	3001	2623	2653
75°	2784	2499	2544
80°	2445	2366	2436
85°	2110	2255	2350



TEST NUMBER: P331262-935

CATALOG NUMBER: S122DIP-S290D725U935-4F0-1E-UDD-D1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	25.6	0.8
10°-20°	73.3	2.2
20°-30°	111.1	3.4
30°-40°	135.3	4.1
40°-50°	145.6	4.5
50°-60°	141.4	4.3
60°-70°	123.5	3.8
70°-80°	95.1	2.9
80°-90°	67.0	2.1
90°-100°	94.5	2.9
100°-110°	189.0	5.8
110°-120°	289.5	8.9
120°-130°	364.6	11.2
130°-140°	400.9	12.3
140°-150°	389.1	11.9
150°-160°	325.7	10.0
160°-170°	216.0	6.6
170°-180°	75.5	2.3
0°-30°	210.0	6.4
0°-40°	345.4	10.6
0°-60°	632.4	19.4
0°-90°	917.9	28.1
90°-120°	573.0	17.6
90°-150°	1727.7	53.0
90°-180°	2345.0	71.9
0°-180°	3262.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	270	270	270	270	270	
5°	271	269	267	269	269	26
15°	258	259	259	262	262	73
25°	235	237	241	245	247	108
35°	202	209	216	225	228	126
45°	166	177	190	202	206	128
55°	127	142	162	175	181	114
65°	87	106	129	145	150	86
75°	48	70	95	111	117	51
85°	14	38	63	79	85	15
90°	5	36	75	89	95	4
95°	38	63	88	102	106	43
105°	147	160	182	196	201	155
115°	271	280	295	306	309	268
125°	392	399	409	417	420	351
135°	507	514	520	527	528	392
145°	615	620	624	627	626	384
155°	703	705	707	710	709	324
165°	765	765	764	769	766	216
175°	796	794	793	797	794	76
180°	798	798	798	798	798	



TEST NUMBER: P331262-935

CATALOG NUMBER: S122DIP-S290D725U935-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	269.9	269.9	269.9	269.9	269.9	269.9	269.9	269.9	269.9	269.9	269.9
2.5°	271.5	271.2	271.0	270.8	270.6	270.3	269.8	269.3	268.8	268.3	268.6
5°	270.7	270.4	270.2	269.9	269.6	269.2	268.7	268.2	267.7	267.2	267.7
7.5°	268.2	268.0	267.9	267.7	267.5	267.3	266.8	266.5	266.0	265.6	266.3
10°	266.4	266.2	266.0	265.9	265.7	265.4	265.2	264.9	264.7	264.4	265.1
12.5°	263.2	263.3	263.3	263.4	263.4	263.3	263.1	262.9	262.7	262.5	263.2
15°	258.1	258.3	258.5	258.6	258.8	258.9	258.9	258.9	258.9	258.9	259.7
17.5°	251.6	251.9	252.3	252.7	253.0	253.4	253.7	253.9	254.2	254.5	255.3
20°	247.2	247.6	248.1	248.5	248.9	249.3	249.7	250.0	250.4	250.7	251.7
22.5°	242.5	243.0	243.5	244.0	244.5	245.0	245.5	246.0	246.5	246.9	247.9
25°	234.7	235.3	235.9	236.5	237.1	237.8	238.6	239.4	240.1	240.9	241.9
27.5°	225.3	226.3	227.3	228.3	229.3	230.2	231.1	232.0	233.0	233.9	235.2
30°	219.0	220.2	221.3	222.4	223.5	224.7	225.8	227.0	228.1	229.2	230.6
32.5°	212.2	213.4	214.6	215.9	217.2	218.5	219.9	221.2	222.6	223.9	225.5
35°	202.2	203.7	205.2	206.6	208.1	209.7	211.4	213.0	214.6	216.3	218.2
37.5°	191.4	193.1	194.8	196.6	198.2	200.2	202.3	204.4	206.6	208.7	210.9
40°	184.3	186.1	188.0	189.9	191.8	194.0	196.3	198.7	201.0	203.4	205.6
42.5°	177.4	179.3	181.2	183.0	185.0	187.3	190.0	192.7	195.4	198.0	200.5
45°	165.8	168.2	170.6	172.9	175.2	177.9	181.0	184.0	187.0	190.1	192.8
47.5°	154.5	157.0	159.6	162.1	164.7	167.8	171.3	174.9	178.5	182.0	184.9
50°	146.7	149.4	152.1	154.7	157.5	160.7	164.7	168.6	172.5	176.4	179.3
52.5°	139.1	142.0	144.8	147.7	150.5	153.9	158.1	162.2	166.3	170.5	173.5
55°	127.1	130.3	133.4	136.5	139.7	143.4	148.0	152.5	157.0	161.5	164.7
57.5°	115.2	118.7	122.3	125.8	129.3	133.4	138.0	142.6	147.2	151.9	155.2
60°	106.8	110.6	114.3	118.0	121.7	126.1	131.0	136.0	140.9	145.9	149.2
62.5°	99.3	103.1	107.0	110.9	114.8	119.2	124.2	129.1	134.1	139.1	142.5
65°	86.8	91.1	95.3	99.6	103.8	108.6	113.7	118.8	124.0	129.1	132.7
67.5°	75.4	79.9	84.3	88.8	93.2	98.1	103.3	108.6	113.8	119.1	122.7
70°	67.2	71.8	76.3	80.8	85.3	90.3	95.7	101.1	106.5	111.8	115.6
72.5°	59.8	64.4	69.1	73.7	78.4	83.4	88.9	94.4	99.9	105.3	109.0
75°	48.1	53.0	57.9	62.7	67.6	72.8	78.4	83.9	89.5	95.1	98.8
77.5°	36.9	41.9	47.0	52.1	57.3	62.6	68.3	73.9	79.6	85.2	88.9
80°	29.4	34.6	40.0	45.2	50.5	56.1	61.6	67.3	72.9	78.6	82.2
82.5°	23.1	28.3	33.6	38.7	44.0	49.5	55.2	61.0	66.6	72.3	76.0
85°	14.1	19.5	24.9	30.2	35.6	41.1	46.7	52.3	57.8	63.4	67.0
87.5°	7.8	13.3	18.9	24.5	30.0	35.8	42.0	48.3	54.5	60.7	64.2
90°	4.6	11.5	18.3	25.1	31.9	39.8	48.6	57.5	66.3	75.2	78.4
92.5°	15.6	21.6	27.6	33.6	39.6	45.7	51.8	57.9	64.1	70.3	73.7
95°	38.1	43.7	49.2	54.8	60.4	66.0	71.5	77.1	82.6	88.1	91.4
97.5°	66.6	71.6	76.5	81.5	86.4	91.7	97.3	102.9	108.5	114.0	117.3
100°	88.2	92.6	97.0	101.4	105.8	110.7	116.1	121.3	126.7	132.0	135.2
102.5°	110.5	114.4	118.3	122.2	126.1	130.7	136.0	141.3	146.5	151.9	155.2
105°	146.6	149.6	152.6	155.6	158.5	162.4	167.2	172.0	176.8	181.7	185.0
107.5°	183.5	186.1	188.8	191.5	194.2	197.7	202.0	206.3	210.6	215.0	218.0
110°	206.8	209.5	212.1	214.7	217.4	220.8	225.1	229.4	233.6	237.9	240.6



TEST NUMBER: P331262-935

CATALOG NUMBER: S122DIP-S290D725U935-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	232.6	235.1	237.4	239.7	242.1	245.2	249.2	253.1	257.0	261.0	263.4
115°	270.8	272.6	274.5	276.3	278.2	280.9	284.6	288.1	291.7	295.3	297.8
117.5°	308.3	310.1	311.9	313.8	315.6	317.9	320.7	323.5	326.2	329.0	331.2
120°	333.6	335.2	336.7	338.3	339.8	341.7	344.0	346.3	348.5	350.9	353.3
122.5°	356.8	358.3	359.9	361.5	363.1	365.1	367.5	370.0	372.4	374.8	376.8
125°	392.4	393.8	395.2	396.5	397.9	399.7	402.0	404.3	406.7	409.1	411.0
127.5°	427.6	429.2	430.8	432.5	434.0	435.8	437.5	439.1	440.8	442.6	444.2
130°	449.7	451.5	453.4	455.2	457.1	458.8	460.3	461.8	463.4	464.9	466.7
132.5°	474.4	476.0	477.4	478.9	480.4	481.9	483.4	484.8	486.3	487.8	489.1
135°	507.1	508.8	510.5	512.1	513.8	515.1	516.3	517.5	518.7	519.8	521.5
137.5°	542.0	543.4	544.7	546.0	547.3	548.4	549.1	549.9	550.7	551.5	552.9
140°	563.0	564.3	565.5	566.8	568.1	569.1	570.1	571.0	571.9	572.8	574.2
142.5°	584.5	585.8	587.0	588.3	589.6	590.5	591.0	591.6	592.1	592.6	593.9
145°	615.1	616.1	617.3	618.3	619.3	620.3	621.2	622.1	622.9	623.9	624.6
147.5°	642.7	643.9	645.2	646.4	647.7	648.7	649.3	649.9	650.5	651.1	651.4
150°	661.6	662.5	663.3	664.3	665.1	665.9	666.5	667.1	667.7	668.3	668.7
152.5°	678.2	679.2	680.0	681.0	681.8	682.6	683.4	684.1	684.8	685.5	686.0
155°	703.3	703.7	704.2	704.6	705.1	705.5	705.9	706.5	706.9	707.3	708.1
157.5°	724.7	725.0	725.3	725.6	725.9	726.2	726.4	726.7	726.9	727.2	728.2
160°	737.6	737.9	738.2	738.5	738.8	739.0	739.2	739.3	739.5	739.6	740.5
162.5°	749.4	749.5	749.6	749.6	749.7	749.8	749.9	750.1	750.3	750.4	751.4
165°	765.2	765.1	764.9	764.7	764.6	764.5	764.5	764.5	764.5	764.5	765.6
167.5°	778.3	777.9	777.5	777.1	776.6	776.4	776.4	776.3	776.3	776.2	777.3
170°	785.4	785.0	784.5	784.0	783.6	783.3	783.2	783.0	782.8	782.6	783.8
172.5°	790.2	789.8	789.4	788.8	788.4	788.2	788.0	787.8	787.7	787.6	788.6
175°	796.2	795.7	795.2	794.8	794.4	794.0	793.7	793.4	793.1	792.8	793.8
177.5°	798.6	798.2	797.9	797.5	797.1	796.9	796.6	796.3	796.1	795.9	796.6
180°	797.5	797.5	797.5	797.5	797.5	797.5	797.5	797.5	797.5	797.5	797.5



TEST NUMBER: P331262-935

CATALOG NUMBER: S122DIP-S290D725U935-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	269.9	269.9	269.9	269.9	269.9	269.9	269.9	269.9
2.5°	269.0	269.3	269.7	269.8	269.7	269.5	269.4	269.2
5°	268.2	268.7	269.2	269.4	269.3	269.2	269.1	269.1
7.5°	266.9	267.5	268.2	268.5	268.4	268.3	268.2	268.1
10°	265.8	266.5	267.2	267.5	267.4	267.3	267.3	267.2
12.5°	263.9	264.6	265.3	265.6	265.5	265.4	265.4	265.3
15°	260.5	261.3	262.1	262.4	262.3	262.3	262.2	262.1
17.5°	256.1	256.9	257.7	258.1	258.1	258.1	258.1	258.1
20°	252.6	253.6	254.5	255.0	255.0	255.0	255.0	255.0
22.5°	248.9	249.9	250.8	251.3	251.5	251.6	251.8	251.9
25°	243.1	244.1	245.1	245.7	246.0	246.2	246.5	246.8
27.5°	236.5	237.9	239.2	240.0	240.1	240.3	240.5	240.7
30°	232.0	233.4	234.8	235.6	235.8	236.1	236.3	236.6
32.5°	227.0	228.7	230.3	231.4	231.8	232.3	232.7	233.2
35°	220.2	222.1	223.9	225.2	225.8	226.4	227.0	227.6
37.5°	212.9	215.1	217.2	218.6	219.2	219.9	220.5	221.1
40°	207.9	210.2	212.4	214.0	214.7	215.5	216.3	217.1
42.5°	203.0	205.4	207.9	209.6	210.3	211.1	211.9	212.7
45°	195.4	198.2	200.9	202.7	203.5	204.4	205.3	206.1
47.5°	187.7	190.5	193.3	195.2	196.1	197.1	198.0	199.0
50°	182.3	185.3	188.2	190.2	191.1	192.1	193.0	194.0
52.5°	176.5	179.5	182.5	184.6	185.6	186.7	187.7	188.6
55°	167.8	170.9	174.1	176.2	177.3	178.5	179.6	180.7
57.5°	158.6	162.0	165.3	167.6	168.8	169.9	171.0	172.2
60°	152.5	155.8	159.1	161.4	162.6	163.8	165.1	166.3
62.5°	146.0	149.6	153.1	155.4	156.5	157.6	158.9	160.0
65°	136.2	139.7	143.4	145.7	146.8	147.9	149.0	150.2
67.5°	126.2	129.8	133.5	135.9	137.0	138.2	139.4	140.6
70°	119.3	123.0	126.8	129.2	130.3	131.3	132.3	133.4
72.5°	112.6	116.3	119.9	122.4	123.6	124.9	126.2	127.4
75°	102.5	106.2	110.0	112.4	113.6	114.7	115.8	116.9
77.5°	92.6	96.3	100.0	102.5	103.8	105.0	106.2	107.4
80°	85.9	89.5	93.2	95.7	96.9	98.1	99.3	100.5
82.5°	79.6	83.3	87.0	89.4	90.5	91.7	92.8	93.9
85°	70.7	74.3	78.0	80.4	81.6	82.8	84.0	85.2
87.5°	67.7	71.2	74.6	77.0	78.1	79.3	80.4	81.5
90°	81.5	84.7	87.9	90.1	91.3	92.5	93.7	94.9
92.5°	77.1	80.6	84.1	86.4	87.4	88.5	89.5	90.7
95°	94.6	98.0	101.3	103.3	104.0	104.8	105.6	106.2
97.5°	120.5	123.6	126.9	129.0	130.0	131.0	132.0	133.0
100°	138.4	141.6	144.8	146.9	147.7	148.4	149.3	150.1
102.5°	158.4	161.7	165.0	166.9	167.8	168.6	169.4	170.2
105°	188.4	191.7	195.1	197.2	198.2	199.1	200.1	201.0
107.5°	221.0	224.1	227.1	228.8	229.0	229.3	229.5	229.9
110°	243.4	246.2	249.0	250.6	251.2	251.7	252.2	252.6



TEST NUMBER: P331262-935

CATALOG NUMBER: S122DIP-S290D725U935-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	265.8	268.2	270.7	272.2	272.9	273.5	274.1	274.7
115°	300.2	302.7	305.2	306.7	307.2	307.7	308.2	308.7
117.5°	333.5	335.7	337.9	339.2	339.7	340.1	340.5	341.0
120°	355.7	358.2	360.6	362.1	362.6	363.1	363.6	364.1
122.5°	378.8	380.8	382.8	384.1	384.5	385.0	385.6	386.0
125°	412.8	414.7	416.6	417.8	418.5	419.1	419.7	420.4
127.5°	445.7	447.4	449.0	450.0	450.2	450.6	450.8	451.1
130°	468.5	470.3	472.0	472.9	473.1	473.2	473.3	473.4
132.5°	490.5	491.9	493.2	494.0	494.2	494.5	494.6	494.9
135°	523.1	524.9	526.5	527.4	527.7	528.0	528.2	528.5
137.5°	554.4	555.9	557.4	558.1	558.1	558.1	558.1	558.1
140°	575.6	577.0	578.4	579.0	578.9	578.9	578.9	578.8
142.5°	595.1	596.3	597.6	598.1	598.0	597.9	597.7	597.5
145°	625.2	625.9	626.5	626.8	626.6	626.5	626.3	626.1
147.5°	651.9	652.2	652.6	652.6	652.3	651.9	651.6	651.3
150°	669.2	669.6	670.1	670.1	669.6	669.2	668.7	668.3
152.5°	686.6	687.3	687.8	687.8	687.3	686.6	686.0	685.5
155°	708.8	709.6	710.3	710.5	710.0	709.6	709.1	708.7
157.5°	729.3	730.3	731.3	731.4	730.7	730.0	729.3	728.6
160°	741.4	742.4	743.2	743.4	742.8	742.2	741.6	741.0
162.5°	752.4	753.5	754.5	754.6	753.9	753.2	752.4	751.7
165°	766.6	767.7	768.7	768.9	768.1	767.3	766.6	765.9
167.5°	778.3	779.4	780.4	780.6	779.8	779.0	778.3	777.5
170°	784.8	785.8	786.9	787.0	786.1	785.1	784.3	783.3
172.5°	789.6	790.7	791.7	791.8	790.9	790.0	789.1	788.2
175°	794.9	795.9	796.9	797.0	796.2	795.2	794.4	793.5
177.5°	797.3	798.1	798.7	798.7	798.1	797.3	796.6	795.9
180°	797.5	797.5	797.5	797.5	797.5	797.5	797.5	797.5

(END OF REPORT)