

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331311-935

Luminaire Tested: **S122DIP-S485D725U935-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331311-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S485D725U935-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 725 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4140.0 lumens
Efficiency: N/A
Efficacy: 107.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 38.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331311-935

CATALOG NUMBER: S122DIP-S485D725U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

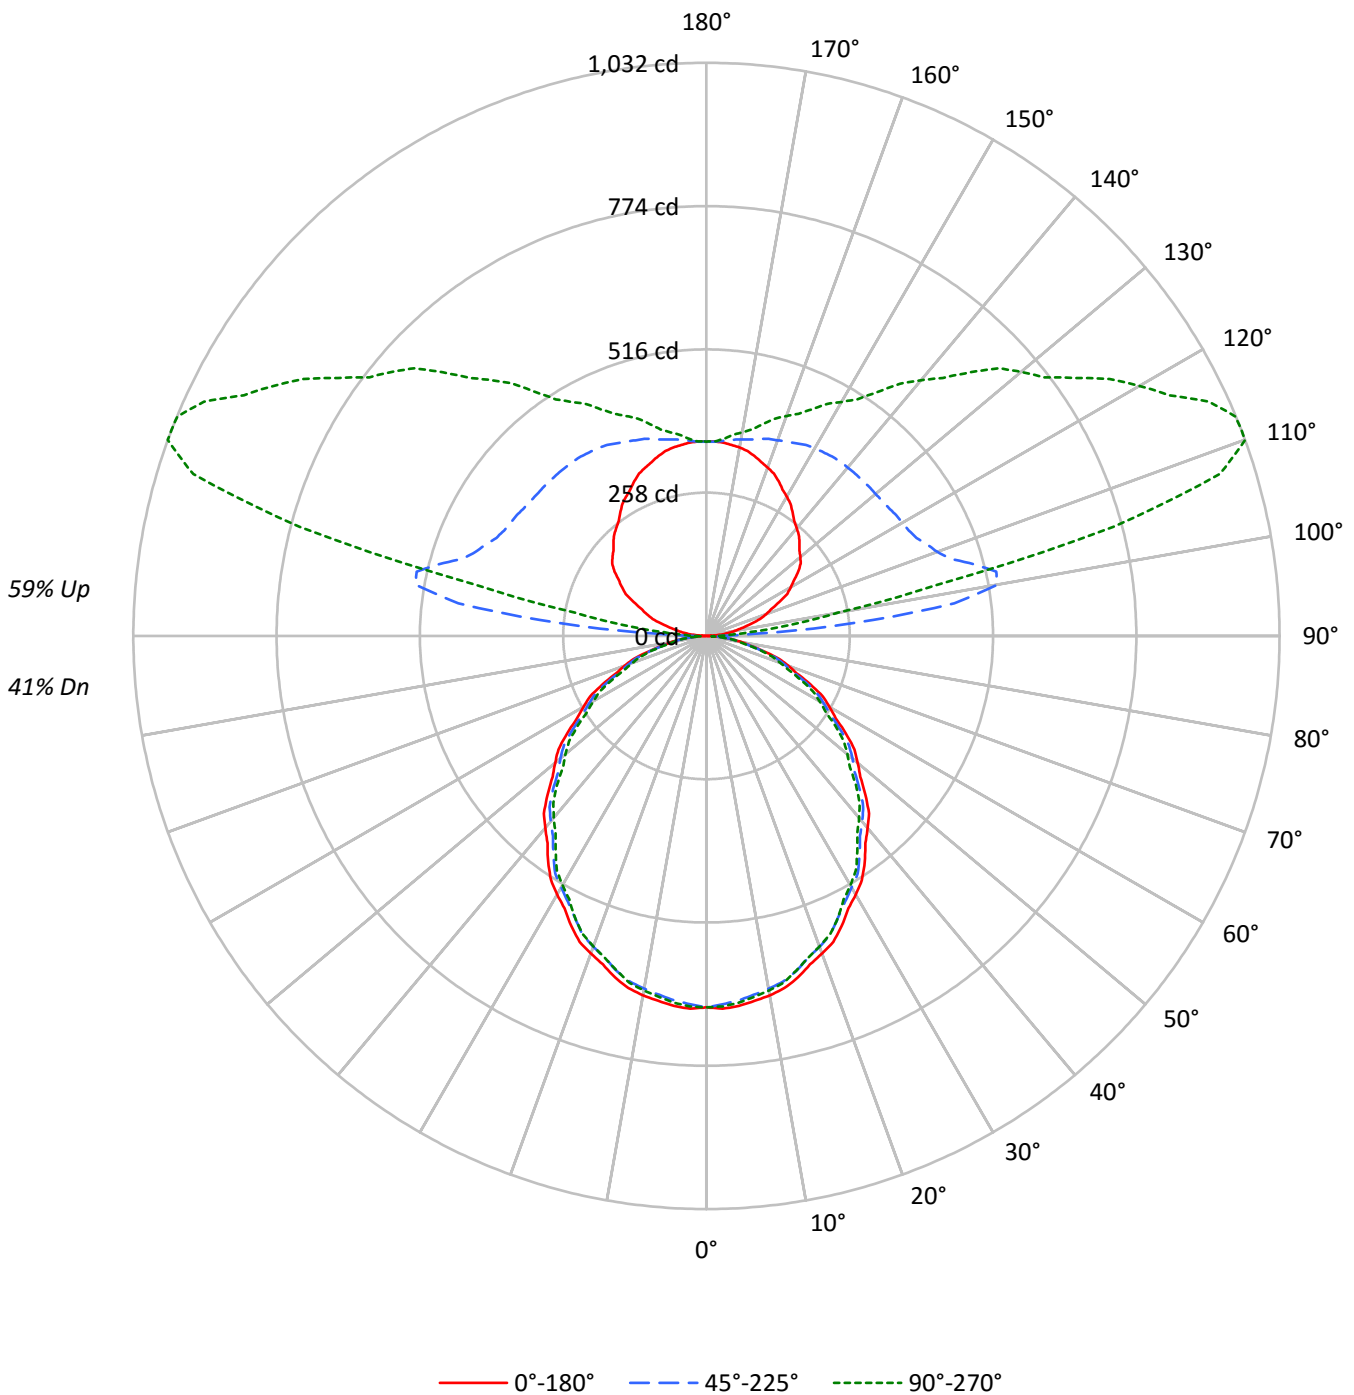



TEST NUMBER: P331311-935

CATALOG NUMBER: S122DIP-S485D725U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	78	78	78	63	63	63	48	48	48	41
1	96	92	88	84	87	84	80	77	69	66	64	55	53	52	42	41	40	35
2	87	80	74	69	79	73	68	63	60	56	53	48	46	43	37	36	34	29
3	80	70	63	57	72	64	58	53	53	48	45	43	39	37	33	31	29	25
4	73	62	54	48	66	57	50	45	47	42	38	38	34	31	30	27	25	21
5	67	55	47	41	61	51	44	38	42	37	33	34	30	27	27	24	22	18
6	61	50	42	36	56	45	38	33	38	33	29	31	27	24	24	21	19	16
7	57	45	37	31	52	41	34	29	34	29	25	28	24	21	22	19	17	14
8	53	40	33	28	48	37	31	26	31	26	22	26	22	19	20	17	15	13
9	49	37	30	25	45	34	27	23	29	23	20	23	20	17	19	16	14	12
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	17	15	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10797	10797	10797
5°	10838	10682	10746
10°	10775	10575	10627
15°	10641	10437	10425
20°	10452	10232	10220
25°	10265	9978	9978
30°	10023	9747	9661
35°	9798	9469	9329
40°	9514	9190	9012
45°	9236	8912	8690
50°	8932	8626	8317
55°	8617	8290	7983
60°	8263	7892	7598
65°	7885	7492	7148
70°	7407	7010	6680
75°	6744	6457	6301
80°	5979	5793	5504
85°	4872	4650	4168



TEST NUMBER: P331311-935

CATALOG NUMBER: S122DIP-S485D725U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	62.9	1.5
10°-20°	176.9	4.3
20°-30°	260.1	6.3
30°-40°	302.1	7.3
40°-50°	301.8	7.3
50°-60°	263.2	6.4
60°-70°	194.6	4.7
70°-80°	110.2	2.7
80°-90°	32.8	0.8
90°-100°	139.9	3.4
100°-110°	474.9	11.5
110°-120°	504.5	12.2
120°-130°	415.3	10.0
130°-140°	333.5	8.1
140°-150°	252.0	6.1
150°-160°	177.1	4.3
160°-170°	104.3	2.5
170°-180°	33.9	0.8
0°-30°	499.9	12.1
0°-40°	802.0	19.4
0°-60°	1366.9	33.0
0°-90°	1704.5	41.2
90°-120°	1119.3	27.0
90°-150°	2120.1	51.2
90°-180°	2435.0	58.8
0°-180°	4140.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	669	669	669	669	669	
5°	669	666	659	664	663	63
15°	637	632	624	627	624	179
25°	576	571	560	561	560	265
35°	497	490	480	476	473	310
45°	404	400	390	384	381	312
55°	306	302	294	287	284	274
65°	206	202	196	190	187	204
75°	108	107	104	100	101	115
85°	26	26	25	23	22	30
90°	1	9	23	22	22	3
95°	24	58	264	100	77	25
105°	82	124	499	892	758	87
115°	145	183	417	861	998	143
125°	202	239	401	698	810	179
135°	237	283	396	586	671	183
145°	270	311	394	490	536	170
155°	308	332	383	433	450	141
165°	335	345	367	389	395	94
175°	349	350	353	357	356	33
180°	350	350	350	350	350	



TEST NUMBER: P331311-935

CATALOG NUMBER: S122DIP-S485D725U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7
2.5°	671.8	671.2	670.7	670.1	669.5	668.7	667.4	666.2	664.9	663.6	664.8
5°	668.7	668.1	667.6	667.0	666.5	665.4	663.8	662.3	660.6	659.1	660.2
7.5°	662.8	661.9	661.1	660.1	659.3	658.1	656.4	654.9	653.2	651.6	652.8
10°	657.2	656.2	655.1	654.2	653.2	651.8	650.1	648.4	646.7	645.0	646.1
12.5°	649.5	648.6	647.6	646.8	645.9	644.6	642.9	641.2	639.5	637.7	638.5
15°	636.6	635.8	634.9	634.0	633.2	631.8	629.9	628.1	626.2	624.4	624.9
17.5°	620.1	619.3	618.5	617.6	616.7	615.4	613.5	611.6	609.7	607.8	608.5
20°	608.3	607.4	606.6	605.7	604.9	603.5	601.4	599.4	597.4	595.5	595.9
22.5°	596.5	595.3	594.1	592.9	591.7	590.1	588.2	586.3	584.4	582.6	582.6
25°	576.2	575.0	573.9	572.7	571.6	569.8	567.4	564.9	562.5	560.1	560.3
27.5°	553.0	552.0	551.0	549.9	548.9	547.4	545.5	543.5	541.7	539.8	539.3
30°	537.6	536.4	535.3	534.2	533.0	531.3	529.2	527.1	525.0	522.8	522.4
32.5°	521.1	520.2	519.3	518.3	517.5	515.8	513.6	511.3	509.1	506.9	506.1
35°	497.1	495.6	494.2	492.8	491.4	489.5	487.2	484.9	482.6	480.4	479.5
37.5°	469.9	468.6	467.4	466.1	464.9	463.1	460.8	458.6	456.2	454.0	452.9
40°	451.4	450.2	449.1	448.0	446.9	445.1	442.8	440.6	438.2	436.0	434.7
42.5°	433.4	432.2	431.1	430.0	428.9	427.1	424.8	422.6	420.3	417.9	416.6
45°	404.5	403.5	402.4	401.5	400.5	398.9	396.7	394.6	392.4	390.3	388.7
47.5°	375.7	374.7	373.8	372.8	371.9	370.3	368.1	365.8	363.6	361.4	359.7
50°	355.6	354.9	354.1	353.4	352.8	351.4	349.4	347.4	345.3	343.4	341.4
52.5°	336.0	335.1	334.2	333.2	332.3	330.9	329.0	327.1	325.2	323.3	321.7
55°	306.1	305.2	304.4	303.5	302.6	301.4	299.6	297.9	296.2	294.5	292.8
57.5°	276.0	275.3	274.6	274.0	273.3	272.0	270.1	268.2	266.3	264.4	262.7
60°	255.9	255.4	254.8	254.2	253.7	252.4	250.4	248.3	246.3	244.4	242.8
62.5°	236.3	235.5	234.5	233.6	232.7	231.5	230.0	228.4	226.9	225.3	223.9
65°	206.4	205.5	204.7	203.8	203.0	201.8	200.4	199.0	197.5	196.1	194.8
67.5°	175.9	175.2	174.5	173.8	173.1	172.2	170.9	169.6	168.3	167.0	166.1
70°	156.9	156.4	155.8	155.2	154.6	153.7	152.4	151.1	149.8	148.5	147.6
72.5°	137.3	136.8	136.2	135.6	135.1	134.4	133.5	132.7	131.9	131.0	130.0
75°	108.1	107.7	107.5	107.2	106.9	106.4	105.6	105.0	104.3	103.5	102.6
77.5°	81.8	81.3	80.8	80.3	79.8	79.5	79.2	78.9	78.6	78.4	77.9
80°	64.3	64.1	64.1	63.9	63.7	63.5	63.2	62.9	62.7	62.3	61.9
82.5°	47.9	47.8	47.8	47.8	47.7	47.6	47.4	47.3	47.1	46.9	46.4
85°	26.3	26.3	26.1	25.9	25.8	25.7	25.5	25.4	25.2	25.1	24.6
87.5°	9.4	9.6	9.9	9.9	10.0	10.2	10.6	11.3	11.9	11.8	11.3
90°	0.7	2.7	5.4	6.7	8.1	10.1	13.4	18.2	22.2	22.9	22.2
92.5°	8.2	11.9	16.7	19.6	24.2	30.6	45.8	67.2	86.3	87.5	73.9
95°	23.6	26.3	33.0	39.0	49.8	66.0	96.9	155.5	233.6	263.8	230.8
97.5°	38.4	42.0	49.2	58.3	70.7	88.9	127.9	209.5	339.2	450.4	472.5
100°	51.8	53.8	59.9	70.7	84.1	103.0	138.6	220.8	366.1	531.7	628.6
102.5°	64.2	65.7	71.7	82.5	96.5	115.4	148.4	221.3	355.9	534.4	686.7
105°	82.1	84.8	89.5	99.6	114.4	133.3	164.9	224.8	335.9	498.7	677.8
107.5°	101.5	103.7	108.2	117.5	132.2	151.2	181.8	234.1	325.9	460.5	618.6
110°	114.4	117.1	121.1	129.9	144.0	163.6	193.1	241.6	323.7	442.2	581.5



TEST NUMBER: P331311-935

CATALOG NUMBER: S122DIP-S485D725U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	126.2	129.0	133.5	141.7	155.3	175.4	204.0	249.7	324.3	430.3	555.7
115°	144.7	148.1	152.1	160.1	173.7	191.8	220.8	261.8	327.1	417.3	523.7
117.5°	163.8	166.5	170.6	177.7	190.6	209.5	236.3	274.7	331.9	411.0	503.4
120°	175.6	178.4	182.4	188.5	201.9	220.8	247.0	283.4	335.2	407.2	492.7
122.5°	187.0	189.2	193.1	199.8	213.2	232.6	257.3	290.9	339.0	405.0	483.5
125°	201.9	204.0	207.9	216.0	229.5	248.3	272.6	302.9	344.6	401.1	470.5
127.5°	213.8	216.5	222.1	231.0	243.9	263.3	286.9	314.0	350.4	398.8	458.3
130°	220.8	223.4	230.1	239.6	253.0	271.9	295.5	321.1	354.7	397.8	450.3
132.5°	227.2	230.5	237.7	247.7	261.7	280.5	303.0	328.0	359.0	397.3	443.8
135°	236.9	239.6	247.7	257.8	273.3	292.1	313.7	337.2	364.1	396.4	434.8
137.5°	246.1	249.3	257.4	268.1	283.5	301.0	322.3	344.2	368.7	396.3	428.4
140°	253.0	255.7	263.8	274.6	289.4	306.9	327.1	347.9	370.8	395.7	424.7
142.5°	260.0	262.3	269.8	280.5	294.8	311.3	330.9	351.2	372.5	395.7	420.9
145°	270.5	273.3	280.0	290.1	303.5	318.3	336.6	355.3	374.2	394.4	415.9
147.5°	281.9	283.9	290.3	299.6	310.8	324.0	341.1	357.7	374.8	392.0	410.9
150°	289.4	291.4	296.8	305.6	315.6	327.8	343.3	358.7	374.2	390.4	406.5
152.5°	297.0	297.9	303.2	310.9	320.5	331.6	345.4	359.3	373.2	387.7	402.8
155°	307.5	308.2	312.3	319.7	327.1	337.2	348.6	360.1	371.5	383.0	395.7
157.5°	316.5	317.1	320.4	326.8	332.8	341.2	350.9	360.1	368.4	378.2	389.2
160°	322.4	323.0	325.7	331.1	336.6	343.9	352.0	360.1	366.8	374.9	384.4
162.5°	328.3	327.9	330.6	334.9	339.8	345.5	352.6	359.6	365.2	372.2	380.0
165°	335.2	334.5	335.9	339.9	343.3	347.3	353.4	358.1	362.1	366.8	372.9
167.5°	340.9	340.0	341.2	343.8	346.2	348.8	353.2	357.1	359.0	362.1	365.8
170°	344.6	343.3	343.9	345.9	347.3	349.3	352.7	356.0	357.4	359.4	362.1
172.5°	346.7	345.9	345.5	347.6	348.4	349.8	352.1	354.4	355.2	356.2	358.3
175°	349.3	348.6	347.9	349.3	349.3	350.0	351.3	352.7	352.0	352.7	353.4
177.5°	350.5	349.5	348.9	350.0	350.0	350.0	350.5	351.6	350.5	350.0	350.5
180°	350.0	350.0	350.0	350.0	350.0	350.0	350.0	350.0	350.0	350.0	350.0



TEST NUMBER: P331311-935

CATALOG NUMBER: S122DIP-S485D725U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7
2.5°	665.9	667.0	668.1	668.7	668.4	668.1	668.0	667.7
5°	661.4	662.5	663.7	664.1	663.8	663.5	663.2	663.0
7.5°	653.9	655.0	656.3	656.6	656.3	656.0	655.7	655.4
10°	647.2	648.4	649.5	649.9	649.5	649.0	648.6	648.2
12.5°	639.4	640.2	640.9	641.2	640.8	640.6	640.2	639.9
15°	625.5	626.1	626.6	626.5	625.9	625.2	624.5	623.7
17.5°	609.1	609.8	610.4	610.4	609.7	609.1	608.4	607.7
20°	596.3	596.8	597.2	597.1	596.5	595.9	595.4	594.8
22.5°	582.7	582.8	582.9	582.8	582.5	582.1	581.8	581.4
25°	560.7	560.9	561.2	561.2	560.9	560.7	560.3	560.1
27.5°	538.9	538.5	538.0	537.5	536.8	536.1	535.5	534.8
30°	521.9	521.5	521.1	520.6	520.0	519.4	518.8	518.2
32.5°	505.3	504.5	503.8	503.1	502.5	502.0	501.4	500.8
35°	478.6	477.8	476.9	476.1	475.4	474.7	474.0	473.3
37.5°	451.9	450.8	449.8	448.8	448.2	447.5	446.8	446.2
40°	433.4	432.1	430.8	429.9	429.3	428.8	428.2	427.6
42.5°	415.2	413.8	412.3	411.3	410.4	409.7	408.9	408.0
45°	387.2	385.6	384.0	383.0	382.4	381.9	381.3	380.6
47.5°	358.1	356.4	354.7	353.5	352.7	351.9	351.0	350.2
50°	339.4	337.3	335.4	334.0	333.3	332.6	331.8	331.1
52.5°	320.0	318.3	316.7	315.4	314.4	313.5	312.5	311.6
55°	291.1	289.4	287.7	286.5	285.7	285.0	284.3	283.6
57.5°	261.1	259.3	257.7	256.6	256.0	255.5	254.9	254.3
60°	241.2	239.6	238.1	237.0	236.6	236.2	235.7	235.3
62.5°	222.4	220.9	219.5	218.5	217.9	217.4	216.9	216.3
65°	193.6	192.3	191.0	189.9	189.2	188.6	187.9	187.1
67.5°	165.1	164.0	163.1	162.3	161.7	161.1	160.6	160.0
70°	146.5	145.5	144.6	143.8	143.2	142.6	142.1	141.5
72.5°	129.1	128.0	127.1	126.3	125.9	125.4	124.9	124.5
75°	101.8	101.0	100.1	99.8	100.1	100.4	100.7	101.0
77.5°	77.5	77.1	76.6	76.2	75.8	75.4	75.0	74.6
80°	61.5	61.0	60.7	60.3	60.0	59.8	59.4	59.2
82.5°	45.9	45.3	44.8	44.4	44.4	44.3	44.3	44.3
85°	24.2	23.8	23.3	23.1	22.9	22.8	22.6	22.5
87.5°	10.8	10.2	10.2	10.1	9.9	9.8	9.7	9.6
90°	21.5	20.2	21.5	22.2	22.2	22.2	22.2	22.2
92.5°	58.7	50.4	44.7	40.6	40.0	37.8	38.4	37.3
95°	176.3	135.3	107.0	92.2	83.4	78.1	76.0	76.7
97.5°	411.5	336.7	263.8	215.2	183.0	166.5	156.7	151.0
100°	614.5	531.1	438.9	357.4	301.5	272.6	253.0	240.9
102.5°	747.5	728.7	661.2	574.9	514.2	464.8	440.4	424.0
105°	817.8	893.8	902.6	880.4	838.6	796.9	767.9	758.5
107.5°	767.2	881.7	951.7	984.3	989.5	987.2	981.5	968.9
110°	723.5	844.0	930.1	985.3	1014.3	1027.1	1033.1	1032.4



TEST NUMBER: P331311-935

CATALOG NUMBER: S122DIP-S485D725U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	683.7	799.3	891.4	954.7	994.9	1016.3	1027.8	1031.4
115°	634.6	738.3	826.5	895.8	943.6	974.6	992.0	998.2
117.5°	597.8	688.8	768.8	833.8	882.5	915.2	933.7	938.7
120°	579.5	663.0	734.3	795.6	842.7	874.3	893.8	900.5
122.5°	565.0	641.4	708.9	764.3	806.6	837.7	855.1	860.7
125°	543.8	613.1	672.4	722.8	761.9	787.5	804.3	809.7
127.5°	523.0	585.7	641.5	688.1	722.2	746.1	760.7	765.0
130°	509.5	567.4	620.5	665.0	697.9	720.8	734.3	739.7
132.5°	496.5	550.2	599.0	640.8	673.2	696.0	708.4	713.3
135°	478.5	523.0	567.4	605.0	634.0	656.3	668.3	671.1
137.5°	464.2	501.3	536.6	569.4	595.8	614.9	625.5	629.6
140°	455.0	487.3	518.2	547.9	569.4	586.9	597.0	601.1
142.5°	447.5	474.9	501.5	526.3	546.8	562.7	571.7	572.5
145°	436.8	459.0	479.9	499.4	515.6	527.0	533.7	535.7
147.5°	428.6	446.1	462.4	476.6	490.0	499.1	503.7	504.9
150°	422.7	437.5	451.6	463.7	473.8	481.9	485.9	486.6
152.5°	416.7	430.5	442.5	453.0	460.9	467.9	470.9	471.0
155°	408.5	419.3	429.4	436.8	444.2	448.9	451.6	450.3
157.5°	399.0	408.0	416.5	422.2	427.5	431.4	432.7	432.7
160°	393.0	400.5	407.9	412.6	417.3	420.7	421.3	421.3
162.5°	387.1	393.5	399.8	403.5	408.1	410.4	411.1	410.5
165°	378.2	383.0	387.7	390.4	393.0	395.7	395.7	395.1
167.5°	369.8	373.4	376.6	379.1	380.3	381.8	381.6	380.8
170°	365.5	367.5	370.1	371.5	372.2	374.2	373.5	372.2
172.5°	360.6	362.1	364.3	365.1	365.8	366.7	366.0	365.2
175°	355.3	356.0	356.7	357.4	357.4	358.1	357.4	356.0
177.5°	351.6	351.6	352.1	352.1	352.1	352.1	351.6	350.5
180°	350.0	350.0	350.0	350.0	350.0	350.0	350.0	350.0

(END OF REPORT)