

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331318-935

Luminaire Tested: **S122DIP-S485D925U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331318-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S485D925U935-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 925 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4888.7 lumens
Efficiency: N/A
Efficacy: 109.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 44.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331318-935

CATALOG NUMBER: S122DIP-S485D925U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

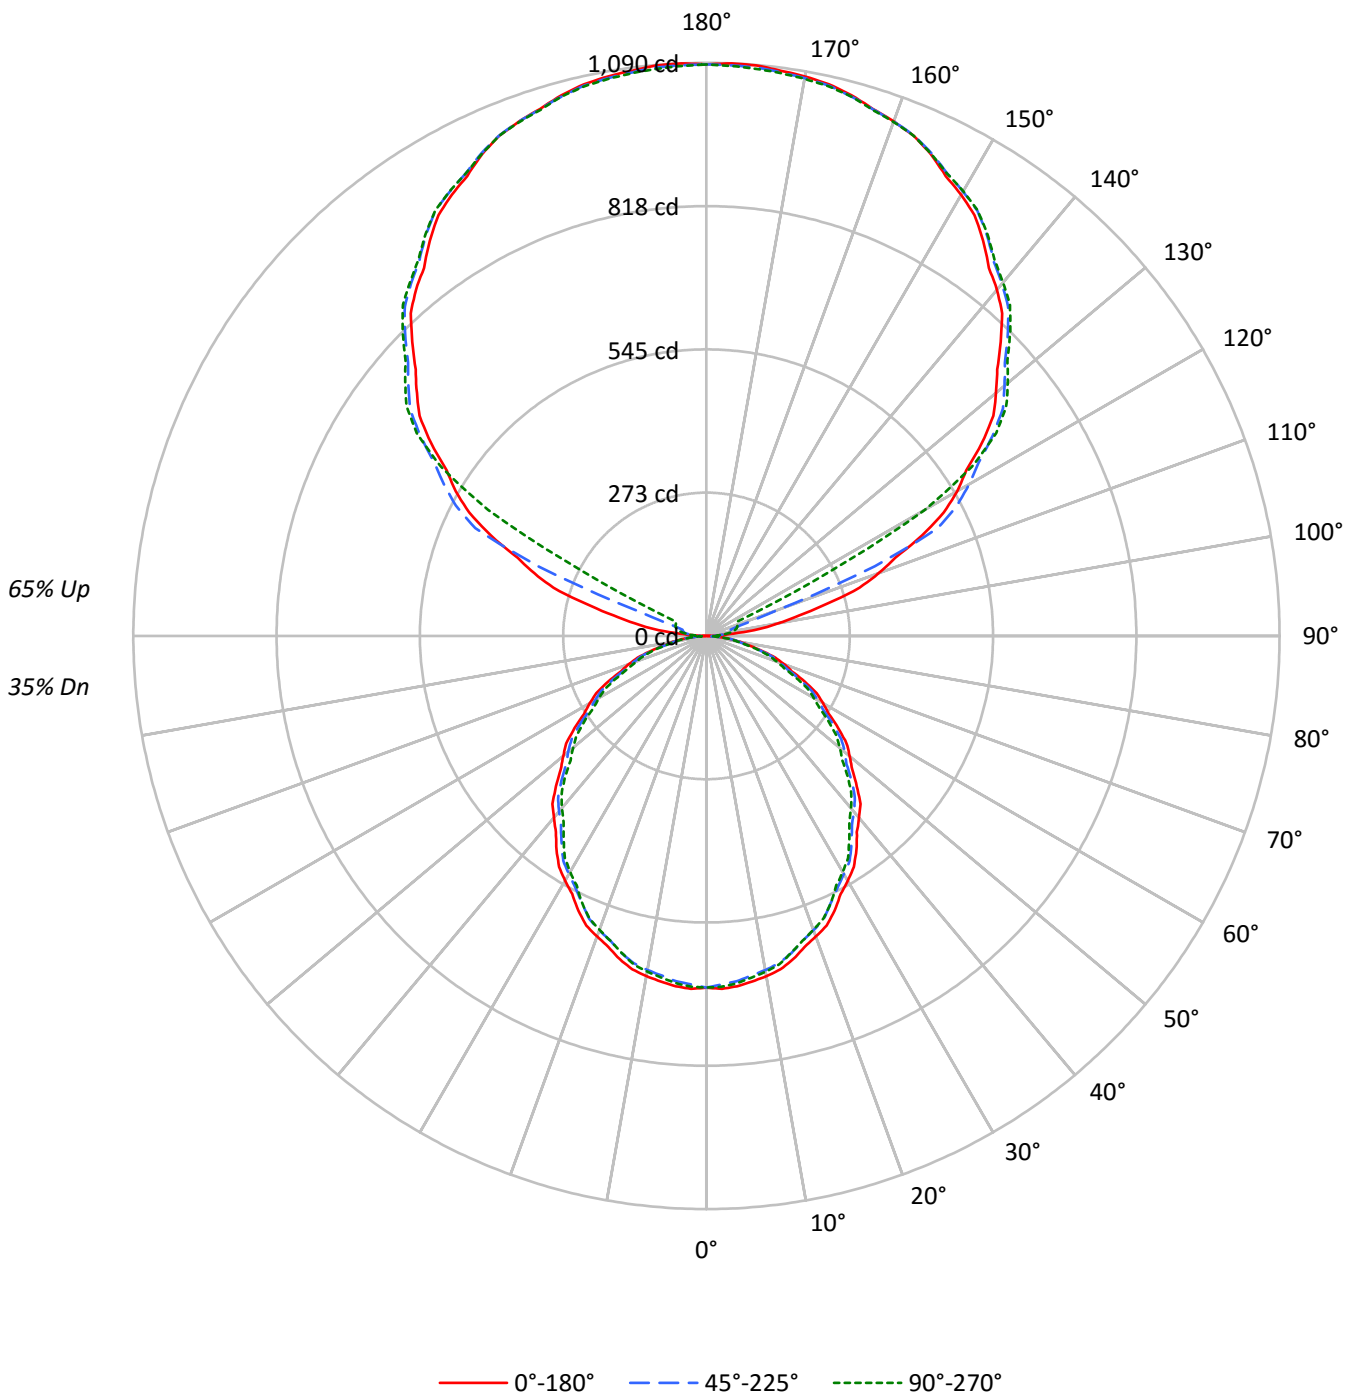



TEST NUMBER: P331318-935

CATALOG NUMBER: S122DIP-S485D925U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	42	42	42	35
1	94	90	86	83	85	82	78	75	66	63	61	51	49	48	37	36	36	29
2	86	79	73	68	77	71	66	62	57	54	51	45	42	40	33	31	30	25
3	78	69	62	56	70	63	57	52	51	46	43	39	36	34	29	27	25	21
4	72	61	53	48	64	55	49	44	45	40	36	35	32	29	26	24	22	18
5	66	54	46	41	59	49	43	37	40	35	31	31	28	25	23	21	19	16
6	60	49	41	35	54	44	37	32	36	31	27	28	25	22	21	19	17	14
7	56	44	36	31	50	40	33	28	33	28	24	26	22	19	19	17	15	12
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	15	13	11
9	48	36	29	24	43	33	27	22	27	22	19	22	18	15	16	14	12	10
10	45	33	26	21	40	30	24	20	25	20	17	20	16	14	15	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10797	10797	10797
5°	10838	10682	10746
10°	10775	10575	10627
15°	10641	10437	10425
20°	10452	10232	10220
25°	10265	9978	9978
30°	10023	9747	9661
35°	9798	9469	9329
40°	9514	9190	9012
45°	9236	8912	8690
50°	8932	8626	8317
55°	8617	8290	7983
60°	8263	7892	7598
65°	7885	7492	7148
70°	7407	7010	6680
75°	6744	6457	6301
80°	5979	5793	5504
85°	4872	4650	4168



TEST NUMBER: P331318-935

CATALOG NUMBER: S122DIP-S485D925U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	62.9	1.3
10°-20°	176.9	3.6
20°-30°	260.1	5.3
30°-40°	302.1	6.2
40°-50°	301.8	6.2
50°-60°	263.2	5.4
60°-70°	194.6	4.0
70°-80°	110.2	2.3
80°-90°	32.3	0.7
90°-100°	36.2	0.7
100°-110°	132.9	2.7
110°-120°	355.3	7.3
120°-130°	586.6	12.0
130°-140°	623.8	12.8
140°-150°	579.8	11.9
150°-160°	466.2	9.5
160°-170°	300.4	6.1
170°-180°	103.4	2.1
0°-30°	499.9	10.2
0°-40°	802.0	16.4
0°-60°	1366.9	28.0
0°-90°	1704.1	34.9
90°-120°	524.5	10.7
90°-150°	2314.7	47.3
90°-180°	3185.0	65.1
0°-180°	4888.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	669	669	669	669	669	
5°	669	666	659	664	663	63
15°	637	632	624	627	624	179
25°	576	571	560	561	560	265
35°	497	490	480	476	473	310
45°	404	400	390	384	381	312
55°	306	302	294	287	284	274
65°	206	202	196	190	187	204
75°	108	107	104	100	101	115
85°	26	26	25	23	22	30
90°	1	9	16	20	21	4
95°	51	27	31	34	34	63
105°	239	249	48	56	60	255
115°	452	466	485	138	64	445
125°	639	650	664	670	672	570
135°	791	803	811	818	817	611
145°	918	918	930	935	932	574
155°	1010	1004	1013	1017	1011	465
165°	1065	1060	1062	1067	1062	301
175°	1089	1084	1085	1090	1083	104
180°	1087	1087	1087	1087	1087	



TEST NUMBER: P331318-935

CATALOG NUMBER: S122DIP-S485D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7
2.5°	671.8	671.2	670.7	670.1	669.5	668.7	667.4	666.2	664.9	663.6	664.8
5°	668.7	668.1	667.6	667.0	666.5	665.4	663.8	662.3	660.6	659.1	660.2
7.5°	662.8	661.9	661.1	660.1	659.3	658.1	656.4	654.9	653.2	651.6	652.8
10°	657.2	656.2	655.1	654.2	653.2	651.8	650.1	648.4	646.7	645.0	646.1
12.5°	649.5	648.6	647.6	646.8	645.9	644.6	642.9	641.2	639.5	637.7	638.5
15°	636.6	635.8	634.9	634.0	633.2	631.8	629.9	628.1	626.2	624.4	624.9
17.5°	620.1	619.3	618.5	617.6	616.7	615.4	613.5	611.6	609.7	607.8	608.5
20°	608.3	607.4	606.6	605.7	604.9	603.5	601.4	599.4	597.4	595.5	595.9
22.5°	596.5	595.3	594.1	592.9	591.7	590.1	588.2	586.3	584.4	582.6	582.6
25°	576.2	575.0	573.9	572.7	571.6	569.8	567.4	564.9	562.5	560.1	560.3
27.5°	553.0	552.0	551.0	549.9	548.9	547.4	545.5	543.5	541.7	539.8	539.3
30°	537.6	536.4	535.3	534.2	533.0	531.3	529.2	527.1	525.0	522.8	522.4
32.5°	521.1	520.2	519.3	518.3	517.5	515.8	513.6	511.3	509.1	506.9	506.1
35°	497.1	495.6	494.2	492.8	491.4	489.5	487.2	484.9	482.6	480.4	479.5
37.5°	469.9	468.6	467.4	466.1	464.9	463.1	460.8	458.6	456.2	454.0	452.9
40°	451.4	450.2	449.1	448.0	446.9	445.1	442.8	440.6	438.2	436.0	434.7
42.5°	433.4	432.2	431.1	430.0	428.9	427.1	424.8	422.6	420.3	417.9	416.6
45°	404.5	403.5	402.4	401.5	400.5	398.9	396.7	394.6	392.4	390.3	388.7
47.5°	375.7	374.7	373.8	372.8	371.9	370.3	368.1	365.8	363.6	361.4	359.7
50°	355.6	354.9	354.1	353.4	352.8	351.4	349.4	347.4	345.3	343.4	341.4
52.5°	336.0	335.1	334.2	333.2	332.3	330.9	329.0	327.1	325.2	323.3	321.7
55°	306.1	305.2	304.4	303.5	302.6	301.4	299.6	297.9	296.2	294.5	292.8
57.5°	276.0	275.3	274.6	274.0	273.3	272.0	270.1	268.2	266.3	264.4	262.7
60°	255.9	255.4	254.8	254.2	253.7	252.4	250.4	248.3	246.3	244.4	242.8
62.5°	236.3	235.5	234.5	233.6	232.7	231.5	230.0	228.4	226.9	225.3	223.9
65°	206.4	205.5	204.7	203.8	203.0	201.8	200.4	199.0	197.5	196.1	194.8
67.5°	175.9	175.2	174.5	173.8	173.1	172.2	170.9	169.6	168.3	167.0	166.1
70°	156.9	156.4	155.8	155.2	154.6	153.7	152.4	151.1	149.8	148.5	147.6
72.5°	137.3	136.8	136.2	135.6	135.1	134.4	133.5	132.7	131.9	131.0	130.0
75°	108.1	107.7	107.5	107.2	106.9	106.4	105.6	105.0	104.3	103.5	102.6
77.5°	81.8	81.3	80.8	80.3	79.8	79.5	79.2	78.9	78.6	78.4	77.9
80°	64.3	64.1	64.1	63.9	63.7	63.5	63.2	62.9	62.7	62.3	61.9
82.5°	47.9	47.8	47.8	47.8	47.7	47.6	47.4	47.3	47.1	46.9	46.4
85°	26.3	26.3	26.1	25.9	25.8	25.7	25.5	25.4	25.2	25.1	24.6
87.5°	9.4	9.6	9.7	9.9	10.1	10.2	10.2	10.2	10.3	10.3	10.2
90°	0.8	2.7	4.6	6.5	8.4	10.2	11.5	12.9	14.3	15.8	16.6
92.5°	15.8	15.7	15.5	15.3	15.2	15.4	16.2	16.9	17.6	18.3	18.7
95°	51.1	45.4	39.6	33.8	28.1	25.7	27.0	28.2	29.4	30.7	31.5
97.5°	101.4	85.2	69.0	52.7	36.4	29.7	32.5	35.4	38.2	41.1	41.8
100°	139.2	115.2	91.3	67.3	43.4	33.0	35.9	38.9	41.8	44.9	46.2
102.5°	180.7	175.6	170.6	165.5	160.4	145.5	120.6	95.7	70.9	46.1	47.9
105°	239.0	244.3	249.5	254.8	260.0	238.8	191.1	143.4	95.7	48.0	49.9
107.5°	305.6	309.8	314.0	318.2	322.5	296.0	238.8	181.6	124.3	67.2	65.2
110°	348.4	352.1	355.7	359.4	363.0	339.6	289.1	238.6	188.1	137.6	120.1



TEST NUMBER: P331318-935

CATALOG NUMBER: S122DIP-S485D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	388.6	391.8	395.1	398.4	401.6	397.0	384.5	372.0	359.6	347.1	283.4
115°	452.1	455.1	458.1	461.1	464.0	467.7	472.1	476.5	480.8	485.2	404.2
117.5°	508.9	512.2	515.6	518.9	522.2	525.4	528.4	531.4	534.4	537.4	517.8
120°	550.4	553.0	555.7	558.3	560.9	563.8	567.0	570.1	573.3	576.4	578.5
122.5°	585.7	588.4	591.2	593.9	596.7	599.8	603.2	606.7	610.1	613.5	614.8
125°	639.3	641.5	643.9	646.1	648.4	651.2	654.5	657.8	661.2	664.4	665.7
127.5°	687.9	690.4	692.9	695.4	697.9	700.4	702.9	705.4	707.9	710.4	712.1
130°	718.8	721.5	724.3	727.1	729.9	732.3	734.2	736.1	738.0	739.9	741.8
132.5°	750.2	752.5	754.9	757.3	759.7	761.8	763.8	765.7	767.6	769.5	771.2
135°	791.1	793.8	796.7	799.4	802.3	804.4	806.0	807.6	809.2	810.7	812.4
137.5°	832.4	834.4	836.4	838.3	840.2	842.1	843.9	845.7	847.5	849.3	850.9
140°	859.5	860.9	862.3	863.7	865.0	866.8	868.7	870.6	872.5	874.4	876.0
142.5°	882.1	883.4	884.7	885.9	887.2	888.9	891.0	893.3	895.5	897.7	899.1
145°	917.7	917.5	917.3	917.1	917.0	918.3	921.4	924.3	927.3	930.2	931.4
147.5°	948.6	948.0	947.4	946.7	946.0	947.1	950.0	953.0	956.0	958.9	959.8
150°	968.8	967.6	966.3	965.1	963.9	964.7	967.5	970.3	973.1	975.9	976.9
152.5°	985.8	984.4	983.0	981.7	980.3	980.9	983.6	986.3	988.9	991.6	992.6
155°	1010.5	1008.9	1007.3	1005.7	1004.2	1004.4	1006.5	1008.7	1010.7	1012.8	1013.8
157.5°	1029.8	1028.5	1027.2	1025.8	1024.5	1024.6	1026.1	1027.5	1029.0	1030.4	1031.7
160°	1041.1	1040.1	1039.1	1037.9	1036.9	1036.9	1037.9	1039.1	1040.1	1041.1	1042.2
162.5°	1051.2	1050.2	1049.1	1048.0	1047.0	1046.9	1047.8	1048.7	1049.6	1050.6	1051.7
165°	1064.7	1063.7	1062.6	1061.5	1060.5	1060.2	1060.8	1061.3	1061.9	1062.4	1063.6
167.5°	1074.8	1073.8	1072.7	1071.6	1070.6	1070.3	1070.8	1071.3	1071.8	1072.3	1073.5
170°	1080.5	1079.3	1078.3	1077.3	1076.2	1075.9	1076.2	1076.6	1076.9	1077.3	1078.5
172.5°	1084.2	1083.1	1082.1	1081.1	1080.0	1079.7	1080.0	1080.4	1080.7	1081.1	1082.3
175°	1089.1	1087.9	1086.7	1085.4	1084.2	1083.7	1084.1	1084.4	1084.8	1085.1	1086.4
177.5°	1089.9	1088.9	1088.0	1086.9	1086.0	1085.5	1085.7	1085.8	1086.0	1086.1	1087.1
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8



TEST NUMBER: P331318-935

CATALOG NUMBER: S122DIP-S485D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7
2.5°	665.9	667.0	668.1	668.7	668.4	668.1	668.0	667.7
5°	661.4	662.5	663.7	664.1	663.8	663.5	663.2	663.0
7.5°	653.9	655.0	656.3	656.6	656.3	656.0	655.7	655.4
10°	647.2	648.4	649.5	649.9	649.5	649.0	648.6	648.2
12.5°	639.4	640.2	640.9	641.2	640.8	640.6	640.2	639.9
15°	625.5	626.1	626.6	626.5	625.9	625.2	624.5	623.7
17.5°	609.1	609.8	610.4	610.4	609.7	609.1	608.4	607.7
20°	596.3	596.8	597.2	597.1	596.5	595.9	595.4	594.8
22.5°	582.7	582.8	582.9	582.8	582.5	582.1	581.8	581.4
25°	560.7	560.9	561.2	561.2	560.9	560.7	560.3	560.1
27.5°	538.9	538.5	538.0	537.5	536.8	536.1	535.5	534.8
30°	521.9	521.5	521.1	520.6	520.0	519.4	518.8	518.2
32.5°	505.3	504.5	503.8	503.1	502.5	502.0	501.4	500.8
35°	478.6	477.8	476.9	476.1	475.4	474.7	474.0	473.3
37.5°	451.9	450.8	449.8	448.8	448.2	447.5	446.8	446.2
40°	433.4	432.1	430.8	429.9	429.3	428.8	428.2	427.6
42.5°	415.2	413.8	412.3	411.3	410.4	409.7	408.9	408.0
45°	387.2	385.6	384.0	383.0	382.4	381.9	381.3	380.6
47.5°	358.1	356.4	354.7	353.5	352.7	351.9	351.0	350.2
50°	339.4	337.3	335.4	334.0	333.3	332.6	331.8	331.1
52.5°	320.0	318.3	316.7	315.4	314.4	313.5	312.5	311.6
55°	291.1	289.4	287.7	286.5	285.7	285.0	284.3	283.6
57.5°	261.1	259.3	257.7	256.6	256.0	255.5	254.9	254.3
60°	241.2	239.6	238.1	237.0	236.6	236.2	235.7	235.3
62.5°	222.4	220.9	219.5	218.5	217.9	217.4	216.9	216.3
65°	193.6	192.3	191.0	189.9	189.2	188.6	187.9	187.1
67.5°	165.1	164.0	163.1	162.3	161.7	161.1	160.6	160.0
70°	146.5	145.5	144.6	143.8	143.2	142.6	142.1	141.5
72.5°	129.1	128.0	127.1	126.3	125.9	125.4	124.9	124.5
75°	101.8	101.0	100.1	99.8	100.1	100.4	100.7	101.0
77.5°	77.5	77.1	76.6	76.2	75.8	75.4	75.0	74.6
80°	61.5	61.0	60.7	60.3	60.0	59.8	59.4	59.2
82.5°	45.9	45.3	44.8	44.4	44.4	44.3	44.3	44.3
85°	24.2	23.8	23.3	23.1	22.9	22.8	22.6	22.5
87.5°	10.0	9.8	9.6	9.6	9.6	9.5	9.5	9.4
90°	17.5	18.3	19.2	19.8	20.1	20.5	20.9	21.3
92.5°	19.1	19.6	20.1	20.4	20.6	20.8	21.0	21.3
95°	32.4	33.3	34.2	34.5	34.4	34.2	34.0	33.8
97.5°	42.4	43.1	43.8	44.3	44.5	44.7	44.9	45.1
100°	47.6	49.0	50.5	51.3	51.7	52.0	52.3	52.7
102.5°	49.7	51.6	53.4	54.5	55.0	55.4	56.0	56.5
105°	51.8	53.7	55.6	57.0	57.7	58.4	59.1	59.8
107.5°	63.2	61.3	59.3	58.7	59.4	60.1	60.8	61.5
110°	102.6	85.2	67.7	59.3	60.0	60.7	61.4	62.2



TEST NUMBER: P331318-935

CATALOG NUMBER: S122DIP-S485D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	219.6	155.8	92.1	60.5	61.0	61.6	62.2	62.8
115°	323.4	242.5	161.5	114.8	102.2	89.6	77.1	64.5
117.5°	498.3	478.7	459.1	428.6	387.3	345.9	304.6	263.3
120°	580.6	582.7	584.8	574.0	550.4	526.8	503.3	479.7
122.5°	616.0	617.3	618.5	616.9	612.3	607.7	603.1	598.6
125°	666.9	668.1	669.3	670.2	670.7	671.2	671.8	672.4
127.5°	713.9	715.7	717.6	718.4	718.6	718.7	718.8	718.8
130°	743.8	745.7	747.6	748.6	748.4	748.1	748.0	747.8
132.5°	772.8	774.5	776.1	776.8	776.6	776.4	776.3	776.1
135°	814.2	816.0	817.7	818.4	818.0	817.7	817.3	817.0
137.5°	852.6	854.4	856.1	856.7	856.1	855.5	854.9	854.3
140°	877.5	879.2	880.7	881.1	880.2	879.3	878.5	877.5
142.5°	900.5	902.0	903.4	903.7	902.8	902.0	901.1	900.2
145°	932.7	933.9	935.1	935.3	934.4	933.6	932.7	931.9
147.5°	960.7	961.6	962.5	962.6	961.8	961.1	960.4	959.7
150°	977.9	979.0	980.1	980.2	979.3	978.4	977.5	976.6
152.5°	993.7	994.7	995.7	995.7	994.5	993.4	992.3	991.1
155°	1014.9	1016.0	1017.0	1016.8	1015.5	1014.0	1012.6	1011.2
157.5°	1032.8	1034.0	1035.2	1035.1	1033.7	1032.3	1031.0	1029.7
160°	1043.2	1044.3	1045.3	1045.3	1044.0	1042.8	1041.6	1040.3
162.5°	1052.9	1054.1	1055.3	1055.2	1053.7	1052.1	1050.7	1049.1
165°	1064.8	1066.0	1067.2	1067.2	1066.0	1064.8	1063.6	1062.4
167.5°	1074.7	1075.9	1077.2	1076.9	1075.4	1073.8	1072.3	1070.7
170°	1079.8	1081.0	1082.2	1082.0	1080.5	1078.8	1077.3	1075.7
172.5°	1083.5	1084.8	1086.0	1085.8	1084.2	1082.6	1081.1	1079.5
175°	1087.6	1088.8	1090.0	1089.8	1088.0	1086.3	1084.5	1082.8
177.5°	1088.0	1089.1	1090.0	1089.9	1088.6	1087.4	1086.1	1084.9
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8

(END OF REPORT)