

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331320-935

Luminaire Tested: **S122DIP-S485D925U935-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331320-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S485D925U935-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 925 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4814.8 lumens
Efficiency: N/A
Efficacy: 108.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 44.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331320-935

CATALOG NUMBER: S122DIP-S485D925U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

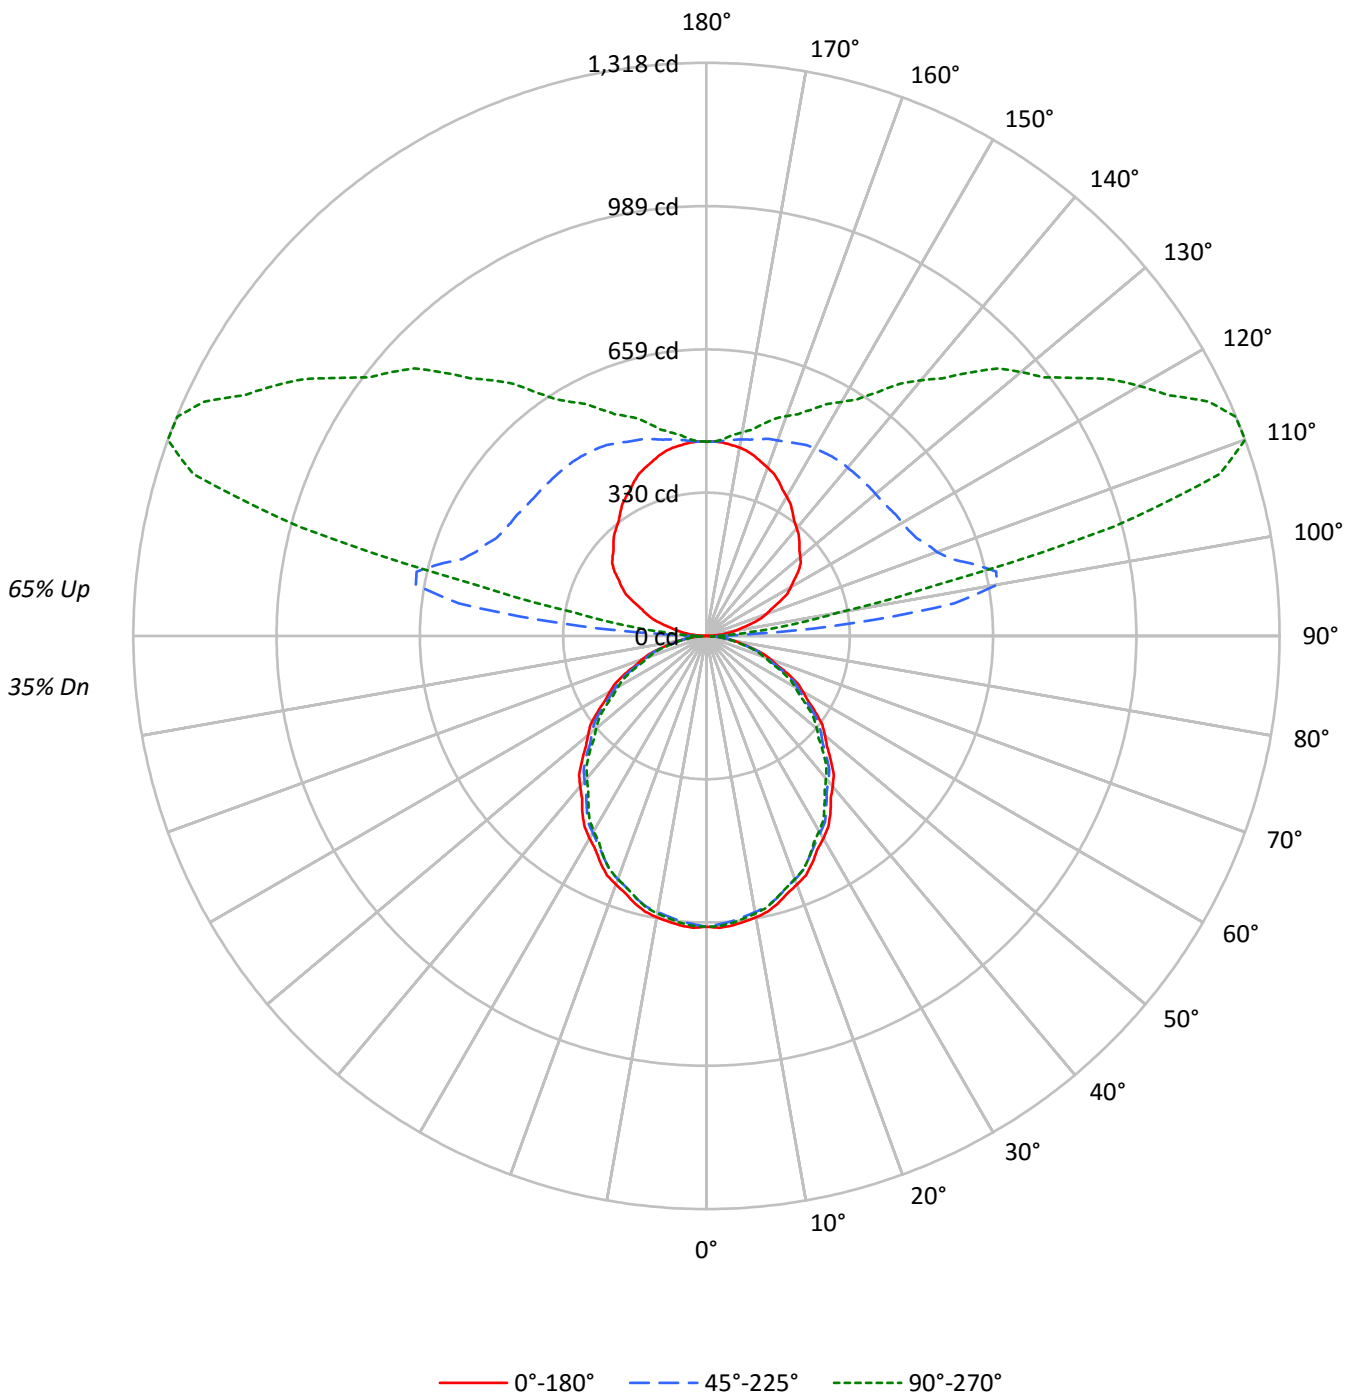



TEST NUMBER: P331320-935

CATALOG NUMBER: S122DIP-S485D925U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	43	43	43	35
1	95	90	86	83	85	82	79	76	66	64	62	51	50	48	38	37	36	30
2	86	79	73	68	78	71	66	62	58	54	51	45	43	40	33	32	30	25
3	78	69	62	56	71	63	57	52	51	46	43	40	37	34	29	27	26	21
4	72	61	53	48	65	56	49	44	45	40	36	35	32	29	26	24	22	18
5	66	54	46	41	59	50	43	37	40	35	31	32	28	25	24	21	19	16
6	60	49	41	35	54	44	37	32	36	31	27	29	25	22	21	19	17	14
7	56	44	36	31	50	40	33	28	33	28	24	26	22	19	20	17	15	12
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	15	14	11
9	48	36	29	24	43	33	27	22	27	22	19	22	18	15	17	14	12	10
10	45	33	26	21	41	30	24	20	25	20	17	20	16	14	15	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10797	10797	10797
5°	10838	10682	10746
10°	10775	10575	10627
15°	10641	10437	10425
20°	10452	10232	10220
25°	10265	9978	9978
30°	10023	9747	9661
35°	9798	9469	9329
40°	9514	9190	9012
45°	9236	8912	8690
50°	8932	8626	8317
55°	8617	8290	7983
60°	8263	7892	7598
65°	7885	7492	7148
70°	7407	7010	6680
75°	6744	6457	6301
80°	5979	5793	5504
85°	4872	4650	4168



TEST NUMBER: P331320-935

CATALOG NUMBER: S122DIP-S485D925U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	62.9	1.3
10°-20°	176.9	3.7
20°-30°	260.1	5.4
30°-40°	302.1	6.3
40°-50°	301.8	6.3
50°-60°	263.2	5.5
60°-70°	194.6	4.0
70°-80°	110.2	2.3
80°-90°	33.7	0.7
90°-100°	178.7	3.7
100°-110°	606.3	12.6
110°-120°	644.1	13.4
120°-130°	530.2	11.0
130°-140°	425.8	8.8
140°-150°	321.8	6.7
150°-160°	226.1	4.7
160°-170°	133.1	2.8
170°-180°	43.3	0.9
0°-30°	499.9	10.4
0°-40°	802.0	16.7
0°-60°	1366.9	28.4
0°-90°	1705.4	35.4
90°-120°	1429.1	29.7
90°-150°	2706.8	56.2
90°-180°	3109.0	64.6
0°-180°	4814.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	669	669	669	669	669	
5°	669	666	659	664	663	63
15°	637	632	624	627	624	179
25°	576	571	560	561	560	265
35°	497	490	480	476	473	310
45°	404	400	390	384	381	312
55°	306	302	294	287	284	274
65°	206	202	196	190	187	204
75°	108	107	104	100	101	115
85°	26	26	25	23	22	30
90°	1	12	29	28	28	3
95°	30	74	337	127	98	32
105°	105	158	637	1138	968	111
115°	185	233	533	1100	1274	183
125°	258	305	512	891	1034	229
135°	302	361	506	748	857	234
145°	345	397	504	625	684	217
155°	393	424	489	553	575	181
165°	428	441	468	497	504	121
175°	446	446	450	456	455	42
180°	447	447	447	447	447	



TEST NUMBER: P331320-935

CATALOG NUMBER: S122DIP-S485D925U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7
2.5°	671.8	671.2	670.7	670.1	669.5	668.7	667.4	666.2	664.9	663.6	664.8
5°	668.7	668.1	667.6	667.0	666.5	665.4	663.8	662.3	660.6	659.1	660.2
7.5°	662.8	661.9	661.1	660.1	659.3	658.1	656.4	654.9	653.2	651.6	652.8
10°	657.2	656.2	655.1	654.2	653.2	651.8	650.1	648.4	646.7	645.0	646.1
12.5°	649.5	648.6	647.6	646.8	645.9	644.6	642.9	641.2	639.5	637.7	638.5
15°	636.6	635.8	634.9	634.0	633.2	631.8	629.9	628.1	626.2	624.4	624.9
17.5°	620.1	619.3	618.5	617.6	616.7	615.4	613.5	611.6	609.7	607.8	608.5
20°	608.3	607.4	606.6	605.7	604.9	603.5	601.4	599.4	597.4	595.5	595.9
22.5°	596.5	595.3	594.1	592.9	591.7	590.1	588.2	586.3	584.4	582.6	582.6
25°	576.2	575.0	573.9	572.7	571.6	569.8	567.4	564.9	562.5	560.1	560.3
27.5°	553.0	552.0	551.0	549.9	548.9	547.4	545.5	543.5	541.7	539.8	539.3
30°	537.6	536.4	535.3	534.2	533.0	531.3	529.2	527.1	525.0	522.8	522.4
32.5°	521.1	520.2	519.3	518.3	517.5	515.8	513.6	511.3	509.1	506.9	506.1
35°	497.1	495.6	494.2	492.8	491.4	489.5	487.2	484.9	482.6	480.4	479.5
37.5°	469.9	468.6	467.4	466.1	464.9	463.1	460.8	458.6	456.2	454.0	452.9
40°	451.4	450.2	449.1	448.0	446.9	445.1	442.8	440.6	438.2	436.0	434.7
42.5°	433.4	432.2	431.1	430.0	428.9	427.1	424.8	422.6	420.3	417.9	416.6
45°	404.5	403.5	402.4	401.5	400.5	398.9	396.7	394.6	392.4	390.3	388.7
47.5°	375.7	374.7	373.8	372.8	371.9	370.3	368.1	365.8	363.6	361.4	359.7
50°	355.6	354.9	354.1	353.4	352.8	351.4	349.4	347.4	345.3	343.4	341.4
52.5°	336.0	335.1	334.2	333.2	332.3	330.9	329.0	327.1	325.2	323.3	321.7
55°	306.1	305.2	304.4	303.5	302.6	301.4	299.6	297.9	296.2	294.5	292.8
57.5°	276.0	275.3	274.6	274.0	273.3	272.0	270.1	268.2	266.3	264.4	262.7
60°	255.9	255.4	254.8	254.2	253.7	252.4	250.4	248.3	246.3	244.4	242.8
62.5°	236.3	235.5	234.5	233.6	232.7	231.5	230.0	228.4	226.9	225.3	223.9
65°	206.4	205.5	204.7	203.8	203.0	201.8	200.4	199.0	197.5	196.1	194.8
67.5°	175.9	175.2	174.5	173.8	173.1	172.2	170.9	169.6	168.3	167.0	166.1
70°	156.9	156.4	155.8	155.2	154.6	153.7	152.4	151.1	149.8	148.5	147.6
72.5°	137.3	136.8	136.2	135.6	135.1	134.4	133.5	132.7	131.9	131.0	130.0
75°	108.1	107.7	107.5	107.2	106.9	106.4	105.6	105.0	104.3	103.5	102.6
77.5°	81.8	81.3	80.8	80.3	79.8	79.5	79.2	78.9	78.6	78.4	77.9
80°	64.3	64.1	64.1	63.9	63.7	63.5	63.2	62.9	62.7	62.3	61.9
82.5°	47.9	47.8	47.8	47.8	47.7	47.6	47.4	47.3	47.1	46.9	46.4
85°	26.3	26.3	26.1	25.9	25.8	25.7	25.5	25.4	25.2	25.1	24.6
87.5°	9.5	9.7	10.2	10.3	10.4	10.7	11.4	12.3	13.1	13.1	12.6
90°	0.9	3.4	6.9	8.6	10.3	12.9	17.2	23.2	28.3	29.2	28.3
92.5°	10.5	15.2	21.4	25.1	30.9	39.0	58.5	85.8	110.1	111.7	94.4
95°	30.0	33.5	42.1	49.9	63.6	84.2	123.7	198.5	298.2	336.8	294.7
97.5°	49.0	53.6	62.8	74.4	90.2	113.6	163.2	267.4	433.1	575.1	603.2
100°	66.1	68.7	76.5	90.2	107.5	131.5	177.0	281.9	467.4	678.8	802.6
102.5°	82.0	83.9	91.6	105.4	123.2	147.3	189.4	282.6	454.4	682.3	876.8
105°	104.9	108.3	114.3	127.2	146.1	170.1	210.5	287.0	428.8	636.7	865.3
107.5°	129.6	132.3	138.2	150.1	168.8	193.0	232.2	298.9	416.0	588.0	789.9
110°	146.1	149.6	154.6	165.8	183.9	208.8	246.6	308.5	413.4	564.6	742.4



TEST NUMBER: P331320-935

CATALOG NUMBER: S122DIP-S485D925U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	161.2	164.6	170.5	181.0	198.3	223.9	260.4	318.8	414.0	549.4	709.5
115°	184.8	189.1	194.2	204.5	221.7	244.9	281.9	334.2	417.6	532.8	668.6
117.5°	209.1	212.6	217.7	226.9	243.3	267.4	301.6	350.8	423.8	524.7	642.7
120°	224.3	227.7	232.9	240.6	257.8	281.9	315.4	361.8	427.9	519.9	629.0
122.5°	238.8	241.4	246.6	255.0	272.2	297.0	328.4	371.3	432.7	517.1	617.3
125°	257.8	260.4	265.5	275.9	293.0	317.1	348.0	386.7	440.0	512.1	600.6
127.5°	272.9	276.4	283.5	294.9	311.4	336.1	366.3	401.0	447.4	509.2	585.2
130°	281.9	285.2	293.9	305.9	323.1	347.2	377.2	409.9	452.9	507.8	574.9
132.5°	290.1	294.2	303.5	316.2	334.1	358.2	386.8	418.8	458.3	507.1	566.6
135°	302.5	305.9	316.2	329.1	348.9	372.9	400.5	430.5	464.9	506.1	555.1
137.5°	314.2	318.3	328.6	342.3	362.0	384.3	411.5	439.5	470.7	505.9	547.0
140°	323.1	326.6	336.8	350.6	369.5	391.8	417.6	444.3	473.5	505.2	542.3
142.5°	332.0	334.8	344.4	358.2	376.3	397.4	422.4	448.4	475.5	505.2	537.4
145°	345.4	348.9	357.5	370.4	387.5	406.5	429.6	453.7	477.8	503.5	531.1
147.5°	359.9	362.5	370.7	382.5	396.8	413.7	435.5	456.7	478.5	500.5	524.5
150°	369.5	372.0	378.9	390.1	403.0	418.4	438.2	458.0	477.8	498.4	519.0
152.5°	379.1	380.3	387.2	397.0	409.2	423.3	441.0	458.7	476.4	495.0	514.2
155°	392.7	393.6	398.7	408.2	417.6	430.5	445.1	459.7	474.3	489.0	505.2
157.5°	404.1	404.9	409.1	417.2	424.8	435.7	448.1	459.7	470.4	482.8	496.9
160°	411.6	412.5	415.9	422.8	429.6	439.1	449.4	459.7	468.3	478.6	490.7
162.5°	419.1	418.6	422.1	427.6	433.8	441.2	450.1	459.0	466.2	475.2	485.2
165°	427.9	427.1	428.8	433.9	438.2	443.4	451.2	457.2	462.3	468.3	476.0
167.5°	435.1	434.1	435.7	438.9	442.0	445.3	451.0	456.0	458.3	462.3	467.1
170°	440.0	438.2	439.1	441.7	443.4	446.0	450.3	454.6	456.3	458.8	462.3
172.5°	442.7	441.7	441.2	443.8	444.8	446.7	449.6	452.5	453.6	454.8	457.5
175°	446.0	445.1	444.3	446.0	446.0	446.9	448.6	450.3	449.4	450.3	451.2
177.5°	447.5	446.2	445.5	446.9	446.9	446.9	447.5	448.9	447.5	446.9	447.5
180°	446.9	446.9	446.9	446.9	446.9	446.9	446.9	446.9	446.9	446.9	446.9



TEST NUMBER: P331320-935

CATALOG NUMBER: S122DIP-S485D925U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7
2.5°	665.9	667.0	668.1	668.7	668.4	668.1	668.0	667.7
5°	661.4	662.5	663.7	664.1	663.8	663.5	663.2	663.0
7.5°	653.9	655.0	656.3	656.6	656.3	656.0	655.7	655.4
10°	647.2	648.4	649.5	649.9	649.5	649.0	648.6	648.2
12.5°	639.4	640.2	640.9	641.2	640.8	640.6	640.2	639.9
15°	625.5	626.1	626.6	626.5	625.9	625.2	624.5	623.7
17.5°	609.1	609.8	610.4	610.4	609.7	609.1	608.4	607.7
20°	596.3	596.8	597.2	597.1	596.5	595.9	595.4	594.8
22.5°	582.7	582.8	582.9	582.8	582.5	582.1	581.8	581.4
25°	560.7	560.9	561.2	561.2	560.9	560.7	560.3	560.1
27.5°	538.9	538.5	538.0	537.5	536.8	536.1	535.5	534.8
30°	521.9	521.5	521.1	520.6	520.0	519.4	518.8	518.2
32.5°	505.3	504.5	503.8	503.1	502.5	502.0	501.4	500.8
35°	478.6	477.8	476.9	476.1	475.4	474.7	474.0	473.3
37.5°	451.9	450.8	449.8	448.8	448.2	447.5	446.8	446.2
40°	433.4	432.1	430.8	429.9	429.3	428.8	428.2	427.6
42.5°	415.2	413.8	412.3	411.3	410.4	409.7	408.9	408.0
45°	387.2	385.6	384.0	383.0	382.4	381.9	381.3	380.6
47.5°	358.1	356.4	354.7	353.5	352.7	351.9	351.0	350.2
50°	339.4	337.3	335.4	334.0	333.3	332.6	331.8	331.1
52.5°	320.0	318.3	316.7	315.4	314.4	313.5	312.5	311.6
55°	291.1	289.4	287.7	286.5	285.7	285.0	284.3	283.6
57.5°	261.1	259.3	257.7	256.6	256.0	255.5	254.9	254.3
60°	241.2	239.6	238.1	237.0	236.6	236.2	235.7	235.3
62.5°	222.4	220.9	219.5	218.5	217.9	217.4	216.9	216.3
65°	193.6	192.3	191.0	189.9	189.2	188.6	187.9	187.1
67.5°	165.1	164.0	163.1	162.3	161.7	161.1	160.6	160.0
70°	146.5	145.5	144.6	143.8	143.2	142.6	142.1	141.5
72.5°	129.1	128.0	127.1	126.3	125.9	125.4	124.9	124.5
75°	101.8	101.0	100.1	99.8	100.1	100.4	100.7	101.0
77.5°	77.5	77.1	76.6	76.2	75.8	75.4	75.0	74.6
80°	61.5	61.0	60.7	60.3	60.0	59.8	59.4	59.2
82.5°	45.9	45.3	44.8	44.4	44.4	44.3	44.3	44.3
85°	24.2	23.8	23.3	23.1	22.9	22.8	22.6	22.5
87.5°	12.1	11.4	11.4	11.3	11.2	11.0	10.9	10.8
90°	27.5	25.7	27.5	28.3	28.3	28.3	28.3	28.3
92.5°	74.9	64.3	57.1	51.7	51.1	48.3	49.0	47.6
95°	225.2	172.7	136.6	117.7	106.6	99.7	97.1	98.0
97.5°	525.4	429.8	336.8	274.8	233.8	212.6	200.0	192.9
100°	784.5	678.0	560.3	456.3	385.0	348.0	323.1	307.6
102.5°	954.3	930.3	844.2	734.0	656.5	593.4	562.3	541.4
105°	1044.0	1141.2	1152.4	1123.9	1070.7	1017.4	980.4	968.5
107.5°	979.5	1125.7	1215.0	1256.6	1263.3	1260.4	1253.0	1237.1
110°	923.8	1077.5	1187.6	1258.0	1294.9	1311.3	1319.1	1318.2



TEST NUMBER: P331320-935

CATALOG NUMBER: S122DIP-S485D925U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	872.9	1020.5	1138.1	1218.8	1270.2	1297.5	1312.2	1316.8
115°	810.3	942.6	1055.2	1143.8	1204.7	1244.2	1266.6	1274.4
117.5°	763.2	879.4	981.5	1064.5	1126.7	1168.5	1192.1	1198.5
120°	739.9	846.4	937.5	1015.7	1075.8	1116.2	1141.2	1149.8
122.5°	721.3	818.9	905.2	975.9	1029.8	1069.4	1091.7	1098.9
125°	694.3	782.8	858.4	922.9	972.8	1005.4	1026.8	1033.7
127.5°	667.7	747.8	819.1	878.6	922.0	952.6	971.2	976.7
130°	650.5	724.4	792.3	849.0	891.1	920.3	937.5	944.3
132.5°	634.0	702.4	764.7	818.0	859.5	888.7	904.5	910.7
135°	611.0	667.7	724.4	772.5	809.4	837.8	853.3	856.7
137.5°	592.5	640.0	685.0	726.9	760.7	785.1	798.7	803.8
140°	580.9	622.2	661.7	699.5	726.9	749.3	762.2	767.3
142.5°	571.3	606.3	640.3	672.0	698.1	718.4	729.9	730.9
145°	557.7	586.1	612.7	637.6	658.2	672.9	681.4	684.0
147.5°	547.2	569.6	590.3	608.6	625.6	637.2	643.1	644.6
150°	539.7	558.5	576.6	592.0	604.9	615.3	620.4	621.3
152.5°	532.1	549.6	564.9	578.3	588.4	597.4	601.2	601.3
155°	521.6	535.4	548.2	557.7	567.1	573.2	576.6	574.9
157.5°	509.4	520.9	531.8	539.2	545.8	550.8	552.3	552.3
160°	501.8	511.3	520.7	526.8	532.8	537.1	538.0	538.0
162.5°	494.3	502.3	510.4	515.1	521.1	524.0	524.9	524.2
165°	482.9	489.0	495.0	498.4	501.8	505.2	505.2	504.4
167.5°	472.1	476.7	480.9	484.0	485.5	487.4	487.2	486.2
170°	466.6	469.2	472.6	474.3	475.2	477.8	476.9	475.2
172.5°	460.4	462.3	465.0	466.1	466.9	468.1	467.3	466.2
175°	453.7	454.6	455.5	456.3	456.3	457.2	456.3	454.6
177.5°	448.9	448.9	449.6	449.6	449.6	449.6	448.9	447.5
180°	446.9	446.9	446.9	446.9	446.9	446.9	446.9	446.9

(END OF REPORT)