

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331382-935

Luminaire Tested: **S122DIP-S865D330U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331382-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S865D330U935-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 330 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4032.3 lumens
Efficiency: N/A
Efficacy: 92.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 43.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331382-935

CATALOG NUMBER: S122DIP-S865D330U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

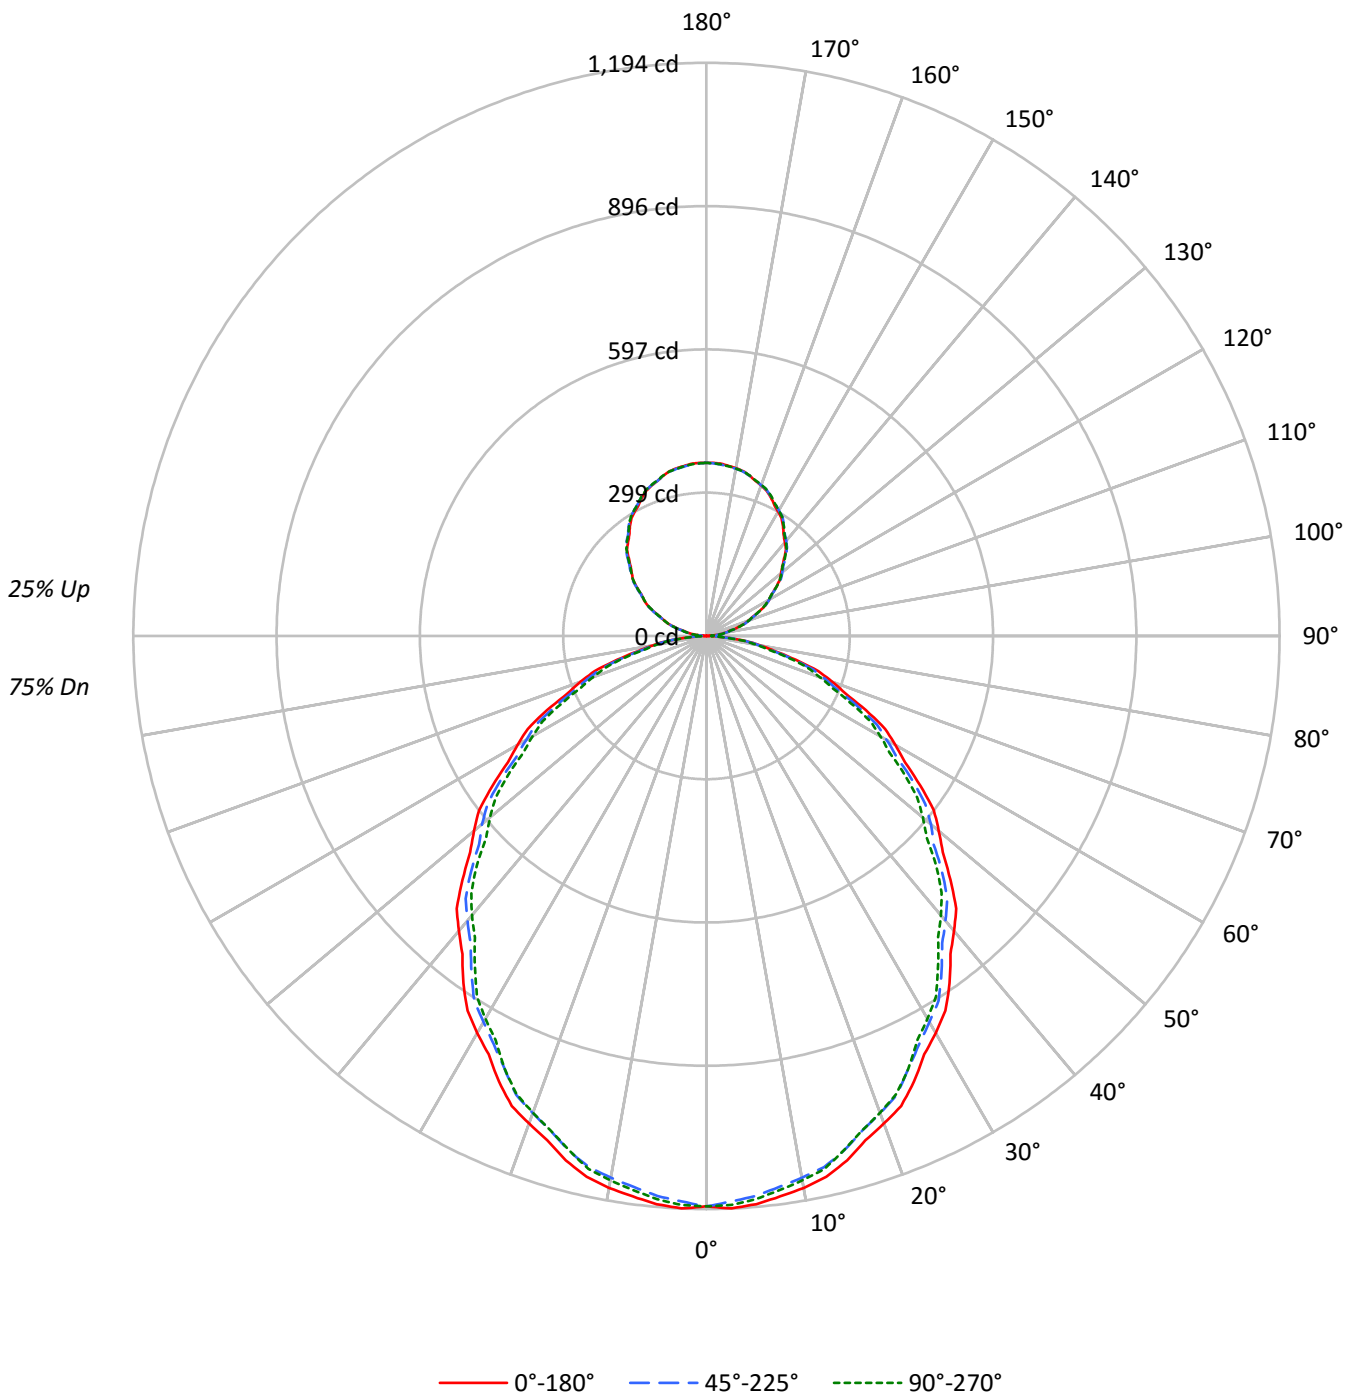



TEST NUMBER: P331382-935

CATALOG NUMBER: S122DIP-S865D330U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	113	113	113	113	108	108	108	108	97	97	97	88	88	88	79	79	79	75
1	103	99	95	91	98	94	91	87	85	83	80	77	75	73	70	68	67	63
2	94	86	80	75	89	82	77	72	75	70	66	68	64	61	62	59	56	53
3	86	76	68	62	81	73	66	60	66	61	56	60	56	52	55	51	48	45
4	79	67	59	53	75	64	57	51	59	53	48	54	49	45	49	45	41	38
5	72	60	52	45	69	58	50	44	53	46	41	48	43	39	44	40	36	33
6	67	54	46	40	63	52	44	39	48	41	36	44	38	34	40	35	32	29
7	62	49	41	35	59	47	39	34	43	37	32	40	34	30	37	32	28	26
8	58	45	37	31	55	43	36	30	40	33	29	37	31	27	34	29	25	23
9	54	41	33	28	51	39	32	27	36	30	26	34	28	24	31	26	23	21
10	50	38	30	25	48	36	29	25	34	28	23	31	26	22	29	24	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	19184	19184	19184
5°	19258	18979	19091
10°	19143	18787	18882
15°	18907	18544	18524
20°	18570	18179	18158
25°	18235	17728	17728
30°	17807	17316	17167
35°	17406	16821	16575
40°	16904	16326	16012
45°	16408	15835	15445
50°	15870	15325	14780
55°	15308	14728	14184
60°	14683	14018	13504
65°	14013	13310	12699
70°	13161	12458	11863
75°	11971	11472	11185
80°	10628	10302	9772
85°	8670	8262	7410



TEST NUMBER: P331382-935

CATALOG NUMBER: S122DIP-S865D330U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	111.7	2.8
10°-20°	314.4	7.8
20°-30°	462.1	11.5
30°-40°	536.8	13.3
40°-50°	536.2	13.3
50°-60°	467.6	11.6
60°-70°	345.7	8.6
70°-80°	195.8	4.9
80°-90°	54.1	1.3
90°-100°	22.8	0.6
100°-110°	70.9	1.8
110°-120°	121.3	3.0
120°-130°	159.5	4.0
130°-140°	179.0	4.4
140°-150°	175.5	4.4
150°-160°	147.2	3.7
160°-170°	97.6	2.4
170°-180°	34.1	0.8
0°-30°	888.2	22.0
0°-40°	1425.0	35.3
0°-60°	2428.7	60.2
0°-90°	3024.4	75.0
90°-120°	215.0	5.3
90°-150°	729.0	18.1
90°-180°	1008.0	25.0
0°-180°	4032.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1188	1188	1188	1188	1188	
5°	1188	1183	1171	1180	1178	113
15°	1131	1124	1109	1113	1108	318
25°	1024	1014	995	997	995	471
35°	883	871	853	847	841	551
45°	719	710	694	681	676	554
55°	544	537	523	510	504	486
65°	367	360	348	338	332	363
75°	192	189	184	178	179	205
85°	47	46	45	41	40	54
90°	0	4	11	10	10	3
95°	16	19	20	19	19	18
105°	65	66	67	68	68	69
115°	122	123	123	123	122	120
125°	177	180	179	178	178	158
135°	229	232	233	233	232	177
145°	278	280	282	282	281	174
155°	318	319	320	321	320	146
165°	346	346	346	347	346	98
175°	360	359	358	360	359	34
180°	360	360	360	360	360	



TEST NUMBER: P331382-935

CATALOG NUMBER: S122DIP-S865D330U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2
2.5°	1193.7	1192.7	1191.6	1190.7	1189.6	1188.0	1185.8	1183.5	1181.3	1179.1	1181.1
5°	1188.2	1187.1	1186.2	1185.2	1184.1	1182.2	1179.5	1176.6	1173.9	1171.0	1173.1
7.5°	1177.7	1176.1	1174.6	1172.9	1171.4	1169.2	1166.3	1163.5	1160.6	1157.8	1159.9
10°	1167.6	1165.9	1164.1	1162.3	1160.5	1158.1	1155.0	1152.0	1149.0	1145.9	1148.0
12.5°	1153.9	1152.4	1150.8	1149.2	1147.6	1145.3	1142.3	1139.2	1136.2	1133.2	1134.5
15°	1131.1	1129.5	1128.0	1126.5	1125.0	1122.6	1119.3	1115.9	1112.7	1109.4	1110.3
17.5°	1101.8	1100.3	1098.8	1097.3	1095.7	1093.3	1089.9	1086.6	1083.2	1079.9	1081.1
20°	1080.8	1079.3	1077.8	1076.2	1074.7	1072.2	1068.6	1065.1	1061.5	1058.0	1058.7
22.5°	1059.8	1057.7	1055.5	1053.3	1051.3	1048.5	1045.2	1041.8	1038.5	1035.1	1035.3
25°	1023.6	1021.7	1019.6	1017.6	1015.5	1012.4	1008.1	1003.8	999.4	995.1	995.7
27.5°	982.6	980.8	978.9	977.1	975.3	972.6	969.2	965.8	962.4	959.0	958.3
30°	955.1	953.1	951.1	949.1	947.0	944.1	940.3	936.5	932.6	928.8	928.1
32.5°	925.9	924.3	922.6	921.0	919.4	916.5	912.6	908.5	904.6	900.5	899.1
35°	883.1	880.6	878.0	875.6	873.0	869.7	865.6	861.6	857.5	853.4	852.0
37.5°	834.9	832.7	830.4	828.2	826.0	822.9	818.8	814.8	810.6	806.6	804.7
40°	802.0	800.0	798.0	795.9	793.9	790.8	786.8	782.7	778.7	774.6	772.3
42.5°	770.1	768.0	765.9	764.0	761.9	758.9	754.8	750.8	746.7	742.6	740.1
45°	718.6	716.9	715.1	713.3	711.5	708.7	704.9	701.1	697.3	693.5	690.7
47.5°	667.4	665.8	664.1	662.5	660.7	657.9	653.9	650.0	646.0	642.0	639.1
50°	631.8	630.5	629.3	628.0	626.7	624.3	620.8	617.2	613.6	610.1	606.6
52.5°	597.1	595.4	593.7	592.0	590.4	587.9	584.5	581.2	577.8	574.5	571.5
55°	543.8	542.3	540.8	539.2	537.7	535.5	532.4	529.3	526.3	523.2	520.2
57.5°	490.3	489.1	487.9	486.7	485.5	483.2	479.8	476.5	473.1	469.8	466.8
60°	454.7	453.7	452.7	451.7	450.6	448.4	444.8	441.3	437.7	434.1	431.4
62.5°	420.0	418.4	416.7	415.1	413.5	411.3	408.5	405.8	403.0	400.4	397.8
65°	366.8	365.2	363.7	362.1	360.7	358.6	356.1	353.5	351.0	348.4	346.2
67.5°	312.6	311.3	310.1	308.9	307.7	306.0	303.7	301.4	299.1	296.8	295.1
70°	278.8	277.8	276.7	275.7	274.7	273.0	270.8	268.5	266.2	263.9	262.2
72.5°	244.0	243.1	242.0	241.0	240.0	238.8	237.3	235.8	234.3	232.8	231.1
75°	191.9	191.4	190.9	190.5	189.9	189.0	187.8	186.5	185.2	183.9	182.4
77.5°	145.3	144.5	143.6	142.8	141.9	141.2	140.7	140.2	139.7	139.1	138.4
80°	114.3	114.0	113.7	113.5	113.2	112.9	112.4	111.8	111.3	110.8	110.0
82.5°	85.0	85.0	84.9	84.8	84.8	84.6	84.3	84.0	83.7	83.4	82.4
85°	46.8	46.6	46.3	46.1	45.8	45.5	45.3	45.0	44.8	44.6	43.8
87.5°	16.5	16.3	16.0	15.8	15.5	15.3	15.2	15.2	15.1	14.9	14.3
90°	0.3	1.1	1.9	2.8	3.5	4.7	6.2	7.7	9.1	10.7	10.5
92.5°	5.4	6.0	6.6	7.2	7.8	8.3	8.6	9.0	9.3	9.6	9.7
95°	15.8	16.5	17.1	17.8	18.5	18.9	19.0	19.2	19.4	19.5	19.5
97.5°	28.9	29.5	30.0	30.7	31.3	31.7	31.9	32.2	32.5	32.7	32.7
100°	38.7	39.2	39.7	40.3	40.8	41.2	41.3	41.6	41.8	42.0	42.0
102.5°	48.8	49.2	49.7	50.1	50.5	51.0	51.1	51.4	51.7	51.9	52.0
105°	65.4	65.6	65.8	66.0	66.2	66.4	66.6	66.6	66.8	66.9	67.1
107.5°	82.1	82.4	82.7	83.0	83.3	83.4	83.4	83.4	83.4	83.4	83.4
110°	92.8	93.2	93.6	94.0	94.4	94.6	94.6	94.6	94.6	94.6	94.6



TEST NUMBER: P331382-935

CATALOG NUMBER: S122DIP-S865D330U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	104.4	104.9	105.3	105.6	106.1	106.2	106.2	106.2	106.1	106.1	105.9
115°	121.7	122.1	122.5	122.9	123.3	123.5	123.3	123.1	123.0	122.9	122.9
117.5°	138.8	139.4	139.9	140.4	141.0	141.1	140.7	140.3	139.9	139.6	139.4
120°	150.2	150.8	151.4	151.9	152.4	152.4	151.9	151.4	150.8	150.2	150.2
122.5°	160.7	161.4	162.0	162.6	163.3	163.5	163.1	162.7	162.3	162.0	161.8
125°	177.0	177.6	178.2	178.8	179.4	179.7	179.4	179.3	179.1	178.8	178.7
127.5°	193.0	193.7	194.5	195.2	196.0	196.2	196.0	195.8	195.5	195.3	195.0
130°	202.9	203.8	204.7	205.5	206.4	206.8	206.6	206.6	206.4	206.2	206.1
132.5°	214.1	214.8	215.5	216.2	217.0	217.3	217.3	217.4	217.4	217.4	217.1
135°	229.0	229.8	230.6	231.3	232.0	232.5	232.6	232.7	232.9	233.0	232.9
137.5°	244.8	245.4	246.0	246.7	247.3	247.6	247.8	248.0	248.1	248.3	248.3
140°	254.3	254.9	255.5	256.1	256.8	257.2	257.5	257.9	258.2	258.6	258.6
142.5°	264.1	264.7	265.3	265.9	266.5	266.9	267.1	267.3	267.6	267.8	267.9
145°	278.0	278.5	279.0	279.5	279.9	280.3	280.8	281.2	281.5	282.0	282.1
147.5°	290.5	291.1	291.6	292.2	292.7	293.2	293.4	293.8	294.0	294.3	294.5
150°	299.0	299.5	299.8	300.2	300.7	301.0	301.3	301.5	301.8	302.0	302.3
152.5°	306.6	306.9	307.4	307.8	308.2	308.6	308.8	309.2	309.5	309.9	310.1
155°	317.9	318.1	318.3	318.5	318.7	318.9	319.1	319.3	319.5	319.7	320.0
157.5°	327.5	327.7	327.8	328.0	328.1	328.2	328.4	328.5	328.6	328.7	329.2
160°	333.4	333.6	333.6	333.8	333.9	334.1	334.1	334.2	334.2	334.3	334.7
162.5°	338.7	338.8	338.8	338.8	338.9	338.9	339.0	339.1	339.1	339.1	339.7
165°	345.9	345.8	345.7	345.7	345.6	345.5	345.5	345.5	345.5	345.5	346.0
167.5°	351.8	351.6	351.5	351.2	351.0	350.9	350.9	350.9	350.9	350.9	351.3
170°	355.0	354.8	354.6	354.4	354.2	354.0	354.0	353.9	353.9	353.8	354.2
172.5°	357.1	357.0	356.8	356.5	356.4	356.2	356.2	356.1	356.0	355.9	356.5
175°	359.9	359.6	359.5	359.2	359.0	358.9	358.8	358.6	358.4	358.3	358.8
177.5°	360.9	360.8	360.6	360.5	360.3	360.2	360.1	360.0	359.8	359.7	360.1
180°	360.5	360.5	360.5	360.5	360.5	360.5	360.5	360.5	360.5	360.5	360.5



TEST NUMBER: P331382-935

CATALOG NUMBER: S122DIP-S865D330U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2
2.5°	1183.1	1185.2	1187.1	1188.0	1187.6	1187.1	1186.8	1186.4
5°	1175.1	1177.2	1179.2	1179.9	1179.5	1179.0	1178.5	1177.9
7.5°	1161.8	1163.9	1166.0	1166.7	1166.1	1165.5	1165.0	1164.4
10°	1150.0	1152.0	1154.1	1154.7	1153.9	1153.1	1152.4	1151.7
12.5°	1136.0	1137.4	1138.8	1139.3	1138.7	1138.2	1137.6	1137.0
15°	1111.4	1112.4	1113.4	1113.3	1112.1	1110.8	1109.5	1108.2
17.5°	1082.2	1083.4	1084.6	1084.5	1083.3	1082.1	1080.9	1079.7
20°	1059.5	1060.2	1061.0	1060.8	1059.9	1058.9	1057.8	1056.8
22.5°	1035.4	1035.5	1035.7	1035.5	1034.8	1034.2	1033.6	1033.0
25°	996.2	996.6	997.1	997.1	996.6	996.2	995.7	995.1
27.5°	957.5	956.7	956.0	955.0	953.7	952.5	951.3	950.1
30°	927.3	926.6	925.8	924.9	923.9	922.9	921.9	920.8
32.5°	897.8	896.4	895.0	893.8	892.9	891.8	890.8	889.8
35°	850.4	848.9	847.4	845.9	844.7	843.4	842.1	840.9
37.5°	802.9	801.0	799.1	797.5	796.3	795.1	793.9	792.6
40°	770.1	767.8	765.5	763.8	762.8	761.8	760.8	759.7
42.5°	737.6	735.1	732.7	730.7	729.3	727.9	726.4	725.0
45°	687.9	685.1	682.3	680.4	679.4	678.4	677.3	676.4
47.5°	636.2	633.3	630.3	628.1	626.6	625.2	623.7	622.2
50°	603.0	599.4	595.9	593.5	592.2	590.9	589.7	588.4
52.5°	568.5	565.6	562.7	560.3	558.7	557.0	555.3	553.6
55°	517.2	514.1	511.1	508.9	507.6	506.4	505.1	503.9
57.5°	463.8	460.8	457.8	455.8	454.9	453.9	453.0	451.9
60°	428.6	425.8	423.0	421.2	420.4	419.7	418.9	418.2
62.5°	395.1	392.5	389.9	388.2	387.2	386.2	385.3	384.4
65°	343.9	341.6	339.3	337.5	336.3	335.0	333.7	332.4
67.5°	293.3	291.4	289.7	288.3	287.3	286.3	285.2	284.2
70°	260.4	258.6	256.8	255.4	254.4	253.4	252.4	251.3
72.5°	229.3	227.5	225.8	224.5	223.6	222.8	222.0	221.2
75°	180.9	179.3	177.9	177.4	177.9	178.4	178.8	179.3
77.5°	137.7	136.9	136.1	135.3	134.7	134.0	133.3	132.5
80°	109.3	108.6	107.8	107.1	106.6	106.2	105.6	105.1
82.5°	81.5	80.5	79.6	79.0	78.9	78.8	78.7	78.6
85°	43.0	42.3	41.5	41.0	40.7	40.5	40.2	40.0
87.5°	13.7	13.0	12.4	12.0	11.8	11.6	11.4	11.2
90°	10.4	10.2	10.1	10.1	10.2	10.2	10.2	10.3
92.5°	9.7	9.7	9.8	9.8	9.8	9.8	9.8	9.8
95°	19.5	19.5	19.5	19.4	19.3	19.1	19.0	18.9
97.5°	32.7	32.7	32.7	32.7	32.7	32.7	32.7	32.6
100°	42.0	42.0	42.0	41.9	41.8	41.8	41.8	41.7
102.5°	52.1	52.1	52.2	52.2	52.1	52.0	52.0	51.9
105°	67.2	67.3	67.5	67.5	67.5	67.5	67.5	67.5
107.5°	83.5	83.6	83.6	83.5	83.2	82.9	82.6	82.2
110°	94.6	94.6	94.6	94.5	94.3	94.1	93.9	93.7



TEST NUMBER: P331382-935

CATALOG NUMBER: S122DIP-S865D330U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	105.7	105.6	105.4	105.2	105.1	105.0	104.8	104.6
115°	122.8	122.7	122.6	122.5	122.3	122.1	121.9	121.7
117.5°	139.2	139.1	138.9	138.7	138.5	138.4	138.1	137.9
120°	150.2	150.2	150.2	150.2	150.0	149.7	149.6	149.4
122.5°	161.6	161.4	161.3	161.2	161.0	160.8	160.7	160.6
125°	178.5	178.2	178.1	177.9	177.9	177.8	177.7	177.6
127.5°	194.8	194.6	194.3	194.1	193.9	193.6	193.5	193.2
130°	206.0	205.9	205.7	205.5	205.3	204.9	204.7	204.4
132.5°	216.8	216.5	216.3	216.0	215.8	215.6	215.3	215.2
135°	232.9	232.8	232.7	232.6	232.4	232.2	232.0	231.8
137.5°	248.2	248.1	248.1	248.0	247.7	247.5	247.2	246.8
140°	258.6	258.6	258.6	258.4	258.1	257.9	257.6	257.4
142.5°	267.9	267.9	268.0	267.9	267.7	267.3	267.1	266.8
145°	282.1	282.1	282.2	282.1	281.9	281.6	281.4	281.0
147.5°	294.5	294.7	294.9	294.8	294.5	294.3	294.0	293.8
150°	302.5	302.6	302.9	302.9	302.6	302.5	302.3	302.0
152.5°	310.4	310.6	310.9	310.9	310.6	310.4	310.1	309.9
155°	320.4	320.7	321.1	321.2	320.9	320.7	320.6	320.3
157.5°	329.6	330.1	330.5	330.6	330.3	329.9	329.7	329.3
160°	335.1	335.5	336.0	336.0	335.7	335.4	335.2	334.9
162.5°	340.1	340.5	341.0	341.0	340.8	340.4	340.1	339.8
165°	346.5	347.0	347.4	347.5	347.2	346.8	346.5	346.2
167.5°	351.8	352.2	352.8	352.8	352.5	352.1	351.7	351.4
170°	354.7	355.2	355.7	355.7	355.3	354.9	354.5	354.0
172.5°	356.9	357.4	357.8	357.9	357.5	357.1	356.7	356.3
175°	359.3	359.7	360.2	360.2	359.9	359.5	359.0	358.6
177.5°	360.4	360.7	361.0	361.0	360.7	360.4	360.1	359.7
180°	360.5	360.5	360.5	360.5	360.5	360.5	360.5	360.5

(END OF REPORT)