

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331750-935

Luminaire Tested: **S122RDIP-S1005D725U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331750-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIP-S1005D725U935-4F0-1E-UDD-F  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 725 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5495.4 lumens  
Efficiency: N/A  
Efficacy: 90.5 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 60.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331750-935

CATALOG NUMBER: S122RDIP-S1005D725U935-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

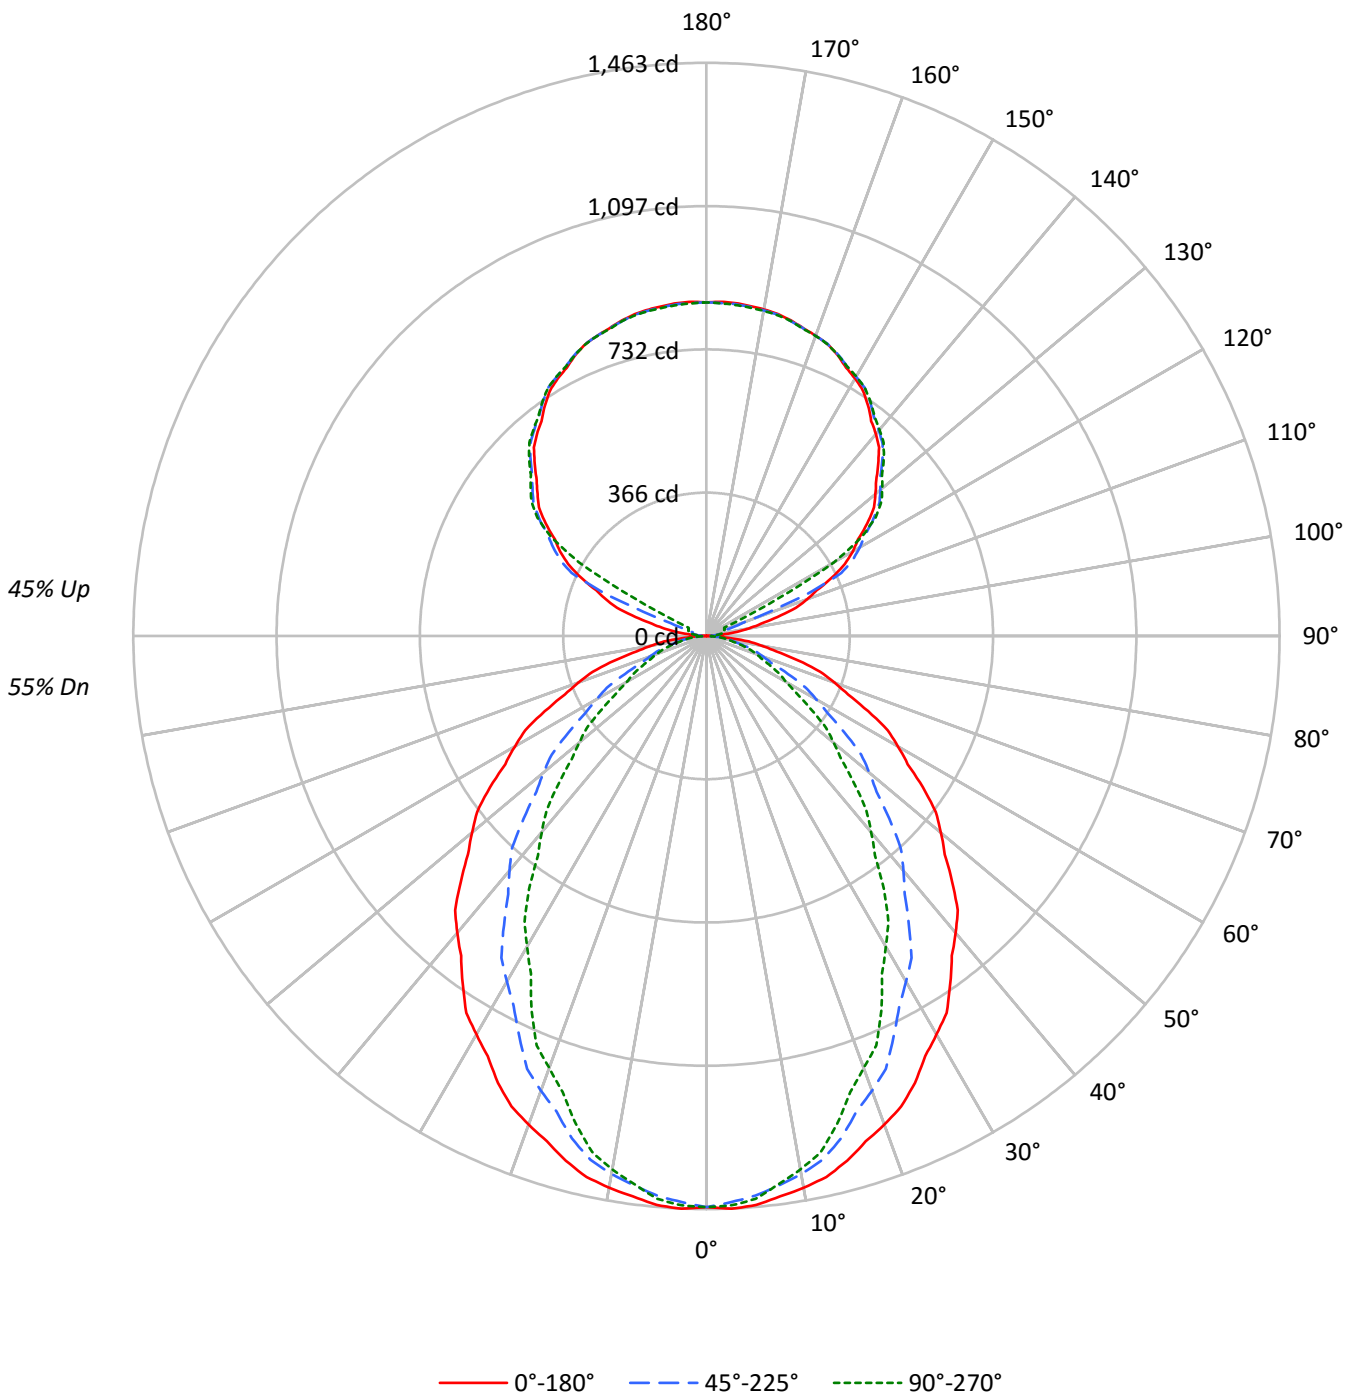



TEST NUMBER: P331750-935

CATALOG NUMBER: S122RDIP-S1005D725U935-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60	55
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	54	53	52	47
2	91	84	78	73	84	78	73	68	67	63	60	57	55	52	48	46	45	40
3	83	74	67	61	77	69	63	58	60	55	51	51	48	45	43	41	39	35
4	76	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34	30
5	70	59	51	45	65	55	48	43	48	43	38	42	37	34	35	32	30	27
6	65	53	45	40	60	50	43	38	44	38	34	38	33	30	32	29	26	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24	21
8	56	44	36	31	52	41	34	30	36	31	27	32	27	24	27	24	21	19
9	52	40	33	28	49	38	31	27	33	28	24	29	25	22	25	22	19	17
10	49	37	30	25	46	35	28	24	31	26	22	27	23	20	24	20	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	23541	23541	23541
5°	23631	23246	23376
10°	23451	22866	22673
15°	23181	22188	21549
20°	22807	21220	20155
25°	22425	20122	18805
30°	21895	18990	17074
35°	21378	17763	15554
40°	20858	16493	13793
45°	20247	15066	12202
50°	19623	13622	10638
55°	18978	12073	9137
60°	18235	10440	7585
65°	17391	8772	6907
70°	16386	7227	6354
75°	15147	6588	5926
80°	13371	5895	5393
85°	10504	4650	4650



TEST NUMBER: P331750-935

CATALOG NUMBER: S122RDIP-S1005D725U935-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	136.5	2.5
10°-20°	374.7	6.8
20°-30°	526.2	9.6
30°-40°	573.8	10.4
40°-50°	527.6	9.6
50°-60°	414.4	7.5
60°-70°	270.2	4.9
70°-80°	139.3	2.5
80°-90°	38.2	0.7
90°-100°	28.4	0.5
100°-110°	104.1	1.9
110°-120°	278.3	5.1
120°-130°	459.4	8.4
130°-140°	488.6	8.9
140°-150°	454.1	8.3
150°-160°	365.1	6.6
160°-170°	235.3	4.3
170°-180°	81.0	1.5
0°-30°	1037.4	18.9
0°-40°	1611.3	29.3
0°-60°	2553.2	46.5
0°-90°	3000.9	54.6
90°-120°	410.8	7.5
90°-150°	1813.0	33.0
90°-180°	2494.0	45.4
0°-180°	5495.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1458	1458	1458	1458	1458	
5°	1458	1451	1434	1445	1442	138
15°	1387	1371	1327	1303	1289	390
25°	1259	1214	1130	1077	1056	579
35°	1085	1015	901	821	789	678
45°	887	796	660	570	534	684
55°	674	569	429	353	325	602
65°	455	348	230	187	181	451
75°	243	153	106	97	95	257
85°	57	30	25	25	25	67
90°	1	7	12	15	17	4
95°	40	21	24	27	26	49
105°	187	195	38	44	47	200
115°	354	365	380	108	50	349
125°	501	509	520	525	527	446
135°	620	629	635	641	640	478
145°	719	719	729	732	730	449
155°	791	787	793	796	792	365
165°	834	830	832	836	832	236
175°	853	849	850	854	848	81
180°	851	851	851	851	851	



TEST NUMBER: P331750-935

CATALOG NUMBER: S122RDIP-S1005D725U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0
2.5°	1463.4	1462.2	1460.9	1459.8	1458.6	1456.7	1454.1	1451.6	1449.1	1446.5	1448.8
5°	1458.0	1456.6	1455.1	1453.6	1452.2	1449.6	1445.7	1441.9	1438.1	1434.3	1436.9
7.5°	1443.0	1441.2	1439.4	1437.5	1435.7	1432.6	1428.1	1423.7	1419.3	1414.8	1415.6
10°	1430.4	1428.3	1426.2	1424.2	1422.1	1418.2	1412.3	1406.4	1400.6	1394.7	1393.9
12.5°	1414.5	1412.0	1409.5	1407.0	1404.5	1399.4	1391.9	1384.4	1376.9	1369.4	1367.8
15°	1386.8	1383.5	1380.4	1377.1	1373.9	1367.3	1357.4	1347.4	1337.4	1327.4	1321.9
17.5°	1352.7	1347.8	1342.9	1338.0	1333.1	1324.2	1311.4	1298.6	1285.8	1273.1	1266.4
20°	1327.4	1321.5	1315.7	1309.8	1304.0	1293.7	1279.0	1264.4	1249.7	1235.0	1227.7
22.5°	1299.9	1293.4	1286.9	1280.3	1273.7	1262.1	1245.6	1229.1	1212.5	1196.0	1186.5
25°	1258.8	1249.4	1240.0	1230.6	1221.2	1206.9	1187.6	1168.2	1148.8	1129.5	1117.5
27.5°	1209.2	1199.0	1188.8	1178.6	1168.4	1152.4	1130.6	1108.7	1086.9	1065.1	1051.1
30°	1174.4	1163.2	1152.1	1140.9	1129.8	1112.5	1089.0	1065.6	1042.2	1018.6	1003.7
32.5°	1140.6	1127.6	1114.6	1101.6	1088.5	1070.1	1046.1	1022.2	998.2	974.3	957.3
35°	1084.6	1069.7	1054.7	1039.7	1024.8	1004.4	978.6	952.9	927.0	901.2	882.8
37.5°	1028.7	1012.3	995.8	979.4	963.0	941.1	913.5	886.1	858.5	831.0	810.7
40°	989.6	972.1	954.4	936.9	919.3	896.2	867.8	839.4	810.9	782.5	761.6
42.5°	949.5	931.0	912.5	893.9	875.4	851.4	822.1	792.6	763.3	733.9	712.4
45°	886.7	867.0	847.4	827.8	808.1	782.9	752.1	721.3	690.5	659.8	638.9
47.5°	825.4	804.7	783.9	763.0	742.2	715.9	684.2	652.3	620.5	588.8	568.1
50°	781.2	760.3	739.5	718.7	697.8	671.3	639.1	606.8	574.5	542.3	522.1
52.5°	737.9	716.1	694.4	672.6	650.8	624.2	592.6	561.1	529.5	498.0	478.5
55°	674.2	651.4	628.5	605.6	582.8	555.5	523.8	492.1	460.5	428.9	411.2
57.5°	609.1	585.7	562.1	538.7	515.2	488.3	457.9	427.4	397.0	366.5	350.4
60°	564.7	541.3	517.8	494.4	470.9	444.1	413.9	383.7	353.4	323.3	308.3
62.5°	521.5	498.0	474.6	451.1	427.7	401.5	372.7	343.9	315.1	286.4	272.1
65°	455.2	431.4	407.8	384.0	360.2	335.2	308.8	282.4	256.0	229.6	219.6
67.5°	391.3	367.8	344.2	320.6	297.0	273.4	249.7	225.9	202.2	178.4	173.8
70°	347.1	324.2	301.3	278.4	255.5	234.0	213.8	193.6	173.3	153.1	150.2
72.5°	304.8	282.8	261.0	239.0	217.1	197.9	181.8	165.5	149.2	133.0	130.5
75°	242.8	222.2	201.7	181.2	160.7	145.4	135.4	125.5	115.5	105.6	103.5
77.5°	181.8	163.8	145.9	127.9	109.8	98.4	93.6	88.8	83.9	79.2	78.0
80°	143.8	128.9	113.9	98.9	84.0	75.1	72.2	69.2	66.3	63.4	62.2
82.5°	109.0	97.3	85.7	74.0	62.3	55.4	53.5	51.5	49.5	47.5	46.8
85°	56.7	50.5	44.4	38.2	32.1	28.6	27.7	26.9	25.9	25.1	25.1
87.5°	17.0	15.4	13.9	12.3	10.7	10.1	10.2	10.5	10.7	10.9	10.8
90°	0.6	2.2	3.6	5.2	6.6	7.9	9.0	10.2	11.2	12.3	13.0
92.5°	12.4	12.3	12.1	12.1	11.9	12.1	12.7	13.2	13.8	14.3	14.6
95°	40.0	35.6	31.0	26.5	22.0	20.1	21.2	22.1	23.1	24.0	24.7
97.5°	79.5	66.7	54.0	41.2	28.5	23.2	25.5	27.7	30.0	32.1	32.7
100°	109.0	90.2	71.5	52.8	34.0	25.8	28.2	30.5	32.8	35.1	36.2
102.5°	141.5	137.6	133.6	129.7	125.6	113.9	94.5	75.0	55.5	36.1	37.5
105°	187.3	191.3	195.4	199.6	203.6	187.0	149.6	112.3	74.9	37.5	39.1
107.5°	239.4	242.6	246.0	249.3	252.6	231.9	187.0	142.2	97.4	52.6	51.1
110°	272.9	275.7	278.6	281.5	284.3	266.0	226.4	186.9	147.3	107.8	94.1



TEST NUMBER: P331750-935

CATALOG NUMBER: S122RDIP-S1005D725U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	304.4	306.9	309.4	312.0	314.5	310.9	301.2	291.4	281.6	271.8	222.0
115°	354.1	356.5	358.8	361.1	363.4	366.4	369.7	373.2	376.6	380.0	316.7
117.5°	398.6	401.2	403.8	406.4	409.0	411.5	413.9	416.2	418.5	420.9	405.6
120°	431.1	433.2	435.2	437.3	439.4	441.6	444.1	446.5	449.0	451.4	453.1
122.5°	458.7	460.9	463.0	465.2	467.4	469.8	472.5	475.2	477.9	480.5	481.5
125°	500.8	502.5	504.3	506.1	507.8	510.1	512.6	515.2	517.8	520.5	521.4
127.5°	538.8	540.8	542.8	544.7	546.6	548.6	550.6	552.5	554.5	556.4	557.8
130°	562.9	565.2	567.3	569.5	571.7	573.5	575.1	576.5	578.1	579.5	581.1
132.5°	587.5	589.4	591.3	593.1	595.0	596.7	598.2	599.7	601.2	602.7	604.0
135°	619.6	621.8	624.0	626.2	628.4	630.1	631.3	632.5	633.8	635.0	636.4
137.5°	652.0	653.5	655.0	656.6	658.1	659.6	661.0	662.4	663.7	665.2	666.5
140°	673.2	674.2	675.4	676.5	677.5	678.9	680.4	681.9	683.4	684.9	686.1
142.5°	691.0	691.9	692.9	693.9	694.8	696.2	697.9	699.6	701.4	703.1	704.2
145°	718.8	718.6	718.5	718.3	718.2	719.3	721.6	723.9	726.3	728.6	729.6
147.5°	743.0	742.5	742.0	741.5	741.0	741.8	744.2	746.4	748.7	751.1	751.7
150°	758.8	757.9	756.9	756.0	754.9	755.6	757.8	759.9	762.2	764.3	765.2
152.5°	772.1	771.0	770.0	768.9	767.8	768.4	770.4	772.5	774.6	776.6	777.5
155°	791.4	790.2	788.9	787.7	786.5	786.7	788.3	790.0	791.6	793.2	794.1
157.5°	806.6	805.6	804.5	803.5	802.5	802.5	803.7	804.8	805.9	807.1	808.0
160°	815.5	814.6	813.8	813.0	812.2	812.2	813.0	813.8	814.6	815.5	816.3
162.5°	823.4	822.5	821.7	820.9	820.0	820.0	820.7	821.4	822.2	822.9	823.8
165°	834.0	833.1	832.3	831.5	830.6	830.4	830.9	831.3	831.6	832.1	833.0
167.5°	841.8	841.0	840.2	839.4	838.5	838.3	838.7	839.0	839.5	839.8	840.8
170°	846.3	845.4	844.6	843.8	843.0	842.7	843.0	843.3	843.5	843.8	844.7
172.5°	849.2	848.3	847.6	846.7	845.9	845.7	845.9	846.2	846.4	846.7	847.7
175°	853.0	852.0	851.1	850.2	849.2	848.9	849.1	849.4	849.6	850.0	850.9
177.5°	853.7	852.9	852.1	851.4	850.6	850.2	850.3	850.5	850.6	850.7	851.4
180°	851.2	851.2	851.2	851.2	851.2	851.2	851.2	851.2	851.2	851.2	851.2



TEST NUMBER: P331750-935

CATALOG NUMBER: S122RDIP-S1005D725U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0
2.5°	1451.1	1453.5	1455.9	1456.7	1456.3	1455.9	1455.3	1454.9
5°	1439.6	1442.3	1444.8	1445.7	1444.8	1444.0	1443.1	1442.3
7.5°	1416.3	1417.0	1417.8	1417.5	1415.9	1414.4	1412.9	1411.4
10°	1392.9	1392.1	1391.2	1389.9	1388.1	1386.4	1384.6	1382.9
12.5°	1366.2	1364.6	1363.0	1360.8	1357.9	1355.0	1352.0	1349.1
15°	1316.3	1310.7	1305.1	1300.9	1298.0	1295.0	1292.1	1289.2
17.5°	1259.8	1253.2	1246.6	1240.7	1235.7	1230.6	1225.5	1220.6
20°	1220.4	1213.1	1205.7	1198.9	1192.4	1185.9	1179.5	1173.0
22.5°	1177.2	1167.7	1158.2	1151.1	1146.3	1141.5	1136.7	1131.9
25°	1105.4	1093.5	1081.4	1073.2	1068.8	1064.4	1060.0	1055.6
27.5°	1037.1	1023.0	1009.0	998.5	991.5	984.6	977.6	970.6
30°	988.8	973.8	958.8	947.4	939.5	931.6	923.7	915.8
32.5°	940.2	923.2	906.0	893.8	886.4	878.9	871.4	864.0
35°	864.3	845.8	827.3	814.9	808.4	801.9	795.5	789.1
37.5°	790.3	770.0	749.6	735.7	728.4	721.0	713.6	706.2
40°	740.8	720.0	699.2	685.0	677.3	669.7	662.1	654.4
42.5°	690.9	669.3	647.8	633.4	625.9	618.5	611.2	603.8
45°	618.1	597.3	576.4	562.6	555.5	548.5	541.4	534.4
47.5°	547.3	526.7	505.9	492.4	486.0	479.7	473.2	466.8
50°	501.9	481.6	461.4	448.2	442.0	435.8	429.7	423.5
52.5°	458.9	439.4	419.9	407.3	401.6	395.9	390.2	384.5
55°	393.6	376.1	358.4	346.9	341.3	335.7	330.2	324.6
57.5°	334.3	318.1	302.0	291.6	287.0	282.2	277.6	272.9
60°	293.3	278.4	263.5	253.7	248.9	244.3	239.5	234.9
62.5°	257.9	243.6	229.4	220.8	218.0	215.2	212.3	209.6
65°	209.7	199.7	189.7	184.3	183.4	182.5	181.7	180.8
67.5°	169.3	164.7	160.1	157.3	156.4	155.5	154.5	153.6
70°	147.2	144.3	141.4	139.3	138.1	136.9	135.8	134.6
72.5°	128.1	125.6	123.1	121.6	120.9	120.2	119.4	118.7
75°	101.4	99.4	97.4	96.2	95.9	95.6	95.3	95.0
77.5°	76.8	75.7	74.5	73.6	73.2	72.8	72.2	71.8
80°	61.0	59.8	58.6	58.0	58.0	58.0	58.0	58.0
82.5°	46.1	45.4	44.7	44.3	44.3	44.3	44.3	44.3
85°	25.1	25.1	25.1	25.1	25.1	25.1	25.1	25.1
87.5°	10.7	10.6	10.5	10.5	10.6	10.6	10.7	10.7
90°	13.7	14.4	15.1	15.5	15.8	16.1	16.4	16.6
92.5°	15.0	15.3	15.7	16.0	16.1	16.3	16.4	16.6
95°	25.4	26.1	26.8	27.0	26.9	26.8	26.6	26.5
97.5°	33.2	33.8	34.4	34.7	34.9	35.0	35.2	35.4
100°	37.3	38.4	39.5	40.2	40.5	40.7	41.0	41.2
102.5°	38.9	40.4	41.8	42.7	43.0	43.5	43.8	44.3
105°	40.6	42.1	43.6	44.6	45.2	45.7	46.2	46.8
107.5°	49.5	48.0	46.5	46.0	46.5	47.1	47.6	48.1
110°	80.4	66.7	53.0	46.5	47.0	47.5	48.1	48.6





TEST NUMBER: P331750-935

CATALOG NUMBER: S122RDIP-S1005D725U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	172.0	122.1	72.2	47.4	47.9	48.3	48.7	49.2
115°	253.3	189.9	126.6	89.9	80.1	70.2	60.4	50.5
117.5°	390.3	374.9	359.6	335.7	303.3	271.0	238.6	206.2
120°	454.8	456.4	458.1	449.6	431.1	412.7	394.2	375.7
122.5°	482.5	483.5	484.5	483.2	479.6	476.0	472.4	468.8
125°	522.4	523.3	524.3	525.0	525.4	525.8	526.2	526.6
127.5°	559.2	560.6	562.0	562.7	562.8	562.9	563.0	563.1
130°	582.6	584.1	585.6	586.3	586.2	586.0	585.8	585.7
132.5°	605.3	606.6	607.9	608.5	608.3	608.2	608.0	607.9
135°	637.7	639.1	640.5	641.0	640.8	640.5	640.2	639.9
137.5°	667.9	669.2	670.5	671.0	670.5	670.0	669.6	669.1
140°	687.3	688.5	689.8	690.1	689.4	688.7	688.0	687.3
142.5°	705.3	706.5	707.6	707.8	707.1	706.5	705.8	705.1
145°	730.6	731.5	732.5	732.5	731.9	731.2	730.6	729.9
147.5°	752.4	753.2	753.9	754.0	753.4	752.8	752.3	751.7
150°	765.9	766.8	767.6	767.7	767.0	766.3	765.6	764.9
152.5°	778.3	779.1	780.0	779.9	779.0	778.1	777.2	776.3
155°	795.0	795.7	796.6	796.4	795.3	794.3	793.2	792.0
157.5°	808.9	809.9	810.8	810.7	809.7	808.6	807.5	806.5
160°	817.1	817.9	818.7	818.6	817.7	816.7	815.8	814.9
162.5°	824.7	825.6	826.6	826.5	825.3	824.1	822.9	821.7
165°	834.0	835.0	835.9	835.9	835.0	834.0	833.0	832.1
167.5°	841.8	842.7	843.7	843.5	842.3	841.1	839.8	838.6
170°	845.7	846.6	847.7	847.5	846.3	845.0	843.8	842.6
172.5°	848.7	849.6	850.6	850.4	849.2	848.0	846.7	845.5
175°	851.9	852.8	853.8	853.6	852.2	850.8	849.5	848.1
177.5°	852.2	853.0	853.8	853.7	852.6	851.7	850.7	849.7
180°	851.2	851.2	851.2	851.2	851.2	851.2	851.2	851.2

(END OF REPORT)