

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331756-935

Luminaire Tested: **S122RDIP-S1005D925U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331756-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIP-S1005D925U935-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 925 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6186.2 lumens
Efficiency: N/A
Efficacy: 92.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 66.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331756-935

CATALOG NUMBER: S122RDIP-S1005D925U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

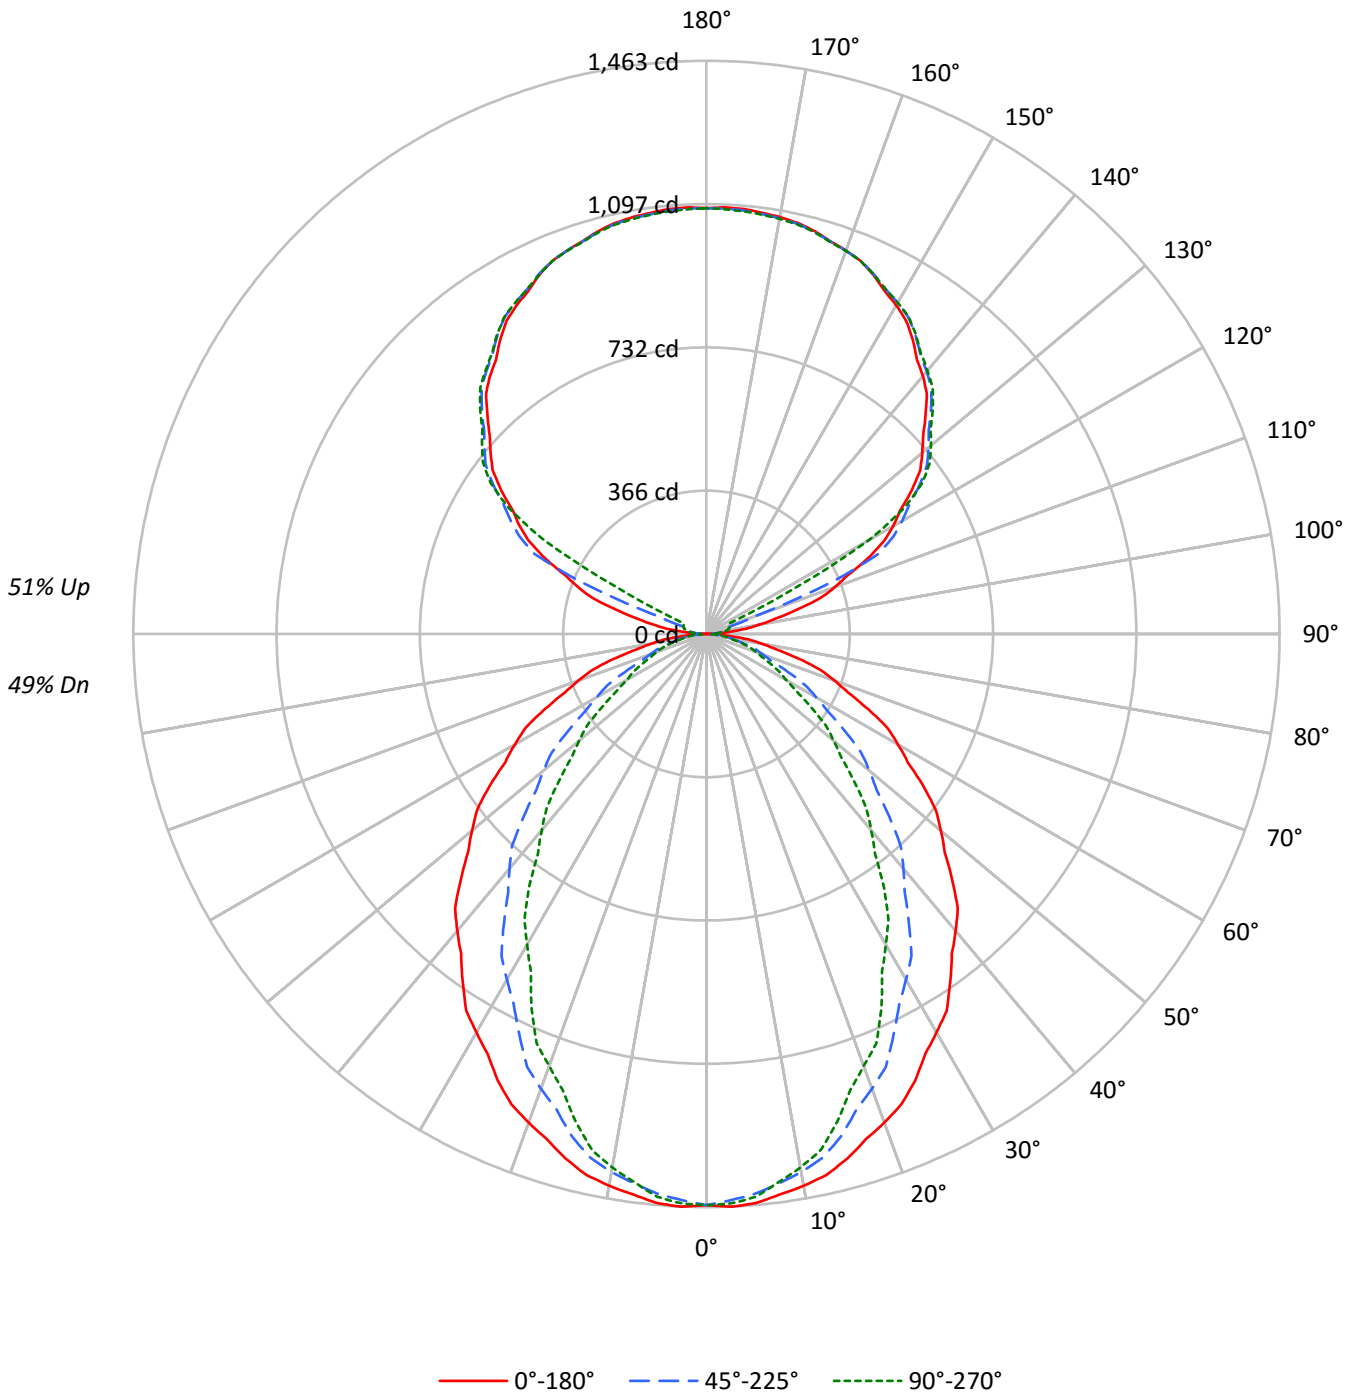



TEST NUMBER: P331756-935

CATALOG NUMBER: S122RDIP-S1005D925U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	83	83	83	68	68	68	55	55	55	49
1	98	94	90	87	90	87	83	80	73	71	69	61	59	58	49	48	47	42
2	90	82	77	72	82	76	71	67	65	61	58	54	51	49	44	42	40	36
3	82	73	66	60	75	67	61	56	57	53	49	48	45	42	39	37	35	31
4	75	65	57	51	69	60	53	48	51	46	42	43	39	36	35	33	30	27
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27	24
6	64	52	44	39	59	49	42	36	42	36	32	35	31	28	29	26	24	21
7	59	47	39	34	54	44	37	32	38	32	29	32	28	25	27	24	21	19
8	55	43	35	30	51	40	33	29	35	29	25	30	25	22	25	22	19	17
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18	15
10	48	36	29	24	44	34	27	23	29	24	21	25	21	18	21	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	23541	23541	23541
5°	23631	23246	23376
10°	23451	22866	22673
15°	23181	22188	21549
20°	22807	21220	20155
25°	22425	20122	18805
30°	21895	18990	17074
35°	21378	17763	15554
40°	20858	16493	13793
45°	20247	15066	12202
50°	19623	13622	10638
55°	18978	12073	9137
60°	18235	10440	7585
65°	17391	8772	6907
70°	16386	7227	6354
75°	15147	6588	5926
80°	13371	5895	5393
85°	10504	4650	4650



TEST NUMBER: P331756-935

CATALOG NUMBER: S122RDIP-S1005D925U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	136.5	2.2
10°-20°	374.7	6.1
20°-30°	526.2	8.5
30°-40°	573.8	9.3
40°-50°	527.6	8.5
50°-60°	414.4	6.7
60°-70°	270.2	4.4
70°-80°	139.3	2.3
80°-90°	38.8	0.6
90°-100°	36.2	0.6
100°-110°	132.9	2.1
110°-120°	355.3	5.7
120°-130°	586.6	9.5
130°-140°	623.8	10.1
140°-150°	579.8	9.4
150°-160°	466.2	7.5
160°-170°	300.4	4.9
170°-180°	103.4	1.7
0°-30°	1037.4	16.8
0°-40°	1611.3	26.0
0°-60°	2553.2	41.3
0°-90°	3001.5	48.5
90°-120°	524.5	8.5
90°-150°	2314.7	37.4
90°-180°	3185.0	51.5
0°-180°	6186.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1458	1458	1458	1458	1458	
5°	1458	1451	1434	1445	1442	138
15°	1387	1371	1327	1303	1289	390
25°	1259	1214	1130	1077	1056	579
35°	1085	1015	901	821	789	678
45°	887	796	660	570	534	684
55°	674	569	429	353	325	602
65°	455	348	230	187	181	451
75°	243	153	106	97	95	257
85°	57	30	25	25	25	67
90°	1	9	16	20	21	5
95°	51	27	31	34	34	63
105°	239	249	48	56	60	255
115°	452	466	485	138	64	445
125°	639	650	664	670	672	570
135°	791	803	811	818	817	611
145°	918	918	930	935	932	574
155°	1010	1004	1013	1017	1011	465
165°	1065	1060	1062	1067	1062	301
175°	1089	1084	1085	1090	1083	104
180°	1087	1087	1087	1087	1087	



TEST NUMBER: P331756-935

CATALOG NUMBER: S122RDIP-S1005D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0
2.5°	1463.4	1462.2	1460.9	1459.8	1458.6	1456.7	1454.1	1451.6	1449.1	1446.5	1448.8
5°	1458.0	1456.6	1455.1	1453.6	1452.2	1449.6	1445.7	1441.9	1438.1	1434.3	1436.9
7.5°	1443.0	1441.2	1439.4	1437.5	1435.7	1432.6	1428.1	1423.7	1419.3	1414.8	1415.6
10°	1430.4	1428.3	1426.2	1424.2	1422.1	1418.2	1412.3	1406.4	1400.6	1394.7	1393.9
12.5°	1414.5	1412.0	1409.5	1407.0	1404.5	1399.4	1391.9	1384.4	1376.9	1369.4	1367.8
15°	1386.8	1383.5	1380.4	1377.1	1373.9	1367.3	1357.4	1347.4	1337.4	1327.4	1321.9
17.5°	1352.7	1347.8	1342.9	1338.0	1333.1	1324.2	1311.4	1298.6	1285.8	1273.1	1266.4
20°	1327.4	1321.5	1315.7	1309.8	1304.0	1293.7	1279.0	1264.4	1249.7	1235.0	1227.7
22.5°	1299.9	1293.4	1286.9	1280.3	1273.7	1262.1	1245.6	1229.1	1212.5	1196.0	1186.5
25°	1258.8	1249.4	1240.0	1230.6	1221.2	1206.9	1187.6	1168.2	1148.8	1129.5	1117.5
27.5°	1209.2	1199.0	1188.8	1178.6	1168.4	1152.4	1130.6	1108.7	1086.9	1065.1	1051.1
30°	1174.4	1163.2	1152.1	1140.9	1129.8	1112.5	1089.0	1065.6	1042.2	1018.6	1003.7
32.5°	1140.6	1127.6	1114.6	1101.6	1088.5	1070.1	1046.1	1022.2	998.2	974.3	957.3
35°	1084.6	1069.7	1054.7	1039.7	1024.8	1004.4	978.6	952.9	927.0	901.2	882.8
37.5°	1028.7	1012.3	995.8	979.4	963.0	941.1	913.5	886.1	858.5	831.0	810.7
40°	989.6	972.1	954.4	936.9	919.3	896.2	867.8	839.4	810.9	782.5	761.6
42.5°	949.5	931.0	912.5	893.9	875.4	851.4	822.1	792.6	763.3	733.9	712.4
45°	886.7	867.0	847.4	827.8	808.1	782.9	752.1	721.3	690.5	659.8	638.9
47.5°	825.4	804.7	783.9	763.0	742.2	715.9	684.2	652.3	620.5	588.8	568.1
50°	781.2	760.3	739.5	718.7	697.8	671.3	639.1	606.8	574.5	542.3	522.1
52.5°	737.9	716.1	694.4	672.6	650.8	624.2	592.6	561.1	529.5	498.0	478.5
55°	674.2	651.4	628.5	605.6	582.8	555.5	523.8	492.1	460.5	428.9	411.2
57.5°	609.1	585.7	562.1	538.7	515.2	488.3	457.9	427.4	397.0	366.5	350.4
60°	564.7	541.3	517.8	494.4	470.9	444.1	413.9	383.7	353.4	323.3	308.3
62.5°	521.5	498.0	474.6	451.1	427.7	401.5	372.7	343.9	315.1	286.4	272.1
65°	455.2	431.4	407.8	384.0	360.2	335.2	308.8	282.4	256.0	229.6	219.6
67.5°	391.3	367.8	344.2	320.6	297.0	273.4	249.7	225.9	202.2	178.4	173.8
70°	347.1	324.2	301.3	278.4	255.5	234.0	213.8	193.6	173.3	153.1	150.2
72.5°	304.8	282.8	261.0	239.0	217.1	197.9	181.8	165.5	149.2	133.0	130.5
75°	242.8	222.2	201.7	181.2	160.7	145.4	135.4	125.5	115.5	105.6	103.5
77.5°	181.8	163.8	145.9	127.9	109.8	98.4	93.6	88.8	83.9	79.2	78.0
80°	143.8	128.9	113.9	98.9	84.0	75.1	72.2	69.2	66.3	63.4	62.2
82.5°	109.0	97.3	85.7	74.0	62.3	55.4	53.5	51.5	49.5	47.5	46.8
85°	56.7	50.5	44.4	38.2	32.1	28.6	27.7	26.9	25.9	25.1	25.1
87.5°	17.0	15.6	14.0	12.6	11.1	10.5	10.8	11.0	11.3	11.6	11.5
90°	0.8	2.7	4.6	6.5	8.4	10.2	11.5	12.9	14.3	15.8	16.6
92.5°	15.8	15.7	15.5	15.3	15.2	15.4	16.2	16.9	17.6	18.3	18.7
95°	51.1	45.4	39.6	33.8	28.1	25.7	27.0	28.2	29.4	30.7	31.5
97.5°	101.4	85.2	69.0	52.7	36.4	29.7	32.5	35.4	38.2	41.1	41.8
100°	139.2	115.2	91.3	67.3	43.4	33.0	35.9	38.9	41.8	44.9	46.2
102.5°	180.7	175.6	170.6	165.5	160.4	145.5	120.6	95.7	70.9	46.1	47.9
105°	239.0	244.3	249.5	254.8	260.0	238.8	191.1	143.4	95.7	48.0	49.9
107.5°	305.6	309.8	314.0	318.2	322.5	296.0	238.8	181.6	124.3	67.2	65.2
110°	348.4	352.1	355.7	359.4	363.0	339.6	289.1	238.6	188.1	137.6	120.1



TEST NUMBER: P331756-935

CATALOG NUMBER: S122RDIP-S1005D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	388.6	391.8	395.1	398.4	401.6	397.0	384.5	372.0	359.6	347.1	283.4
115°	452.1	455.1	458.1	461.1	464.0	467.7	472.1	476.5	480.8	485.2	404.2
117.5°	508.9	512.2	515.6	518.9	522.2	525.4	528.4	531.4	534.4	537.4	517.8
120°	550.4	553.0	555.7	558.3	560.9	563.8	567.0	570.1	573.3	576.4	578.5
122.5°	585.7	588.4	591.2	593.9	596.7	599.8	603.2	606.7	610.1	613.5	614.8
125°	639.3	641.5	643.9	646.1	648.4	651.2	654.5	657.8	661.2	664.4	665.7
127.5°	687.9	690.4	692.9	695.4	697.9	700.4	702.9	705.4	707.9	710.4	712.1
130°	718.8	721.5	724.3	727.1	729.9	732.3	734.2	736.1	738.0	739.9	741.8
132.5°	750.2	752.5	754.9	757.3	759.7	761.8	763.8	765.7	767.6	769.5	771.2
135°	791.1	793.8	796.7	799.4	802.3	804.4	806.0	807.6	809.2	810.7	812.4
137.5°	832.4	834.4	836.4	838.3	840.2	842.1	843.9	845.7	847.5	849.3	850.9
140°	859.5	860.9	862.3	863.7	865.0	866.8	868.7	870.6	872.5	874.4	876.0
142.5°	882.1	883.4	884.7	885.9	887.2	888.9	891.0	893.3	895.5	897.7	899.1
145°	917.7	917.5	917.3	917.1	917.0	918.3	921.4	924.3	927.3	930.2	931.4
147.5°	948.6	948.0	947.4	946.7	946.0	947.1	950.0	953.0	956.0	958.9	959.8
150°	968.8	967.6	966.3	965.1	963.9	964.7	967.5	970.3	973.1	975.9	976.9
152.5°	985.8	984.4	983.0	981.7	980.3	980.9	983.6	986.3	988.9	991.6	992.6
155°	1010.5	1008.9	1007.3	1005.7	1004.2	1004.4	1006.5	1008.7	1010.7	1012.8	1013.8
157.5°	1029.8	1028.5	1027.2	1025.8	1024.5	1024.6	1026.1	1027.5	1029.0	1030.4	1031.7
160°	1041.1	1040.1	1039.1	1037.9	1036.9	1036.9	1037.9	1039.1	1040.1	1041.1	1042.2
162.5°	1051.2	1050.2	1049.1	1048.0	1047.0	1046.9	1047.8	1048.7	1049.6	1050.6	1051.7
165°	1064.7	1063.7	1062.6	1061.5	1060.5	1060.2	1060.8	1061.3	1061.9	1062.4	1063.6
167.5°	1074.8	1073.8	1072.7	1071.6	1070.6	1070.3	1070.8	1071.3	1071.8	1072.3	1073.5
170°	1080.5	1079.3	1078.3	1077.3	1076.2	1075.9	1076.2	1076.6	1076.9	1077.3	1078.5
172.5°	1084.2	1083.1	1082.1	1081.1	1080.0	1079.7	1080.0	1080.4	1080.7	1081.1	1082.3
175°	1089.1	1087.9	1086.7	1085.4	1084.2	1083.7	1084.1	1084.4	1084.8	1085.1	1086.4
177.5°	1089.9	1088.9	1088.0	1086.9	1086.0	1085.5	1085.7	1085.8	1086.0	1086.1	1087.1
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8



TEST NUMBER: P331756-935

CATALOG NUMBER: S122RDIP-S1005D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0
2.5°	1451.1	1453.5	1455.9	1456.7	1456.3	1455.9	1455.3	1454.9
5°	1439.6	1442.3	1444.8	1445.7	1444.8	1444.0	1443.1	1442.3
7.5°	1416.3	1417.0	1417.8	1417.5	1415.9	1414.4	1412.9	1411.4
10°	1392.9	1392.1	1391.2	1389.9	1388.1	1386.4	1384.6	1382.9
12.5°	1366.2	1364.6	1363.0	1360.8	1357.9	1355.0	1352.0	1349.1
15°	1316.3	1310.7	1305.1	1300.9	1298.0	1295.0	1292.1	1289.2
17.5°	1259.8	1253.2	1246.6	1240.7	1235.7	1230.6	1225.5	1220.6
20°	1220.4	1213.1	1205.7	1198.9	1192.4	1185.9	1179.5	1173.0
22.5°	1177.2	1167.7	1158.2	1151.1	1146.3	1141.5	1136.7	1131.9
25°	1105.4	1093.5	1081.4	1073.2	1068.8	1064.4	1060.0	1055.6
27.5°	1037.1	1023.0	1009.0	998.5	991.5	984.6	977.6	970.6
30°	988.8	973.8	958.8	947.4	939.5	931.6	923.7	915.8
32.5°	940.2	923.2	906.0	893.8	886.4	878.9	871.4	864.0
35°	864.3	845.8	827.3	814.9	808.4	801.9	795.5	789.1
37.5°	790.3	770.0	749.6	735.7	728.4	721.0	713.6	706.2
40°	740.8	720.0	699.2	685.0	677.3	669.7	662.1	654.4
42.5°	690.9	669.3	647.8	633.4	625.9	618.5	611.2	603.8
45°	618.1	597.3	576.4	562.6	555.5	548.5	541.4	534.4
47.5°	547.3	526.7	505.9	492.4	486.0	479.7	473.2	466.8
50°	501.9	481.6	461.4	448.2	442.0	435.8	429.7	423.5
52.5°	458.9	439.4	419.9	407.3	401.6	395.9	390.2	384.5
55°	393.6	376.1	358.4	346.9	341.3	335.7	330.2	324.6
57.5°	334.3	318.1	302.0	291.6	287.0	282.2	277.6	272.9
60°	293.3	278.4	263.5	253.7	248.9	244.3	239.5	234.9
62.5°	257.9	243.6	229.4	220.8	218.0	215.2	212.3	209.6
65°	209.7	199.7	189.7	184.3	183.4	182.5	181.7	180.8
67.5°	169.3	164.7	160.1	157.3	156.4	155.5	154.5	153.6
70°	147.2	144.3	141.4	139.3	138.1	136.9	135.8	134.6
72.5°	128.1	125.6	123.1	121.6	120.9	120.2	119.4	118.7
75°	101.4	99.4	97.4	96.2	95.9	95.6	95.3	95.0
77.5°	76.8	75.7	74.5	73.6	73.2	72.8	72.2	71.8
80°	61.0	59.8	58.6	58.0	58.0	58.0	58.0	58.0
82.5°	46.1	45.4	44.7	44.3	44.3	44.3	44.3	44.3
85°	25.1	25.1	25.1	25.1	25.1	25.1	25.1	25.1
87.5°	11.5	11.5	11.4	11.4	11.5	11.5	11.5	11.6
90°	17.5	18.3	19.2	19.8	20.1	20.5	20.9	21.3
92.5°	19.1	19.6	20.1	20.4	20.6	20.8	21.0	21.3
95°	32.4	33.3	34.2	34.5	34.4	34.2	34.0	33.8
97.5°	42.4	43.1	43.8	44.3	44.5	44.7	44.9	45.1
100°	47.6	49.0	50.5	51.3	51.7	52.0	52.3	52.7
102.5°	49.7	51.6	53.4	54.5	55.0	55.4	56.0	56.5
105°	51.8	53.7	55.6	57.0	57.7	58.4	59.1	59.8
107.5°	63.2	61.3	59.3	58.7	59.4	60.1	60.8	61.5
110°	102.6	85.2	67.7	59.3	60.0	60.7	61.4	62.2



TEST NUMBER: P331756-935

CATALOG NUMBER: S122RDIP-S1005D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	219.6	155.8	92.1	60.5	61.0	61.6	62.2	62.8
115°	323.4	242.5	161.5	114.8	102.2	89.6	77.1	64.5
117.5°	498.3	478.7	459.1	428.6	387.3	345.9	304.6	263.3
120°	580.6	582.7	584.8	574.0	550.4	526.8	503.3	479.7
122.5°	616.0	617.3	618.5	616.9	612.3	607.7	603.1	598.6
125°	666.9	668.1	669.3	670.2	670.7	671.2	671.8	672.4
127.5°	713.9	715.7	717.6	718.4	718.6	718.7	718.8	718.8
130°	743.8	745.7	747.6	748.6	748.4	748.1	748.0	747.8
132.5°	772.8	774.5	776.1	776.8	776.6	776.4	776.3	776.1
135°	814.2	816.0	817.7	818.4	818.0	817.7	817.3	817.0
137.5°	852.6	854.4	856.1	856.7	856.1	855.5	854.9	854.3
140°	877.5	879.2	880.7	881.1	880.2	879.3	878.5	877.5
142.5°	900.5	902.0	903.4	903.7	902.8	902.0	901.1	900.2
145°	932.7	933.9	935.1	935.3	934.4	933.6	932.7	931.9
147.5°	960.7	961.6	962.5	962.6	961.8	961.1	960.4	959.7
150°	977.9	979.0	980.1	980.2	979.3	978.4	977.5	976.6
152.5°	993.7	994.7	995.7	995.7	994.5	993.4	992.3	991.1
155°	1014.9	1016.0	1017.0	1016.8	1015.5	1014.0	1012.6	1011.2
157.5°	1032.8	1034.0	1035.2	1035.1	1033.7	1032.3	1031.0	1029.7
160°	1043.2	1044.3	1045.3	1045.3	1044.0	1042.8	1041.6	1040.3
162.5°	1052.9	1054.1	1055.3	1055.2	1053.7	1052.1	1050.7	1049.1
165°	1064.8	1066.0	1067.2	1067.2	1066.0	1064.8	1063.6	1062.4
167.5°	1074.7	1075.9	1077.2	1076.9	1075.4	1073.8	1072.3	1070.7
170°	1079.8	1081.0	1082.2	1082.0	1080.5	1078.8	1077.3	1075.7
172.5°	1083.5	1084.8	1086.0	1085.8	1084.2	1082.6	1081.1	1079.5
175°	1087.6	1088.8	1090.0	1089.8	1088.0	1086.3	1084.5	1082.8
177.5°	1088.0	1089.1	1090.0	1089.9	1088.6	1087.4	1086.1	1084.9
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8

(END OF REPORT)