

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331672-935

Luminaire Tested: **S122RDIP-S485D1080U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331672-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIP-S485D1080U935-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1080 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5171.4 lumens
Efficiency: N/A
Efficacy: 104.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 49.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331672-935

CATALOG NUMBER: S122RDIP-S485D1080U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

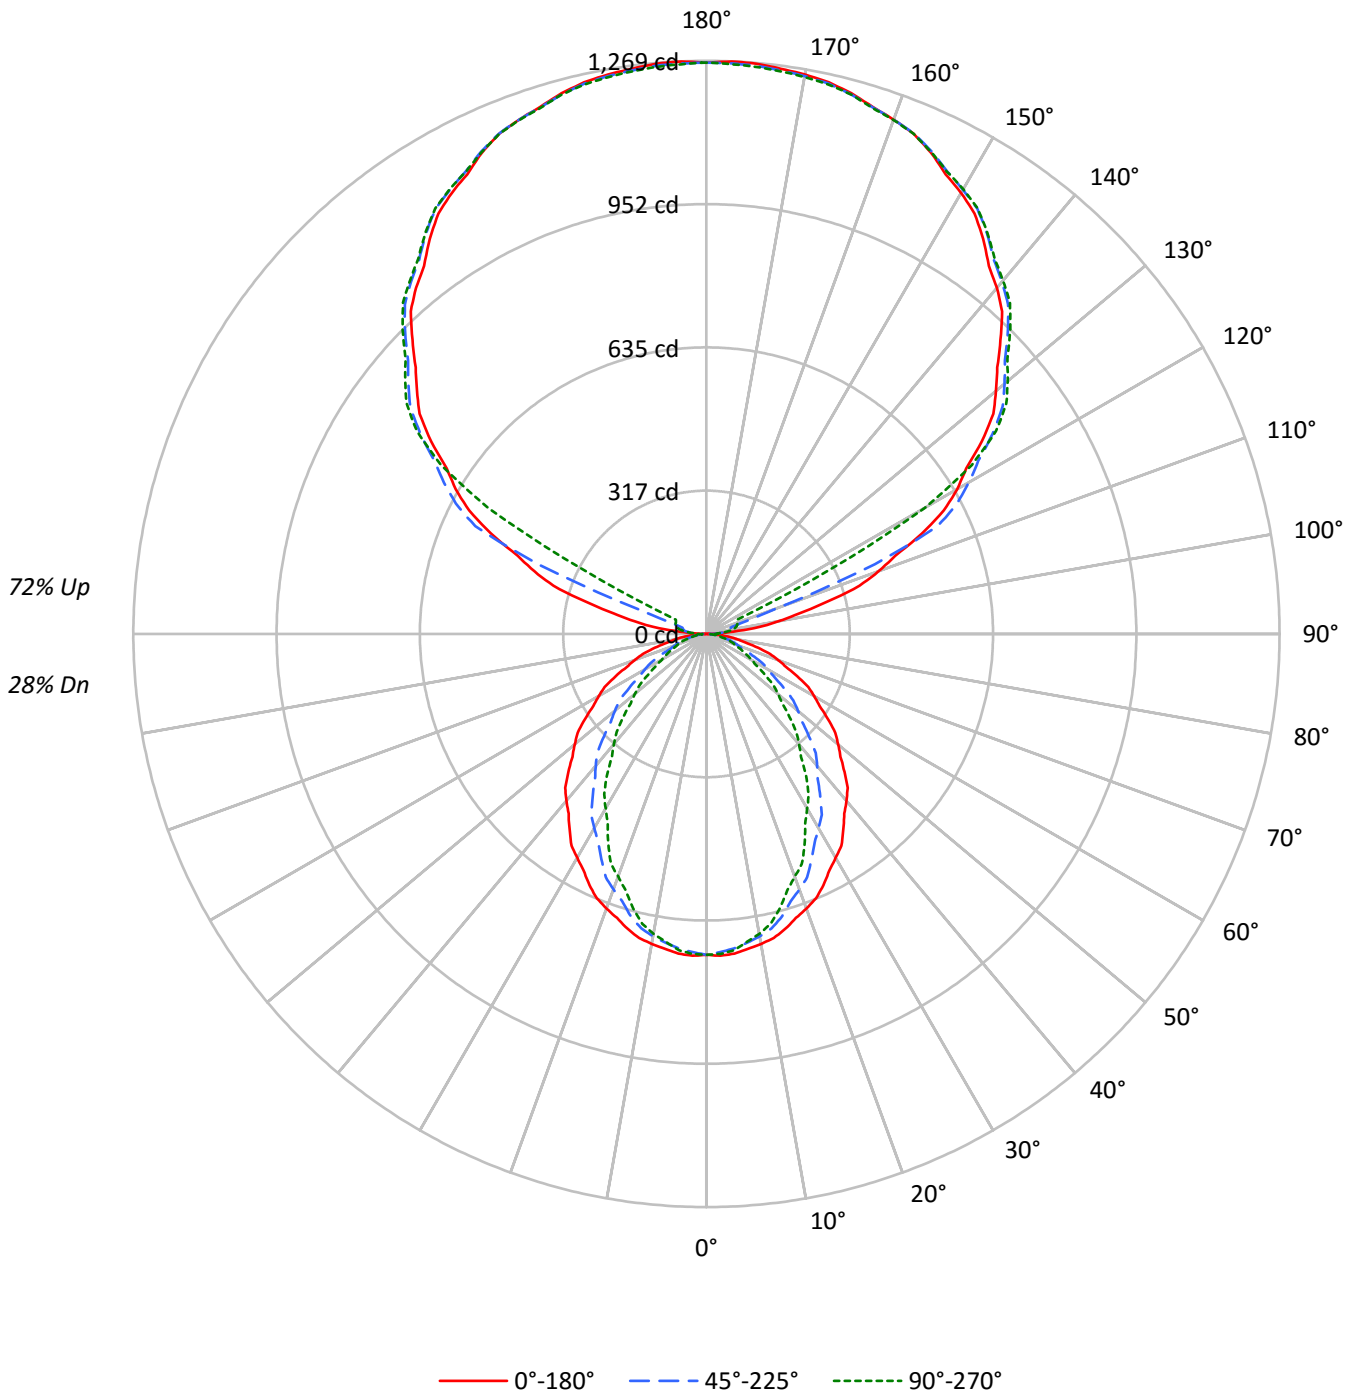



TEST NUMBER: P331672-935

CATALOG NUMBER: S122RDIP-S485D1080U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	28
1	93	89	85	82	83	80	77	74	63	61	59	47	46	44	32	32	31	24
2	85	78	72	67	76	70	65	61	55	52	49	41	39	38	29	28	27	21
3	78	69	62	56	69	62	56	51	49	45	42	37	34	32	26	24	23	18
4	71	61	53	48	63	55	49	44	44	39	36	33	30	28	23	21	20	16
5	65	54	47	41	58	49	42	37	39	34	31	30	26	24	21	19	17	14
6	60	49	41	35	54	44	37	33	35	30	27	27	24	21	19	17	15	12
7	56	44	36	31	50	40	33	29	32	27	24	24	21	19	17	15	14	11
8	51	40	32	27	46	36	30	25	29	24	21	22	19	17	16	14	12	10
9	48	36	29	24	43	33	27	22	27	22	19	21	17	15	15	13	11	9
10	45	33	26	22	40	30	24	20	24	20	17	19	16	13	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11472	11472	11472
5°	11515	11329	11391
10°	11429	11144	11049
15°	11296	10813	10502
20°	11115	10340	9821
25°	10929	9805	9164
30°	10670	9257	8321
35°	10419	8657	7579
40°	10163	8037	6721
45°	9866	7341	5948
50°	9560	6636	5184
55°	9250	5883	4453
60°	8887	5089	3694
65°	8478	4271	3366
70°	7983	3522	3097
75°	7380	3206	2888
80°	6518	2864	2631
85°	5113	2260	2260



TEST NUMBER: P331672-935

CATALOG NUMBER: S122RDIP-S485D1080U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.5	1.3
10°-20°	182.6	3.5
20°-30°	256.4	5.0
30°-40°	279.6	5.4
40°-50°	257.1	5.0
50°-60°	201.9	3.9
60°-70°	131.7	2.5
70°-80°	67.9	1.3
80°-90°	20.7	0.4
90°-100°	42.2	0.8
100°-110°	154.7	3.0
110°-120°	413.6	8.0
120°-130°	682.8	13.2
130°-140°	726.1	14.0
140°-150°	674.9	13.1
150°-160°	542.6	10.5
160°-170°	349.7	6.8
170°-180°	120.4	2.3
0°-30°	505.6	9.8
0°-40°	785.2	15.2
0°-60°	1244.3	24.1
0°-90°	1464.5	28.3
90°-120°	610.5	11.8
90°-150°	2694.3	52.1
90°-180°	3707.0	71.7
0°-180°	5171.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	710	710	710	710	710	
5°	710	707	699	704	703	67
15°	676	668	647	635	628	190
25°	614	592	550	525	514	282
35°	529	494	439	400	384	331
45°	432	388	322	278	260	334
55°	329	277	209	172	158	293
65°	222	169	112	91	88	220
75°	118	75	51	47	46	125
85°	28	15	12	12	12	33
90°	1	11	18	23	25	4
95°	60	31	36	40	39	73
105°	278	290	56	66	70	297
115°	526	542	565	161	75	518
125°	744	756	773	780	783	663
135°	921	935	944	952	951	711
145°	1068	1068	1083	1089	1085	668
155°	1176	1169	1179	1184	1177	542
165°	1239	1234	1237	1242	1237	350
175°	1268	1262	1263	1269	1260	121
180°	1265	1265	1265	1265	1265	



TEST NUMBER: P331672-935

CATALOG NUMBER: S122RDIP-S485D1080U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	710.5	710.5	710.5	710.5	710.5	710.5	710.5	710.5	710.5	710.5	710.5
2.5°	713.1	712.6	712.0	711.4	710.8	709.9	708.7	707.4	706.1	704.9	706.0
5°	710.5	709.8	709.1	708.4	707.7	706.4	704.6	702.7	700.9	699.0	700.3
7.5°	703.2	702.3	701.5	700.5	699.6	698.1	695.9	693.8	691.6	689.5	689.8
10°	697.1	696.0	695.0	694.1	693.0	691.1	688.3	685.4	682.5	679.7	679.2
12.5°	689.3	688.1	686.8	685.6	684.4	682.0	678.3	674.7	671.0	667.4	666.6
15°	675.8	674.2	672.7	671.1	669.5	666.3	661.4	656.6	651.8	646.9	644.2
17.5°	659.3	656.9	654.4	652.0	649.6	645.3	639.1	632.8	626.6	620.4	617.2
20°	646.9	644.0	641.2	638.3	635.4	630.4	623.3	616.1	609.0	601.8	598.3
22.5°	633.5	630.3	627.1	623.9	620.7	615.1	607.0	598.9	590.9	582.8	578.2
25°	613.5	608.9	604.3	599.7	595.1	588.1	578.7	569.3	559.8	550.4	544.6
27.5°	589.3	584.3	579.3	574.4	569.4	561.5	551.0	540.3	529.7	519.0	512.2
30°	572.3	566.9	561.5	556.0	550.6	542.2	530.7	519.3	507.8	496.5	489.1
32.5°	555.9	549.5	543.1	536.8	530.5	521.4	509.8	498.1	486.5	474.8	466.5
35°	528.6	521.2	514.0	506.7	499.4	489.5	476.9	464.3	451.8	439.2	430.2
37.5°	501.3	493.3	485.3	477.3	469.3	458.6	445.2	431.8	418.4	405.0	395.0
40°	482.2	473.7	465.1	456.6	448.0	436.8	422.9	409.1	395.2	381.3	371.2
42.5°	462.7	453.7	444.6	435.7	426.6	414.9	400.6	386.2	372.0	357.7	347.2
45°	432.1	422.6	412.9	403.4	393.8	381.5	366.5	351.5	336.5	321.5	311.3
47.5°	402.3	392.1	382.0	371.9	361.7	348.9	333.4	317.9	302.4	286.9	276.8
50°	380.6	370.5	360.4	350.3	340.1	327.2	311.4	295.8	280.0	264.2	254.4
52.5°	359.6	349.0	338.4	327.8	317.2	304.2	288.8	273.5	258.0	242.7	233.2
55°	328.6	317.5	306.3	295.2	284.0	270.7	255.3	239.9	224.4	209.0	200.4
57.5°	296.8	285.4	274.0	262.5	251.1	238.0	223.2	208.3	193.5	178.7	170.7
60°	275.2	263.8	252.4	240.9	229.5	216.5	201.7	187.0	172.3	157.6	150.2
62.5°	254.1	242.7	231.3	219.8	208.4	195.7	181.7	167.6	153.6	139.6	132.6
65°	221.9	210.3	198.7	187.1	175.6	163.3	150.5	137.6	124.8	111.8	107.0
67.5°	190.7	179.3	167.7	156.3	144.7	133.2	121.7	110.1	98.5	87.0	84.7
70°	169.1	158.0	146.8	135.7	124.5	114.0	104.2	94.3	84.5	74.6	73.2
72.5°	148.5	137.8	127.2	116.5	105.8	96.5	88.6	80.7	72.8	64.8	63.6
75°	118.3	108.3	98.3	88.3	78.3	70.9	66.0	61.1	56.3	51.4	50.5
77.5°	88.6	79.8	71.0	62.3	53.6	48.0	45.6	43.3	40.9	38.6	38.0
80°	70.1	62.8	55.5	48.2	40.9	36.6	35.1	33.8	32.3	30.8	30.3
82.5°	53.1	47.4	41.8	36.1	30.4	27.0	26.1	25.1	24.1	23.2	22.8
85°	27.6	24.6	21.6	18.7	15.7	13.9	13.5	13.1	12.7	12.2	12.2
87.5°	8.4	7.9	7.5	7.0	6.5	6.5	6.8	7.1	7.5	7.7	7.8
90°	0.9	3.2	5.4	7.7	9.9	11.8	13.4	15.1	16.7	18.3	19.3
92.5°	18.5	18.3	18.1	17.9	17.7	18.0	18.8	19.6	20.4	21.3	21.8
95°	59.5	52.8	46.1	39.3	32.6	30.0	31.4	32.9	34.3	35.7	36.7
97.5°	118.0	99.2	80.2	61.3	42.4	34.6	37.9	41.2	44.5	47.8	48.6
100°	162.0	134.1	106.2	78.4	50.5	38.3	41.8	45.3	48.7	52.2	53.8
102.5°	210.3	204.4	198.5	192.6	186.8	169.4	140.4	111.5	82.6	53.6	55.8
105°	278.3	284.4	290.4	296.5	302.6	277.9	222.4	166.9	111.3	55.8	58.0
107.5°	355.7	360.6	365.5	370.4	375.4	344.6	277.9	211.4	144.7	78.2	75.9
110°	405.4	409.7	414.1	418.3	422.6	395.3	336.5	277.8	219.0	160.1	139.8



TEST NUMBER: P331672-935

CATALOG NUMBER: S122RDIP-S485D1080U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	452.4	456.2	459.9	463.6	467.4	462.1	447.5	433.1	418.5	404.0	329.8
115°	526.3	529.8	533.2	536.7	540.1	544.4	549.5	554.6	559.6	564.7	470.5
117.5°	592.4	596.2	600.1	604.0	607.9	611.5	615.0	618.5	622.0	625.5	602.7
120°	640.7	643.8	646.8	649.9	652.9	656.3	660.0	663.6	667.3	670.9	673.3
122.5°	681.7	684.9	688.1	691.4	694.6	698.2	702.1	706.1	710.2	714.1	715.6
125°	744.2	746.7	749.4	752.1	754.7	757.9	761.8	765.7	769.6	773.4	774.8
127.5°	800.7	803.7	806.6	809.5	812.4	815.3	818.2	821.0	824.0	826.9	829.0
130°	836.5	839.8	843.1	846.4	849.5	852.3	854.5	856.8	859.0	861.3	863.5
132.5°	873.1	876.0	878.7	881.5	884.2	886.7	889.0	891.2	893.5	895.7	897.6
135°	920.8	924.0	927.3	930.6	933.8	936.3	938.1	940.0	941.8	943.7	945.7
137.5°	968.9	971.2	973.4	975.8	978.0	980.2	982.3	984.4	986.4	988.5	990.5
140°	1000.4	1002.0	1003.7	1005.3	1006.9	1008.8	1011.1	1013.3	1015.5	1017.8	1019.6
142.5°	1026.7	1028.2	1029.7	1031.1	1032.6	1034.7	1037.2	1039.7	1042.3	1044.9	1046.5
145°	1068.2	1067.9	1067.7	1067.6	1067.3	1068.9	1072.4	1075.8	1079.3	1082.8	1084.2
147.5°	1104.2	1103.5	1102.7	1101.9	1101.1	1102.4	1105.9	1109.2	1112.7	1116.1	1117.1
150°	1127.7	1126.2	1124.8	1123.3	1122.0	1122.8	1126.1	1129.4	1132.6	1135.8	1137.1
152.5°	1147.4	1145.8	1144.2	1142.6	1141.1	1141.8	1144.9	1148.0	1151.1	1154.2	1155.4
155°	1176.1	1174.3	1172.5	1170.6	1168.8	1169.2	1171.6	1174.0	1176.5	1178.9	1180.1
157.5°	1198.7	1197.1	1195.6	1194.0	1192.5	1192.6	1194.3	1195.9	1197.7	1199.4	1200.8
160°	1211.9	1210.7	1209.4	1208.2	1206.9	1206.9	1208.2	1209.4	1210.7	1211.9	1213.1
162.5°	1223.6	1222.4	1221.1	1219.9	1218.7	1218.6	1219.6	1220.7	1221.8	1222.8	1224.2
165°	1239.3	1238.0	1236.8	1235.6	1234.4	1234.1	1234.7	1235.4	1236.0	1236.6	1237.9
167.5°	1251.0	1249.8	1248.5	1247.3	1246.1	1245.8	1246.4	1246.9	1247.5	1248.1	1249.5
170°	1257.6	1256.4	1255.2	1254.0	1252.8	1252.3	1252.8	1253.1	1253.5	1254.0	1255.3
172.5°	1262.0	1260.8	1259.6	1258.4	1257.1	1256.7	1257.1	1257.5	1257.9	1258.4	1259.7
175°	1267.7	1266.3	1264.8	1263.4	1262.0	1261.5	1261.9	1262.3	1262.7	1263.1	1264.6
177.5°	1268.6	1267.5	1266.3	1265.2	1264.0	1263.5	1263.7	1263.9	1264.0	1264.2	1265.3
180°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9



TEST NUMBER: P331672-935

CATALOG NUMBER: S122RDIP-S485D1080U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	710.5	710.5	710.5	710.5	710.5	710.5	710.5	710.5
2.5°	707.1	708.3	709.5	709.9	709.7	709.5	709.2	709.0
5°	701.5	702.8	704.1	704.6	704.1	703.7	703.3	702.8
7.5°	690.2	690.5	691.0	690.8	690.0	689.2	688.5	687.8
10°	678.8	678.4	678.0	677.3	676.5	675.6	674.8	673.9
12.5°	665.8	665.0	664.3	663.1	661.7	660.3	658.8	657.5
15°	641.4	638.8	636.0	634.0	632.5	631.1	629.6	628.3
17.5°	613.9	610.7	607.4	604.6	602.2	599.7	597.3	594.8
20°	594.7	591.2	587.5	584.2	581.1	577.9	574.8	571.6
22.5°	573.6	569.0	564.5	560.9	558.6	556.3	554.0	551.6
25°	538.7	532.9	527.0	523.0	520.8	518.7	516.6	514.4
27.5°	505.4	498.5	491.7	486.6	483.2	479.8	476.4	473.0
30°	481.8	474.6	467.3	461.7	457.8	454.0	450.1	446.3
32.5°	458.1	449.9	441.5	435.6	432.0	428.3	424.6	421.0
35°	421.2	412.2	403.2	397.1	394.0	390.8	387.7	384.5
37.5°	385.1	375.2	365.3	358.5	355.0	351.4	347.8	344.1
40°	361.0	350.9	340.7	333.8	330.1	326.4	322.6	318.9
42.5°	336.7	326.1	315.7	308.7	305.1	301.4	297.8	294.2
45°	301.2	291.1	280.9	274.1	270.7	267.3	263.8	260.5
47.5°	266.7	256.7	246.6	240.0	236.9	233.8	230.6	227.5
50°	244.5	234.7	224.8	218.4	215.4	212.4	209.4	206.4
52.5°	223.6	214.1	204.6	198.5	195.7	193.0	190.1	187.4
55°	191.8	183.2	174.7	169.0	166.3	163.6	160.9	158.2
57.5°	162.9	155.1	147.2	142.2	139.8	137.6	135.3	132.9
60°	142.9	135.7	128.4	123.6	121.3	119.0	116.8	114.4
62.5°	125.6	118.7	111.8	107.6	106.2	104.9	103.5	102.1
65°	102.2	97.3	92.5	89.8	89.4	88.9	88.5	88.1
67.5°	82.5	80.2	78.0	76.7	76.2	75.8	75.3	74.8
70°	71.7	70.3	68.9	67.8	67.3	66.7	66.1	65.6
72.5°	62.4	61.2	60.0	59.2	58.9	58.5	58.2	57.9
75°	49.4	48.5	47.4	46.8	46.8	46.6	46.4	46.3
77.5°	37.5	36.9	36.3	35.9	35.6	35.5	35.2	35.0
80°	29.7	29.2	28.6	28.3	28.3	28.3	28.3	28.3
82.5°	22.5	22.1	21.8	21.6	21.6	21.6	21.6	21.6
85°	12.2	12.2	12.2	12.2	12.2	12.2	12.2	12.2
87.5°	7.9	8.0	8.1	8.2	8.3	8.4	8.4	8.5
90°	20.3	21.4	22.4	23.1	23.5	23.9	24.3	24.7
92.5°	22.3	22.8	23.3	23.8	24.0	24.2	24.5	24.7
95°	37.7	38.7	39.8	40.2	40.0	39.8	39.5	39.3
97.5°	49.4	50.2	51.1	51.6	51.8	52.1	52.3	52.5
100°	55.4	57.1	58.7	59.7	60.1	60.5	61.0	61.3
102.5°	57.9	60.0	62.1	63.5	64.0	64.6	65.2	65.7
105°	60.3	62.5	64.7	66.3	67.2	67.9	68.7	69.6
107.5°	73.6	71.3	69.1	68.4	69.1	69.9	70.8	71.5
110°	119.5	99.2	78.8	69.1	69.8	70.7	71.5	72.3



TEST NUMBER: P331672-935

CATALOG NUMBER: S122RDIP-S485D1080U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	255.6	181.4	107.2	70.4	71.1	71.7	72.4	73.0
115°	376.3	282.2	188.0	133.6	119.0	104.4	89.7	75.1
117.5°	580.0	557.2	534.4	498.9	450.8	402.7	354.6	306.4
120°	675.8	678.2	680.7	668.1	640.7	613.2	585.7	558.4
122.5°	717.0	718.5	720.0	718.0	712.7	707.4	702.1	696.7
125°	776.3	777.7	779.1	780.2	780.8	781.4	782.0	782.6
127.5°	831.0	833.1	835.2	836.3	836.4	836.5	836.6	836.7
130°	865.7	868.0	870.2	871.2	871.1	870.8	870.6	870.5
132.5°	899.5	901.5	903.4	904.2	904.0	903.8	903.6	903.4
135°	947.7	949.8	951.7	952.6	952.2	951.7	951.4	951.0
137.5°	992.5	994.5	996.4	997.1	996.4	995.7	995.1	994.4
140°	1021.5	1023.3	1025.1	1025.5	1024.5	1023.5	1022.4	1021.5
142.5°	1048.2	1049.9	1051.5	1051.9	1050.9	1049.8	1048.9	1047.8
145°	1085.6	1087.0	1088.5	1088.6	1087.7	1086.7	1085.6	1084.6
147.5°	1118.2	1119.3	1120.3	1120.4	1119.6	1118.7	1117.8	1117.0
150°	1138.3	1139.5	1140.7	1140.8	1139.8	1138.8	1137.8	1136.8
152.5°	1156.6	1157.9	1159.1	1159.0	1157.6	1156.3	1154.9	1153.7
155°	1181.3	1182.6	1183.8	1183.5	1181.9	1180.3	1178.7	1177.1
157.5°	1202.1	1203.5	1204.9	1204.8	1203.2	1201.6	1200.1	1198.4
160°	1214.3	1215.5	1216.7	1216.6	1215.2	1213.8	1212.4	1210.9
162.5°	1225.5	1226.9	1228.4	1228.1	1226.4	1224.7	1222.9	1221.2
165°	1239.4	1240.8	1242.3	1242.3	1240.8	1239.4	1237.9	1236.6
167.5°	1250.9	1252.3	1253.8	1253.5	1251.7	1249.9	1248.1	1246.2
170°	1256.8	1258.2	1259.6	1259.4	1257.6	1255.8	1254.0	1252.1
172.5°	1261.2	1262.6	1264.0	1263.9	1262.0	1260.2	1258.4	1256.5
175°	1265.9	1267.4	1268.8	1268.5	1266.4	1264.4	1262.4	1260.3
177.5°	1266.4	1267.6	1268.8	1268.6	1267.1	1265.7	1264.2	1262.7
180°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9

(END OF REPORT)