

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331282-840

Luminaire Tested: **S122DIP-S290D1080U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331282-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S290D1080U840-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5565.2 lumens
Efficiency: N/A
Efficacy: 131.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 42.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331282-840
CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

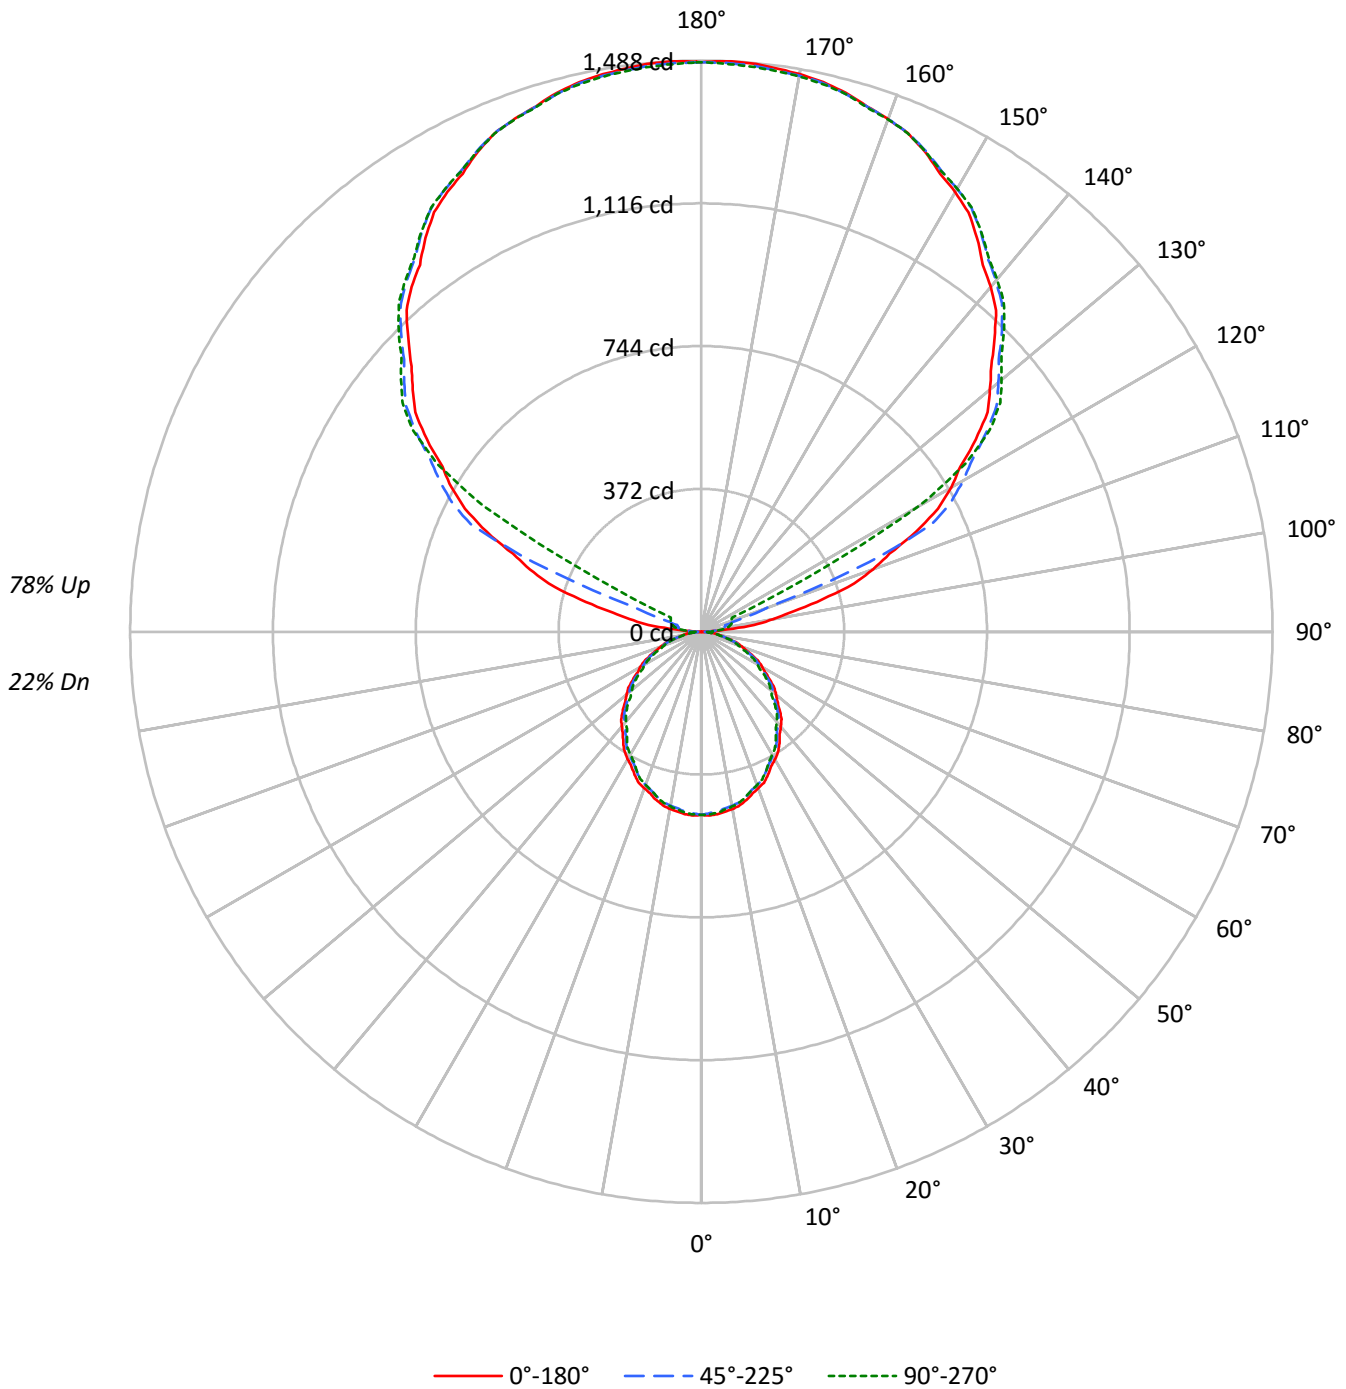



TEST NUMBER: P331282-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	100	100	100	100	89	89	89	89	68	68	68	48	48	48	30	30	30	22				
1	91	87	84	80	81	78	74	72	59	57	55	42	41	40	27	26	25	18				
2	83	76	70	65	74	68	63	59	52	49	46	37	35	33	23	22	21	15				
3	76	67	60	54	67	59	54	49	46	42	38	33	30	28	21	19	18	13				
4	69	59	52	46	61	53	46	41	40	36	33	29	26	24	19	17	16	11				
5	63	52	45	39	56	47	40	35	36	31	28	26	23	21	17	15	14	10				
6	58	47	39	34	51	42	35	30	32	28	24	23	20	18	15	13	12	9				
7	54	42	35	29	47	38	31	26	29	24	21	21	18	16	14	12	11	8				
8	50	38	31	26	44	34	28	23	26	22	19	19	16	14	13	11	9	7				
9	46	35	27	23	41	31	25	21	24	20	16	18	15	12	12	10	8	6				
10	43	32	25	20	38	28	22	18	22	18	15	16	13	11	11	9	8	6				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7703	7703	7703
5°	7733	7621	7666
10°	7688	7543	7581
15°	7590	7447	7438
20°	7455	7301	7290
25°	7322	7119	7119
30°	7150	6952	6893
35°	6991	6753	6654
40°	6787	6555	6431
45°	6588	6357	6202
50°	6373	6154	5935
55°	6145	5917	5695
60°	5896	5628	5422
65°	5624	5349	5100
70°	5282	4999	4763
75°	4810	4604	4492
80°	4258	4138	3924
85°	3483	3316	2983



TEST NUMBER: P331282-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.9	0.8
10°-20°	126.2	2.3
20°-30°	185.5	3.3
30°-40°	215.5	3.9
40°-50°	215.3	3.9
50°-60°	187.7	3.4
60°-70°	138.8	2.5
70°-80°	78.6	1.4
80°-90°	24.8	0.4
90°-100°	49.5	0.9
100°-110°	181.5	3.3
110°-120°	485.1	8.7
120°-130°	800.8	14.4
130°-140°	851.6	15.3
140°-150°	791.6	14.2
150°-160°	636.4	11.4
160°-170°	410.1	7.4
170°-180°	141.2	2.5
0°-30°	356.6	6.4
0°-40°	572.2	10.3
0°-60°	975.2	17.5
0°-90°	1217.4	21.9
90°-120°	716.1	12.9
90°-150°	3160.1	56.8
90°-180°	4348.0	78.1
0°-180°	5565.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	477	477	477	477	477	
5°	477	475	470	474	473	45
15°	454	451	446	447	445	128
25°	411	407	400	400	400	189
35°	355	350	343	340	338	221
45°	288	285	278	274	272	223
55°	218	215	210	205	202	195
65°	147	144	140	136	134	146
75°	77	76	74	71	72	82
85°	19	18	18	17	16	22
90°	1	13	22	27	29	4
95°	70	37	42	47	46	85
105°	326	340	65	77	82	349
115°	617	636	662	189	88	608
125°	873	887	907	914	918	778
135°	1080	1097	1107	1117	1115	834
145°	1253	1253	1270	1277	1272	783
155°	1380	1371	1383	1388	1381	635
165°	1454	1448	1450	1457	1450	410
175°	1487	1480	1482	1488	1478	141
180°	1484	1484	1484	1484	1484	



TEST NUMBER: P331282-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1
2.5°	479.3	478.9	478.5	478.1	477.7	477.1	476.2	475.2	474.3	473.4	474.2
5°	477.1	476.7	476.3	475.8	475.4	474.7	473.6	472.5	471.3	470.2	471.0
7.5°	472.9	472.2	471.6	471.0	470.4	469.5	468.4	467.2	466.1	464.9	465.7
10°	468.9	468.2	467.5	466.8	466.0	465.0	463.8	462.6	461.4	460.1	460.9
12.5°	463.3	462.7	462.1	461.4	460.8	459.9	458.7	457.5	456.3	455.0	455.6
15°	454.1	453.5	452.9	452.3	451.7	450.8	449.4	448.1	446.8	445.5	445.9
17.5°	442.4	441.8	441.2	440.6	440.0	439.0	437.7	436.3	434.9	433.6	434.0
20°	433.9	433.3	432.7	432.1	431.5	430.5	429.1	427.7	426.3	424.9	425.2
22.5°	425.6	424.6	423.8	422.9	422.1	421.0	419.7	418.3	417.0	415.7	415.7
25°	411.0	410.2	409.4	408.6	407.8	406.5	404.8	403.0	401.3	399.6	399.8
27.5°	394.6	393.8	393.0	392.3	391.6	390.5	389.2	387.8	386.5	385.1	384.8
30°	383.5	382.7	381.9	381.1	380.2	379.1	377.6	376.1	374.5	372.9	372.6
32.5°	371.7	371.1	370.5	369.8	369.2	368.0	366.4	364.9	363.2	361.6	361.0
35°	354.7	353.6	352.5	351.5	350.5	349.2	347.6	346.0	344.4	342.6	342.0
37.5°	335.3	334.4	333.5	332.5	331.6	330.4	328.8	327.2	325.5	323.9	323.2
40°	322.0	321.2	320.4	319.6	318.8	317.6	315.9	314.3	312.7	311.0	310.1
42.5°	309.2	308.4	307.6	306.8	306.0	304.7	303.1	301.4	299.8	298.2	297.2
45°	288.5	287.8	287.1	286.4	285.7	284.6	283.1	281.6	280.0	278.4	277.3
47.5°	268.0	267.3	266.7	266.0	265.3	264.2	262.6	261.1	259.4	257.8	256.6
50°	253.7	253.2	252.7	252.2	251.7	250.6	249.2	247.8	246.4	245.0	243.6
52.5°	239.7	239.0	238.4	237.7	237.0	236.0	234.7	233.4	232.0	230.7	229.4
55°	218.3	217.7	217.1	216.5	215.9	215.0	213.8	212.6	211.4	210.2	208.8
57.5°	196.9	196.4	195.9	195.4	194.9	194.0	192.7	191.4	190.0	188.6	187.4
60°	182.6	182.2	181.8	181.4	181.0	180.1	178.6	177.2	175.7	174.3	173.2
62.5°	168.6	167.9	167.3	166.7	166.0	165.1	164.0	163.0	161.9	160.8	159.7
65°	147.2	146.6	146.0	145.4	144.8	144.0	143.0	142.0	141.0	140.0	139.0
67.5°	125.5	125.0	124.5	124.0	123.6	122.9	121.9	121.0	120.1	119.2	118.5
70°	111.9	111.5	111.1	110.7	110.3	109.7	108.8	107.9	106.8	105.9	105.2
72.5°	98.0	97.6	97.1	96.7	96.3	95.8	95.2	94.7	94.1	93.5	92.8
75°	77.1	76.9	76.6	76.4	76.2	75.9	75.4	74.8	74.3	73.8	73.2
77.5°	58.4	58.0	57.7	57.4	57.0	56.7	56.5	56.2	56.0	55.8	55.5
80°	45.8	45.7	45.6	45.5	45.4	45.3	45.1	44.9	44.7	44.5	44.2
82.5°	34.1	34.1	34.1	34.0	34.0	33.9	33.8	33.7	33.6	33.5	33.1
85°	18.8	18.7	18.6	18.5	18.4	18.3	18.2	18.1	18.0	17.9	17.6
87.5°	6.9	7.2	7.6	7.9	8.3	8.6	8.8	9.0	9.2	9.4	9.4
90°	1.1	3.7	6.4	9.0	11.6	13.8	15.8	17.7	19.6	21.5	22.6
92.5°	21.7	21.4	21.2	21.0	20.7	21.1	22.0	23.0	23.9	24.9	25.5
95°	69.8	61.9	54.0	46.2	38.3	35.1	36.9	38.6	40.2	41.9	43.0
97.5°	138.5	116.3	94.1	71.9	49.8	40.6	44.4	48.3	52.2	56.0	57.0
100°	190.1	157.3	124.6	92.0	59.3	44.9	49.0	53.1	57.2	61.2	63.1
102.5°	246.7	239.7	232.9	225.9	219.0	198.6	164.7	130.8	96.8	62.9	65.4
105°	326.4	333.6	340.6	347.8	355.0	326.0	260.8	195.7	130.6	65.4	68.1
107.5°	417.2	422.9	428.7	434.4	440.3	404.1	326.0	247.9	169.8	91.7	89.0
110°	475.5	480.6	485.6	490.6	495.6	463.6	394.7	325.8	256.8	187.8	164.0



TEST NUMBER: P331282-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	530.6	535.0	539.4	543.8	548.3	542.0	524.9	508.0	490.9	473.8	386.9
115°	617.3	621.4	625.4	629.4	633.5	638.5	644.5	650.5	656.4	662.4	551.9
117.5°	694.8	699.3	703.9	708.4	713.0	717.2	721.3	725.5	729.5	733.7	706.9
120°	751.4	755.1	758.6	762.2	765.8	769.7	774.1	778.3	782.6	786.9	789.7
122.5°	799.6	803.3	807.1	810.9	814.7	818.9	823.5	828.2	832.9	837.6	839.3
125°	872.8	875.9	879.0	882.1	885.1	889.0	893.5	898.1	902.6	907.2	908.8
127.5°	939.2	942.6	946.0	949.5	952.9	956.2	959.7	963.0	966.4	969.9	972.3
130°	981.2	985.0	988.9	992.7	996.4	999.7	1002.3	1004.9	1007.5	1010.2	1012.8
132.5°	1024.1	1027.4	1030.7	1033.9	1037.1	1040.1	1042.7	1045.3	1047.9	1050.6	1052.8
135°	1079.9	1083.8	1087.6	1091.5	1095.2	1098.2	1100.3	1102.5	1104.7	1106.8	1109.2
137.5°	1136.4	1139.1	1141.8	1144.5	1147.1	1149.6	1152.2	1154.6	1157.0	1159.4	1161.7
140°	1173.4	1175.3	1177.2	1179.1	1181.0	1183.3	1185.9	1188.5	1191.1	1193.8	1195.9
142.5°	1204.3	1206.0	1207.7	1209.4	1211.1	1213.6	1216.5	1219.5	1222.5	1225.6	1227.5
145°	1252.8	1252.5	1252.3	1252.1	1251.8	1253.7	1257.8	1261.8	1266.0	1270.0	1271.6
147.5°	1295.2	1294.2	1293.3	1292.4	1291.5	1293.0	1297.1	1301.0	1305.0	1309.1	1310.3
150°	1322.6	1320.9	1319.3	1317.6	1316.0	1317.0	1320.8	1324.6	1328.5	1332.2	1333.7
152.5°	1345.7	1343.9	1342.0	1340.2	1338.4	1339.2	1342.8	1346.5	1350.1	1353.7	1355.1
155°	1379.5	1377.4	1375.2	1373.0	1370.9	1371.3	1374.1	1377.0	1379.9	1382.7	1384.1
157.5°	1405.9	1404.1	1402.3	1400.5	1398.7	1398.8	1400.8	1402.7	1404.7	1406.7	1408.4
160°	1421.4	1420.0	1418.5	1417.0	1415.6	1415.6	1417.0	1418.5	1420.0	1421.4	1422.8
162.5°	1435.1	1433.7	1432.2	1430.8	1429.4	1429.3	1430.5	1431.8	1433.0	1434.2	1435.8
165°	1453.6	1452.1	1450.7	1449.3	1447.8	1447.4	1448.1	1449.0	1449.7	1450.4	1452.0
167.5°	1467.3	1465.9	1464.4	1463.0	1461.6	1461.2	1461.9	1462.5	1463.2	1463.9	1465.5
170°	1475.0	1473.6	1472.2	1470.8	1469.4	1468.8	1469.4	1469.8	1470.3	1470.8	1472.4
172.5°	1480.2	1478.7	1477.3	1475.9	1474.5	1474.0	1474.5	1474.9	1475.4	1475.9	1477.5
175°	1486.8	1485.2	1483.5	1481.9	1480.2	1479.6	1480.1	1480.6	1481.0	1481.5	1483.2
177.5°	1487.9	1486.6	1485.2	1483.9	1482.6	1482.0	1482.2	1482.4	1482.6	1482.8	1484.1
180°	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6



TEST NUMBER: P331282-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1
2.5°	475.0	475.8	476.7	477.1	476.9	476.7	476.6	476.4
5°	471.9	472.7	473.5	473.8	473.6	473.4	473.2	473.0
7.5°	466.6	467.4	468.2	468.5	468.3	468.0	467.8	467.6
10°	461.8	462.6	463.4	463.6	463.3	463.0	462.7	462.4
12.5°	456.2	456.7	457.3	457.5	457.3	457.0	456.8	456.6
15°	446.3	446.7	447.1	447.1	446.6	446.1	445.6	445.0
17.5°	434.5	435.0	435.5	435.5	434.9	434.5	434.0	433.5
20°	425.5	425.8	426.1	426.0	425.6	425.2	424.7	424.3
22.5°	415.8	415.9	415.9	415.8	415.6	415.3	415.1	414.9
25°	400.0	400.2	400.4	400.4	400.2	400.0	399.8	399.6
27.5°	384.5	384.2	383.8	383.4	382.9	382.4	382.0	381.5
30°	372.3	372.0	371.7	371.4	371.0	370.6	370.2	369.7
32.5°	360.5	359.9	359.4	358.9	358.5	358.1	357.7	357.3
35°	341.4	340.8	340.2	339.7	339.2	338.7	338.2	337.6
37.5°	322.3	321.6	320.8	320.2	319.7	319.2	318.8	318.3
40°	309.2	308.3	307.4	306.7	306.3	305.9	305.5	305.1
42.5°	296.2	295.2	294.2	293.4	292.9	292.3	291.8	291.1
45°	276.2	275.1	274.0	273.2	272.8	272.4	272.0	271.6
47.5°	255.5	254.3	253.1	252.2	251.7	251.1	250.4	249.8
50°	242.2	240.7	239.2	238.3	237.8	237.3	236.8	236.3
52.5°	228.3	227.1	225.9	225.0	224.3	223.7	223.0	222.3
55°	207.6	206.4	205.2	204.4	203.9	203.3	202.8	202.3
57.5°	186.2	185.0	183.8	183.0	182.7	182.3	181.9	181.5
60°	172.1	171.0	169.9	169.2	168.8	168.5	168.2	167.9
62.5°	158.6	157.6	156.6	155.9	155.5	155.1	154.7	154.3
65°	138.0	137.1	136.2	135.5	135.0	134.5	134.0	133.5
67.5°	117.8	117.0	116.3	115.7	115.3	114.9	114.5	114.1
70°	104.5	103.8	103.1	102.6	102.2	101.7	101.3	100.9
72.5°	92.1	91.4	90.7	90.1	89.8	89.5	89.2	88.8
75°	72.6	72.0	71.4	71.2	71.4	71.6	71.8	72.0
77.5°	55.2	54.9	54.6	54.3	54.0	53.8	53.5	53.2
80°	43.9	43.6	43.3	43.0	42.8	42.6	42.4	42.2
82.5°	32.7	32.3	31.9	31.7	31.7	31.6	31.6	31.6
85°	17.3	17.0	16.7	16.5	16.4	16.3	16.2	16.1
87.5°	9.4	9.4	9.4	9.4	9.4	9.4	9.5	9.5
90°	23.8	25.0	26.3	27.1	27.6	28.1	28.5	29.0
92.5°	26.2	26.8	27.4	27.9	28.2	28.4	28.7	29.0
95°	44.2	45.4	46.7	47.2	46.9	46.7	46.4	46.2
97.5°	58.0	58.9	59.9	60.5	60.8	61.1	61.3	61.6
100°	65.0	67.0	68.9	70.0	70.5	71.0	71.5	71.9
102.5°	67.9	70.4	72.8	74.4	75.0	75.7	76.4	77.1
105°	70.7	73.3	75.9	77.8	78.8	79.7	80.6	81.6
107.5°	86.3	83.6	81.0	80.2	81.1	82.0	83.0	83.9
110°	140.2	116.3	92.4	81.0	81.9	82.9	83.8	84.8



TEST NUMBER: P331282-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	299.8	212.8	125.7	82.6	83.4	84.1	84.9	85.6
115°	441.4	331.0	220.6	156.7	139.6	122.4	105.2	88.1
117.5°	680.2	653.5	626.8	585.2	528.8	472.3	415.9	359.4
120°	792.6	795.5	798.4	783.7	751.4	719.2	687.0	654.9
122.5°	841.0	842.7	844.4	842.1	836.0	829.7	823.4	817.2
125°	910.5	912.1	913.8	915.0	915.7	916.5	917.2	917.9
127.5°	974.7	977.1	979.6	980.9	981.0	981.2	981.3	981.4
130°	1015.4	1018.0	1020.7	1021.9	1021.7	1021.4	1021.2	1021.0
132.5°	1055.0	1057.3	1059.6	1060.6	1060.3	1060.1	1059.9	1059.6
135°	1111.6	1114.0	1116.3	1117.3	1116.8	1116.3	1115.9	1115.4
137.5°	1164.1	1166.4	1168.7	1169.5	1168.7	1167.9	1167.1	1166.3
140°	1198.1	1200.2	1202.3	1202.9	1201.6	1200.4	1199.2	1198.1
142.5°	1229.4	1231.4	1233.3	1233.8	1232.5	1231.3	1230.2	1229.0
145°	1273.3	1275.0	1276.7	1276.9	1275.8	1274.6	1273.3	1272.1
147.5°	1311.5	1312.8	1314.0	1314.1	1313.1	1312.1	1311.1	1310.1
150°	1335.1	1336.6	1338.0	1338.1	1336.9	1335.7	1334.5	1333.3
152.5°	1356.6	1358.1	1359.5	1359.4	1357.8	1356.2	1354.6	1353.1
155°	1385.5	1387.0	1388.5	1388.2	1386.2	1384.4	1382.5	1380.6
157.5°	1410.0	1411.6	1413.2	1413.1	1411.3	1409.4	1407.5	1405.6
160°	1424.2	1425.6	1427.0	1426.9	1425.3	1423.6	1422.0	1420.3
162.5°	1437.4	1439.1	1440.8	1440.5	1438.5	1436.4	1434.3	1432.3
165°	1453.7	1455.3	1457.0	1457.0	1455.3	1453.7	1452.0	1450.4
167.5°	1467.2	1468.8	1470.6	1470.3	1468.1	1466.0	1463.9	1461.7
170°	1474.1	1475.7	1477.4	1477.1	1475.0	1472.9	1470.8	1468.5
172.5°	1479.3	1480.9	1482.6	1482.4	1480.2	1478.0	1475.9	1473.7
175°	1484.8	1486.5	1488.1	1487.8	1485.4	1483.0	1480.7	1478.2
177.5°	1485.4	1486.7	1488.1	1487.9	1486.2	1484.5	1482.8	1481.1
180°	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6

(END OF REPORT)