

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331244-840

Luminaire Tested: **S122DIP-S290D330U840-4F0-1E-UDD-D1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331244-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S290D330U840-4F0-1E-UDD-D1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, DROP SATIN WHITE DIFFUSER
UPLIGHT 330 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2391.5 lumens
Efficiency: N/A
Efficacy: 117.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.31 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.08')
CIE Type: General Diffuse

Input Watts (W): 20.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331244-840
CATALOG NUMBER: S122DIP-S290D330U840-4F0-1E-UDD-D1

Luminous Intensity Polar Plot

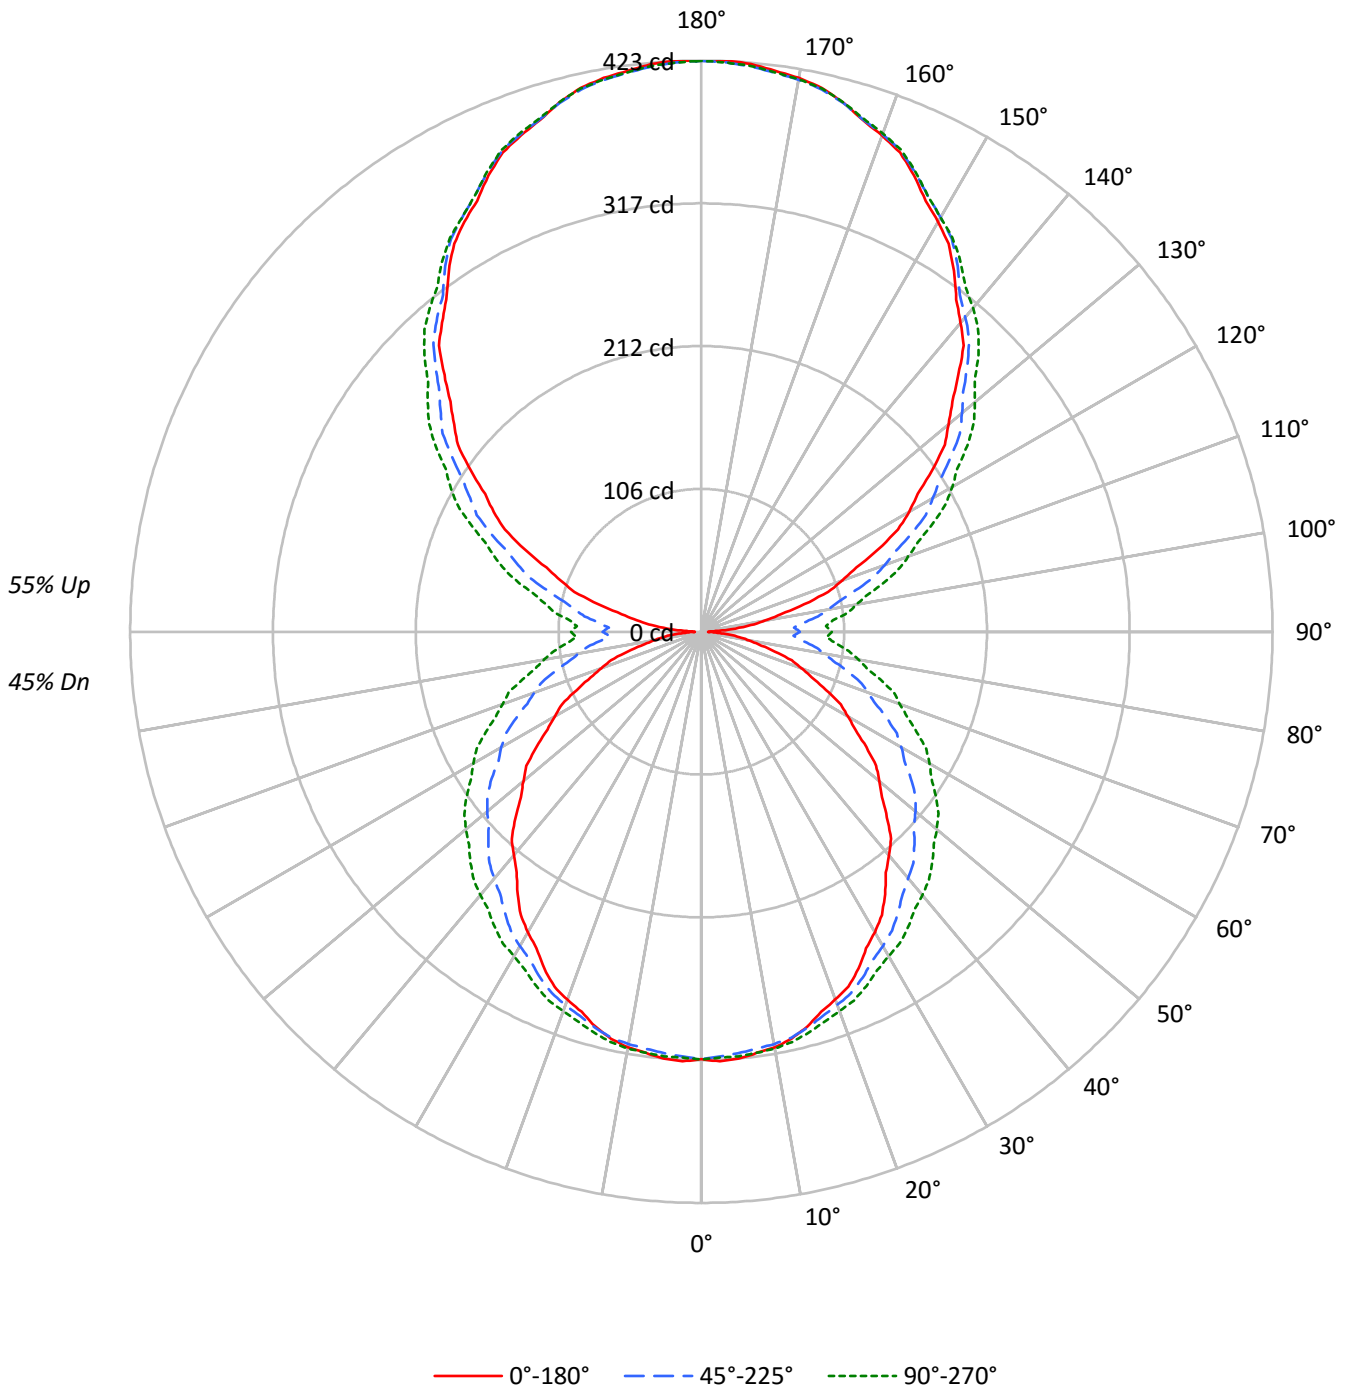



TEST NUMBER: P331244-840

CATALOG NUMBER: S122DIP-S290D330U840-4F0-1E-UDD-D1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	65	65	65	51	51	51	45
1	95	90	86	82	87	83	79	76	69	66	63	55	53	52	43	42	41	35
2	86	78	72	66	78	72	66	61	59	55	51	48	45	42	37	35	33	28
3	78	68	60	54	71	63	56	50	52	47	42	42	38	35	33	30	28	23
4	71	60	52	45	65	55	48	42	46	40	36	37	33	30	29	26	24	20
5	65	53	45	39	59	49	41	36	41	35	31	33	29	25	26	23	20	17
6	60	48	39	33	55	44	36	31	37	31	26	30	25	22	23	20	18	15
7	55	43	35	29	50	39	32	27	33	27	23	27	23	19	21	18	16	13
8	51	39	31	25	47	36	29	24	30	24	20	25	20	17	19	16	14	11
9	48	35	28	23	44	33	26	21	27	22	18	23	18	15	18	15	12	10
10	45	32	25	20	41	30	23	19	25	20	16	21	17	14	17	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5112	5112	5112
5°	5137	4921	4901
10°	5105	4774	4722
15°	5033	4621	4531
20°	4944	4456	4348
25°	4857	4297	4181
30°	4733	4133	4015
35°	4608	3975	3898
40°	4476	3840	3780
45°	4351	3721	3681
50°	4218	3612	3581
55°	4076	3496	3482
60°	3902	3373	3374
65°	3723	3232	3247
70°	3523	3079	3110
75°	3270	2929	2984
80°	2861	2776	2858
85°	2484	2642	2759



TEST NUMBER: P331244-840

CATALOG NUMBER: S122DIP-S290D330U840-4F0-1E-UDD-D1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	30.0	1.3
10°-20°	86.0	3.6
20°-30°	130.3	5.4
30°-40°	158.8	6.6
40°-50°	170.8	7.1
50°-60°	165.9	6.9
60°-70°	144.8	6.1
70°-80°	111.5	4.7
80°-90°	76.5	3.2
90°-100°	78.3	3.3
100°-110°	120.9	5.1
110°-120°	167.1	7.0
120°-130°	200.9	8.4
130°-140°	215.7	9.0
140°-150°	206.8	8.6
150°-160°	172.7	7.2
160°-170°	114.5	4.8
170°-180°	40.0	1.7
0°-30°	246.3	10.3
0°-40°	405.1	16.9
0°-60°	741.7	31.0
0°-90°	1074.6	44.9
90°-120°	366.3	15.3
90°-150°	989.8	41.4
90°-180°	1317.0	55.1
0°-180°	2391.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	317	317	317	317	317	
5°	318	316	313	316	316	30
15°	303	304	304	308	307	85
25°	275	278	283	288	289	127
35°	237	245	254	263	267	148
45°	194	207	223	237	242	150
55°	149	166	190	205	212	133
65°	102	125	151	170	176	101
75°	56	82	112	130	137	60
85°	17	45	74	93	100	18
90°	5	36	73	90	96	4
95°	22	48	76	92	98	24
105°	79	94	118	134	140	84
115°	144	152	172	185	189	143
125°	208	212	225	236	240	186
135°	269	273	278	287	290	208
145°	326	329	331	334	335	204
155°	373	374	375	377	376	172
165°	406	405	405	408	406	114
175°	422	421	420	422	421	40
180°	423	423	423	423	423	



TEST NUMBER: P331244-840

CATALOG NUMBER: S122DIP-S290D330U840-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	316.6	316.6	316.6	316.6	316.6	316.6	316.6	316.6	316.6	316.6	316.6
2.5°	318.4	318.1	317.9	317.6	317.4	317.0	316.4	315.9	315.3	314.7	315.1
5°	317.5	317.2	316.9	316.6	316.2	315.8	315.2	314.6	314.0	313.4	314.0
7.5°	314.6	314.4	314.2	314.0	313.8	313.5	313.0	312.6	312.0	311.5	312.4
10°	312.5	312.3	312.0	311.8	311.6	311.3	311.0	310.7	310.4	310.1	310.9
12.5°	308.7	308.8	308.8	308.9	308.9	308.8	308.6	308.4	308.1	307.9	308.7
15°	302.8	303.0	303.2	303.4	303.6	303.7	303.7	303.7	303.7	303.7	304.6
17.5°	295.1	295.5	295.9	296.4	296.8	297.2	297.5	297.8	298.1	298.5	299.4
20°	289.9	290.4	290.9	291.4	292.0	292.5	292.9	293.3	293.7	294.1	295.2
22.5°	284.5	285.0	285.6	286.2	286.8	287.4	287.9	288.5	289.1	289.6	290.7
25°	275.3	276.0	276.7	277.4	278.1	278.9	279.8	280.7	281.7	282.6	283.8
27.5°	264.3	265.4	266.6	267.7	268.9	270.0	271.0	272.2	273.3	274.4	275.9
30°	256.9	258.2	259.5	260.8	262.2	263.6	264.9	266.2	267.5	268.8	270.4
32.5°	248.8	250.3	251.8	253.3	254.8	256.3	257.9	259.4	261.1	262.6	264.5
35°	237.2	238.9	240.7	242.4	244.1	245.9	247.9	249.8	251.8	253.7	255.9
37.5°	224.5	226.5	228.5	230.6	232.5	234.8	237.3	239.7	242.3	244.8	247.3
40°	216.1	218.3	220.6	222.8	225.0	227.5	230.2	233.1	235.8	238.5	241.2
42.5°	208.0	210.3	212.5	214.7	217.0	219.6	222.9	226.0	229.1	232.3	235.2
45°	194.5	197.2	200.1	202.8	205.5	208.6	212.3	215.8	219.3	223.0	226.1
47.5°	181.2	184.2	187.2	190.2	193.2	196.8	201.0	205.1	209.3	213.5	216.8
50°	172.1	175.2	178.3	181.5	184.7	188.5	193.2	197.7	202.3	206.9	210.4
52.5°	163.2	166.5	169.9	173.2	176.5	180.6	185.4	190.3	195.1	200.0	203.5
55°	149.1	152.8	156.4	160.1	163.8	168.2	173.6	178.8	184.2	189.5	193.2
57.5°	135.1	139.3	143.4	147.5	151.7	156.4	161.9	167.2	172.7	178.1	182.1
60°	125.2	129.7	134.0	138.4	142.8	147.8	153.7	159.5	165.3	171.1	175.0
62.5°	116.4	121.0	125.5	130.1	134.6	139.8	145.6	151.4	157.2	163.1	167.1
65°	101.8	106.8	111.8	116.8	121.8	127.3	133.3	139.4	145.4	151.4	155.6
67.5°	88.5	93.7	98.9	104.1	109.4	115.0	121.2	127.3	133.5	139.7	143.9
70°	78.9	84.2	89.5	94.8	100.1	105.9	112.2	118.6	124.9	131.2	135.6
72.5°	70.1	75.5	81.0	86.4	92.0	97.9	104.3	110.7	117.1	123.5	127.8
75°	56.5	62.1	67.9	73.5	79.3	85.3	91.9	98.5	104.9	111.5	115.8
77.5°	43.2	49.2	55.1	61.1	67.2	73.4	80.1	86.6	93.3	99.9	104.3
80°	34.4	40.6	46.9	53.0	59.3	65.7	72.3	79.0	85.5	92.2	96.4
82.5°	27.1	33.2	39.4	45.4	51.6	58.1	64.7	71.5	78.2	84.8	89.2
85°	16.6	22.8	29.2	35.4	41.8	48.2	54.7	61.3	67.8	74.3	78.6
87.5°	9.1	15.3	21.6	27.9	34.1	40.7	47.6	54.4	61.3	68.2	72.3
90°	4.9	11.8	18.7	25.5	32.4	40.0	48.3	56.6	64.7	73.0	77.0
92.5°	10.6	16.8	23.0	29.2	35.3	41.8	48.5	55.2	61.9	68.6	72.6
95°	22.2	27.8	33.4	39.0	44.5	50.5	56.8	63.0	69.3	75.6	79.5
97.5°	37.1	42.1	47.1	52.0	57.0	62.5	68.7	74.8	81.0	87.3	91.0
100°	48.5	52.9	57.4	61.7	66.1	71.3	77.3	83.2	89.2	95.1	98.9
102.5°	60.2	64.1	68.1	72.0	75.9	80.9	86.7	92.5	98.4	104.2	108.0
105°	79.0	82.2	85.4	88.6	91.8	96.1	101.6	107.0	112.5	118.0	121.7
107.5°	98.5	101.2	103.9	106.6	109.4	113.2	118.3	123.4	128.5	133.5	137.0
110°	110.7	113.2	115.7	118.2	120.7	124.5	129.5	134.4	139.5	144.4	147.7



TEST NUMBER: P331244-840

CATALOG NUMBER: S122DIP-S290D330U840-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	124.3	126.5	128.8	130.9	133.1	136.5	141.3	145.9	150.6	155.3	158.3
115°	144.5	146.1	147.7	149.4	151.0	153.9	158.3	162.8	167.2	171.7	174.6
117.5°	164.2	165.6	166.9	168.3	169.7	172.3	176.0	179.9	183.7	187.4	190.3
120°	177.6	178.6	179.8	180.8	181.8	184.0	187.5	191.0	194.4	197.8	200.7
122.5°	189.9	190.9	191.8	192.7	193.6	195.7	199.1	202.6	205.9	209.3	211.9
125°	208.5	209.2	210.0	210.7	211.5	213.3	216.3	219.3	222.4	225.4	227.9
127.5°	227.2	228.0	228.8	229.6	230.4	232.0	234.3	236.6	239.0	241.4	243.6
130°	238.9	239.8	240.8	241.7	242.6	244.1	246.0	248.0	250.0	252.0	254.3
132.5°	252.1	252.8	253.5	254.3	255.0	256.2	257.9	259.5	261.3	263.0	264.9
135°	269.1	270.0	270.8	271.8	272.6	273.7	274.8	276.0	277.2	278.3	280.4
137.5°	287.6	288.3	289.0	289.6	290.3	291.0	291.8	292.4	293.0	293.7	295.5
140°	298.7	299.3	299.9	300.5	301.1	301.7	302.4	303.0	303.6	304.2	305.8
142.5°	310.1	310.7	311.3	311.9	312.6	313.1	313.4	313.7	314.0	314.3	315.7
145°	326.1	326.7	327.2	327.8	328.3	328.8	329.3	329.8	330.2	330.7	331.4
147.5°	340.7	341.4	342.0	342.7	343.4	343.9	344.2	344.6	344.9	345.2	345.4
150°	350.7	351.2	351.6	352.1	352.6	353.0	353.4	353.7	354.0	354.3	354.6
152.5°	359.6	360.0	360.5	361.0	361.4	361.9	362.2	362.6	363.0	363.5	363.8
155°	372.8	373.0	373.3	373.5	373.8	374.1	374.3	374.5	374.8	375.0	375.4
157.5°	384.2	384.4	384.5	384.7	384.9	385.0	385.2	385.3	385.4	385.6	386.1
160°	391.0	391.2	391.3	391.5	391.6	391.8	391.8	391.9	392.0	392.1	392.5
162.5°	397.3	397.4	397.4	397.4	397.5	397.5	397.6	397.7	397.8	397.8	398.4
165°	405.7	405.6	405.5	405.5	405.4	405.3	405.3	405.3	405.3	405.3	405.9
167.5°	412.6	412.4	412.2	411.9	411.7	411.6	411.5	411.5	411.5	411.5	412.0
170°	416.4	416.2	415.9	415.7	415.5	415.3	415.2	415.1	415.1	415.0	415.5
172.5°	418.9	418.7	418.5	418.2	418.0	417.8	417.8	417.7	417.6	417.5	418.1
175°	422.1	421.8	421.6	421.3	421.1	420.9	420.8	420.6	420.4	420.3	420.8
177.5°	423.3	423.1	422.9	422.8	422.6	422.4	422.3	422.2	422.0	421.9	422.3
180°	422.8	422.8	422.8	422.8	422.8	422.8	422.8	422.8	422.8	422.8	422.8



TEST NUMBER: P331244-840

CATALOG NUMBER: S122DIP-S290D330U840-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	316.6	316.6	316.6	316.6	316.6	316.6	316.6	316.6
2.5°	315.5	315.9	316.3	316.5	316.3	316.1	316.0	315.8
5°	314.6	315.2	315.8	316.0	315.9	315.8	315.7	315.6
7.5°	313.1	313.8	314.6	314.9	314.8	314.7	314.6	314.5
10°	311.7	312.6	313.4	313.8	313.7	313.6	313.5	313.4
12.5°	309.5	310.3	311.1	311.5	311.4	311.3	311.2	311.1
15°	305.5	306.5	307.4	307.8	307.7	307.6	307.5	307.4
17.5°	300.4	301.3	302.3	302.8	302.8	302.8	302.8	302.8
20°	296.3	297.4	298.5	299.1	299.1	299.1	299.1	299.1
22.5°	292.0	293.1	294.2	294.8	295.0	295.1	295.3	295.5
25°	285.1	286.3	287.5	288.2	288.5	288.8	289.1	289.4
27.5°	277.4	279.0	280.5	281.4	281.7	281.9	282.1	282.4
30°	272.1	273.8	275.4	276.3	276.6	276.9	277.2	277.5
32.5°	266.3	268.2	270.1	271.4	271.9	272.5	273.0	273.5
35°	258.2	260.4	262.7	264.2	264.9	265.6	266.3	267.0
37.5°	249.7	252.3	254.8	256.4	257.1	257.9	258.6	259.3
40°	243.9	246.5	249.1	251.0	251.9	252.8	253.7	254.6
42.5°	238.1	241.0	243.9	245.8	246.7	247.6	248.5	249.4
45°	229.2	232.5	235.6	237.7	238.7	239.7	240.8	241.8
47.5°	220.2	223.4	226.7	228.9	230.0	231.2	232.3	233.4
50°	213.8	217.3	220.8	223.1	224.2	225.3	226.4	227.5
52.5°	207.0	210.6	214.1	216.5	217.7	218.9	220.2	221.3
55°	196.8	200.5	204.2	206.6	207.9	209.3	210.7	212.0
57.5°	186.0	190.0	193.9	196.5	197.9	199.2	200.6	202.0
60°	178.8	182.8	186.6	189.2	190.7	192.1	193.6	195.0
62.5°	171.3	175.4	179.6	182.3	183.6	184.9	186.3	187.6
65°	159.8	163.9	168.1	170.9	172.2	173.5	174.8	176.1
67.5°	148.0	152.3	156.5	159.4	160.7	162.1	163.5	164.9
70°	140.0	144.3	148.8	151.6	152.8	154.0	155.2	156.4
72.5°	132.1	136.4	140.7	143.6	145.0	146.5	148.0	149.5
75°	120.3	124.6	129.1	131.9	133.2	134.5	135.8	137.1
77.5°	108.7	113.0	117.3	120.3	121.7	123.1	124.5	125.9
80°	100.8	105.0	109.4	112.2	113.6	115.0	116.4	117.9
82.5°	93.4	97.8	102.0	104.8	106.1	107.6	108.9	110.2
85°	82.9	87.2	91.5	94.3	95.7	97.1	98.6	100.0
87.5°	76.4	80.6	84.7	87.5	88.8	90.1	91.4	92.7
90°	80.9	84.8	88.8	91.3	92.6	93.9	95.2	96.5
92.5°	76.6	80.7	84.7	87.4	88.6	89.8	91.1	92.3
95°	83.3	87.3	91.1	93.5	94.6	95.7	96.7	97.9
97.5°	94.7	98.6	102.3	104.7	105.9	107.1	108.4	109.5
100°	102.7	106.4	110.2	112.6	113.6	114.7	115.7	116.7
102.5°	111.8	115.5	119.3	121.7	122.7	123.7	124.8	125.8
105°	125.4	129.2	132.9	135.3	136.4	137.5	138.7	139.8
107.5°	140.5	144.0	147.4	149.6	150.4	151.1	151.9	152.6
110°	151.0	154.2	157.5	159.6	160.5	161.4	162.2	163.1



TEST NUMBER: P331244-840

CATALOG NUMBER: S122DIP-S290D330U840-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	161.5	164.5	167.5	169.6	170.6	171.5	172.4	173.4
115°	177.6	180.6	183.6	185.5	186.4	187.3	188.1	189.0
117.5°	193.1	195.9	198.7	200.6	201.4	202.2	203.0	203.8
120°	203.5	206.4	209.2	211.1	212.0	212.9	213.8	214.6
122.5°	214.5	217.0	219.6	221.4	222.1	222.9	223.7	224.5
125°	230.5	233.0	235.4	237.1	237.9	238.8	239.6	240.4
127.5°	245.8	248.1	250.3	251.8	252.4	253.1	253.7	254.4
130°	256.6	258.8	261.2	262.6	263.1	263.6	264.1	264.5
132.5°	266.9	268.9	270.9	272.3	272.9	273.4	274.0	274.5
135°	282.5	284.5	286.6	287.9	288.5	289.0	289.6	290.2
137.5°	297.3	299.1	300.9	302.1	302.4	302.8	303.2	303.5
140°	307.4	309.1	310.7	311.6	311.9	312.3	312.6	312.9
142.5°	317.0	318.4	319.7	320.5	320.7	321.0	321.2	321.4
145°	332.1	332.9	333.5	334.0	334.2	334.4	334.6	334.7
147.5°	345.7	345.9	346.2	346.3	346.2	346.2	346.1	346.1
150°	354.8	355.0	355.3	355.3	355.0	354.8	354.6	354.3
152.5°	364.1	364.4	364.7	364.7	364.4	364.1	363.8	363.5
155°	375.8	376.2	376.6	376.7	376.4	376.2	376.0	375.7
157.5°	386.6	387.2	387.7	387.8	387.4	387.0	386.7	386.3
160°	393.0	393.5	394.0	394.0	393.7	393.4	393.1	392.8
162.5°	398.9	399.4	400.0	400.0	399.7	399.3	398.9	398.5
165°	406.4	407.0	407.5	407.6	407.2	406.8	406.4	406.1
167.5°	412.6	413.1	413.7	413.8	413.4	412.9	412.5	412.1
170°	416.1	416.6	417.2	417.2	416.8	416.3	415.8	415.3
172.5°	418.6	419.2	419.7	419.8	419.3	418.8	418.4	417.9
175°	421.4	421.9	422.5	422.5	422.1	421.6	421.1	420.6
177.5°	422.7	423.0	423.4	423.4	423.0	422.7	422.3	421.9
180°	422.8	422.8	422.8	422.8	422.8	422.8	422.8	422.8

(END OF REPORT)