

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331310-840

Luminaire Tested: **S122DIP-S485D725U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331310-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S485D725U840-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 725 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4614.8 lumens
Efficiency: N/A
Efficacy: 120.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 38.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331310-840

CATALOG NUMBER: S122DIP-S485D725U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

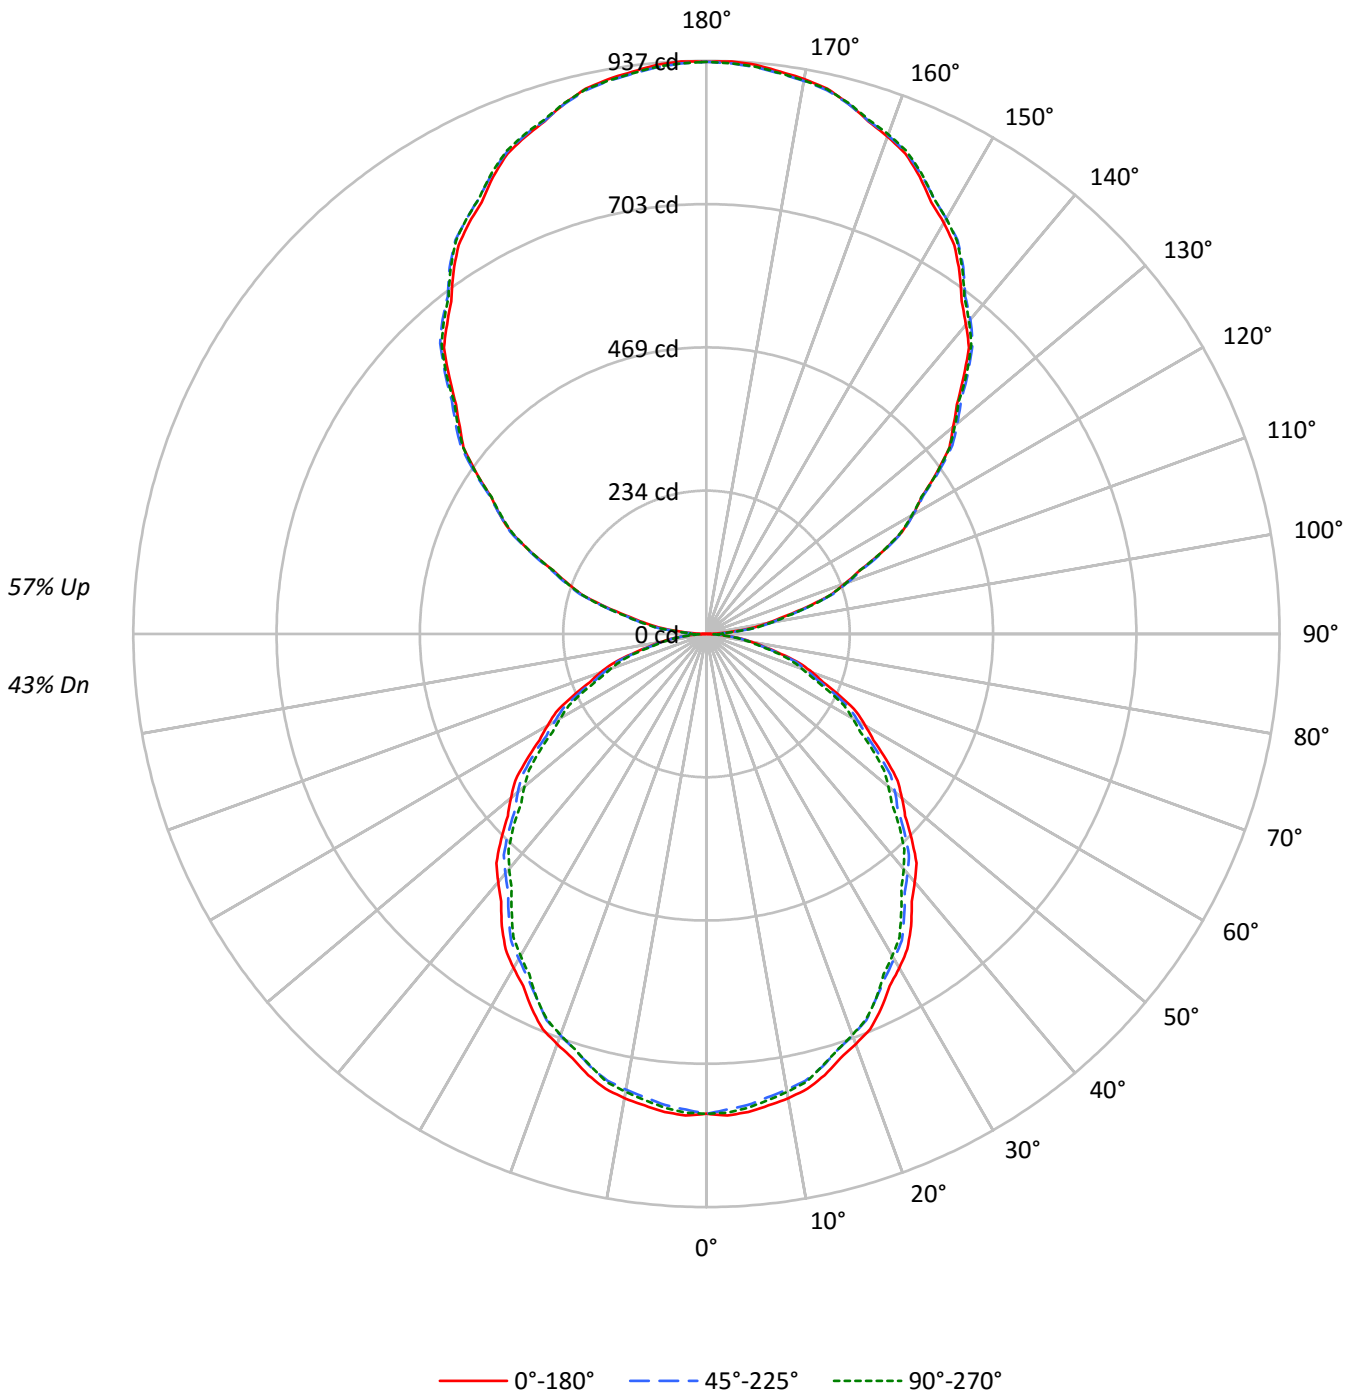



TEST NUMBER: P331310-840

CATALOG NUMBER: S122DIP-S485D725U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	80	80	80	64	64	64	50	50	50	43				
1	96	92	88	85	88	84	81	78	70	67	65	56	55	53	44	43	42	36				
2	88	80	74	69	80	74	68	64	61	57	54	50	47	45	39	37	35	31				
3	80	71	63	58	73	65	58	53	54	49	45	44	40	38	34	32	30	26				
4	73	62	55	49	67	57	51	45	48	43	39	39	35	32	31	28	26	22				
5	67	56	48	42	61	51	44	39	43	37	33	35	31	28	28	25	23	19				
6	62	50	42	36	56	46	39	34	39	33	29	32	28	24	25	22	20	17				
7	57	45	37	32	52	41	34	30	35	29	26	29	25	22	23	20	18	15				
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16	13				
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	17	14	12				
10	46	34	27	22	42	32	25	21	27	22	18	22	18	16	18	15	13	11				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12665	12665	12665
5°	12713	12530	12603
10°	12637	12403	12463
15°	12481	12242	12227
20°	12259	12000	11986
25°	12039	11703	11703
30°	11757	11432	11332
35°	11491	11105	10941
40°	11160	10779	10570
45°	10832	10453	10195
50°	10477	10115	9756
55°	10106	9723	9362
60°	9691	9255	8913
65°	9249	8787	8382
70°	8686	8224	7832
75°	7904	7573	7392
80°	7011	6797	6453
85°	5724	5446	4891



TEST NUMBER: P331310-840

CATALOG NUMBER: S122DIP-S485D725U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.8	1.6
10°-20°	207.5	4.5
20°-30°	305.0	6.6
30°-40°	354.3	7.7
40°-50°	354.0	7.7
50°-60°	308.7	6.7
60°-70°	228.2	4.9
70°-80°	129.3	2.8
80°-90°	38.5	0.8
90°-100°	59.3	1.3
100°-110°	184.1	4.0
110°-120°	314.7	6.8
120°-130°	413.8	9.0
130°-140°	464.4	10.1
140°-150°	455.4	9.9
150°-160°	382.0	8.3
160°-170°	253.3	5.5
170°-180°	88.5	1.9
0°-30°	586.3	12.7
0°-40°	940.7	20.4
0°-60°	1603.3	34.7
0°-90°	1999.3	43.3
90°-120°	558.0	12.1
90°-150°	1891.7	41.0
90°-180°	2616.0	56.7
0°-180°	4614.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	784	784	784	784	784	
5°	784	781	773	779	778	74
15°	747	742	732	735	732	210
25°	676	669	657	658	657	311
35°	583	575	563	559	555	364
45°	474	469	458	450	446	366
55°	359	354	345	337	333	321
65°	242	237	230	223	219	239
75°	127	125	121	117	118	135
85°	31	30	29	27	26	35
90°	1	11	28	26	27	4
95°	41	49	50	50	49	47
105°	170	172	174	175	175	179
115°	316	320	319	318	316	312
125°	459	466	464	462	461	410
135°	594	603	605	604	602	459
145°	721	727	732	732	729	451
155°	825	827	830	833	831	380
165°	898	897	897	902	898	253
175°	934	932	930	935	931	89
180°	935	935	935	935	935	



TEST NUMBER: P331310-840

CATALOG NUMBER: S122DIP-S485D725U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	784.4	784.4	784.4	784.4	784.4	784.4	784.4	784.4	784.4	784.4	784.4
2.5°	788.0	787.3	786.7	786.0	785.3	784.3	782.7	781.3	779.8	778.3	779.7
5°	784.4	783.7	783.0	782.3	781.7	780.4	778.6	776.8	774.9	773.1	774.4
7.5°	777.4	776.4	775.4	774.3	773.3	771.8	769.9	768.1	766.2	764.3	765.7
10°	770.8	769.6	768.4	767.3	766.1	764.5	762.4	760.5	758.5	756.5	757.8
12.5°	761.7	760.7	759.6	758.6	757.6	756.1	754.1	752.0	750.0	748.0	748.9
15°	746.7	745.7	744.7	743.7	742.7	741.0	738.8	736.7	734.5	732.4	733.0
17.5°	727.3	726.4	725.4	724.4	723.4	721.8	719.5	717.3	715.1	712.9	713.7
20°	713.5	712.5	711.4	710.4	709.4	707.8	705.4	703.1	700.7	698.4	698.9
22.5°	699.6	698.2	696.8	695.4	694.0	692.2	689.9	687.7	685.5	683.3	683.4
25°	675.8	674.4	673.1	671.8	670.4	668.3	665.5	662.6	659.7	656.9	657.2
27.5°	648.6	647.4	646.2	645.0	643.8	642.1	639.9	637.5	635.3	633.1	632.6
30°	630.6	629.1	627.8	626.5	625.1	623.2	620.7	618.2	615.7	613.2	612.7
32.5°	611.2	610.2	609.0	607.9	606.9	605.0	602.4	599.8	597.1	594.5	593.6
35°	583.0	581.3	579.7	577.9	576.3	574.1	571.5	568.8	566.0	563.4	562.4
37.5°	551.2	549.7	548.3	546.7	545.2	543.2	540.5	537.9	535.1	532.5	531.2
40°	529.5	528.1	526.7	525.4	524.1	522.1	519.4	516.7	514.0	511.4	509.9
42.5°	508.4	507.0	505.6	504.3	503.0	501.0	498.3	495.6	492.9	490.2	488.6
45°	474.4	473.2	472.0	470.9	469.7	467.9	465.3	462.8	460.3	457.8	456.0
47.5°	440.6	439.5	438.4	437.3	436.2	434.3	431.7	429.1	426.5	423.8	421.9
50°	417.1	416.3	415.4	414.5	413.7	412.1	409.8	407.5	405.1	402.7	400.4
52.5°	394.2	393.0	391.9	390.8	389.7	388.1	385.9	383.6	381.4	379.2	377.3
55°	359.0	358.0	357.0	356.0	355.0	353.5	351.4	349.4	347.4	345.4	343.5
57.5°	323.7	322.9	322.0	321.3	320.5	319.0	316.8	314.6	312.4	310.1	308.1
60°	300.1	299.5	298.8	298.1	297.5	296.0	293.7	291.2	288.9	286.6	284.8
62.5°	277.2	276.2	275.1	274.0	273.0	271.6	269.7	267.9	266.1	264.3	262.6
65°	242.1	241.1	240.0	239.0	238.1	236.7	235.1	233.4	231.7	230.0	228.5
67.5°	206.3	205.5	204.7	203.9	203.1	202.0	200.5	198.9	197.4	195.9	194.8
70°	184.0	183.4	182.7	182.0	181.4	180.3	178.7	177.2	175.7	174.2	173.1
72.5°	161.1	160.5	159.8	159.1	158.4	157.6	156.6	155.6	154.7	153.7	152.5
75°	126.7	126.3	126.0	125.7	125.3	124.8	123.9	123.1	122.3	121.4	120.4
77.5°	95.9	95.3	94.8	94.2	93.6	93.2	92.9	92.5	92.2	91.9	91.4
80°	75.4	75.2	75.1	74.9	74.7	74.5	74.1	73.8	73.5	73.1	72.6
82.5°	56.1	56.0	56.0	56.0	55.9	55.8	55.6	55.4	55.2	55.0	54.4
85°	30.9	30.8	30.6	30.4	30.3	30.1	29.9	29.8	29.6	29.4	28.9
87.5°	11.0	11.2	11.3	11.5	11.6	11.9	12.4	12.9	13.4	13.9	13.5
90°	0.8	2.9	5.0	7.1	9.2	12.2	16.1	19.9	23.7	27.7	27.3
92.5°	14.0	15.6	17.2	18.7	20.2	21.4	22.3	23.2	24.2	25.1	25.1
95°	41.0	42.8	44.5	46.4	48.1	49.1	49.5	49.8	50.2	50.5	50.5
97.5°	75.0	76.5	78.1	79.6	81.2	82.3	82.9	83.6	84.2	84.9	84.9
100°	100.3	101.7	103.0	104.4	105.8	106.8	107.3	107.9	108.4	109.0	109.0
102.5°	126.7	127.8	129.1	130.2	131.3	132.2	132.8	133.5	134.1	134.8	134.9
105°	169.8	170.3	170.8	171.3	171.8	172.3	172.6	173.0	173.3	173.7	174.0
107.5°	213.0	213.8	214.5	215.3	216.0	216.4	216.4	216.4	216.4	216.4	216.6
110°	240.8	241.8	242.9	243.9	245.0	245.5	245.5	245.5	245.5	245.5	245.5



TEST NUMBER: P331310-840

CATALOG NUMBER: S122DIP-S485D725U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	271.0	272.2	273.2	274.2	275.3	275.7	275.6	275.5	275.3	275.2	274.8
115°	315.8	316.8	317.8	318.9	319.9	320.3	319.9	319.6	319.2	318.9	318.7
117.5°	360.2	361.6	363.0	364.5	365.9	366.1	365.1	364.2	363.1	362.1	361.7
120°	389.9	391.3	392.7	394.2	395.6	395.6	394.2	392.7	391.3	389.9	389.9
122.5°	417.1	418.8	420.5	422.1	423.8	424.1	423.2	422.2	421.2	420.2	419.8
125°	459.4	461.0	462.5	464.1	465.7	466.3	465.7	465.1	464.6	464.1	463.6
127.5°	500.6	502.6	504.6	506.6	508.6	509.3	508.7	508.1	507.4	506.8	506.1
130°	526.5	528.8	531.1	533.3	535.6	536.5	536.2	535.8	535.5	535.2	534.8
132.5°	555.5	557.4	559.3	561.1	563.0	563.9	564.0	564.1	564.1	564.2	563.5
135°	594.4	596.3	598.2	600.2	602.1	603.2	603.6	603.9	604.3	604.6	604.5
137.5°	635.3	636.8	638.4	640.1	641.6	642.6	643.1	643.5	644.0	644.4	644.3
140°	659.9	661.5	663.1	664.6	666.2	667.4	668.3	669.2	670.0	671.0	671.0
142.5°	685.2	686.7	688.3	689.9	691.5	692.6	693.2	693.8	694.4	695.0	695.1
145°	721.4	722.7	724.0	725.2	726.4	727.5	728.6	729.6	730.6	731.7	732.0
147.5°	753.9	755.3	756.8	758.2	759.7	760.8	761.5	762.2	763.0	763.7	764.0
150°	776.0	777.0	778.0	779.1	780.1	781.0	781.7	782.4	783.2	783.9	784.4
152.5°	795.5	796.6	797.6	798.7	799.7	800.6	801.5	802.3	803.1	804.1	804.7
155°	824.9	825.4	826.0	826.5	827.0	827.5	828.0	828.6	829.1	829.6	830.5
157.5°	850.0	850.3	850.7	851.0	851.4	851.7	852.0	852.3	852.6	852.9	854.1
160°	865.2	865.5	865.9	866.2	866.6	866.8	867.0	867.2	867.4	867.5	868.6
162.5°	879.0	879.1	879.2	879.2	879.3	879.4	879.6	879.8	880.0	880.1	881.3
165°	897.5	897.4	897.2	897.0	896.8	896.7	896.7	896.7	896.7	896.7	898.0
167.5°	912.9	912.4	911.9	911.4	910.9	910.6	910.6	910.5	910.5	910.4	911.7
170°	921.2	920.7	920.1	919.6	919.1	918.7	918.6	918.4	918.2	918.0	919.3
172.5°	926.9	926.3	925.8	925.2	924.7	924.4	924.2	924.0	923.9	923.7	924.9
175°	933.8	933.3	932.7	932.2	931.7	931.3	930.9	930.6	930.2	929.9	931.1
177.5°	936.6	936.2	935.8	935.3	934.9	934.6	934.3	934.0	933.7	933.5	934.3
180°	935.3	935.3	935.3	935.3	935.3	935.3	935.3	935.3	935.3	935.3	935.3



TEST NUMBER: P331310-840

CATALOG NUMBER: S122DIP-S485D725U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	784.4	784.4	784.4	784.4	784.4	784.4	784.4	784.4
2.5°	781.0	782.3	783.7	784.3	784.0	783.7	783.5	783.2
5°	775.8	777.1	778.4	778.9	778.6	778.2	777.9	777.6
7.5°	767.0	768.3	769.7	770.1	769.8	769.4	769.0	768.7
10°	759.1	760.5	761.8	762.2	761.7	761.2	760.7	760.2
12.5°	749.9	750.8	751.7	752.0	751.6	751.3	750.9	750.5
15°	733.7	734.4	735.0	734.9	734.1	733.3	732.5	731.5
17.5°	714.4	715.2	716.0	715.9	715.1	714.4	713.6	712.8
20°	699.4	699.9	700.4	700.3	699.6	698.9	698.3	697.6
22.5°	683.5	683.6	683.7	683.6	683.2	682.8	682.4	682.0
25°	657.6	657.9	658.2	658.2	657.9	657.6	657.2	656.9
27.5°	632.1	631.6	631.1	630.5	629.7	628.8	628.0	627.2
30°	612.2	611.7	611.2	610.6	609.9	609.3	608.5	607.8
32.5°	592.7	591.8	590.9	590.1	589.4	588.8	588.0	587.3
35°	561.4	560.4	559.4	558.5	557.6	556.7	555.9	555.1
37.5°	530.0	528.8	527.6	526.4	525.6	524.8	524.0	523.3
40°	508.4	506.9	505.3	504.2	503.5	502.9	502.2	501.5
42.5°	487.0	485.3	483.6	482.4	481.4	480.5	479.6	478.6
45°	454.1	452.3	450.4	449.2	448.5	447.9	447.2	446.5
47.5°	420.0	418.0	416.1	414.7	413.6	412.7	411.7	410.7
50°	398.1	395.7	393.3	391.7	390.9	390.1	389.2	388.4
52.5°	375.4	373.3	371.4	369.9	368.8	367.7	366.6	365.5
55°	341.4	339.4	337.4	336.0	335.1	334.3	333.5	332.6
57.5°	306.2	304.2	302.3	300.9	300.2	299.6	299.0	298.3
60°	282.9	281.0	279.2	278.0	277.5	277.0	276.5	276.0
62.5°	260.8	259.1	257.4	256.3	255.6	255.0	254.4	253.7
65°	227.0	225.5	224.0	222.8	222.0	221.2	220.4	219.4
67.5°	193.6	192.4	191.3	190.4	189.7	188.9	188.3	187.6
70°	171.9	170.7	169.6	168.6	167.9	167.2	166.6	165.9
72.5°	151.4	150.2	149.1	148.1	147.6	147.0	146.5	146.0
75°	119.4	118.5	117.4	117.0	117.4	117.8	118.1	118.5
77.5°	90.9	90.4	89.9	89.4	88.9	88.5	88.0	87.5
80°	72.1	71.6	71.2	70.7	70.4	70.1	69.7	69.4
82.5°	53.8	53.1	52.5	52.1	52.1	52.0	51.9	51.9
85°	28.4	27.9	27.4	27.1	26.9	26.8	26.6	26.4
87.5°	13.0	12.5	12.1	11.8	11.7	11.6	11.5	11.4
90°	27.0	26.6	26.3	26.2	26.4	26.5	26.7	26.9
92.5°	25.2	25.3	25.3	25.4	25.4	25.5	25.5	25.5
95°	50.5	50.5	50.5	50.4	50.0	49.7	49.3	49.0
97.5°	84.9	84.9	84.9	84.9	84.9	84.8	84.8	84.7
100°	109.0	109.0	109.0	108.9	108.7	108.5	108.4	108.2
102.5°	135.1	135.2	135.4	135.3	135.2	135.0	134.8	134.6
105°	174.4	174.7	175.1	175.2	175.2	175.2	175.2	175.2
107.5°	216.7	216.8	217.0	216.7	215.9	215.1	214.3	213.5
110°	245.5	245.5	245.5	245.2	244.7	244.2	243.7	243.1



TEST NUMBER: P331310-840

CATALOG NUMBER: S122DIP-S485D725U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	274.3	273.9	273.5	273.1	272.7	272.3	272.0	271.6
115°	318.5	318.4	318.2	317.8	317.3	316.8	316.3	315.8
117.5°	361.3	360.9	360.4	360.0	359.5	358.9	358.4	357.9
120°	389.9	389.9	389.9	389.7	389.1	388.6	388.1	387.6
122.5°	419.4	419.0	418.6	418.2	417.8	417.4	417.0	416.7
125°	463.1	462.5	462.0	461.7	461.5	461.3	461.2	461.0
127.5°	505.5	504.8	504.2	503.6	503.1	502.5	502.0	501.4
130°	534.5	534.1	533.8	533.2	532.5	531.9	531.2	530.5
132.5°	562.7	561.9	561.2	560.5	559.9	559.4	558.8	558.3
135°	604.3	604.1	603.9	603.6	603.1	602.6	602.0	601.5
137.5°	644.2	644.0	643.9	643.5	642.8	642.1	641.4	640.7
140°	671.0	671.0	671.0	670.6	669.9	669.2	668.5	667.8
142.5°	695.2	695.4	695.5	695.2	694.5	693.8	693.2	692.5
145°	732.1	732.3	732.5	732.2	731.4	730.7	730.0	729.3
147.5°	764.4	764.8	765.2	765.1	764.4	763.7	763.1	762.3
150°	784.9	785.4	786.0	786.0	785.4	784.9	784.4	783.9
152.5°	805.4	806.1	806.7	806.7	806.1	805.4	804.7	804.1
155°	831.3	832.2	833.1	833.3	832.7	832.2	831.7	831.2
157.5°	855.4	856.6	857.8	857.9	857.1	856.3	855.4	854.5
160°	869.6	870.7	871.7	871.9	871.2	870.5	869.8	869.1
162.5°	882.5	883.7	884.9	885.0	884.2	883.4	882.5	881.7
165°	899.2	900.4	901.6	901.8	900.9	900.0	899.2	898.3
167.5°	912.9	914.1	915.3	915.5	914.6	913.7	912.8	911.9
170°	920.5	921.7	922.9	923.0	922.0	920.9	919.9	918.8
172.5°	926.1	927.4	928.6	928.7	927.7	926.6	925.5	924.5
175°	932.3	933.5	934.7	934.8	933.8	932.7	931.7	930.7
177.5°	935.1	936.0	936.9	936.9	936.0	935.1	934.3	933.5
180°	935.3	935.3	935.3	935.3	935.3	935.3	935.3	935.3

(END OF REPORT)