

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331318-840

Luminaire Tested: **S122DIP-S485D925U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331318-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIP-S485D925U840-4F0-1E-UDD-F  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 925 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5734.0 lumens  
Efficiency: N/A  
Efficacy: 128.9 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 44.5  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331318-840

CATALOG NUMBER: S122DIP-S485D925U840-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

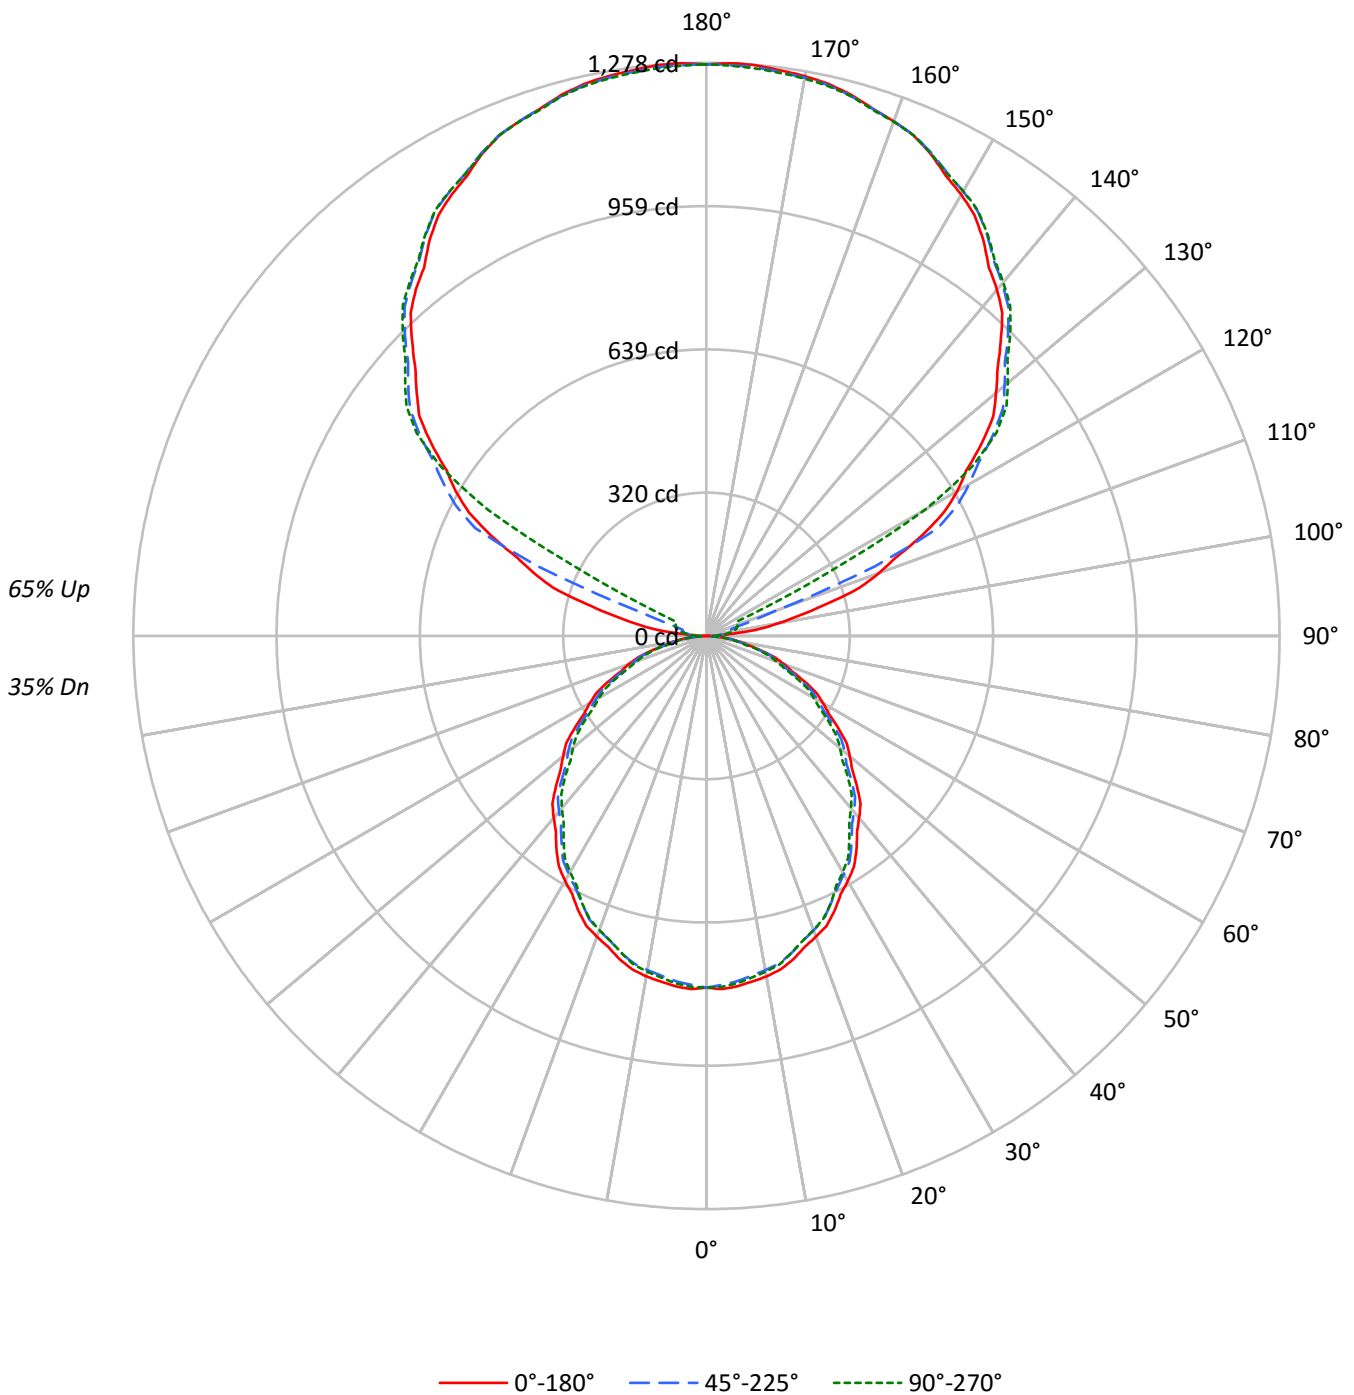



TEST NUMBER: P331318-840

CATALOG NUMBER: S122DIP-S485D925U840-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	42	42	42	35
1	94	90	86	83	85	82	78	75	66	63	61	51	49	48	37	36	36	29
2	86	79	73	68	77	71	66	62	57	54	51	45	42	40	33	31	30	25
3	78	69	62	56	70	63	57	52	51	46	43	39	36	34	29	27	25	21
4	72	61	53	48	64	55	49	44	45	40	36	35	32	29	26	24	22	18
5	66	54	46	41	59	49	43	37	40	35	31	31	28	25	23	21	19	16
6	60	49	41	35	54	44	37	32	36	31	27	28	25	22	21	19	17	14
7	56	44	36	31	50	40	33	28	33	28	24	26	22	19	19	17	15	12
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	15	13	11
9	48	36	29	24	43	33	27	22	27	22	19	22	18	15	16	14	12	10
10	45	33	26	21	40	30	24	20	25	20	17	20	16	14	15	13	11	9

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	12665	12665	12665
5°	12713	12530	12603
10°	12637	12403	12463
15°	12481	12242	12227
20°	12259	12000	11986
25°	12039	11703	11703
30°	11757	11432	11332
35°	11491	11105	10941
40°	11160	10779	10570
45°	10832	10453	10195
50°	10477	10115	9756
55°	10106	9723	9362
60°	9691	9255	8913
65°	9249	8787	8382
70°	8686	8224	7832
75°	7904	7573	7392
80°	7011	6797	6453
85°	5724	5446	4891



TEST NUMBER: P331318-840

CATALOG NUMBER: S122DIP-S485D925U840-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	73.8	1.3
10°-20°	207.5	3.6
20°-30°	305.0	5.3
30°-40°	354.3	6.2
40°-50°	354.0	6.2
50°-60°	308.7	5.4
60°-70°	228.2	4.0
70°-80°	129.3	2.3
80°-90°	37.9	0.7
90°-100°	42.5	0.7
100°-110°	155.9	2.7
110°-120°	416.8	7.3
120°-130°	688.0	12.0
130°-140°	731.7	12.8
140°-150°	680.1	11.9
150°-160°	546.8	9.5
160°-170°	352.3	6.1
170°-180°	121.3	2.1
0°-30°	586.3	10.2
0°-40°	940.7	16.4
0°-60°	1603.3	28.0
0°-90°	1998.7	34.9
90°-120°	615.2	10.7
90°-150°	2714.9	47.3
90°-180°	3735.0	65.1
0°-180°	5734.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	784	784	784	784	784	
5°	784	781	773	779	778	74
15°	747	742	732	735	732	210
25°	676	669	657	658	657	311
35°	583	575	563	559	555	364
45°	474	469	458	450	446	366
55°	359	354	345	337	333	321
65°	242	237	230	223	219	239
75°	127	125	121	117	118	135
85°	31	30	29	27	26	35
90°	1	11	18	23	25	4
95°	60	32	36	40	40	73
105°	280	292	56	66	70	300
115°	530	546	569	162	76	522
125°	750	762	779	786	789	668
135°	928	942	951	960	958	716
145°	1076	1076	1091	1097	1093	673
155°	1185	1178	1188	1193	1186	546
165°	1249	1244	1246	1252	1246	353
175°	1277	1271	1273	1278	1270	122
180°	1275	1275	1275	1275	1275	



TEST NUMBER: P331318-840

CATALOG NUMBER: S122DIP-S485D925U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	784.4	784.4	784.4	784.4	784.4	784.4	784.4	784.4	784.4	784.4	784.4
2.5°	788.0	787.3	786.7	786.0	785.3	784.3	782.7	781.3	779.8	778.3	779.7
5°	784.4	783.7	783.0	782.3	781.7	780.4	778.6	776.8	774.9	773.1	774.4
7.5°	777.4	776.4	775.4	774.3	773.3	771.8	769.9	768.1	766.2	764.3	765.7
10°	770.8	769.6	768.4	767.3	766.1	764.5	762.4	760.5	758.5	756.5	757.8
12.5°	761.7	760.7	759.6	758.6	757.6	756.1	754.1	752.0	750.0	748.0	748.9
15°	746.7	745.7	744.7	743.7	742.7	741.0	738.8	736.7	734.5	732.4	733.0
17.5°	727.3	726.4	725.4	724.4	723.4	721.8	719.5	717.3	715.1	712.9	713.7
20°	713.5	712.5	711.4	710.4	709.4	707.8	705.4	703.1	700.7	698.4	698.9
22.5°	699.6	698.2	696.8	695.4	694.0	692.2	689.9	687.7	685.5	683.3	683.4
25°	675.8	674.4	673.1	671.8	670.4	668.3	665.5	662.6	659.7	656.9	657.2
27.5°	648.6	647.4	646.2	645.0	643.8	642.1	639.9	637.5	635.3	633.1	632.6
30°	630.6	629.1	627.8	626.5	625.1	623.2	620.7	618.2	615.7	613.2	612.7
32.5°	611.2	610.2	609.0	607.9	606.9	605.0	602.4	599.8	597.1	594.5	593.6
35°	583.0	581.3	579.7	577.9	576.3	574.1	571.5	568.8	566.0	563.4	562.4
37.5°	551.2	549.7	548.3	546.7	545.2	543.2	540.5	537.9	535.1	532.5	531.2
40°	529.5	528.1	526.7	525.4	524.1	522.1	519.4	516.7	514.0	511.4	509.9
42.5°	508.4	507.0	505.6	504.3	503.0	501.0	498.3	495.6	492.9	490.2	488.6
45°	474.4	473.2	472.0	470.9	469.7	467.9	465.3	462.8	460.3	457.8	456.0
47.5°	440.6	439.5	438.4	437.3	436.2	434.3	431.7	429.1	426.5	423.8	421.9
50°	417.1	416.3	415.4	414.5	413.7	412.1	409.8	407.5	405.1	402.7	400.4
52.5°	394.2	393.0	391.9	390.8	389.7	388.1	385.9	383.6	381.4	379.2	377.3
55°	359.0	358.0	357.0	356.0	355.0	353.5	351.4	349.4	347.4	345.4	343.5
57.5°	323.7	322.9	322.0	321.3	320.5	319.0	316.8	314.6	312.4	310.1	308.1
60°	300.1	299.5	298.8	298.1	297.5	296.0	293.7	291.2	288.9	286.6	284.8
62.5°	277.2	276.2	275.1	274.0	273.0	271.6	269.7	267.9	266.1	264.3	262.6
65°	242.1	241.1	240.0	239.0	238.1	236.7	235.1	233.4	231.7	230.0	228.5
67.5°	206.3	205.5	204.7	203.9	203.1	202.0	200.5	198.9	197.4	195.9	194.8
70°	184.0	183.4	182.7	182.0	181.4	180.3	178.7	177.2	175.7	174.2	173.1
72.5°	161.1	160.5	159.8	159.1	158.4	157.6	156.6	155.6	154.7	153.7	152.5
75°	126.7	126.3	126.0	125.7	125.3	124.8	123.9	123.1	122.3	121.4	120.4
77.5°	95.9	95.3	94.8	94.2	93.6	93.2	92.9	92.5	92.2	91.9	91.4
80°	75.4	75.2	75.1	74.9	74.7	74.5	74.1	73.8	73.5	73.1	72.6
82.5°	56.1	56.0	56.0	56.0	55.9	55.8	55.6	55.4	55.2	55.0	54.4
85°	30.9	30.8	30.6	30.4	30.3	30.1	29.9	29.8	29.6	29.4	28.9
87.5°	11.0	11.2	11.4	11.6	11.8	11.9	11.9	12.0	12.1	12.1	11.9
90°	0.9	3.1	5.5	7.7	9.9	11.9	13.5	15.1	16.8	18.5	19.5
92.5°	18.6	18.4	18.2	18.0	17.8	18.1	19.0	19.8	20.6	21.4	21.9
95°	60.0	53.2	46.5	39.7	32.9	30.2	31.7	33.1	34.5	36.0	37.0
97.5°	119.0	99.9	80.9	61.8	42.7	34.8	38.2	41.5	44.8	48.2	49.0
100°	163.3	135.1	107.0	79.0	50.9	38.7	42.1	45.6	49.1	52.6	54.2
102.5°	212.0	206.0	200.1	194.1	188.1	170.7	141.5	112.3	83.2	54.0	56.1
105°	280.3	286.5	292.7	298.8	305.0	280.0	224.1	168.1	112.2	56.2	58.5
107.5°	358.4	363.3	368.3	373.2	378.3	347.2	280.0	213.0	145.8	78.8	76.4
110°	408.6	412.9	417.2	421.5	425.8	398.3	339.1	279.8	220.7	161.4	140.9



TEST NUMBER: P331318-840

CATALOG NUMBER: S122DIP-S485D925U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	455.8	459.6	463.4	467.3	471.0	465.6	451.0	436.4	421.7	407.1	332.3
115°	530.3	533.8	537.2	540.8	544.2	548.6	553.7	558.9	563.9	569.1	474.1
117.5°	596.9	600.8	604.7	608.6	612.5	616.2	619.8	623.3	626.8	630.3	607.3
120°	645.6	648.6	651.8	654.8	657.9	661.3	665.0	668.6	672.4	676.0	678.5
122.5°	686.9	690.1	693.4	696.6	699.8	703.5	707.5	711.6	715.6	719.6	721.0
125°	749.8	752.5	755.2	757.8	760.5	763.8	767.7	771.5	775.5	779.3	780.8
127.5°	806.8	809.8	812.7	815.7	818.6	821.5	824.5	827.4	830.3	833.2	835.3
130°	843.0	846.3	849.5	852.8	856.1	858.9	861.1	863.3	865.7	867.9	870.1
132.5°	879.9	882.6	885.4	888.3	891.0	893.5	895.9	898.1	900.3	902.5	904.5
135°	927.9	931.1	934.4	937.7	941.0	943.5	945.3	947.3	949.1	950.9	952.9
137.5°	976.3	978.7	981.0	983.2	985.5	987.7	989.8	991.9	994.0	996.1	998.0
140°	1008.0	1009.8	1011.4	1013.0	1014.6	1016.6	1018.9	1021.1	1023.4	1025.6	1027.4
142.5°	1034.6	1036.1	1037.6	1039.1	1040.6	1042.6	1045.1	1047.7	1050.4	1052.9	1054.6
145°	1076.3	1076.1	1075.9	1075.7	1075.5	1077.1	1080.7	1084.1	1087.6	1091.1	1092.5
147.5°	1112.7	1111.9	1111.2	1110.3	1109.5	1110.9	1114.3	1117.8	1121.3	1124.7	1125.7
150°	1136.3	1134.9	1133.4	1132.0	1130.5	1131.5	1134.8	1138.0	1141.3	1144.6	1145.8
152.5°	1156.2	1154.6	1153.0	1151.4	1149.8	1150.5	1153.7	1156.8	1159.9	1163.1	1164.3
155°	1185.2	1183.4	1181.4	1179.6	1177.8	1178.1	1180.5	1183.1	1185.5	1187.9	1189.1
157.5°	1207.8	1206.3	1204.8	1203.2	1201.6	1201.7	1203.5	1205.2	1206.9	1208.6	1210.0
160°	1221.1	1219.9	1218.7	1217.4	1216.2	1216.2	1217.4	1218.7	1219.9	1221.1	1222.3
162.5°	1232.9	1231.7	1230.5	1229.2	1228.0	1227.9	1229.0	1230.0	1231.1	1232.2	1233.6
165°	1248.8	1247.6	1246.4	1245.1	1243.9	1243.5	1244.2	1244.8	1245.5	1246.1	1247.5
167.5°	1260.6	1259.4	1258.2	1256.9	1255.7	1255.4	1256.0	1256.5	1257.1	1257.7	1259.1
170°	1267.3	1266.0	1264.8	1263.5	1262.3	1261.9	1262.3	1262.7	1263.1	1263.5	1265.0
172.5°	1271.6	1270.4	1269.2	1268.0	1266.8	1266.4	1266.8	1267.2	1267.6	1268.0	1269.4
175°	1277.4	1276.0	1274.6	1273.0	1271.6	1271.1	1271.5	1271.9	1272.3	1272.7	1274.2
177.5°	1278.3	1277.2	1276.1	1274.9	1273.7	1273.2	1273.4	1273.5	1273.7	1273.8	1275.1
180°	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7



TEST NUMBER: P331318-840

CATALOG NUMBER: S122DIP-S485D925U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	784.4	784.4	784.4	784.4	784.4	784.4	784.4	784.4
2.5°	781.0	782.3	783.7	784.3	784.0	783.7	783.5	783.2
5°	775.8	777.1	778.4	778.9	778.6	778.2	777.9	777.6
7.5°	767.0	768.3	769.7	770.1	769.8	769.4	769.0	768.7
10°	759.1	760.5	761.8	762.2	761.7	761.2	760.7	760.2
12.5°	749.9	750.8	751.7	752.0	751.6	751.3	750.9	750.5
15°	733.7	734.4	735.0	734.9	734.1	733.3	732.5	731.5
17.5°	714.4	715.2	716.0	715.9	715.1	714.4	713.6	712.8
20°	699.4	699.9	700.4	700.3	699.6	698.9	698.3	697.6
22.5°	683.5	683.6	683.7	683.6	683.2	682.8	682.4	682.0
25°	657.6	657.9	658.2	658.2	657.9	657.6	657.2	656.9
27.5°	632.1	631.6	631.1	630.5	629.7	628.8	628.0	627.2
30°	612.2	611.7	611.2	610.6	609.9	609.3	608.5	607.8
32.5°	592.7	591.8	590.9	590.1	589.4	588.8	588.0	587.3
35°	561.4	560.4	559.4	558.5	557.6	556.7	555.9	555.1
37.5°	530.0	528.8	527.6	526.4	525.6	524.8	524.0	523.3
40°	508.4	506.9	505.3	504.2	503.5	502.9	502.2	501.5
42.5°	487.0	485.3	483.6	482.4	481.4	480.5	479.6	478.6
45°	454.1	452.3	450.4	449.2	448.5	447.9	447.2	446.5
47.5°	420.0	418.0	416.1	414.7	413.6	412.7	411.7	410.7
50°	398.1	395.7	393.3	391.7	390.9	390.1	389.2	388.4
52.5°	375.4	373.3	371.4	369.9	368.8	367.7	366.6	365.5
55°	341.4	339.4	337.4	336.0	335.1	334.3	333.5	332.6
57.5°	306.2	304.2	302.3	300.9	300.2	299.6	299.0	298.3
60°	282.9	281.0	279.2	278.0	277.5	277.0	276.5	276.0
62.5°	260.8	259.1	257.4	256.3	255.6	255.0	254.4	253.7
65°	227.0	225.5	224.0	222.8	222.0	221.2	220.4	219.4
67.5°	193.6	192.4	191.3	190.4	189.7	188.9	188.3	187.6
70°	171.9	170.7	169.6	168.6	167.9	167.2	166.6	165.9
72.5°	151.4	150.2	149.1	148.1	147.6	147.0	146.5	146.0
75°	119.4	118.5	117.4	117.0	117.4	117.8	118.1	118.5
77.5°	90.9	90.4	89.9	89.4	88.9	88.5	88.0	87.5
80°	72.1	71.6	71.2	70.7	70.4	70.1	69.7	69.4
82.5°	53.8	53.1	52.5	52.1	52.1	52.0	51.9	51.9
85°	28.4	27.9	27.4	27.1	26.9	26.8	26.6	26.4
87.5°	11.7	11.5	11.3	11.2	11.2	11.1	11.1	11.0
90°	20.5	21.5	22.5	23.2	23.6	24.0	24.5	24.9
92.5°	22.4	23.0	23.5	23.9	24.1	24.4	24.6	24.9
95°	38.0	39.1	40.1	40.5	40.3	40.1	39.9	39.7
97.5°	49.8	50.6	51.4	51.9	52.2	52.4	52.7	52.9
100°	55.8	57.5	59.2	60.2	60.6	61.0	61.4	61.8
102.5°	58.3	60.5	62.6	63.9	64.5	65.0	65.6	66.2
105°	60.8	63.0	65.2	66.9	67.7	68.5	69.3	70.1
107.5°	74.1	71.9	69.6	68.9	69.7	70.5	71.3	72.1
110°	120.4	99.9	79.4	69.6	70.4	71.2	72.0	72.9





TEST NUMBER: P331318-840

CATALOG NUMBER: S122DIP-S485D925U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	257.6	182.8	108.1	71.0	71.6	72.3	72.9	73.6
115°	379.3	284.4	189.5	134.6	119.9	105.1	90.4	75.6
117.5°	584.4	561.5	538.5	502.7	454.2	405.8	357.3	308.8
120°	681.0	683.5	685.9	673.3	645.6	617.9	590.3	562.6
122.5°	722.6	724.0	725.5	723.6	718.2	712.8	707.4	702.1
125°	782.2	783.7	785.1	786.1	786.7	787.3	788.0	788.6
127.5°	837.4	839.5	841.6	842.6	842.8	842.9	843.0	843.1
130°	872.4	874.6	876.9	878.0	877.8	877.5	877.3	877.1
132.5°	906.5	908.4	910.3	911.1	910.9	910.7	910.5	910.3
135°	955.0	957.0	959.1	959.9	959.5	959.1	958.7	958.3
137.5°	1000.1	1002.1	1004.1	1004.8	1004.1	1003.4	1002.7	1002.0
140°	1029.3	1031.2	1033.0	1033.4	1032.4	1031.4	1030.4	1029.3
142.5°	1056.2	1057.9	1059.7	1060.0	1058.9	1057.9	1056.9	1055.8
145°	1094.0	1095.4	1096.8	1097.0	1096.0	1095.0	1094.0	1093.0
147.5°	1126.8	1127.8	1128.9	1129.0	1128.1	1127.3	1126.4	1125.6
150°	1147.0	1148.3	1149.5	1149.6	1148.6	1147.5	1146.5	1145.5
152.5°	1165.5	1166.7	1167.9	1167.9	1166.5	1165.2	1163.9	1162.5
155°	1190.4	1191.6	1192.9	1192.7	1191.0	1189.3	1187.7	1186.1
157.5°	1211.3	1212.7	1214.2	1214.1	1212.4	1210.8	1209.2	1207.7
160°	1223.6	1224.9	1226.1	1226.0	1224.5	1223.0	1221.6	1220.2
162.5°	1235.0	1236.4	1237.8	1237.6	1235.9	1234.1	1232.3	1230.5
165°	1248.9	1250.3	1251.7	1251.7	1250.3	1248.9	1247.5	1246.1
167.5°	1260.5	1261.9	1263.4	1263.1	1261.3	1259.5	1257.7	1255.8
170°	1266.5	1267.9	1269.3	1269.1	1267.3	1265.4	1263.5	1261.7
172.5°	1270.8	1272.3	1273.7	1273.5	1271.6	1269.8	1268.0	1266.2
175°	1275.7	1277.1	1278.5	1278.2	1276.2	1274.1	1272.0	1270.0
177.5°	1276.2	1277.4	1278.5	1278.3	1276.9	1275.4	1273.8	1272.4
180°	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7

(END OF REPORT)