

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331373-840

Luminaire Tested: **S122DIP-S675D1080U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331373-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S675D1080U840-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6620.1 lumens
Efficiency: N/A
Efficacy: 116.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331373-840

CATALOG NUMBER: S122DIP-S675D1080U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

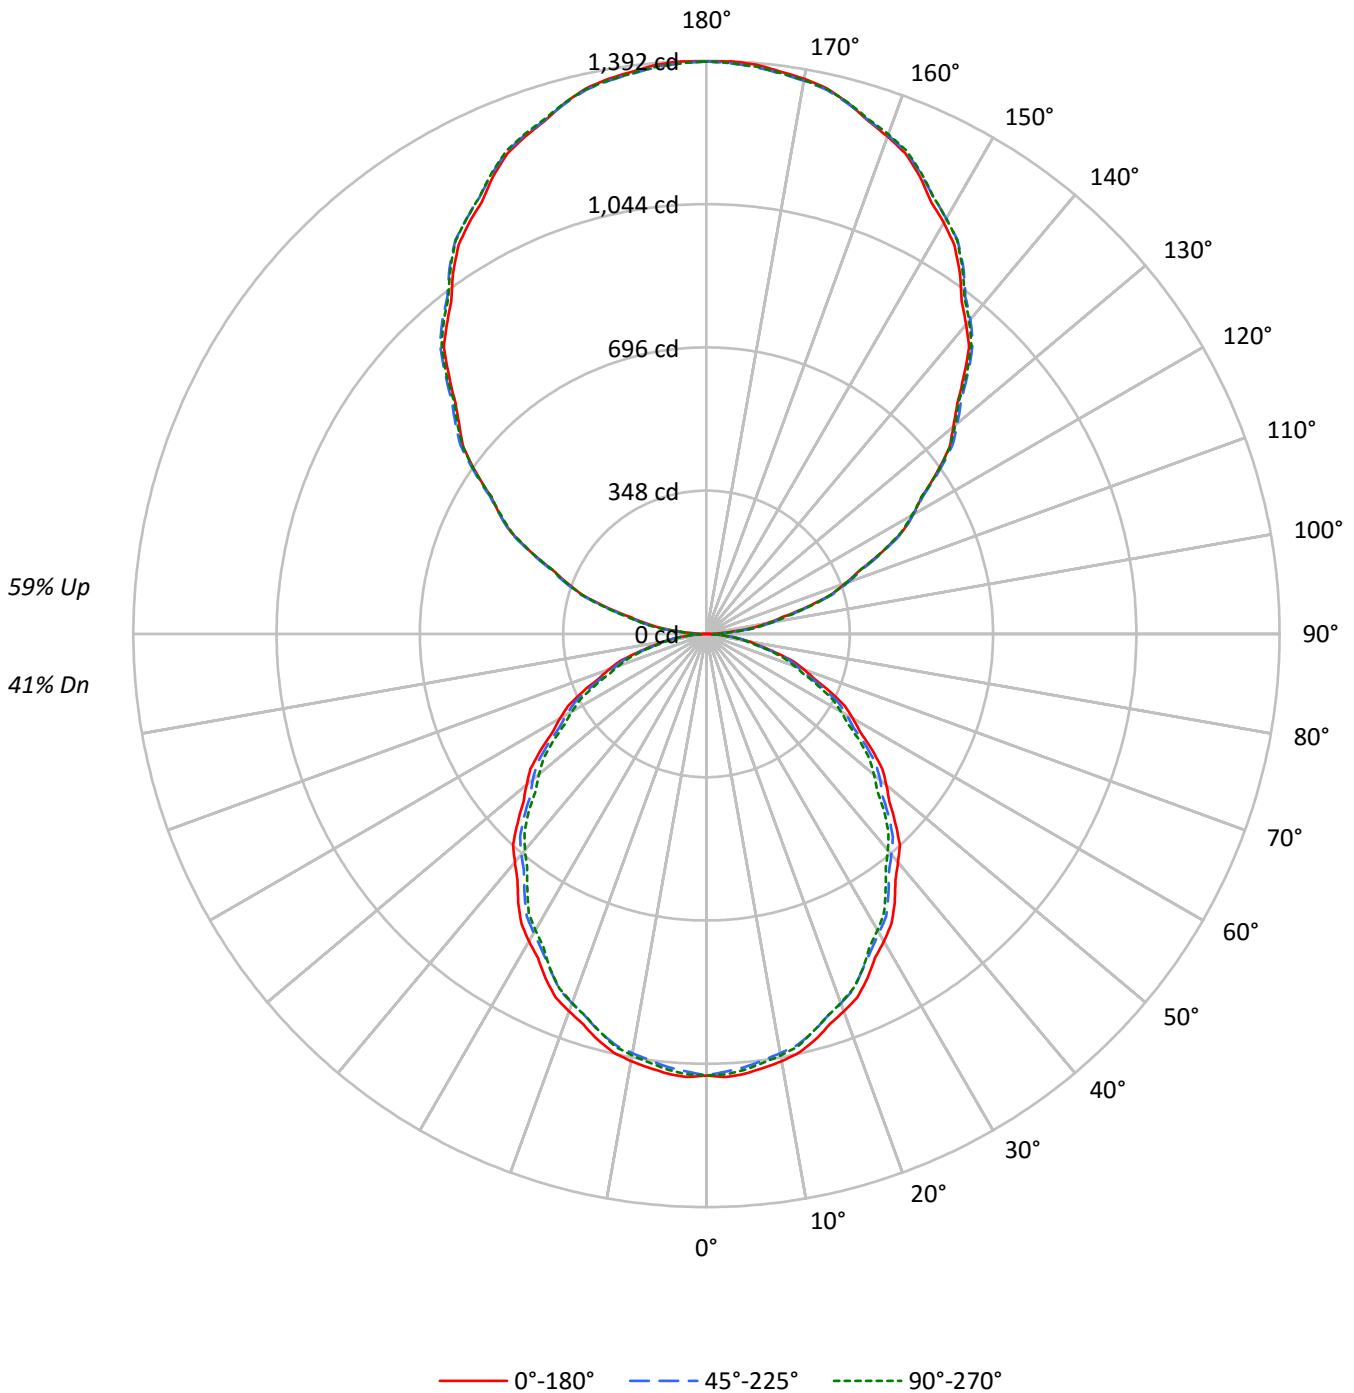



TEST NUMBER: P331373-840

CATALOG NUMBER: S122DIP-S675D1080U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	78	78	78	63	63	63	48	48	48	41
1	96	92	88	84	87	84	80	77	69	66	64	55	54	52	42	41	41	35
2	87	80	74	69	79	73	68	63	60	56	53	48	46	43	37	36	34	29
3	80	70	63	57	72	64	58	53	53	49	45	43	39	37	33	31	29	25
4	73	62	54	48	66	57	50	45	47	42	38	38	34	31	30	27	25	21
5	67	55	47	41	61	51	44	38	42	37	33	34	30	27	27	24	22	18
6	61	50	42	36	56	46	38	33	38	33	29	31	27	24	24	21	19	16
7	57	45	37	31	52	41	34	29	34	29	25	28	24	21	22	19	17	14
8	53	40	33	28	48	37	31	26	31	26	22	26	22	19	20	17	15	13
9	49	37	30	25	45	34	27	23	29	23	20	24	20	17	19	16	14	12
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	17	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17312	17312	17312
5°	17378	17126	17227
10°	17274	16952	17038
15°	17060	16732	16715
20°	16756	16402	16385
25°	16456	15998	15998
30°	16067	15627	15491
35°	15707	15179	14954
40°	15253	14731	14450
45°	14805	14289	13935
50°	14320	13828	13335
55°	13813	13292	12797
60°	13249	12649	12184
65°	12642	12015	11461
70°	11877	11240	10707
75°	10805	10356	10100
80°	9586	9298	8815
85°	7836	7447	6688



TEST NUMBER: P331373-840

CATALOG NUMBER: S122DIP-S675D1080U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	100.8	1.5
10°-20°	283.7	4.3
20°-30°	417.0	6.3
30°-40°	484.3	7.3
40°-50°	483.8	7.3
50°-60°	421.9	6.4
60°-70°	312.0	4.7
70°-80°	176.7	2.7
80°-90°	53.1	0.8
90°-100°	88.1	1.3
100°-110°	273.6	4.1
110°-120°	467.6	7.1
120°-130°	614.9	9.3
130°-140°	690.2	10.4
140°-150°	676.7	10.2
150°-160°	567.6	8.6
160°-170°	376.5	5.7
170°-180°	131.6	2.0
0°-30°	801.5	12.1
0°-40°	1285.8	19.4
0°-60°	2191.5	33.1
0°-90°	2733.3	41.3
90°-120°	829.3	12.5
90°-150°	2811.1	42.5
90°-180°	3887.0	58.7
0°-180°	6620.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1072	1072	1072	1072	1072	
5°	1072	1068	1057	1064	1063	102
15°	1021	1014	1001	1005	1000	287
25°	924	915	898	900	898	425
35°	797	786	770	764	759	497
45°	648	641	626	615	610	500
55°	491	484	472	460	455	439
65°	331	324	314	305	300	327
75°	173	171	166	160	162	185
85°	42	41	40	37	36	48
90°	1	16	41	39	40	5
95°	61	72	75	75	73	70
105°	252	256	258	260	260	266
115°	469	476	474	473	469	464
125°	683	692	690	686	685	610
135°	883	896	899	897	894	682
145°	1072	1080	1087	1088	1084	670
155°	1226	1229	1233	1238	1235	564
165°	1334	1333	1333	1340	1335	376
175°	1388	1384	1382	1389	1383	132
180°	1390	1390	1390	1390	1390	



TEST NUMBER: P331373-840

CATALOG NUMBER: S122DIP-S675D1080U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2
2.5°	1077.1	1076.2	1075.3	1074.4	1073.5	1072.0	1070.0	1067.9	1065.9	1063.9	1065.7
5°	1072.2	1071.3	1070.4	1069.4	1068.5	1066.8	1064.3	1061.8	1059.2	1056.7	1058.5
7.5°	1062.7	1061.3	1059.9	1058.4	1057.0	1055.0	1052.5	1049.9	1047.3	1044.7	1046.5
10°	1053.6	1052.0	1050.4	1048.7	1047.2	1045.0	1042.3	1039.6	1036.7	1034.0	1035.8
12.5°	1041.3	1039.9	1038.3	1036.9	1035.5	1033.5	1030.7	1027.9	1025.2	1022.5	1023.8
15°	1020.6	1019.3	1017.8	1016.5	1015.1	1012.9	1010.0	1006.9	1004.0	1001.0	1002.0
17.5°	994.2	992.8	991.5	990.1	988.8	986.5	983.5	980.5	977.4	974.4	975.5
20°	975.2	973.9	972.5	971.1	969.8	967.5	964.2	961.1	957.9	954.6	955.3
22.5°	956.2	954.3	952.4	950.5	948.6	946.1	943.1	940.1	937.1	934.0	934.1
25°	923.7	921.9	920.1	918.2	916.4	913.5	909.6	905.7	901.8	898.0	898.4
27.5°	886.6	884.9	883.3	881.6	880.0	877.7	874.5	871.5	868.4	865.4	864.6
30°	861.8	860.0	858.2	856.4	854.5	851.9	848.5	845.1	841.6	838.2	837.5
32.5°	835.5	833.9	832.5	831.0	829.6	827.1	823.4	819.8	816.2	812.5	811.3
35°	796.9	794.7	792.3	790.0	787.7	784.8	781.1	777.4	773.8	770.1	768.7
37.5°	753.4	751.3	749.3	747.3	745.4	742.5	738.8	735.2	731.5	727.8	726.1
40°	723.7	721.9	720.0	718.2	716.4	713.7	709.9	706.3	702.7	698.9	696.9
42.5°	694.9	693.0	691.2	689.3	687.5	684.8	681.1	677.4	673.8	670.1	667.8
45°	648.4	646.8	645.2	643.7	642.1	639.5	636.1	632.7	629.2	625.8	623.3
47.5°	602.3	600.8	599.3	597.7	596.2	593.7	590.1	586.5	583.0	579.4	576.7
50°	570.1	569.0	567.8	566.6	565.5	563.3	560.2	556.9	553.7	550.5	547.3
52.5°	538.8	537.2	535.7	534.2	532.7	530.5	527.5	524.4	521.4	518.4	515.7
55°	490.7	489.4	488.0	486.6	485.2	483.1	480.4	477.7	474.9	472.2	469.4
57.5°	442.4	441.4	440.3	439.2	438.1	436.1	433.0	430.0	427.0	423.9	421.2
60°	410.3	409.4	408.5	407.6	406.7	404.6	401.4	398.2	395.0	391.7	389.2
62.5°	379.0	377.5	376.1	374.6	373.1	371.1	368.7	366.2	363.8	361.2	358.9
65°	330.9	329.5	328.2	326.8	325.4	323.6	321.3	319.0	316.7	314.5	312.4
67.5°	282.1	280.9	279.8	278.7	277.6	276.1	274.0	272.0	269.9	267.8	266.2
70°	251.6	250.6	249.7	248.8	247.9	246.4	244.3	242.3	240.2	238.1	236.5
72.5°	220.3	219.2	218.3	217.4	216.5	215.4	214.1	212.8	211.5	210.1	208.5
75°	173.2	172.7	172.3	171.8	171.4	170.6	169.5	168.2	167.1	166.0	164.6
77.5°	131.2	130.4	129.6	128.8	128.1	127.4	126.9	126.4	126.0	125.5	124.9
80°	103.1	102.9	102.6	102.4	102.2	101.8	101.4	100.9	100.5	100.0	99.3
82.5°	76.7	76.6	76.6	76.5	76.5	76.3	76.0	75.8	75.5	75.2	74.4
85°	42.3	42.0	41.8	41.6	41.3	41.1	40.9	40.7	40.4	40.2	39.5
87.5°	15.0	15.3	15.6	15.9	16.2	16.7	17.4	18.2	19.0	19.8	19.1
90°	1.2	4.3	7.5	10.6	13.7	18.1	23.8	29.6	35.3	41.1	40.5
92.5°	20.9	23.1	25.4	27.8	30.1	31.9	33.2	34.6	36.0	37.3	37.4
95°	61.0	63.6	66.2	68.8	71.4	73.0	73.5	74.0	74.5	75.0	75.0
97.5°	111.5	113.7	116.0	118.4	120.6	122.3	123.2	124.2	125.2	126.2	126.2
100°	149.0	151.1	153.2	155.2	157.3	158.8	159.6	160.3	161.1	161.9	161.9
102.5°	188.4	190.1	191.8	193.4	195.1	196.4	197.4	198.3	199.3	200.4	200.6
105°	252.2	253.0	253.8	254.6	255.3	256.0	256.5	257.0	257.5	258.0	258.6
107.5°	316.5	317.6	318.8	319.9	321.0	321.6	321.6	321.6	321.6	321.6	321.8
110°	357.8	359.3	360.9	362.4	364.1	364.9	364.9	364.9	364.9	364.9	364.9



TEST NUMBER: P331373-840

CATALOG NUMBER: S122DIP-S675D1080U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	402.8	404.3	406.0	407.5	409.1	409.8	409.5	409.3	409.1	408.9	408.3
115°	469.2	470.8	472.3	473.9	475.4	475.9	475.4	474.9	474.4	473.9	473.6
117.5°	535.3	537.5	539.6	541.6	543.7	544.0	542.6	541.1	539.7	538.2	537.6
120°	579.5	581.6	583.7	585.7	587.8	587.8	585.7	583.7	581.6	579.5	579.5
122.5°	619.9	622.4	624.8	627.3	629.9	630.4	628.9	627.4	626.0	624.5	623.9
125°	682.7	685.1	687.4	689.7	692.1	692.9	692.1	691.4	690.5	689.7	688.9
127.5°	744.0	746.9	749.9	752.9	755.8	756.9	755.9	755.0	754.1	753.1	752.1
130°	782.4	785.8	789.2	792.5	796.0	797.4	796.9	796.4	795.9	795.4	794.8
132.5°	825.6	828.4	831.1	833.8	836.7	838.1	838.2	838.3	838.4	838.5	837.4
135°	883.3	886.2	889.1	891.9	894.7	896.5	897.0	897.5	898.1	898.6	898.3
137.5°	944.0	946.4	948.8	951.1	953.4	954.9	955.6	956.3	956.9	957.7	957.5
140°	980.7	983.0	985.3	987.7	990.1	991.9	993.2	994.5	995.8	997.0	997.0
142.5°	1018.2	1020.6	1022.9	1025.2	1027.5	1029.2	1030.1	1031.0	1031.9	1032.8	1033.0
145°	1072.2	1074.0	1075.8	1077.6	1079.4	1081.2	1082.7	1084.3	1085.8	1087.4	1087.6
147.5°	1120.2	1122.5	1124.6	1126.8	1129.0	1130.6	1131.7	1132.8	1133.8	1134.8	1135.4
150°	1153.1	1154.7	1156.2	1157.8	1159.3	1160.6	1161.7	1162.8	1163.8	1164.9	1165.6
152.5°	1182.1	1183.8	1185.3	1186.9	1188.4	1189.8	1191.1	1192.3	1193.7	1194.9	1195.9
155°	1225.9	1226.6	1227.4	1228.2	1229.0	1229.7	1230.5	1231.3	1232.1	1232.8	1234.2
157.5°	1263.1	1263.6	1264.1	1264.7	1265.3	1265.7	1266.2	1266.7	1267.1	1267.6	1269.4
160°	1285.7	1286.2	1286.7	1287.2	1287.8	1288.1	1288.4	1288.7	1288.9	1289.2	1290.7
162.5°	1306.3	1306.4	1306.5	1306.6	1306.8	1306.9	1307.2	1307.4	1307.7	1308.0	1309.7
165°	1333.7	1333.5	1333.2	1332.9	1332.7	1332.6	1332.6	1332.6	1332.6	1332.6	1334.4
167.5°	1356.8	1355.9	1355.1	1354.4	1353.6	1353.2	1353.1	1353.1	1353.0	1353.0	1354.8
170°	1369.0	1368.2	1367.4	1366.5	1365.8	1365.3	1365.0	1364.7	1364.5	1364.2	1366.0
172.5°	1377.4	1376.6	1375.8	1375.0	1374.2	1373.7	1373.5	1373.2	1372.9	1372.7	1374.5
175°	1387.8	1386.9	1386.1	1385.3	1384.6	1383.9	1383.4	1382.9	1382.4	1381.8	1383.7
177.5°	1391.9	1391.3	1390.7	1390.1	1389.5	1388.9	1388.5	1388.1	1387.7	1387.3	1388.5
180°	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1



TEST NUMBER: P331373-840

CATALOG NUMBER: S122DIP-S675D1080U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2
2.5°	1067.5	1069.4	1071.3	1072.0	1071.6	1071.3	1070.9	1070.6
5°	1060.4	1062.2	1064.0	1064.7	1064.3	1063.8	1063.4	1062.9
7.5°	1048.4	1050.3	1052.1	1052.7	1052.2	1051.8	1051.3	1050.8
10°	1037.6	1039.6	1041.4	1041.9	1041.3	1040.6	1039.9	1039.2
12.5°	1025.0	1026.3	1027.6	1027.9	1027.4	1027.0	1026.5	1026.0
15°	1002.9	1003.8	1004.7	1004.6	1003.4	1002.3	1001.2	1000.0
17.5°	976.5	977.5	978.7	978.7	977.5	976.4	975.3	974.2
20°	956.0	956.7	957.4	957.3	956.3	955.4	954.5	953.6
22.5°	934.3	934.4	934.5	934.3	933.8	933.2	932.7	932.2
25°	898.9	899.3	899.8	899.8	899.3	898.9	898.4	898.0
27.5°	863.9	863.3	862.6	861.7	860.6	859.5	858.4	857.3
30°	836.8	836.1	835.4	834.6	833.6	832.7	831.8	830.9
32.5°	810.1	808.9	807.6	806.6	805.7	804.8	803.8	802.8
35°	767.4	766.0	764.6	763.4	762.2	761.0	759.9	758.7
37.5°	724.5	722.8	721.0	719.6	718.5	717.4	716.4	715.3
40°	694.9	692.8	690.7	689.2	688.3	687.4	686.5	685.6
42.5°	665.6	663.4	661.2	659.3	658.0	656.8	655.5	654.2
45°	620.8	618.2	615.7	614.0	613.1	612.2	611.3	610.3
47.5°	574.1	571.4	568.8	566.7	565.4	564.1	562.8	561.5
50°	544.1	540.9	537.7	535.5	534.3	533.2	532.1	530.9
52.5°	513.0	510.4	507.8	505.6	504.1	502.6	501.1	499.6
55°	466.7	463.9	461.2	459.2	458.1	457.0	455.8	454.6
57.5°	418.5	415.8	413.1	411.3	410.4	409.6	408.7	407.8
60°	386.7	384.2	381.6	380.1	379.4	378.7	378.0	377.3
62.5°	356.6	354.3	351.9	350.3	349.4	348.5	347.7	346.8
65°	310.3	308.2	306.2	304.6	303.5	302.3	301.1	300.0
67.5°	264.6	263.1	261.5	260.1	259.2	258.3	257.4	256.5
70°	234.9	233.4	231.8	230.5	229.5	228.6	227.7	226.8
72.5°	206.9	205.3	203.7	202.5	201.8	201.1	200.4	199.5
75°	163.2	161.9	160.5	160.1	160.5	161.0	161.4	161.9
77.5°	124.2	123.5	122.8	122.2	121.5	120.9	120.3	119.6
80°	98.7	98.0	97.3	96.6	96.2	95.7	95.3	94.8
82.5°	73.5	72.6	71.8	71.3	71.2	71.1	71.0	70.9
85°	38.9	38.2	37.5	37.0	36.8	36.6	36.4	36.1
87.5°	18.5	17.8	17.2	16.8	16.7	16.5	16.4	16.3
90°	40.0	39.5	39.0	38.9	39.1	39.4	39.6	39.9
92.5°	37.5	37.6	37.8	37.8	37.9	37.9	38.0	38.0
95°	75.0	75.0	75.0	74.8	74.3	73.8	73.2	72.7
97.5°	126.2	126.2	126.2	126.2	126.1	126.1	126.0	126.0
100°	161.9	161.9	161.9	161.8	161.5	161.3	161.0	160.7
102.5°	200.8	201.0	201.2	201.2	200.9	200.7	200.4	200.2
105°	259.1	259.6	260.1	260.4	260.4	260.4	260.4	260.4
107.5°	322.0	322.2	322.4	321.9	320.8	319.6	318.4	317.2
110°	364.9	364.9	364.9	364.5	363.7	362.8	362.0	361.3



TEST NUMBER: P331373-840

CATALOG NUMBER: S122DIP-S675D1080U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	407.7	407.1	406.5	405.9	405.3	404.7	404.1	403.5
115°	473.4	473.1	472.8	472.3	471.6	470.8	470.0	469.2
117.5°	536.9	536.3	535.7	535.0	534.2	533.4	532.6	531.9
120°	579.5	579.5	579.5	579.1	578.3	577.5	576.7	575.9
122.5°	623.3	622.7	622.0	621.5	620.9	620.3	619.8	619.1
125°	688.2	687.4	686.6	686.1	685.8	685.6	685.3	685.1
127.5°	751.2	750.2	749.3	748.4	747.6	746.8	746.0	745.1
130°	794.3	793.8	793.2	792.4	791.4	790.3	789.3	788.3
132.5°	836.2	835.1	833.9	832.9	832.1	831.2	830.4	829.6
135°	898.1	897.8	897.5	897.0	896.2	895.4	894.6	893.8
137.5°	957.3	957.0	956.8	956.2	955.1	954.1	953.1	952.0
140°	997.0	997.0	997.0	996.5	995.5	994.5	993.4	992.4
142.5°	1033.2	1033.4	1033.6	1033.2	1032.1	1031.1	1030.1	1029.0
145°	1087.9	1088.2	1088.4	1088.0	1087.0	1086.0	1084.9	1083.9
147.5°	1136.0	1136.5	1137.1	1136.9	1135.9	1134.9	1133.9	1133.0
150°	1166.4	1167.2	1168.0	1168.0	1167.2	1166.4	1165.6	1164.9
152.5°	1196.9	1197.8	1198.8	1198.8	1197.8	1196.9	1195.9	1194.9
155°	1235.5	1236.8	1238.1	1238.3	1237.6	1236.8	1236.0	1235.2
157.5°	1271.1	1272.9	1274.7	1275.0	1273.6	1272.4	1271.2	1269.9
160°	1292.3	1293.8	1295.5	1295.7	1294.6	1293.6	1292.5	1291.5
162.5°	1311.5	1313.2	1315.0	1315.2	1314.0	1312.8	1311.5	1310.3
165°	1336.3	1338.1	1339.9	1340.1	1338.9	1337.6	1336.3	1334.9
167.5°	1356.7	1358.5	1360.3	1360.5	1359.2	1357.8	1356.5	1355.1
170°	1367.9	1369.7	1371.5	1371.7	1370.1	1368.6	1367.0	1365.4
172.5°	1376.3	1378.2	1380.0	1380.1	1378.6	1377.0	1375.4	1373.8
175°	1385.5	1387.4	1389.2	1389.3	1387.8	1386.1	1384.6	1383.0
177.5°	1389.8	1391.0	1392.2	1392.2	1391.0	1389.8	1388.5	1387.3
180°	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1

(END OF REPORT)