

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331355-840

Luminaire Tested: **S122DIP-S675D725U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331355-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIP-S675D725U840-4F0-1E-UDD-F1  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 725 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5347.0 lumens  
Efficiency: N/A  
Efficacy: 116.5 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 45.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331355-840

CATALOG NUMBER: S122DIP-S675D725U840-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

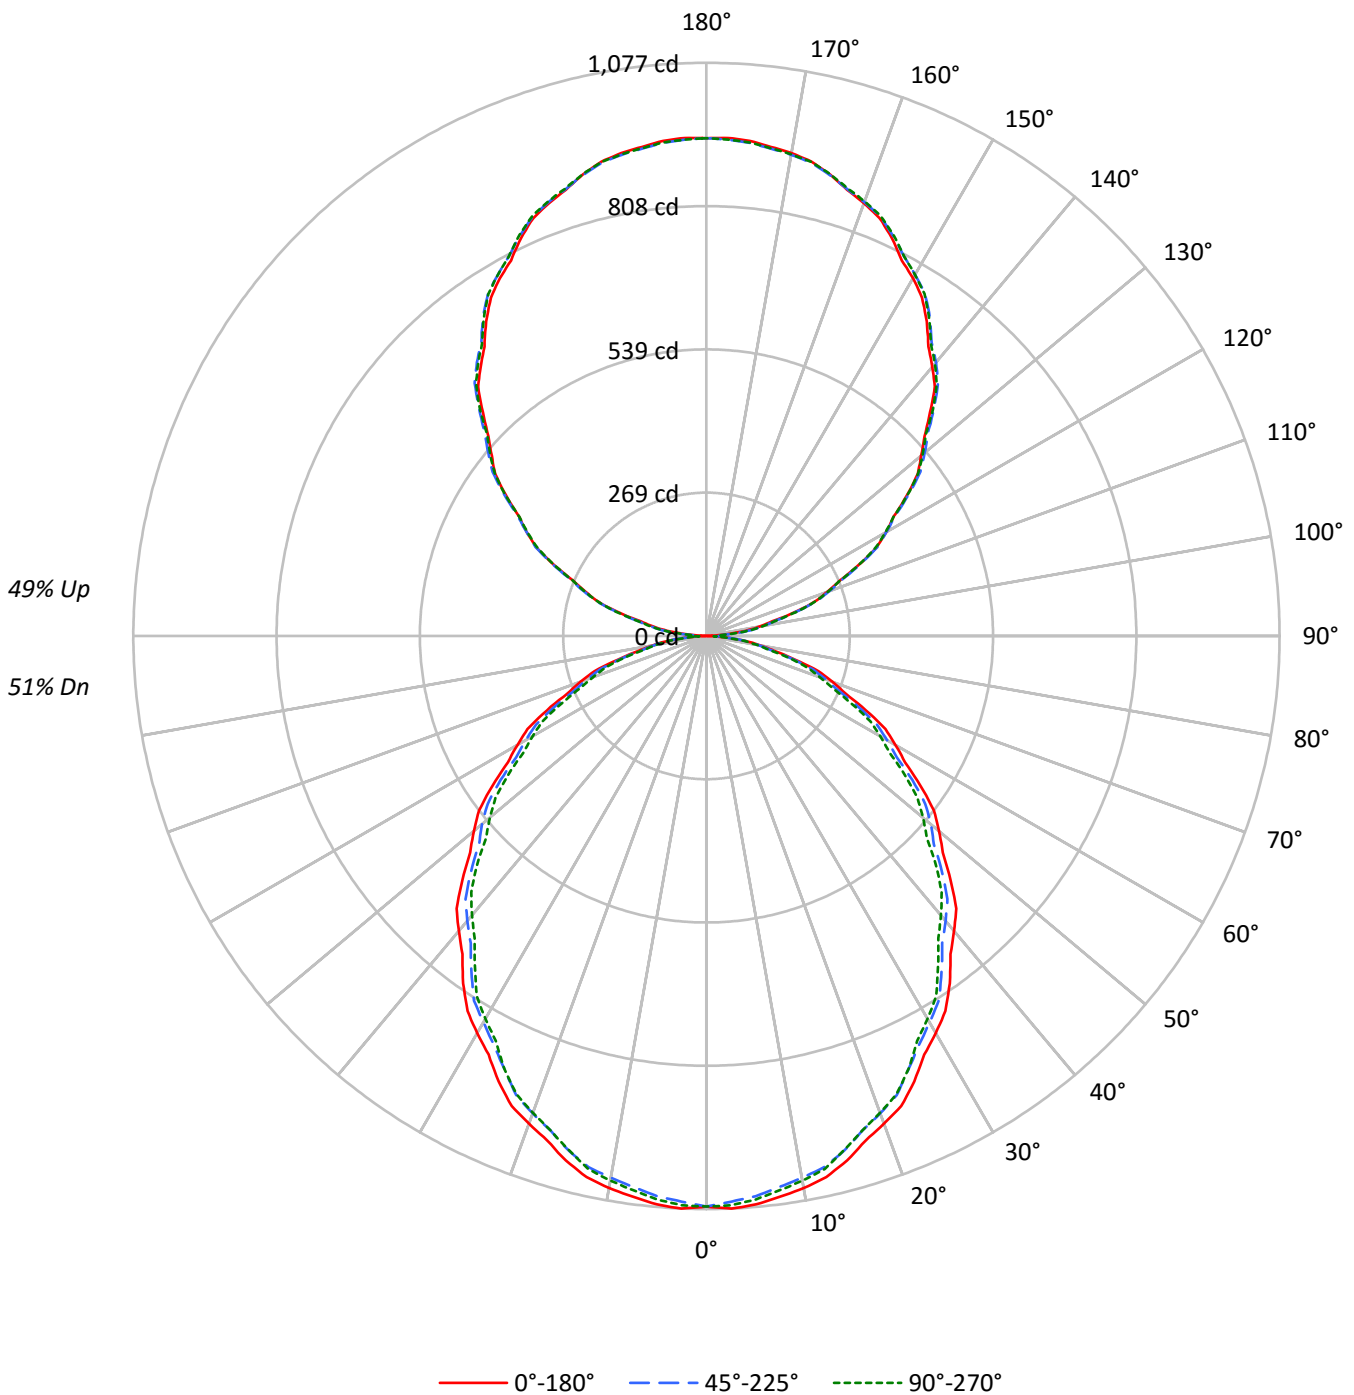



TEST NUMBER: P331355-840

CATALOG NUMBER: S122DIP-S675D725U840-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51
1	98	94	90	86	90	87	83	80	74	71	69	62	60	58	50	49	48	43
2	89	82	76	70	82	76	70	66	64	60	57	54	51	49	44	42	41	36
3	81	72	65	59	75	67	60	55	57	52	48	48	44	41	39	37	35	31
4	74	64	56	50	69	59	52	47	51	45	41	43	39	35	35	32	30	26
5	68	57	49	43	63	53	46	40	45	40	35	38	34	31	32	29	26	23
6	63	51	43	37	58	47	40	35	41	35	31	35	30	27	29	25	23	20
7	58	46	38	32	54	43	36	31	37	31	27	31	27	24	26	23	20	18
8	54	42	34	29	50	39	32	27	34	28	24	29	24	21	24	21	18	16
9	50	38	31	26	46	36	29	24	31	25	22	26	22	19	22	19	16	14
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	21	17	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	17312	17312	17312
5°	17378	17126	17227
10°	17274	16952	17038
15°	17060	16732	16715
20°	16756	16402	16385
25°	16456	15998	15998
30°	16067	15627	15491
35°	15707	15179	14954
40°	15253	14731	14450
45°	14805	14289	13935
50°	14320	13828	13335
55°	13813	13292	12797
60°	13249	12649	12184
65°	12642	12015	11461
70°	11877	11240	10707
75°	10805	10356	10100
80°	9586	9298	8815
85°	7836	7447	6688



TEST NUMBER: P331355-840

CATALOG NUMBER: S122DIP-S675D725U840-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	100.8	1.9
10°-20°	283.7	5.3
20°-30°	417.0	7.8
30°-40°	484.3	9.1
40°-50°	483.8	9.0
50°-60°	421.9	7.9
60°-70°	312.0	5.8
70°-80°	176.7	3.3
80°-90°	51.3	1.0
90°-100°	59.3	1.1
100°-110°	184.1	3.4
110°-120°	314.7	5.9
120°-130°	413.8	7.7
130°-140°	464.4	8.7
140°-150°	455.4	8.5
150°-160°	382.0	7.1
160°-170°	253.3	4.7
170°-180°	88.5	1.7
0°-30°	801.5	15.0
0°-40°	1285.8	24.0
0°-60°	2191.5	41.0
0°-90°	2731.5	51.1
90°-120°	558.0	10.4
90°-150°	1891.7	35.4
90°-180°	2616.0	48.9
0°-180°	5347.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1072	1072	1072	1072	1072	
5°	1072	1068	1057	1064	1063	102
15°	1021	1014	1001	1005	1000	287
25°	924	915	898	900	898	425
35°	797	786	770	764	759	497
45°	648	641	626	615	610	500
55°	491	484	472	460	455	439
65°	331	324	314	305	300	327
75°	173	171	166	160	162	185
85°	42	41	40	37	36	48
90°	1	11	28	26	27	4
95°	41	49	50	50	49	47
105°	170	172	174	175	175	179
115°	316	320	319	318	316	312
125°	459	466	464	462	461	410
135°	594	603	605	604	602	459
145°	721	727	732	732	729	451
155°	825	827	830	833	831	380
165°	898	897	897	902	898	253
175°	934	932	930	935	931	89
180°	935	935	935	935	935	



TEST NUMBER: P331355-840

CATALOG NUMBER: S122DIP-S675D725U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2
2.5°	1077.1	1076.2	1075.3	1074.4	1073.5	1072.0	1070.0	1067.9	1065.9	1063.9	1065.7
5°	1072.2	1071.3	1070.4	1069.4	1068.5	1066.8	1064.3	1061.8	1059.2	1056.7	1058.5
7.5°	1062.7	1061.3	1059.9	1058.4	1057.0	1055.0	1052.5	1049.9	1047.3	1044.7	1046.5
10°	1053.6	1052.0	1050.4	1048.7	1047.2	1045.0	1042.3	1039.6	1036.7	1034.0	1035.8
12.5°	1041.3	1039.9	1038.3	1036.9	1035.5	1033.5	1030.7	1027.9	1025.2	1022.5	1023.8
15°	1020.6	1019.3	1017.8	1016.5	1015.1	1012.9	1010.0	1006.9	1004.0	1001.0	1002.0
17.5°	994.2	992.8	991.5	990.1	988.8	986.5	983.5	980.5	977.4	974.4	975.5
20°	975.2	973.9	972.5	971.1	969.8	967.5	964.2	961.1	957.9	954.6	955.3
22.5°	956.2	954.3	952.4	950.5	948.6	946.1	943.1	940.1	937.1	934.0	934.1
25°	923.7	921.9	920.1	918.2	916.4	913.5	909.6	905.7	901.8	898.0	898.4
27.5°	886.6	884.9	883.3	881.6	880.0	877.7	874.5	871.5	868.4	865.4	864.6
30°	861.8	860.0	858.2	856.4	854.5	851.9	848.5	845.1	841.6	838.2	837.5
32.5°	835.5	833.9	832.5	831.0	829.6	827.1	823.4	819.8	816.2	812.5	811.3
35°	796.9	794.7	792.3	790.0	787.7	784.8	781.1	777.4	773.8	770.1	768.7
37.5°	753.4	751.3	749.3	747.3	745.4	742.5	738.8	735.2	731.5	727.8	726.1
40°	723.7	721.9	720.0	718.2	716.4	713.7	709.9	706.3	702.7	698.9	696.9
42.5°	694.9	693.0	691.2	689.3	687.5	684.8	681.1	677.4	673.8	670.1	667.8
45°	648.4	646.8	645.2	643.7	642.1	639.5	636.1	632.7	629.2	625.8	623.3
47.5°	602.3	600.8	599.3	597.7	596.2	593.7	590.1	586.5	583.0	579.4	576.7
50°	570.1	569.0	567.8	566.6	565.5	563.3	560.2	556.9	553.7	550.5	547.3
52.5°	538.8	537.2	535.7	534.2	532.7	530.5	527.5	524.4	521.4	518.4	515.7
55°	490.7	489.4	488.0	486.6	485.2	483.1	480.4	477.7	474.9	472.2	469.4
57.5°	442.4	441.4	440.3	439.2	438.1	436.1	433.0	430.0	427.0	423.9	421.2
60°	410.3	409.4	408.5	407.6	406.7	404.6	401.4	398.2	395.0	391.7	389.2
62.5°	379.0	377.5	376.1	374.6	373.1	371.1	368.7	366.2	363.8	361.2	358.9
65°	330.9	329.5	328.2	326.8	325.4	323.6	321.3	319.0	316.7	314.5	312.4
67.5°	282.1	280.9	279.8	278.7	277.6	276.1	274.0	272.0	269.9	267.8	266.2
70°	251.6	250.6	249.7	248.8	247.9	246.4	244.3	242.3	240.2	238.1	236.5
72.5°	220.3	219.2	218.3	217.4	216.5	215.4	214.1	212.8	211.5	210.1	208.5
75°	173.2	172.7	172.3	171.8	171.4	170.6	169.5	168.2	167.1	166.0	164.6
77.5°	131.2	130.4	129.6	128.8	128.1	127.4	126.9	126.4	126.0	125.5	124.9
80°	103.1	102.9	102.6	102.4	102.2	101.8	101.4	100.9	100.5	100.0	99.3
82.5°	76.7	76.6	76.6	76.5	76.5	76.3	76.0	75.8	75.5	75.2	74.4
85°	42.3	42.0	41.8	41.6	41.3	41.1	40.9	40.7	40.4	40.2	39.5
87.5°	15.0	15.0	15.1	15.1	15.2	15.5	15.9	16.3	16.7	17.1	16.5
90°	0.8	2.9	5.0	7.1	9.2	12.2	16.1	19.9	23.7	27.7	27.3
92.5°	14.0	15.6	17.2	18.7	20.2	21.4	22.3	23.2	24.2	25.1	25.1
95°	41.0	42.8	44.5	46.4	48.1	49.1	49.5	49.8	50.2	50.5	50.5
97.5°	75.0	76.5	78.1	79.6	81.2	82.3	82.9	83.6	84.2	84.9	84.9
100°	100.3	101.7	103.0	104.4	105.8	106.8	107.3	107.9	108.4	109.0	109.0
102.5°	126.7	127.8	129.1	130.2	131.3	132.2	132.8	133.5	134.1	134.8	134.9
105°	169.8	170.3	170.8	171.3	171.8	172.3	172.6	173.0	173.3	173.7	174.0
107.5°	213.0	213.8	214.5	215.3	216.0	216.4	216.4	216.4	216.4	216.4	216.6
110°	240.8	241.8	242.9	243.9	245.0	245.5	245.5	245.5	245.5	245.5	245.5



TEST NUMBER: P331355-840

CATALOG NUMBER: S122DIP-S675D725U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	271.0	272.2	273.2	274.2	275.3	275.7	275.6	275.5	275.3	275.2	274.8
115°	315.8	316.8	317.8	318.9	319.9	320.3	319.9	319.6	319.2	318.9	318.7
117.5°	360.2	361.6	363.0	364.5	365.9	366.1	365.1	364.2	363.1	362.1	361.7
120°	389.9	391.3	392.7	394.2	395.6	395.6	394.2	392.7	391.3	389.9	389.9
122.5°	417.1	418.8	420.5	422.1	423.8	424.1	423.2	422.2	421.2	420.2	419.8
125°	459.4	461.0	462.5	464.1	465.7	466.3	465.7	465.1	464.6	464.1	463.6
127.5°	500.6	502.6	504.6	506.6	508.6	509.3	508.7	508.1	507.4	506.8	506.1
130°	526.5	528.8	531.1	533.3	535.6	536.5	536.2	535.8	535.5	535.2	534.8
132.5°	555.5	557.4	559.3	561.1	563.0	563.9	564.0	564.1	564.1	564.2	563.5
135°	594.4	596.3	598.2	600.2	602.1	603.2	603.6	603.9	604.3	604.6	604.5
137.5°	635.3	636.8	638.4	640.1	641.6	642.6	643.1	643.5	644.0	644.4	644.3
140°	659.9	661.5	663.1	664.6	666.2	667.4	668.3	669.2	670.0	671.0	671.0
142.5°	685.2	686.7	688.3	689.9	691.5	692.6	693.2	693.8	694.4	695.0	695.1
145°	721.4	722.7	724.0	725.2	726.4	727.5	728.6	729.6	730.6	731.7	732.0
147.5°	753.9	755.3	756.8	758.2	759.7	760.8	761.5	762.2	763.0	763.7	764.0
150°	776.0	777.0	778.0	779.1	780.1	781.0	781.7	782.4	783.2	783.9	784.4
152.5°	795.5	796.6	797.6	798.7	799.7	800.6	801.5	802.3	803.1	804.1	804.7
155°	824.9	825.4	826.0	826.5	827.0	827.5	828.0	828.6	829.1	829.6	830.5
157.5°	850.0	850.3	850.7	851.0	851.4	851.7	852.0	852.3	852.6	852.9	854.1
160°	865.2	865.5	865.9	866.2	866.6	866.8	867.0	867.2	867.4	867.5	868.6
162.5°	879.0	879.1	879.2	879.2	879.3	879.4	879.6	879.8	880.0	880.1	881.3
165°	897.5	897.4	897.2	897.0	896.8	896.7	896.7	896.7	896.7	896.7	898.0
167.5°	912.9	912.4	911.9	911.4	910.9	910.6	910.6	910.5	910.5	910.4	911.7
170°	921.2	920.7	920.1	919.6	919.1	918.7	918.6	918.4	918.2	918.0	919.3
172.5°	926.9	926.3	925.8	925.2	924.7	924.4	924.2	924.0	923.9	923.7	924.9
175°	933.8	933.3	932.7	932.2	931.7	931.3	930.9	930.6	930.2	929.9	931.1
177.5°	936.6	936.2	935.8	935.3	934.9	934.6	934.3	934.0	933.7	933.5	934.3
180°	935.3	935.3	935.3	935.3	935.3	935.3	935.3	935.3	935.3	935.3	935.3



TEST NUMBER: P331355-840

CATALOG NUMBER: S122DIP-S675D725U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2
2.5°	1067.5	1069.4	1071.3	1072.0	1071.6	1071.3	1070.9	1070.6
5°	1060.4	1062.2	1064.0	1064.7	1064.3	1063.8	1063.4	1062.9
7.5°	1048.4	1050.3	1052.1	1052.7	1052.2	1051.8	1051.3	1050.8
10°	1037.6	1039.6	1041.4	1041.9	1041.3	1040.6	1039.9	1039.2
12.5°	1025.0	1026.3	1027.6	1027.9	1027.4	1027.0	1026.5	1026.0
15°	1002.9	1003.8	1004.7	1004.6	1003.4	1002.3	1001.2	1000.0
17.5°	976.5	977.5	978.7	978.7	977.5	976.4	975.3	974.2
20°	956.0	956.7	957.4	957.3	956.3	955.4	954.5	953.6
22.5°	934.3	934.4	934.5	934.3	933.8	933.2	932.7	932.2
25°	898.9	899.3	899.8	899.8	899.3	898.9	898.4	898.0
27.5°	863.9	863.3	862.6	861.7	860.6	859.5	858.4	857.3
30°	836.8	836.1	835.4	834.6	833.6	832.7	831.8	830.9
32.5°	810.1	808.9	807.6	806.6	805.7	804.8	803.8	802.8
35°	767.4	766.0	764.6	763.4	762.2	761.0	759.9	758.7
37.5°	724.5	722.8	721.0	719.6	718.5	717.4	716.4	715.3
40°	694.9	692.8	690.7	689.2	688.3	687.4	686.5	685.6
42.5°	665.6	663.4	661.2	659.3	658.0	656.8	655.5	654.2
45°	620.8	618.2	615.7	614.0	613.1	612.2	611.3	610.3
47.5°	574.1	571.4	568.8	566.7	565.4	564.1	562.8	561.5
50°	544.1	540.9	537.7	535.5	534.3	533.2	532.1	530.9
52.5°	513.0	510.4	507.8	505.6	504.1	502.6	501.1	499.6
55°	466.7	463.9	461.2	459.2	458.1	457.0	455.8	454.6
57.5°	418.5	415.8	413.1	411.3	410.4	409.6	408.7	407.8
60°	386.7	384.2	381.6	380.1	379.4	378.7	378.0	377.3
62.5°	356.6	354.3	351.9	350.3	349.4	348.5	347.7	346.8
65°	310.3	308.2	306.2	304.6	303.5	302.3	301.1	300.0
67.5°	264.6	263.1	261.5	260.1	259.2	258.3	257.4	256.5
70°	234.9	233.4	231.8	230.5	229.5	228.6	227.7	226.8
72.5°	206.9	205.3	203.7	202.5	201.8	201.1	200.4	199.5
75°	163.2	161.9	160.5	160.1	160.5	161.0	161.4	161.9
77.5°	124.2	123.5	122.8	122.2	121.5	120.9	120.3	119.6
80°	98.7	98.0	97.3	96.6	96.2	95.7	95.3	94.8
82.5°	73.5	72.6	71.8	71.3	71.2	71.1	71.0	70.9
85°	38.9	38.2	37.5	37.0	36.8	36.6	36.4	36.1
87.5°	15.9	15.2	14.5	14.2	14.0	13.9	13.7	13.6
90°	27.0	26.6	26.3	26.2	26.4	26.5	26.7	26.9
92.5°	25.2	25.3	25.3	25.4	25.4	25.5	25.5	25.5
95°	50.5	50.5	50.5	50.4	50.0	49.7	49.3	49.0
97.5°	84.9	84.9	84.9	84.9	84.9	84.8	84.8	84.7
100°	109.0	109.0	109.0	108.9	108.7	108.5	108.4	108.2
102.5°	135.1	135.2	135.4	135.3	135.2	135.0	134.8	134.6
105°	174.4	174.7	175.1	175.2	175.2	175.2	175.2	175.2
107.5°	216.7	216.8	217.0	216.7	215.9	215.1	214.3	213.5
110°	245.5	245.5	245.5	245.2	244.7	244.2	243.7	243.1





TEST NUMBER: P331355-840

CATALOG NUMBER: S122DIP-S675D725U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	274.3	273.9	273.5	273.1	272.7	272.3	272.0	271.6
115°	318.5	318.4	318.2	317.8	317.3	316.8	316.3	315.8
117.5°	361.3	360.9	360.4	360.0	359.5	358.9	358.4	357.9
120°	389.9	389.9	389.9	389.7	389.1	388.6	388.1	387.6
122.5°	419.4	419.0	418.6	418.2	417.8	417.4	417.0	416.7
125°	463.1	462.5	462.0	461.7	461.5	461.3	461.2	461.0
127.5°	505.5	504.8	504.2	503.6	503.1	502.5	502.0	501.4
130°	534.5	534.1	533.8	533.2	532.5	531.9	531.2	530.5
132.5°	562.7	561.9	561.2	560.5	559.9	559.4	558.8	558.3
135°	604.3	604.1	603.9	603.6	603.1	602.6	602.0	601.5
137.5°	644.2	644.0	643.9	643.5	642.8	642.1	641.4	640.7
140°	671.0	671.0	671.0	670.6	669.9	669.2	668.5	667.8
142.5°	695.2	695.4	695.5	695.2	694.5	693.8	693.2	692.5
145°	732.1	732.3	732.5	732.2	731.4	730.7	730.0	729.3
147.5°	764.4	764.8	765.2	765.1	764.4	763.7	763.1	762.3
150°	784.9	785.4	786.0	786.0	785.4	784.9	784.4	783.9
152.5°	805.4	806.1	806.7	806.7	806.1	805.4	804.7	804.1
155°	831.3	832.2	833.1	833.3	832.7	832.2	831.7	831.2
157.5°	855.4	856.6	857.8	857.9	857.1	856.3	855.4	854.5
160°	869.6	870.7	871.7	871.9	871.2	870.5	869.8	869.1
162.5°	882.5	883.7	884.9	885.0	884.2	883.4	882.5	881.7
165°	899.2	900.4	901.6	901.8	900.9	900.0	899.2	898.3
167.5°	912.9	914.1	915.3	915.5	914.6	913.7	912.8	911.9
170°	920.5	921.7	922.9	923.0	922.0	920.9	919.9	918.8
172.5°	926.1	927.4	928.6	928.7	927.7	926.6	925.5	924.5
175°	932.3	933.5	934.7	934.8	933.8	932.7	931.7	930.7
177.5°	935.1	936.0	936.9	936.9	936.0	935.1	934.3	933.5
180°	935.3	935.3	935.3	935.3	935.3	935.3	935.3	935.3

(END OF REPORT)