

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331409-840

Luminaire Tested: **S122DIP-S865D925U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331409-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S865D925U840-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 925 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6889.7 lumens
Efficiency: N/A
Efficacy: 113.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 60.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331409-840

CATALOG NUMBER: S122DIP-S865D925U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

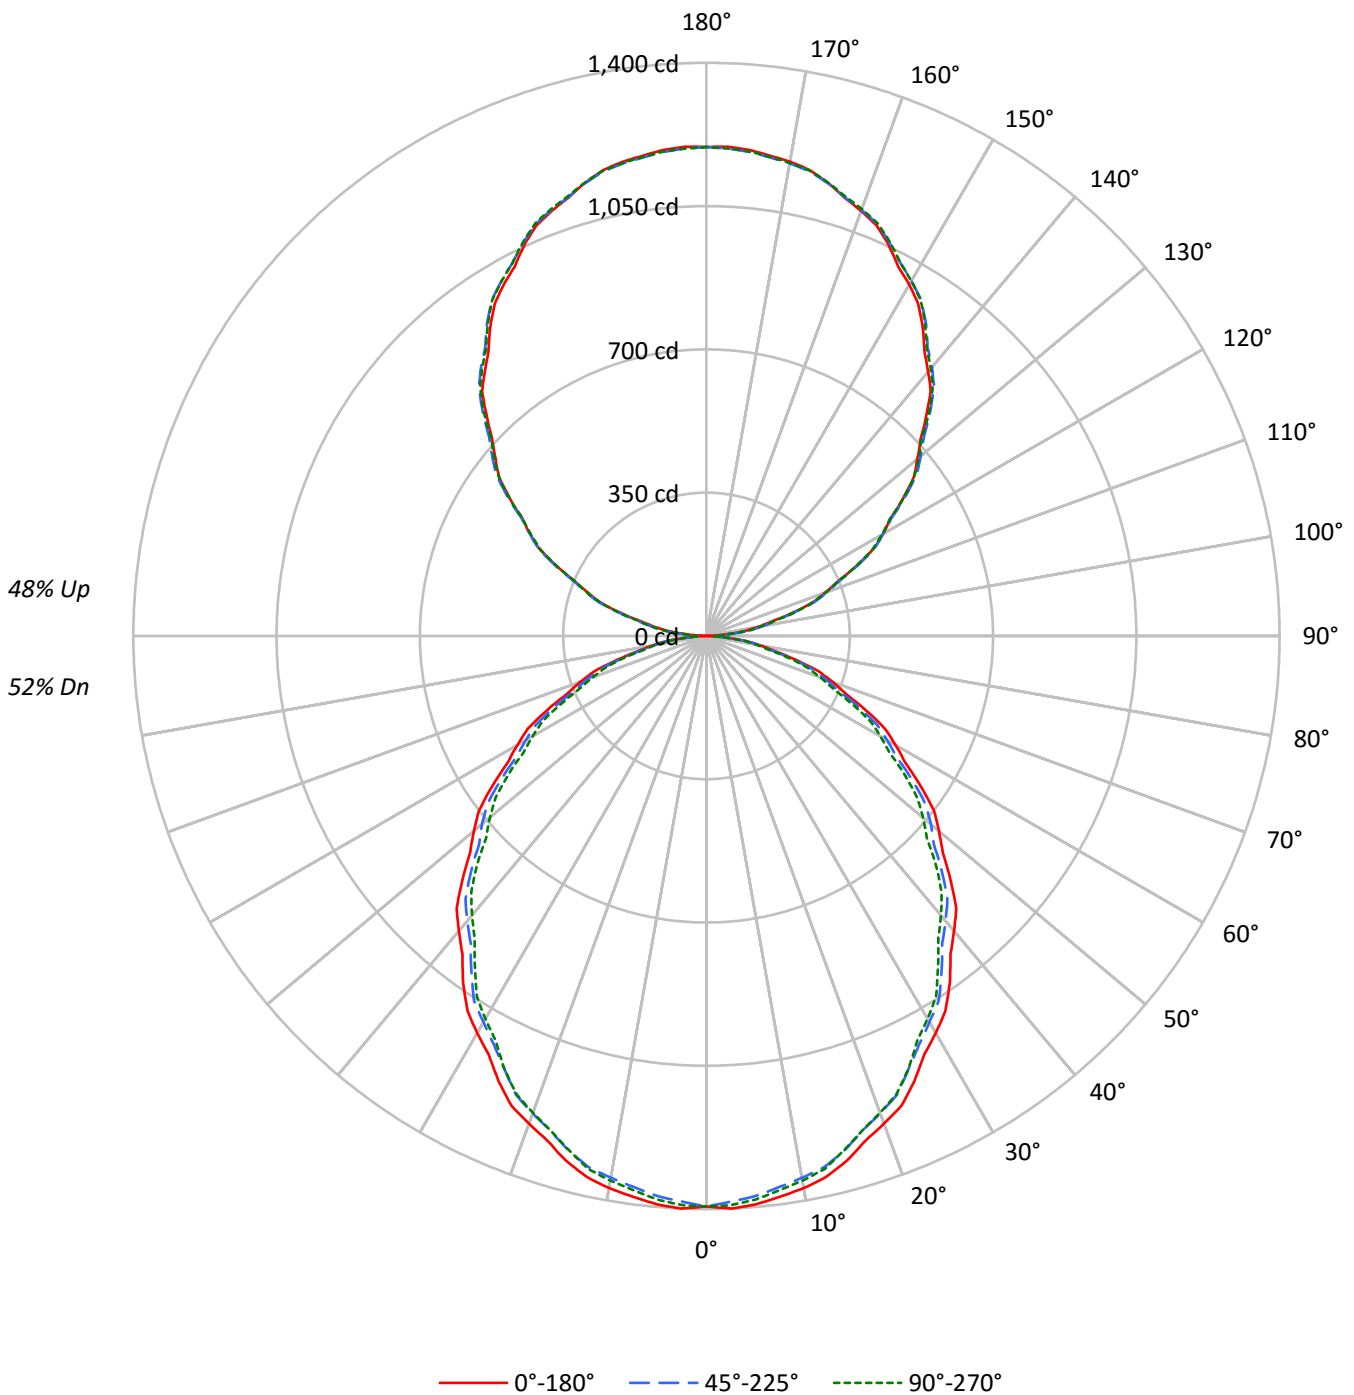



TEST NUMBER: P331409-840

CATALOG NUMBER: S122DIP-S865D925U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58	52
1	98	94	90	86	91	87	83	80	74	71	69	62	60	59	51	50	49	43
2	89	82	76	71	82	76	71	66	65	61	57	54	51	49	45	43	41	36
3	81	72	65	59	75	67	60	55	57	52	48	48	44	41	40	37	35	31
4	75	64	56	50	69	59	52	47	51	45	41	43	39	35	35	32	30	26
5	68	57	49	43	63	53	46	40	45	40	35	38	34	31	32	29	26	23
6	63	51	43	37	58	47	40	35	41	35	31	35	30	27	29	26	23	20
7	58	46	38	32	54	43	36	31	37	31	27	32	27	24	26	23	20	18
8	54	42	34	29	50	39	32	27	34	28	24	29	24	21	24	21	18	16
9	50	38	31	26	47	36	29	24	31	26	22	27	22	19	22	19	17	14
10	47	35	28	23	44	33	26	22	29	23	20	25	20	17	21	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	22501	22501	22501
5°	22587	22261	22392
10°	22453	22035	22146
15°	22176	21750	21727
20°	21782	21321	21297
25°	21389	20794	20794
30°	20885	20310	20137
35°	20416	19730	19438
40°	19827	19150	18782
45°	19244	18573	18114
50°	18613	17975	17334
55°	17954	17275	16636
60°	17221	16443	15839
65°	16435	15614	14896
70°	15437	14611	13917
75°	14042	13456	13125
80°	12459	12087	11464
85°	10170	9689	8688



TEST NUMBER: P331409-840

CATALOG NUMBER: S122DIP-S865D925U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	131.0	1.9
10°-20°	368.7	5.4
20°-30°	542.0	7.9
30°-40°	629.6	9.1
40°-50°	628.9	9.1
50°-60°	548.4	8.0
60°-70°	405.5	5.9
70°-80°	229.7	3.3
80°-90°	66.5	1.0
90°-100°	75.7	1.1
100°-110°	235.0	3.4
110°-120°	401.8	5.8
120°-130°	528.3	7.7
130°-140°	593.0	8.6
140°-150°	581.4	8.4
150°-160°	487.7	7.1
160°-170°	323.5	4.7
170°-180°	113.0	1.6
0°-30°	1041.8	15.1
0°-40°	1671.3	24.3
0°-60°	2848.6	41.3
0°-90°	3550.4	51.5
90°-120°	712.5	10.3
90°-150°	2415.2	35.1
90°-180°	3339.0	48.5
0°-180°	6889.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1394	1394	1394	1394	1394	
5°	1394	1388	1374	1384	1382	132
15°	1327	1318	1301	1306	1300	373
25°	1201	1189	1167	1170	1167	552
35°	1036	1022	1001	993	986	646
45°	843	833	813	799	793	650
55°	638	629	614	598	591	570
65°	430	422	409	397	390	425
75°	225	222	216	208	210	240
85°	55	54	52	48	47	63
90°	1	14	35	33	34	5
95°	52	62	64	64	62	60
105°	217	220	222	224	224	229
115°	403	409	407	406	403	399
125°	586	595	593	590	588	524
135°	759	769	772	771	768	586
145°	921	928	934	935	931	575
155°	1053	1056	1059	1064	1061	485
165°	1146	1145	1145	1151	1147	323
175°	1192	1189	1187	1194	1188	113
180°	1194	1194	1194	1194	1194	



TEST NUMBER: P331409-840

CATALOG NUMBER: S122DIP-S865D925U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6
2.5°	1400.1	1398.9	1397.7	1396.5	1395.3	1393.4	1390.8	1388.2	1385.5	1382.9	1385.3
5°	1393.6	1392.4	1391.3	1390.1	1388.9	1386.6	1383.4	1380.1	1376.8	1373.5	1375.9
7.5°	1381.3	1379.5	1377.7	1375.7	1373.9	1371.3	1368.0	1364.6	1361.3	1358.0	1360.4
10°	1369.5	1367.5	1365.3	1363.2	1361.2	1358.4	1354.7	1351.2	1347.7	1344.0	1346.5
12.5°	1353.4	1351.6	1349.8	1347.9	1346.0	1343.3	1339.8	1336.2	1332.6	1329.1	1330.7
15°	1326.7	1324.8	1323.0	1321.3	1319.5	1316.7	1312.8	1308.9	1305.0	1301.2	1302.3
17.5°	1292.3	1290.5	1288.8	1287.0	1285.2	1282.3	1278.4	1274.4	1270.5	1266.6	1268.0
20°	1267.7	1265.9	1264.1	1262.3	1260.5	1257.6	1253.3	1249.2	1245.1	1240.9	1241.7
22.5°	1243.0	1240.5	1238.0	1235.5	1233.0	1229.8	1225.9	1221.9	1218.0	1214.1	1214.3
25°	1200.6	1198.3	1195.9	1193.6	1191.1	1187.4	1182.3	1177.3	1172.3	1167.2	1167.8
27.5°	1152.5	1150.3	1148.1	1146.0	1143.9	1140.7	1136.8	1132.8	1128.8	1124.8	1124.0
30°	1120.2	1117.9	1115.5	1113.2	1110.8	1107.3	1102.9	1098.4	1093.9	1089.4	1088.5
32.5°	1086.0	1084.1	1082.2	1080.3	1078.3	1075.0	1070.4	1065.6	1061.0	1056.2	1054.6
35°	1035.8	1032.9	1029.9	1026.9	1023.9	1020.1	1015.3	1010.6	1005.7	1001.0	999.3
37.5°	979.3	976.6	974.0	971.4	968.9	965.1	960.4	955.6	950.8	946.0	943.8
40°	940.7	938.4	935.9	933.5	931.2	927.6	922.8	918.1	913.3	908.6	905.8
42.5°	903.2	900.8	898.4	896.1	893.6	890.1	885.3	880.6	875.8	871.0	868.1
45°	842.8	840.8	838.7	836.7	834.6	831.2	826.8	822.3	817.9	813.4	810.1
47.5°	782.8	780.9	778.9	777.0	775.0	771.6	767.0	762.3	757.7	753.1	749.6
50°	741.0	739.5	738.1	736.6	735.1	732.3	728.1	723.9	719.7	715.6	711.4
52.5°	700.3	698.3	696.4	694.4	692.5	689.5	685.6	681.7	677.7	673.8	670.3
55°	637.8	636.1	634.3	632.5	630.7	628.0	624.5	620.9	617.3	613.7	610.2
57.5°	575.1	573.7	572.3	570.9	569.5	566.7	562.8	558.9	554.9	551.0	547.5
60°	533.3	532.1	531.0	529.8	528.6	525.9	521.7	517.6	513.4	509.2	505.9
62.5°	492.6	490.7	488.8	486.9	484.9	482.4	479.2	475.9	472.7	469.6	466.6
65°	430.2	428.4	426.6	424.7	423.0	420.6	417.7	414.7	411.7	408.7	406.1
67.5°	366.7	365.2	363.8	362.3	360.9	358.9	356.2	353.5	350.8	348.1	346.1
70°	327.0	325.8	324.6	323.4	322.2	320.2	317.6	314.9	312.3	309.5	307.5
72.5°	286.2	285.1	283.9	282.7	281.4	280.0	278.3	276.6	274.8	273.1	271.0
75°	225.1	224.5	223.9	223.4	222.8	221.7	220.3	218.7	217.2	215.7	214.0
77.5°	170.5	169.5	168.4	167.4	166.4	165.6	165.0	164.4	163.8	163.2	162.3
80°	134.0	133.7	133.4	133.1	132.8	132.4	131.8	131.2	130.6	130.0	129.1
82.5°	99.7	99.7	99.6	99.5	99.5	99.3	98.9	98.6	98.2	97.9	96.6
85°	54.9	54.6	54.3	54.0	53.7	53.4	53.1	52.8	52.5	52.3	51.4
87.5°	19.5	19.6	19.6	19.7	19.7	20.0	20.5	21.0	21.5	22.0	21.3
90°	1.0	3.7	6.4	9.1	11.7	15.6	20.5	25.4	30.3	35.2	34.8
92.5°	18.0	19.9	21.9	23.8	25.9	27.4	28.6	29.7	30.9	32.0	32.1
95°	52.4	54.6	56.9	59.1	61.4	62.7	63.1	63.6	64.0	64.5	64.5
97.5°	95.7	97.8	99.7	101.7	103.6	105.0	105.9	106.7	107.6	108.5	108.5
100°	127.9	129.8	131.6	133.4	135.1	136.4	137.0	137.7	138.5	139.1	139.1
102.5°	161.9	163.3	164.7	166.1	167.5	168.7	169.6	170.5	171.3	172.2	172.3
105°	216.7	217.3	218.0	218.7	219.3	219.9	220.4	220.9	221.3	221.7	222.2
107.5°	271.9	272.9	273.9	274.9	275.9	276.3	276.3	276.3	276.3	276.3	276.5
110°	307.4	308.7	310.0	311.4	312.8	313.5	313.5	313.5	313.5	313.5	313.5



TEST NUMBER: P331409-840

CATALOG NUMBER: S122DIP-S865D925U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	346.1	347.4	348.8	350.1	351.4	352.0	351.8	351.6	351.5	351.3	350.8
115°	403.1	404.5	405.8	407.2	408.5	408.9	408.5	408.1	407.6	407.2	407.0
117.5°	460.0	461.7	463.5	465.3	467.2	467.4	466.2	464.8	463.6	462.4	461.8
120°	497.9	499.7	501.4	503.2	505.0	505.0	503.2	501.4	499.7	497.9	497.9
122.5°	532.5	534.6	536.8	539.0	541.1	541.6	540.3	539.1	537.9	536.5	536.0
125°	586.5	588.5	590.6	592.6	594.6	595.3	594.6	593.9	593.3	592.6	591.9
127.5°	639.1	641.7	644.3	646.8	649.3	650.3	649.4	648.6	647.8	647.0	646.2
130°	672.2	675.1	678.0	681.0	683.9	685.1	684.6	684.2	683.8	683.3	682.9
132.5°	709.3	711.7	714.1	716.4	718.8	720.0	720.1	720.2	720.2	720.3	719.4
135°	758.9	761.3	763.8	766.3	768.7	770.2	770.6	771.0	771.5	771.9	771.7
137.5°	811.1	813.0	815.1	817.1	819.1	820.4	821.0	821.6	822.2	822.7	822.6
140°	842.5	844.6	846.6	848.6	850.6	852.1	853.2	854.3	855.6	856.7	856.7
142.5°	874.7	876.8	878.8	880.8	882.8	884.2	884.9	885.8	886.5	887.3	887.5
145°	921.1	922.7	924.2	925.8	927.4	928.9	930.2	931.5	932.9	934.2	934.4
147.5°	962.4	964.3	966.2	968.1	970.0	971.4	972.3	973.1	974.0	974.9	975.4
150°	990.7	992.0	993.3	994.7	996.0	997.1	998.0	999.0	999.9	1000.8	1001.4
152.5°	1015.6	1017.0	1018.3	1019.7	1021.1	1022.3	1023.3	1024.4	1025.4	1026.5	1027.4
155°	1053.2	1053.8	1054.5	1055.2	1055.8	1056.5	1057.2	1057.8	1058.5	1059.1	1060.4
157.5°	1085.2	1085.6	1086.1	1086.5	1087.0	1087.4	1087.8	1088.2	1088.6	1089.0	1090.6
160°	1104.6	1105.0	1105.4	1105.9	1106.3	1106.7	1106.9	1107.1	1107.3	1107.5	1108.9
162.5°	1122.3	1122.4	1122.5	1122.6	1122.7	1122.8	1123.1	1123.3	1123.5	1123.7	1125.2
165°	1145.9	1145.7	1145.4	1145.2	1145.0	1144.9	1144.9	1144.9	1144.9	1144.9	1146.4
167.5°	1165.6	1165.0	1164.3	1163.6	1163.0	1162.6	1162.6	1162.5	1162.5	1162.4	1164.0
170°	1176.1	1175.4	1174.8	1174.1	1173.4	1173.0	1172.8	1172.6	1172.3	1172.0	1173.7
172.5°	1183.4	1182.7	1182.0	1181.3	1180.6	1180.2	1180.0	1179.7	1179.5	1179.3	1180.9
175°	1192.2	1191.5	1190.8	1190.2	1189.5	1189.0	1188.5	1188.1	1187.6	1187.2	1188.7
177.5°	1195.9	1195.3	1194.8	1194.3	1193.7	1193.3	1192.9	1192.5	1192.1	1191.8	1192.9
180°	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3



TEST NUMBER: P331409-840

CATALOG NUMBER: S122DIP-S865D925U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6
2.5°	1387.7	1390.1	1392.4	1393.4	1392.9	1392.4	1392.0	1391.5
5°	1378.3	1380.7	1383.1	1383.9	1383.4	1382.8	1382.2	1381.6
7.5°	1362.7	1365.1	1367.6	1368.4	1367.8	1367.1	1366.4	1365.7
10°	1348.8	1351.2	1353.6	1354.3	1353.4	1352.5	1351.6	1350.8
12.5°	1332.4	1334.0	1335.7	1336.3	1335.5	1334.9	1334.2	1333.6
15°	1303.5	1304.7	1306.0	1305.8	1304.3	1302.8	1301.3	1299.8
17.5°	1269.3	1270.7	1272.1	1272.0	1270.6	1269.2	1267.8	1266.4
20°	1242.6	1243.5	1244.5	1244.3	1243.1	1241.9	1240.7	1239.5
22.5°	1214.5	1214.6	1214.8	1214.6	1213.8	1213.0	1212.3	1211.6
25°	1168.4	1168.9	1169.5	1169.5	1168.9	1168.4	1167.8	1167.2
27.5°	1123.1	1122.2	1121.3	1120.1	1118.6	1117.2	1115.8	1114.4
30°	1087.6	1086.8	1085.9	1084.8	1083.7	1082.5	1081.3	1080.1
32.5°	1053.0	1051.4	1049.8	1048.3	1047.2	1046.0	1044.8	1043.6
35°	997.4	995.6	993.9	992.2	990.8	989.3	987.7	986.2
37.5°	941.7	939.5	937.3	935.4	934.0	932.6	931.2	929.7
40°	903.2	900.5	897.9	895.9	894.7	893.5	892.3	891.1
42.5°	865.2	862.2	859.4	857.1	855.4	853.7	852.0	850.4
45°	806.9	803.5	800.3	798.1	796.9	795.7	794.5	793.3
47.5°	746.2	742.8	739.3	736.7	735.0	733.3	731.5	729.8
50°	707.2	703.1	698.9	696.1	694.6	693.1	691.7	690.1
52.5°	666.8	663.4	659.9	657.2	655.3	653.3	651.4	649.3
55°	606.6	603.0	599.5	596.9	595.4	593.9	592.5	591.0
57.5°	544.0	540.5	536.9	534.6	533.5	532.4	531.3	530.1
60°	502.7	499.4	496.1	494.0	493.1	492.2	491.3	490.5
62.5°	463.4	460.4	457.4	455.3	454.1	453.0	451.9	450.8
65°	403.3	400.7	398.0	395.9	394.5	392.9	391.4	389.9
67.5°	344.0	341.8	339.8	338.2	337.0	335.8	334.6	333.4
70°	305.4	303.3	301.2	299.5	298.4	297.2	296.0	294.8
72.5°	268.9	266.8	264.8	263.3	262.3	261.4	260.3	259.4
75°	212.2	210.4	208.6	208.0	208.6	209.2	209.7	210.4
77.5°	161.5	160.6	159.7	158.8	157.9	157.1	156.3	155.4
80°	128.2	127.3	126.4	125.6	125.0	124.5	123.9	123.3
82.5°	95.5	94.4	93.3	92.7	92.5	92.4	92.3	92.2
85°	50.5	49.6	48.7	48.1	47.8	47.5	47.2	46.9
87.5°	20.5	19.7	18.9	18.4	18.2	18.0	17.8	17.6
90°	34.3	33.9	33.5	33.3	33.6	33.8	34.0	34.2
92.5°	32.2	32.3	32.4	32.5	32.5	32.5	32.6	32.6
95°	64.5	64.5	64.5	64.2	63.8	63.4	62.9	62.5
97.5°	108.5	108.5	108.5	108.5	108.4	108.4	108.3	108.3
100°	139.1	139.1	139.1	139.0	138.8	138.6	138.3	138.0
102.5°	172.5	172.7	172.9	172.8	172.6	172.4	172.2	172.0
105°	222.6	223.1	223.5	223.7	223.7	223.7	223.7	223.7
107.5°	276.7	276.9	277.0	276.6	275.6	274.6	273.6	272.5
110°	313.5	313.5	313.5	313.1	312.5	311.7	311.0	310.4



TEST NUMBER: P331409-840

CATALOG NUMBER: S122DIP-S865D925U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	350.2	349.7	349.2	348.6	348.2	347.7	347.2	346.7
115°	406.7	406.5	406.3	405.8	405.2	404.5	403.7	403.1
117.5°	461.3	460.8	460.2	459.6	459.0	458.3	457.6	457.0
120°	497.9	497.9	497.9	497.6	496.9	496.1	495.5	494.8
122.5°	535.4	534.9	534.4	533.9	533.4	532.9	532.4	531.9
125°	591.3	590.6	589.9	589.5	589.3	589.0	588.8	588.5
127.5°	645.4	644.6	643.8	643.0	642.3	641.6	640.9	640.2
130°	682.4	682.0	681.5	680.9	679.9	679.0	678.1	677.2
132.5°	718.4	717.4	716.4	715.6	714.9	714.2	713.5	712.8
135°	771.5	771.3	771.0	770.6	769.9	769.3	768.6	767.9
137.5°	822.4	822.2	822.0	821.5	820.6	819.7	818.8	817.9
140°	856.7	856.7	856.7	856.2	855.3	854.3	853.5	852.6
142.5°	887.7	887.8	888.0	887.7	886.8	885.9	884.9	884.0
145°	934.6	934.9	935.1	934.8	933.9	933.0	932.1	931.2
147.5°	975.9	976.4	976.9	976.7	975.9	975.0	974.2	973.3
150°	1002.1	1002.8	1003.4	1003.4	1002.8	1002.1	1001.4	1000.8
152.5°	1028.2	1029.1	1030.0	1030.0	1029.1	1028.2	1027.4	1026.5
155°	1061.5	1062.6	1063.7	1063.9	1063.2	1062.6	1061.9	1061.2
157.5°	1092.1	1093.6	1095.1	1095.3	1094.3	1093.2	1092.1	1091.1
160°	1110.2	1111.6	1113.0	1113.2	1112.3	1111.4	1110.4	1109.5
162.5°	1126.7	1128.2	1129.7	1130.0	1128.9	1127.8	1126.8	1125.7
165°	1148.0	1149.5	1151.1	1151.3	1150.2	1149.1	1148.0	1146.9
167.5°	1165.5	1167.1	1168.6	1168.8	1167.7	1166.5	1165.4	1164.2
170°	1175.2	1176.8	1178.3	1178.4	1177.1	1175.8	1174.4	1173.1
172.5°	1182.5	1184.1	1185.6	1185.7	1184.4	1183.1	1181.6	1180.3
175°	1190.3	1191.8	1193.5	1193.6	1192.2	1190.8	1189.5	1188.2
177.5°	1194.0	1195.1	1196.1	1196.1	1195.1	1194.0	1192.9	1191.8
180°	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3

(END OF REPORT)