

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331445-940

Luminaire Tested: **S122DIP-S1005D725U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331445-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S1005D725U940-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 725 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5928.6 lumens
Efficiency: N/A
Efficacy: 97.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331445-940

CATALOG NUMBER: S122DIP-S1005D725U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

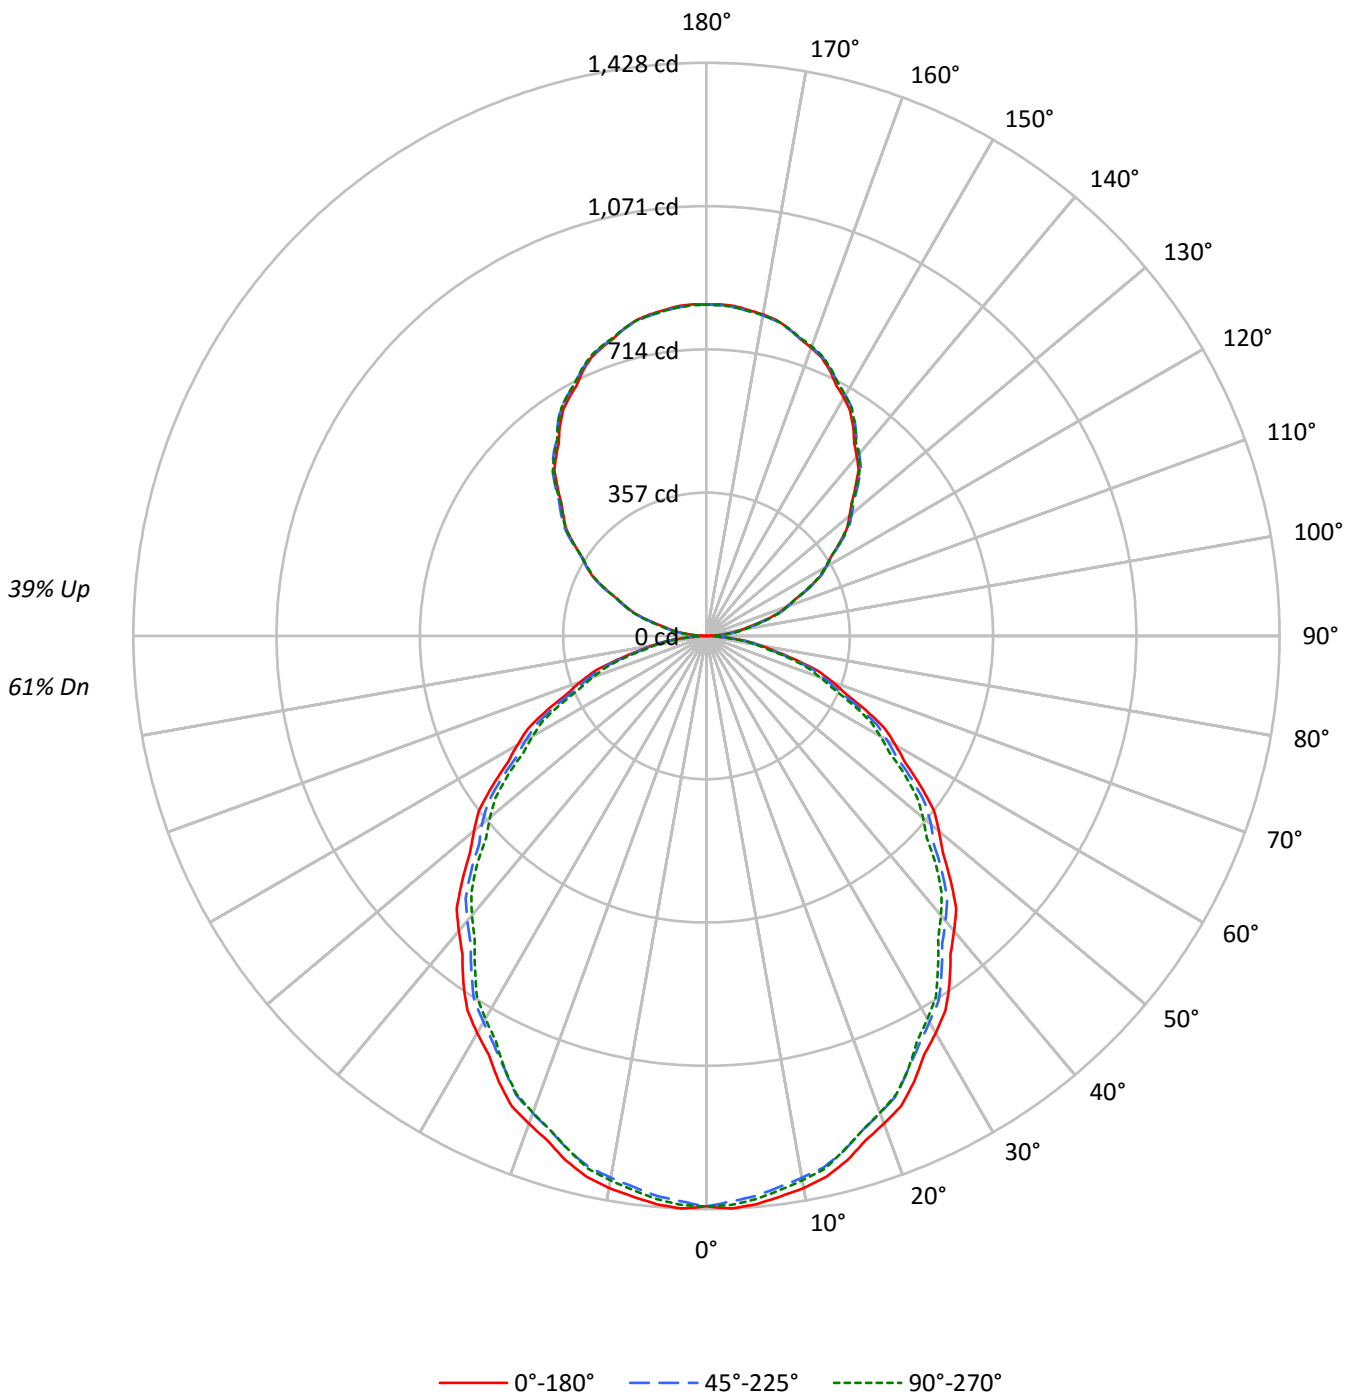



TEST NUMBER: P331445-940

CATALOG NUMBER: S122DIP-S1005D725U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66	61
1	100	96	92	88	94	90	86	83	79	76	74	68	66	64	59	57	56	51
2	91	84	77	72	85	79	73	68	69	65	61	60	57	54	52	49	47	43
3	83	74	66	60	78	69	63	57	61	56	51	53	49	46	46	43	40	36
4	76	65	57	51	71	61	54	49	54	48	44	47	43	39	41	37	35	31
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30	27
6	65	52	44	38	60	49	42	36	44	38	33	38	34	30	33	30	27	24
7	60	47	39	33	56	45	37	32	40	34	29	35	30	26	31	27	24	21
8	56	43	35	30	52	41	33	28	36	30	26	32	27	24	28	24	21	19
9	52	39	32	27	48	37	30	25	33	27	23	29	25	21	26	22	19	17
10	48	36	29	24	45	34	27	23	31	25	21	27	23	19	24	20	17	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	22946	22946	22946
5°	23034	22702	22835
10°	22897	22471	22584
15°	22614	22181	22158
20°	22213	21742	21720
25°	21814	21205	21205
30°	21300	20713	20534
35°	20820	20120	19825
40°	20219	19530	19153
45°	19628	18941	18472
50°	18982	18331	17678
55°	18311	17619	16963
60°	17563	16769	16152
65°	16756	15924	15194
70°	15739	14903	14195
75°	14323	13724	13381
80°	12710	12329	11688
85°	10374	9874	8855



TEST NUMBER: P331445-940

CATALOG NUMBER: S122DIP-S1005D725U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.6	2.3
10°-20°	376.0	6.3
20°-30°	552.7	9.3
30°-40°	642.0	10.8
40°-50°	641.3	10.8
50°-60°	559.3	9.4
60°-70°	413.6	7.0
70°-80°	234.2	4.0
80°-90°	66.3	1.1
90°-100°	52.3	0.9
100°-110°	162.5	2.7
110°-120°	277.9	4.7
120°-130°	365.4	6.2
130°-140°	410.1	6.9
140°-150°	402.1	6.8
150°-160°	337.3	5.7
160°-170°	223.7	3.8
170°-180°	78.2	1.3
0°-30°	1062.4	17.9
0°-40°	1704.4	28.7
0°-60°	2905.1	49.0
0°-90°	3619.1	61.0
90°-120°	492.7	8.3
90°-150°	1670.3	28.2
90°-180°	2309.0	38.9
0°-180°	5928.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1421	1421	1421	1421	1421	
5°	1421	1415	1401	1411	1409	135
15°	1353	1344	1327	1332	1326	381
25°	1224	1213	1190	1193	1190	563
35°	1056	1042	1021	1013	1006	659
45°	860	849	830	815	809	663
55°	650	642	626	610	603	581
65°	439	430	417	405	398	434
75°	230	227	220	212	214	245
85°	56	55	53	49	48	64
90°	1	9	24	23	24	5
95°	36	43	45	45	43	42
105°	150	152	153	155	155	158
115°	279	283	282	281	279	276
125°	406	412	410	408	407	362
135°	525	532	534	533	531	405
145°	637	642	646	647	644	398
155°	728	730	732	736	734	335
165°	792	792	792	796	793	223
175°	825	822	821	825	822	78
180°	826	826	826	826	826	



TEST NUMBER: P331445-940

CATALOG NUMBER: S122DIP-S1005D725U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2
2.5°	1427.8	1426.6	1425.4	1424.2	1422.9	1421.0	1418.4	1415.7	1413.0	1410.3	1412.7
5°	1421.2	1420.0	1418.8	1417.6	1416.4	1414.1	1410.8	1407.4	1404.1	1400.7	1403.2
7.5°	1408.6	1406.8	1404.9	1403.0	1401.1	1398.5	1395.1	1391.7	1388.3	1384.9	1387.3
10°	1396.6	1394.5	1392.4	1390.3	1388.1	1385.3	1381.6	1378.0	1374.3	1370.6	1373.1
12.5°	1380.3	1378.3	1376.4	1374.6	1372.7	1369.9	1366.3	1362.6	1359.1	1355.4	1357.1
15°	1352.9	1351.1	1349.2	1347.5	1345.6	1342.7	1338.8	1334.8	1330.9	1327.0	1328.2
17.5°	1317.9	1316.1	1314.3	1312.4	1310.6	1307.7	1303.7	1299.7	1295.7	1291.7	1293.1
20°	1292.8	1290.9	1289.1	1287.3	1285.5	1282.5	1278.2	1274.0	1269.7	1265.4	1266.3
22.5°	1267.7	1265.1	1262.6	1260.0	1257.4	1254.2	1250.2	1246.2	1242.2	1238.1	1238.3
25°	1224.5	1222.0	1219.6	1217.2	1214.8	1210.9	1205.8	1200.6	1195.4	1190.3	1190.9
27.5°	1175.3	1173.0	1170.9	1168.7	1166.5	1163.4	1159.3	1155.2	1151.2	1147.1	1146.2
30°	1142.5	1140.1	1137.6	1135.1	1132.7	1129.3	1124.7	1120.2	1115.6	1111.0	1110.1
32.5°	1107.5	1105.5	1103.6	1101.6	1099.7	1096.4	1091.5	1086.7	1081.9	1077.1	1075.5
35°	1056.3	1053.3	1050.3	1047.2	1044.2	1040.3	1035.4	1030.6	1025.7	1020.8	1019.0
37.5°	998.7	996.0	993.4	990.7	988.0	984.3	979.4	974.6	969.6	964.8	962.5
40°	959.3	956.9	954.5	952.1	949.6	946.0	941.1	936.3	931.4	926.6	923.8
42.5°	921.0	918.6	916.2	913.8	911.3	907.7	902.9	898.0	893.1	888.2	885.3
45°	859.6	857.5	855.3	853.2	851.0	847.7	843.2	838.7	834.1	829.5	826.2
47.5°	798.3	796.4	794.3	792.4	790.3	786.9	782.2	777.5	772.8	768.0	764.5
50°	755.7	754.2	752.7	751.2	749.7	746.7	742.5	738.2	734.0	729.8	725.5
52.5°	714.2	712.2	710.2	708.2	706.1	703.1	699.1	695.1	691.2	687.2	683.6
55°	650.5	648.6	646.8	645.1	643.2	640.4	636.9	633.2	629.5	625.9	622.2
57.5°	586.6	585.1	583.6	582.2	580.7	578.0	574.0	570.0	566.0	562.0	558.4
60°	543.9	542.7	541.4	540.3	539.0	536.3	532.1	527.8	523.5	519.3	515.9
62.5°	502.4	500.4	498.5	496.5	494.5	492.0	488.7	485.4	482.1	478.8	475.7
65°	438.6	436.8	435.1	433.2	431.4	428.9	425.9	422.8	419.8	416.8	414.1
67.5°	373.9	372.5	371.0	369.5	368.1	366.0	363.2	360.5	357.8	355.1	352.9
70°	333.4	332.3	331.0	329.8	328.6	326.6	323.9	321.1	318.4	315.7	313.5
72.5°	291.9	290.7	289.4	288.3	287.0	285.5	283.8	282.0	280.3	278.5	276.3
75°	229.6	229.0	228.4	227.7	227.1	226.0	224.5	223.0	221.5	220.0	218.2
77.5°	173.8	172.8	171.7	170.8	169.7	168.9	168.3	167.6	167.0	166.5	165.5
80°	136.7	136.3	136.1	135.7	135.5	135.0	134.4	133.8	133.1	132.6	131.6
82.5°	101.7	101.7	101.6	101.5	101.4	101.2	100.9	100.5	100.1	99.8	98.6
85°	56.0	55.7	55.5	55.1	54.8	54.5	54.2	53.9	53.6	53.3	52.3
87.5°	19.8	19.7	19.6	19.4	19.4	19.4	19.6	19.8	20.0	20.2	19.4
90°	0.7	2.6	4.5	6.2	8.1	10.8	14.2	17.6	21.0	24.4	24.1
92.5°	12.4	13.7	15.2	16.5	17.8	18.9	19.7	20.5	21.4	22.2	22.2
95°	36.2	37.8	39.3	40.9	42.4	43.3	43.7	44.0	44.3	44.6	44.6
97.5°	66.3	67.6	68.9	70.3	71.7	72.7	73.2	73.8	74.4	75.0	75.0
100°	88.5	89.8	91.0	92.2	93.5	94.3	94.8	95.2	95.7	96.2	96.2
102.5°	111.9	112.9	114.0	114.9	115.9	116.7	117.3	117.9	118.4	119.0	119.1
105°	149.9	150.3	150.8	151.2	151.7	152.1	152.4	152.8	153.0	153.4	153.6
107.5°	188.1	188.8	189.4	190.1	190.7	191.1	191.1	191.1	191.1	191.1	191.3
110°	212.6	213.5	214.5	215.3	216.3	216.8	216.8	216.8	216.8	216.8	216.8



TEST NUMBER: P331445-940

CATALOG NUMBER: S122DIP-S1005D725U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	239.3	240.3	241.2	242.1	243.1	243.4	243.3	243.3	243.1	243.0	242.6
115°	278.8	279.7	280.6	281.6	282.5	282.9	282.5	282.2	281.9	281.6	281.4
117.5°	318.1	319.3	320.6	321.8	323.1	323.2	322.4	321.6	320.7	319.8	319.4
120°	344.3	345.5	346.8	348.0	349.3	349.3	348.0	346.8	345.5	344.3	344.3
122.5°	368.3	369.8	371.3	372.7	374.3	374.5	373.7	372.8	371.9	371.0	370.7
125°	405.6	407.1	408.4	409.8	411.3	411.7	411.3	410.7	410.3	409.8	409.4
127.5°	442.0	443.8	445.6	447.4	449.1	449.7	449.2	448.6	448.0	447.5	446.9
130°	464.9	466.9	469.0	470.9	473.0	473.8	473.5	473.1	472.9	472.6	472.3
132.5°	490.5	492.2	493.8	495.4	497.1	497.9	498.0	498.1	498.1	498.2	497.6
135°	524.9	526.6	528.2	529.9	531.6	532.6	533.0	533.2	533.6	533.9	533.8
137.5°	561.0	562.3	563.7	565.2	566.5	567.4	567.8	568.2	568.6	569.0	568.9
140°	582.7	584.1	585.5	586.8	588.3	589.3	590.1	590.9	591.7	592.5	592.5
142.5°	605.0	606.4	607.8	609.2	610.6	611.5	612.1	612.6	613.1	613.7	613.8
145°	637.0	638.1	639.3	640.3	641.4	642.4	643.4	644.3	645.2	646.1	646.3
147.5°	665.7	666.9	668.2	669.5	670.8	671.8	672.4	673.1	673.7	674.3	674.6
150°	685.2	686.1	687.0	688.0	688.8	689.6	690.3	690.9	691.5	692.1	692.6
152.5°	702.4	703.4	704.3	705.3	706.1	706.9	707.8	708.5	709.2	710.0	710.5
155°	728.3	728.8	729.3	729.8	730.2	730.7	731.1	731.6	732.1	732.5	733.3
157.5°	750.6	750.8	751.2	751.4	751.8	752.1	752.3	752.6	752.9	753.1	754.2
160°	763.9	764.2	764.6	764.8	765.2	765.4	765.5	765.7	765.9	766.0	767.0
162.5°	776.1	776.2	776.3	776.3	776.4	776.5	776.7	776.9	777.0	777.1	778.2
165°	792.5	792.4	792.2	792.0	791.8	791.8	791.8	791.8	791.8	791.8	792.9
167.5°	806.1	805.7	805.2	804.8	804.3	804.1	804.1	804.0	804.0	803.9	805.0
170°	813.4	813.0	812.4	812.0	811.5	811.2	811.1	810.9	810.7	810.6	811.7
172.5°	818.4	818.0	817.5	817.0	816.5	816.3	816.1	815.9	815.8	815.6	816.7
175°	824.6	824.1	823.6	823.1	822.7	822.3	822.0	821.7	821.4	821.1	822.2
177.5°	827.1	826.7	826.3	825.9	825.5	825.3	825.0	824.7	824.5	824.3	825.0
180°	825.9	825.9	825.9	825.9	825.9	825.9	825.9	825.9	825.9	825.9	825.9



TEST NUMBER: P331445-940

CATALOG NUMBER: S122DIP-S1005D725U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2
2.5°	1415.1	1417.6	1420.0	1421.0	1420.5	1420.0	1419.5	1419.1
5°	1405.6	1408.0	1410.4	1411.4	1410.8	1410.2	1409.5	1408.9
7.5°	1389.7	1392.1	1394.6	1395.5	1394.8	1394.2	1393.5	1392.9
10°	1375.6	1378.0	1380.4	1381.2	1380.3	1379.3	1378.4	1377.5
12.5°	1358.8	1360.5	1362.2	1362.7	1362.0	1361.4	1360.7	1360.0
15°	1329.4	1330.6	1331.8	1331.7	1330.2	1328.6	1327.1	1325.6
17.5°	1294.5	1295.9	1297.3	1297.3	1295.7	1294.3	1292.9	1291.4
20°	1267.3	1268.2	1269.1	1268.9	1267.7	1266.5	1265.3	1264.1
22.5°	1238.5	1238.7	1238.9	1238.6	1237.9	1237.2	1236.4	1235.6
25°	1191.5	1192.1	1192.8	1192.8	1192.1	1191.5	1190.9	1190.3
27.5°	1145.3	1144.3	1143.4	1142.3	1140.9	1139.3	1137.9	1136.5
30°	1109.2	1108.3	1107.4	1106.3	1105.1	1103.8	1102.7	1101.4
32.5°	1073.9	1072.2	1070.6	1069.2	1067.9	1066.8	1065.5	1064.3
35°	1017.2	1015.4	1013.5	1011.9	1010.4	1008.9	1007.3	1005.8
37.5°	960.3	958.1	955.8	954.0	952.5	951.0	949.6	948.2
40°	921.0	918.4	915.6	913.6	912.4	911.2	910.0	908.7
42.5°	882.3	879.3	876.4	874.1	872.4	870.7	869.0	867.2
45°	822.9	819.5	816.2	813.9	812.6	811.5	810.2	809.0
47.5°	761.0	757.4	753.9	751.3	749.5	747.8	746.0	744.2
50°	721.2	717.0	712.7	709.9	708.4	706.9	705.3	703.8
52.5°	680.1	676.5	673.1	670.3	668.2	666.3	664.2	662.3
55°	618.6	614.9	611.4	608.8	607.3	605.7	604.2	602.6
57.5°	554.7	551.2	547.6	545.2	544.1	543.0	541.8	540.6
60°	512.6	509.3	506.0	503.8	502.9	502.0	501.1	500.2
62.5°	472.7	469.6	466.5	464.3	463.2	462.0	460.8	459.7
65°	411.3	408.6	405.9	403.8	402.3	400.7	399.2	397.7
67.5°	350.8	348.7	346.5	344.8	343.7	342.4	341.3	340.0
70°	311.4	309.3	307.2	305.5	304.3	303.1	301.8	300.7
72.5°	274.3	272.2	270.0	268.5	267.5	266.5	265.6	264.6
75°	216.4	214.5	212.8	212.1	212.8	213.3	213.9	214.5
77.5°	164.6	163.7	162.8	161.9	161.0	160.2	159.3	158.5
80°	130.7	129.8	128.9	128.1	127.5	127.0	126.4	125.7
82.5°	97.5	96.3	95.1	94.5	94.3	94.3	94.2	94.0
85°	51.5	50.6	49.7	49.0	48.8	48.4	48.2	47.8
87.5°	18.6	17.8	17.0	16.5	16.3	16.1	15.9	15.7
90°	23.8	23.5	23.2	23.1	23.3	23.4	23.5	23.7
92.5°	22.3	22.4	22.4	22.5	22.5	22.6	22.6	22.6
95°	44.6	44.6	44.6	44.5	44.1	43.9	43.5	43.2
97.5°	75.0	75.0	75.0	75.0	75.0	74.9	74.9	74.8
100°	96.2	96.2	96.2	96.1	95.9	95.8	95.7	95.5
102.5°	119.3	119.4	119.6	119.5	119.4	119.2	119.0	118.9
105°	154.0	154.3	154.6	154.7	154.7	154.7	154.7	154.7
107.5°	191.4	191.5	191.6	191.4	190.6	189.9	189.2	188.5
110°	216.8	216.8	216.8	216.5	216.1	215.6	215.2	214.6



TEST NUMBER: P331445-940

CATALOG NUMBER: S122DIP-S1005D725U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	242.2	241.8	241.5	241.1	240.8	240.4	240.1	239.8
115°	281.2	281.2	281.0	280.6	280.2	279.7	279.3	278.8
117.5°	319.1	318.7	318.3	317.9	317.4	316.9	316.5	316.0
120°	344.3	344.3	344.3	344.1	343.6	343.1	342.7	342.2
122.5°	370.3	370.0	369.6	369.3	368.9	368.5	368.2	367.9
125°	408.9	408.4	408.0	407.7	407.5	407.3	407.2	407.1
127.5°	446.4	445.8	445.2	444.7	444.3	443.7	443.3	442.7
130°	472.0	471.6	471.4	470.8	470.2	469.7	469.0	468.4
132.5°	496.9	496.1	495.5	494.9	494.4	493.9	493.4	492.9
135°	533.6	533.4	533.2	533.0	532.5	532.1	531.5	531.1
137.5°	568.8	568.6	568.6	568.2	567.6	566.9	566.3	565.7
140°	592.5	592.5	592.5	592.1	591.6	590.9	590.3	589.7
142.5°	613.9	614.0	614.1	613.9	613.2	612.6	612.1	611.4
145°	646.4	646.6	646.8	646.5	645.9	645.2	644.6	644.0
147.5°	674.9	675.3	675.6	675.6	674.9	674.3	673.8	673.2
150°	693.0	693.5	694.0	694.0	693.5	693.0	692.6	692.1
152.5°	711.1	711.8	712.3	712.3	711.8	711.1	710.5	710.0
155°	734.1	734.9	735.7	735.8	735.3	734.9	734.4	734.0
157.5°	755.3	756.3	757.4	757.5	756.8	756.1	755.3	754.6
160°	767.9	768.8	769.7	769.9	769.3	768.7	768.0	767.4
162.5°	779.3	780.3	781.4	781.5	780.8	780.1	779.3	778.6
165°	794.0	795.0	796.1	796.3	795.5	794.7	794.0	793.2
167.5°	806.1	807.2	808.2	808.4	807.6	806.8	806.0	805.2
170°	812.8	813.9	814.9	815.0	814.1	813.2	812.3	811.3
172.5°	817.8	818.9	819.9	820.0	819.1	818.1	817.3	816.4
175°	823.2	824.3	825.4	825.5	824.6	823.6	822.7	821.8
177.5°	825.7	826.5	827.2	827.2	826.5	825.7	825.0	824.3
180°	825.9	825.9	825.9	825.9	825.9	825.9	825.9	825.9

(END OF REPORT)