

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331373-940

Luminaire Tested: **S122DIP-S675D1080U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331373-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S675D1080U940-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5845.6 lumens
Efficiency: N/A
Efficacy: 102.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331373-940

CATALOG NUMBER: S122DIP-S675D1080U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

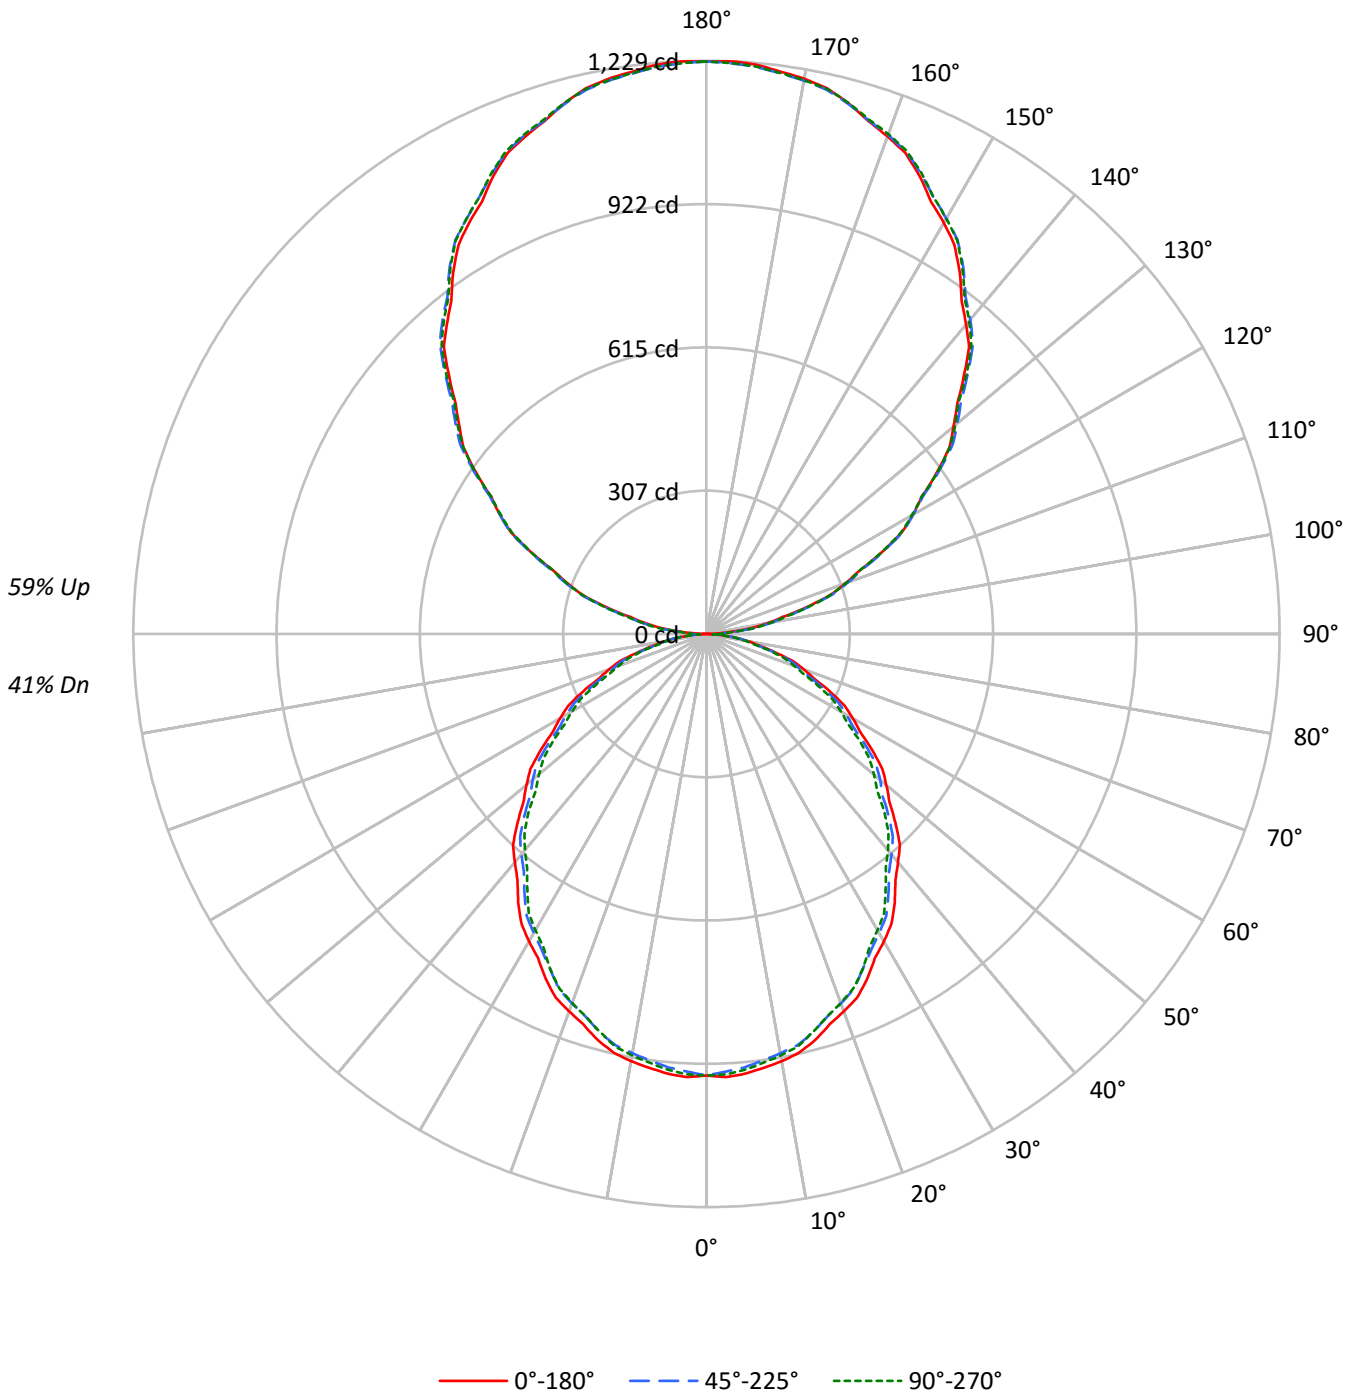



TEST NUMBER: P331373-940

CATALOG NUMBER: S122DIP-S675D1080U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	78	78	78	63	63	63	48	48	48	41
1	96	92	88	84	87	84	80	77	69	66	64	55	54	52	42	41	41	35
2	87	80	74	69	79	73	68	63	60	56	53	48	46	43	37	36	34	29
3	80	70	63	57	72	64	58	53	53	49	45	43	39	37	33	31	29	25
4	73	62	54	48	66	57	50	45	47	42	38	38	34	31	30	27	25	21
5	67	55	47	41	61	51	44	38	42	37	33	34	30	27	27	24	22	18
6	61	50	42	36	56	46	38	33	38	33	29	31	27	24	24	21	19	16
7	57	45	37	31	52	41	34	29	34	29	25	28	24	21	22	19	17	14
8	53	40	33	28	48	37	31	26	31	26	22	26	22	19	20	17	15	13
9	49	37	30	25	45	34	27	23	29	23	20	24	20	17	19	16	14	12
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	17	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	15285	15285	15285
5°	15344	15123	15211
10°	15252	14969	15044
15°	15064	14775	14760
20°	14795	14483	14467
25°	14530	14125	14125
30°	14188	13798	13679
35°	13868	13403	13204
40°	13468	13009	12760
45°	13075	12618	12305
50°	12645	12210	11776
55°	12197	11738	11299
60°	11699	11170	10756
65°	11163	10609	10120
70°	10485	9928	9456
75°	9538	9145	8914
80°	8461	8210	7782
85°	6928	6576	5891



TEST NUMBER: P331373-940

CATALOG NUMBER: S122DIP-S675D1080U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	89.0	1.5
10°-20°	250.5	4.3
20°-30°	368.2	6.3
30°-40°	427.7	7.3
40°-50°	427.2	7.3
50°-60°	372.6	6.4
60°-70°	275.5	4.7
70°-80°	156.0	2.7
80°-90°	46.9	0.8
90°-100°	77.8	1.3
100°-110°	241.6	4.1
110°-120°	412.9	7.1
120°-130°	543.0	9.3
130°-140°	609.4	10.4
140°-150°	597.6	10.2
150°-160°	501.2	8.6
160°-170°	332.4	5.7
170°-180°	116.2	2.0
0°-30°	707.7	12.1
0°-40°	1135.4	19.4
0°-60°	1935.1	33.1
0°-90°	2413.5	41.3
90°-120°	732.3	12.5
90°-150°	2482.3	42.5
90°-180°	3432.0	58.7
0°-180°	5845.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	947	947	947	947	947	
5°	947	943	933	940	938	90
15°	901	895	884	887	883	254
25°	816	808	793	794	793	375
35°	704	694	680	675	670	439
45°	573	566	553	543	539	442
55°	433	428	417	406	401	387
65°	292	286	278	270	265	289
75°	153	151	147	142	143	163
85°	37	36	36	33	32	43
90°	1	14	36	34	35	5
95°	54	64	66	66	64	62
105°	223	226	228	230	230	235
115°	414	420	418	417	414	410
125°	603	611	609	606	605	538
135°	780	791	793	792	789	602
145°	947	954	960	961	957	591
155°	1082	1086	1089	1093	1091	498
165°	1178	1177	1177	1183	1179	332
175°	1225	1222	1220	1227	1221	116
180°	1227	1227	1227	1227	1227	



TEST NUMBER: P331373-940

CATALOG NUMBER: S122DIP-S675D1080U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	946.7	946.7	946.7	946.7	946.7	946.7	946.7	946.7	946.7	946.7	946.7
2.5°	951.1	950.3	949.5	948.7	947.9	946.6	944.8	943.0	941.2	939.4	941.0
5°	946.7	945.9	945.1	944.3	943.5	942.0	939.8	937.5	935.3	933.1	934.7
7.5°	938.3	937.1	935.9	934.6	933.4	931.6	929.3	927.0	924.8	922.5	924.1
10°	930.3	928.9	927.5	926.0	924.7	922.7	920.3	917.9	915.4	913.0	914.6
12.5°	919.4	918.2	916.9	915.6	914.4	912.6	910.1	907.7	905.3	902.9	904.0
15°	901.2	900.0	898.8	897.6	896.3	894.4	891.8	889.1	886.5	883.9	884.8
17.5°	877.9	876.6	875.5	874.2	873.1	871.1	868.4	865.8	863.1	860.4	861.4
20°	861.1	860.0	858.7	857.5	856.3	854.3	851.4	848.6	845.8	842.9	843.6
22.5°	844.4	842.7	841.0	839.3	837.6	835.4	832.8	830.1	827.4	824.7	824.8
25°	815.6	814.0	812.4	810.7	809.1	806.6	803.2	799.8	796.3	792.9	793.3
27.5°	782.8	781.4	780.0	778.5	777.0	775.0	772.2	769.5	766.8	764.1	763.5
30°	761.0	759.4	757.8	756.2	754.6	752.2	749.2	746.2	743.2	740.1	739.5
32.5°	737.7	736.4	735.1	733.8	732.5	730.3	727.1	723.9	720.7	717.5	716.4
35°	703.6	701.7	699.6	697.6	695.5	692.9	689.7	686.4	683.2	680.0	678.8
37.5°	665.2	663.4	661.6	659.9	658.2	655.6	652.4	649.2	646.0	642.7	641.1
40°	639.0	637.4	635.8	634.2	632.6	630.2	626.9	623.7	620.5	617.2	615.4
42.5°	613.6	611.9	610.3	608.7	607.1	604.7	601.4	598.2	594.9	591.7	589.7
45°	572.6	571.1	569.7	568.4	566.9	564.7	561.7	558.7	555.6	552.6	550.4
47.5°	531.8	530.5	529.1	527.8	526.5	524.2	521.0	517.9	514.8	511.6	509.3
50°	503.4	502.4	501.4	500.3	499.4	497.4	494.6	491.8	488.9	486.1	483.3
52.5°	475.7	474.4	473.1	471.7	470.4	468.4	465.7	463.1	460.4	457.7	455.4
55°	433.3	432.1	430.9	429.6	428.5	426.6	424.2	421.8	419.4	417.0	414.5
57.5°	390.7	389.8	388.8	387.8	386.8	385.0	382.4	379.7	377.0	374.3	371.9
60°	362.3	361.5	360.7	359.9	359.1	357.2	354.5	351.6	348.7	345.9	343.7
62.5°	334.7	333.3	332.1	330.7	329.5	327.7	325.6	323.3	321.2	319.0	316.9
65°	292.2	291.0	289.8	288.6	287.3	285.7	283.7	281.7	279.6	277.7	275.8
67.5°	249.1	248.1	247.1	246.1	245.1	243.8	241.9	240.1	238.4	236.5	235.1
70°	222.1	221.3	220.5	219.7	218.9	217.6	215.7	213.9	212.1	210.3	208.8
72.5°	194.5	193.6	192.8	192.0	191.2	190.2	189.0	187.9	186.7	185.5	184.1
75°	152.9	152.5	152.1	151.7	151.3	150.6	149.6	148.6	147.6	146.6	145.3
77.5°	115.8	115.1	114.4	113.7	113.1	112.5	112.1	111.6	111.3	110.8	110.3
80°	91.0	90.9	90.6	90.4	90.2	89.9	89.5	89.1	88.7	88.3	87.7
82.5°	67.8	67.7	67.7	67.6	67.6	67.4	67.1	67.0	66.7	66.4	65.7
85°	37.4	37.1	36.9	36.7	36.5	36.3	36.1	35.9	35.7	35.5	34.9
87.5°	13.3	13.6	13.7	14.0	14.3	14.7	15.3	16.1	16.8	17.5	16.9
90°	1.1	3.8	6.6	9.4	12.1	16.0	21.0	26.1	31.2	36.3	35.8
92.5°	18.5	20.4	22.5	24.5	26.6	28.2	29.3	30.6	31.7	32.9	33.0
95°	53.9	56.2	58.5	60.7	63.0	64.5	64.9	65.4	65.8	66.3	66.3
97.5°	98.4	100.4	102.5	104.5	106.5	108.0	108.8	109.7	110.6	111.5	111.5
100°	131.5	133.4	135.3	137.1	138.9	140.2	140.9	141.5	142.2	142.9	142.9
102.5°	166.4	167.8	169.3	170.8	172.3	173.4	174.3	175.1	176.0	176.9	177.1
105°	222.7	223.4	224.1	224.8	225.4	226.0	226.5	226.9	227.4	227.8	228.4
107.5°	279.5	280.4	281.5	282.5	283.5	284.0	284.0	284.0	284.0	284.0	284.2
110°	315.9	317.3	318.7	320.0	321.5	322.2	322.2	322.2	322.2	322.2	322.2



TEST NUMBER: P331373-940

CATALOG NUMBER: S122DIP-S675D1080U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	355.7	357.0	358.5	359.8	361.2	361.9	361.6	361.4	361.2	361.1	360.5
115°	414.3	415.7	417.1	418.5	419.8	420.3	419.8	419.4	418.9	418.5	418.2
117.5°	472.7	474.6	476.4	478.2	480.1	480.4	479.1	477.8	476.5	475.2	474.7
120°	511.7	513.5	515.4	517.2	519.1	519.1	517.2	515.4	513.5	511.7	511.7
122.5°	547.3	549.6	551.7	553.9	556.2	556.6	555.4	554.0	552.8	551.4	550.9
125°	602.8	604.9	607.0	609.0	611.1	611.8	611.1	610.5	609.8	609.0	608.3
127.5°	656.9	659.5	662.2	664.8	667.4	668.3	667.4	666.6	665.8	664.9	664.1
130°	690.9	693.8	696.9	699.8	702.8	704.1	703.6	703.2	702.8	702.3	701.8
132.5°	729.0	731.5	733.9	736.3	738.8	740.0	740.1	740.2	740.3	740.4	739.4
135°	780.0	782.5	785.1	787.6	790.1	791.6	792.0	792.5	793.0	793.4	793.2
137.5°	833.6	835.7	837.8	839.8	841.9	843.2	843.8	844.5	845.0	845.6	845.4
140°	865.9	868.0	870.0	872.2	874.2	875.8	877.0	878.2	879.3	880.4	880.4
142.5°	899.1	901.2	903.2	905.3	907.3	908.7	909.5	910.3	911.2	912.0	912.1
145°	946.7	948.3	949.9	951.5	953.1	954.7	956.0	957.4	958.8	960.2	960.4
147.5°	989.2	991.1	993.0	995.0	996.9	998.4	999.3	1000.2	1001.1	1002.0	1002.6
150°	1018.2	1019.6	1020.9	1022.3	1023.7	1024.8	1025.8	1026.7	1027.6	1028.6	1029.2
152.5°	1043.8	1045.3	1046.6	1048.0	1049.4	1050.6	1051.8	1052.8	1054.0	1055.1	1056.0
155°	1082.4	1083.1	1083.8	1084.5	1085.2	1085.8	1086.5	1087.3	1088.0	1088.6	1089.8
157.5°	1115.4	1115.8	1116.2	1116.7	1117.2	1117.6	1118.0	1118.5	1118.8	1119.3	1120.9
160°	1135.2	1135.7	1136.1	1136.6	1137.1	1137.4	1137.6	1137.9	1138.1	1138.4	1139.7
162.5°	1153.4	1153.5	1153.6	1153.7	1153.9	1154.0	1154.2	1154.4	1154.7	1154.9	1156.5
165°	1177.7	1177.5	1177.2	1177.0	1176.8	1176.7	1176.7	1176.7	1176.7	1176.7	1178.3
167.5°	1198.0	1197.3	1196.6	1196.0	1195.2	1194.9	1194.8	1194.8	1194.7	1194.7	1196.3
170°	1208.8	1208.1	1207.4	1206.7	1206.0	1205.6	1205.3	1205.1	1204.9	1204.6	1206.2
172.5°	1216.2	1215.6	1214.9	1214.2	1213.4	1213.0	1212.8	1212.5	1212.3	1212.1	1213.7
175°	1225.4	1224.7	1224.0	1223.2	1222.6	1222.0	1221.6	1221.1	1220.7	1220.1	1221.8
177.5°	1229.0	1228.5	1228.0	1227.4	1226.9	1226.4	1226.0	1225.7	1225.3	1224.9	1226.0
180°	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4



TEST NUMBER: P331373-940

CATALOG NUMBER: S122DIP-S675D1080U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	946.7	946.7	946.7	946.7	946.7	946.7	946.7	946.7
2.5°	942.6	944.3	945.9	946.6	946.2	945.9	945.6	945.3
5°	936.3	937.9	939.5	940.1	939.8	939.3	939.0	938.5
7.5°	925.8	927.4	929.0	929.5	929.1	928.7	928.3	927.8
10°	916.2	917.9	919.5	920.0	919.4	918.8	918.2	917.6
12.5°	905.1	906.2	907.4	907.7	907.2	906.9	906.4	906.0
15°	885.6	886.4	887.2	887.1	886.0	885.0	884.0	883.0
17.5°	862.3	863.2	864.2	864.2	863.2	862.2	861.2	860.2
20°	844.2	844.8	845.3	845.3	844.5	843.6	842.8	842.0
22.5°	825.0	825.1	825.2	825.0	824.6	824.0	823.6	823.1
25°	793.7	794.1	794.5	794.5	794.1	793.7	793.3	792.9
27.5°	762.9	762.3	761.7	760.9	759.9	758.9	758.0	757.0
30°	738.9	738.2	737.6	736.9	736.1	735.3	734.5	733.7
32.5°	715.3	714.3	713.1	712.2	711.4	710.6	709.7	708.9
35°	677.6	676.4	675.1	674.0	673.1	672.0	671.0	669.9
37.5°	639.7	638.2	636.7	635.4	634.5	633.5	632.6	631.6
40°	613.6	611.7	609.9	608.6	607.8	607.0	606.2	605.4
42.5°	587.7	585.8	583.8	582.2	581.0	580.0	578.8	577.7
45°	548.1	545.9	543.7	542.2	541.4	540.6	539.8	538.9
47.5°	506.9	504.5	502.2	500.4	499.3	498.1	497.0	495.8
50°	480.5	477.6	474.7	472.9	471.8	470.8	469.8	468.8
52.5°	453.0	450.7	448.4	446.5	445.1	443.8	442.5	441.1
55°	412.1	409.7	407.2	405.5	404.5	403.5	402.4	401.4
57.5°	369.5	367.1	364.8	363.2	362.4	361.7	360.9	360.1
60°	341.4	339.2	337.0	335.6	335.0	334.4	333.8	333.1
62.5°	314.9	312.8	310.8	309.3	308.5	307.7	307.0	306.2
65°	274.0	272.2	270.4	268.9	268.0	266.9	265.9	264.9
67.5°	233.6	232.3	230.9	229.7	228.9	228.1	227.3	226.5
70°	207.4	206.1	204.6	203.5	202.7	201.9	201.1	200.3
72.5°	182.7	181.3	179.9	178.8	178.2	177.5	176.9	176.2
75°	144.1	142.9	141.7	141.3	141.7	142.1	142.5	142.9
77.5°	109.7	109.1	108.4	107.9	107.3	106.7	106.2	105.6
80°	87.1	86.5	85.9	85.3	85.0	84.5	84.2	83.7
82.5°	64.9	64.1	63.4	63.0	62.9	62.8	62.7	62.6
85°	34.3	33.7	33.1	32.6	32.5	32.3	32.1	31.8
87.5°	16.3	15.7	15.2	14.8	14.7	14.5	14.4	14.4
90°	35.3	34.9	34.4	34.3	34.5	34.8	35.0	35.2
92.5°	33.1	33.2	33.3	33.3	33.4	33.4	33.5	33.5
95°	66.3	66.3	66.3	66.1	65.6	65.2	64.6	64.2
97.5°	111.5	111.5	111.5	111.5	111.4	111.4	111.3	111.3
100°	142.9	142.9	142.9	142.9	142.6	142.4	142.1	141.9
102.5°	177.3	177.5	177.6	177.6	177.4	177.2	176.9	176.7
105°	228.8	229.3	229.7	230.0	230.0	230.0	230.0	230.0
107.5°	284.4	284.5	284.7	284.3	283.3	282.2	281.2	280.1
110°	322.2	322.2	322.2	321.8	321.1	320.4	319.7	319.1



TEST NUMBER: P331373-940

CATALOG NUMBER: S122DIP-S675D1080U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	360.0	359.4	358.9	358.4	357.8	357.3	356.9	356.3
115°	418.0	417.8	417.5	417.1	416.4	415.7	415.0	414.3
117.5°	474.1	473.6	473.1	472.4	471.7	471.0	470.3	469.7
120°	511.7	511.7	511.7	511.3	510.7	510.0	509.3	508.5
122.5°	550.4	549.8	549.2	548.8	548.2	547.7	547.2	546.7
125°	607.7	607.0	606.3	605.8	605.6	605.4	605.1	604.9
127.5°	663.3	662.5	661.6	660.8	660.1	659.4	658.7	657.9
130°	701.3	700.9	700.4	699.7	698.8	697.9	697.0	696.1
132.5°	738.3	737.4	736.4	735.5	734.8	734.0	733.3	732.5
135°	793.0	792.7	792.5	792.0	791.3	790.7	790.0	789.3
137.5°	845.3	845.1	844.9	844.4	843.4	842.5	841.6	840.6
140°	880.4	880.4	880.4	879.9	879.0	878.2	877.2	876.3
142.5°	912.3	912.5	912.7	912.3	911.3	910.4	909.5	908.6
145°	960.6	960.9	961.1	960.7	959.8	958.9	958.0	957.1
147.5°	1003.1	1003.5	1004.1	1003.9	1003.0	1002.1	1001.2	1000.4
150°	1029.9	1030.6	1031.4	1031.4	1030.6	1029.9	1029.2	1028.6
152.5°	1056.9	1057.7	1058.5	1058.5	1057.7	1056.9	1056.0	1055.1
155°	1090.9	1092.1	1093.2	1093.4	1092.8	1092.1	1091.4	1090.7
157.5°	1122.4	1124.0	1125.5	1125.8	1124.6	1123.6	1122.5	1121.3
160°	1141.1	1142.5	1143.9	1144.1	1143.2	1142.3	1141.3	1140.4
162.5°	1158.1	1159.6	1161.2	1161.4	1160.3	1159.2	1158.1	1157.0
165°	1179.9	1181.5	1183.1	1183.3	1182.2	1181.1	1179.9	1178.8
167.5°	1197.9	1199.5	1201.1	1201.3	1200.2	1198.9	1197.7	1196.6
170°	1207.8	1209.4	1211.0	1211.2	1209.8	1208.4	1207.0	1205.7
172.5°	1215.3	1216.9	1218.5	1218.6	1217.3	1215.8	1214.5	1213.1
175°	1223.4	1225.0	1226.6	1226.7	1225.4	1224.0	1222.6	1221.2
177.5°	1227.2	1228.2	1229.3	1229.3	1228.2	1227.2	1226.0	1224.9
180°	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4

(END OF REPORT)