

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331361-940

Luminaire Tested: **S122DIP-S675D925U940-4F0-1E-UDD-D1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331361-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S675D925U940-4F0-1E-UDD-D1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, DROP SATIN WHITE DIFFUSER
UPLIGHT 925 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5349.1 lumens
Efficiency: N/A
Efficacy: 102.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.32 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.08')
CIE Type: Semi-Indirect


Input Watts (W): 52
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331361-940

CATALOG NUMBER: S122DIP-S675D925U940-4F0-1E-UDD-D1

Luminous Intensity Polar Plot

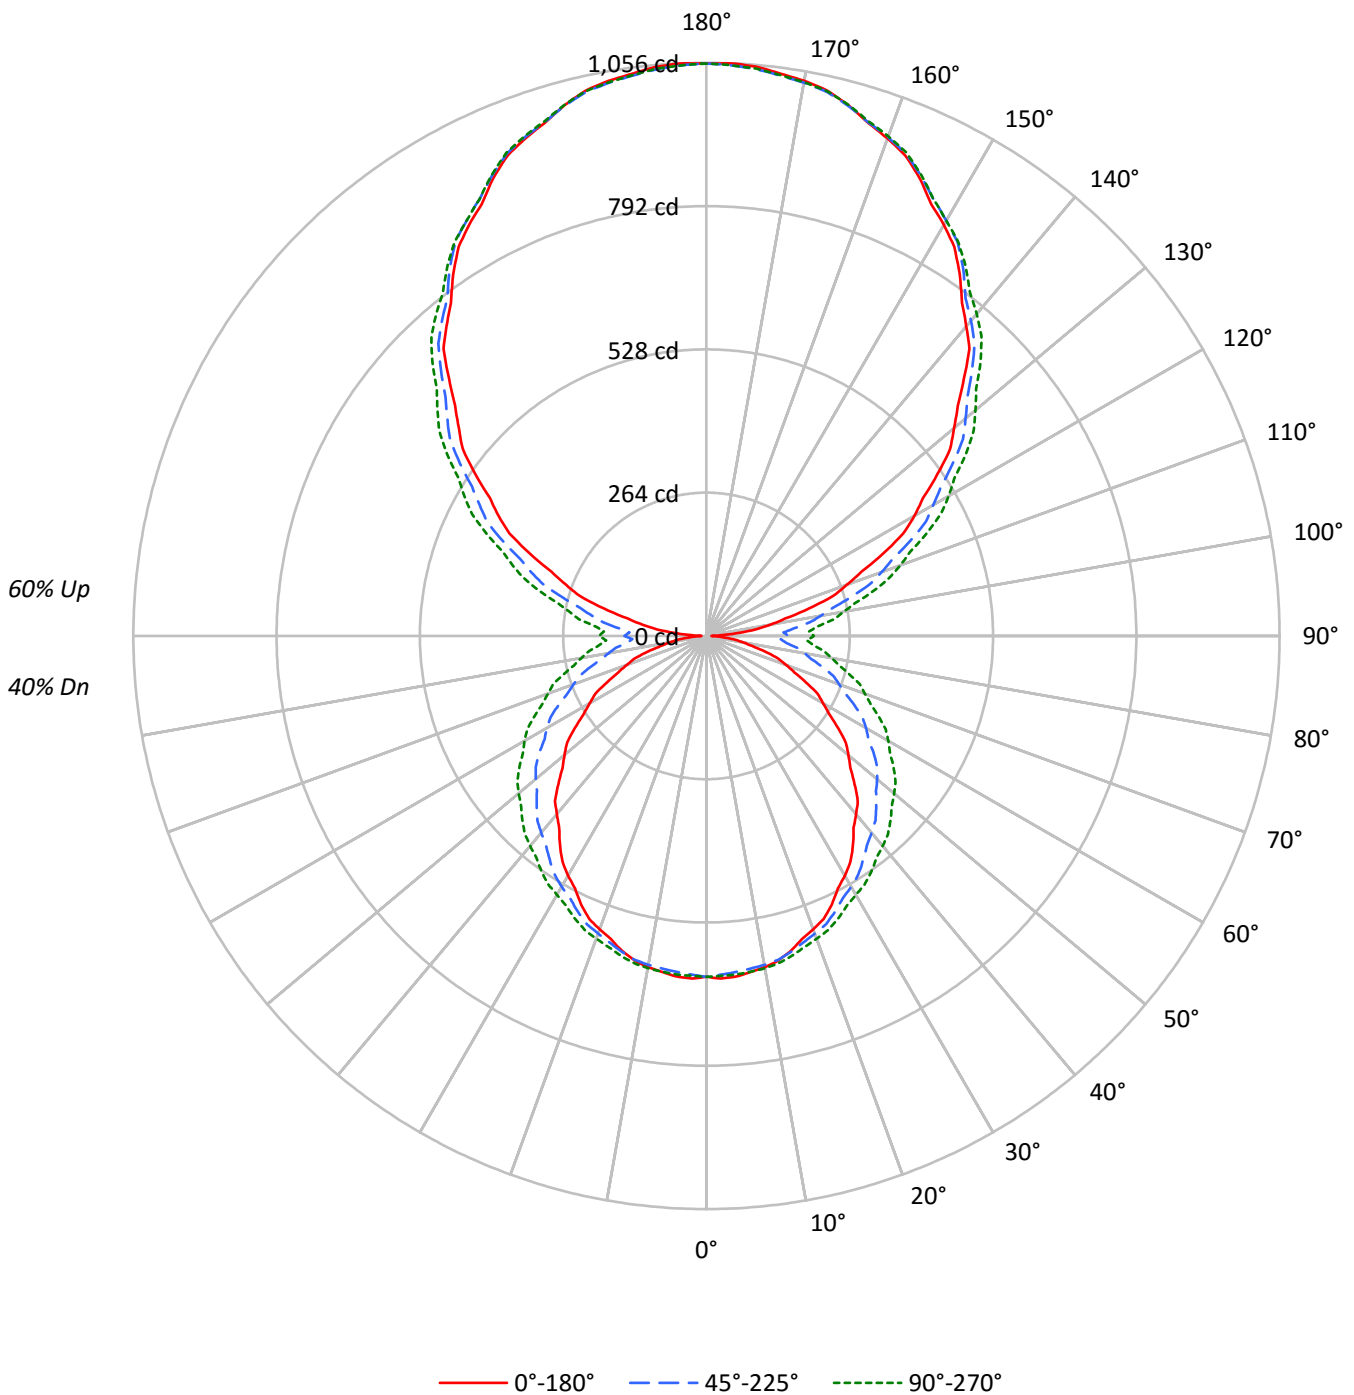



TEST NUMBER: P331361-940

CATALOG NUMBER: S122DIP-S675D925U940-4F0-1E-UDD-D1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47	40
1	94	90	85	81	85	81	78	74	66	64	61	52	50	49	39	38	37	31
2	85	77	71	65	77	70	65	60	57	53	50	45	42	40	34	32	30	25
3	78	68	60	54	70	62	55	50	50	45	41	40	36	33	30	27	25	21
4	71	60	51	45	64	54	47	42	44	39	35	35	31	28	26	24	21	17
5	65	53	45	38	58	48	41	35	39	34	30	31	27	24	24	21	18	15
6	59	47	39	33	54	43	36	31	35	30	26	28	24	21	21	18	16	13
7	55	42	34	29	50	39	32	27	32	26	22	25	21	18	19	16	14	11
8	51	38	31	25	46	35	28	23	29	24	20	23	19	16	18	15	13	10
9	47	35	27	22	43	32	25	21	26	21	18	21	17	14	16	13	11	9
10	44	32	25	20	40	29	23	18	24	19	16	20	16	13	15	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10141	10141	10141
5°	10191	9762	9724
10°	10126	9474	9367
15°	9987	9168	8990
20°	9810	8841	8627
25°	9637	8525	8298
30°	9392	8201	7967
35°	9142	7888	7735
40°	8880	7621	7501
45°	8632	7383	7302
50°	8365	7166	7106
55°	8089	6934	6906
60°	7745	6695	6695
65°	7391	6412	6445
70°	6992	6110	6173
75°	6483	5811	5925
80°	5680	5509	5672
85°	4908	5245	5473



TEST NUMBER: P331361-940

CATALOG NUMBER: S122DIP-S675D925U940-4F0-1E-UDD-D1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.5	1.1
10°-20°	170.7	3.2
20°-30°	258.6	4.8
30°-40°	315.0	5.9
40°-50°	338.9	6.3
50°-60°	329.1	6.2
60°-70°	287.4	5.4
70°-80°	221.2	4.1
80°-90°	152.7	2.9
90°-100°	169.1	3.2
100°-110°	282.2	5.3
110°-120°	404.1	7.6
120°-130°	494.0	9.2
130°-140°	535.1	10.0
140°-150°	515.4	9.6
150°-160°	430.6	8.1
160°-170°	285.6	5.3
170°-180°	99.8	1.9
0°-30°	488.8	9.1
0°-40°	803.8	15.0
0°-60°	1471.8	27.5
0°-90°	2133.1	39.9
90°-120°	855.4	16.0
90°-150°	2400.0	44.9
90°-180°	3216.0	60.1
0°-180°	5349.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	628	628	628	628	628	
5°	630	627	622	627	626	60
15°	601	602	603	610	610	169
25°	546	553	561	571	574	251
35°	471	486	503	523	530	294
45°	386	411	442	470	480	298
55°	296	329	376	408	420	264
65°	202	247	300	336	350	201
75°	112	163	221	259	272	118
85°	33	89	148	184	198	35
90°	10	74	151	185	198	9
95°	54	106	162	195	205	59
105°	196	226	274	306	318	207
115°	360	376	414	440	448	355
125°	520	529	554	575	583	465
135°	671	681	692	709	714	518
145°	813	820	825	831	832	508
155°	930	933	935	939	937	428
165°	1012	1011	1011	1017	1013	285
175°	1053	1050	1048	1054	1049	100
180°	1054	1054	1054	1054	1054	



TEST NUMBER: P331361-940

CATALOG NUMBER: S122DIP-S675D925U940-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	628.1	628.1	628.1	628.1	628.1	628.1	628.1	628.1	628.1	628.1	628.1
2.5°	631.8	631.2	630.8	630.3	629.8	629.0	627.9	626.7	625.6	624.5	625.3
5°	629.9	629.3	628.7	628.1	627.5	626.6	625.4	624.2	622.9	621.7	622.9
7.5°	624.3	623.8	623.5	623.0	622.7	622.0	621.1	620.1	619.2	618.3	619.7
10°	619.9	619.5	619.1	618.7	618.3	617.8	617.2	616.6	616.0	615.4	617.0
12.5°	612.6	612.7	612.8	612.9	613.0	612.8	612.3	611.9	611.4	611.0	612.6
15°	600.8	601.2	601.6	602.0	602.4	602.6	602.6	602.6	602.6	602.6	604.4
17.5°	585.5	586.4	587.2	588.1	588.9	589.7	590.3	590.9	591.6	592.3	594.1
20°	575.3	576.3	577.3	578.4	579.3	580.2	581.0	581.9	582.7	583.5	585.8
22.5°	564.4	565.5	566.8	567.9	569.1	570.2	571.4	572.5	573.6	574.8	577.0
25°	546.2	547.6	549.0	550.5	551.9	553.5	555.3	557.1	558.9	560.7	563.2
27.5°	524.3	526.6	529.0	531.3	533.6	535.8	538.0	540.1	542.2	544.4	547.4
30°	509.8	512.4	515.1	517.6	520.3	522.9	525.6	528.2	530.8	533.4	536.6
32.5°	493.7	496.7	499.6	502.6	505.6	508.6	511.8	514.8	517.9	521.0	524.8
35°	470.6	474.0	477.5	480.9	484.4	488.0	491.9	495.7	499.5	503.4	507.8
37.5°	445.5	449.5	453.4	457.4	461.4	465.8	470.8	475.8	480.7	485.7	490.7
40°	428.7	433.2	437.7	442.1	446.6	451.5	457.0	462.4	467.9	473.3	478.6
42.5°	412.8	417.1	421.6	426.1	430.5	435.9	442.2	448.4	454.7	461.0	466.7
45°	385.9	391.5	396.9	402.3	407.8	414.1	421.2	428.3	435.3	442.4	448.7
47.5°	359.5	365.5	371.5	377.4	383.3	390.5	398.8	407.1	415.4	423.7	430.3
50°	341.3	347.7	353.9	360.2	366.4	374.2	383.3	392.4	401.4	410.5	417.4
52.5°	323.9	330.5	337.1	343.7	350.3	358.4	367.9	377.6	387.1	396.7	403.8
55°	295.9	303.1	310.4	317.7	324.9	333.9	344.4	354.9	365.4	375.9	383.3
57.5°	268.1	276.4	284.6	292.8	301.0	310.5	321.2	331.9	342.7	353.4	361.2
60°	248.5	257.2	265.9	274.6	283.3	293.5	305.0	316.5	328.0	339.6	347.2
62.5°	231.0	240.0	249.1	258.1	267.2	277.4	288.9	300.4	312.0	323.5	331.7
65°	202.1	212.0	221.9	231.8	241.7	252.6	264.6	276.5	288.5	300.4	308.7
67.5°	175.5	185.8	196.3	206.6	217.0	228.2	240.4	252.6	264.8	277.1	285.4
70°	156.6	167.1	177.6	188.2	198.7	210.2	222.7	235.2	247.8	260.4	269.0
72.5°	139.1	149.9	160.8	171.7	182.4	194.2	207.0	219.6	232.4	245.0	253.6
75°	112.0	123.3	134.6	146.0	157.3	169.4	182.4	195.3	208.2	221.2	229.9
77.5°	85.8	97.6	109.5	121.3	133.1	145.7	158.8	172.0	185.1	198.2	207.0
80°	68.3	80.6	92.9	105.3	117.6	130.4	143.6	156.7	169.8	183.0	191.5
82.5°	53.7	65.9	78.0	90.2	102.5	115.1	128.5	141.8	155.1	168.4	176.9
85°	32.8	45.3	57.9	70.4	82.9	95.7	108.6	121.5	134.6	147.5	156.0
87.5°	18.0	30.6	43.1	55.6	68.1	81.3	95.1	109.0	122.8	136.6	144.7
90°	10.0	24.1	38.2	52.3	66.4	82.1	99.4	116.7	134.0	151.3	159.0
92.5°	24.3	36.9	49.6	62.2	74.9	87.9	101.5	114.9	128.4	141.9	149.9
95°	53.6	65.0	76.5	88.0	99.5	111.5	124.0	136.6	149.1	161.7	169.3
97.5°	91.0	101.1	111.3	121.5	131.7	143.0	155.4	167.8	180.2	192.6	200.1
100°	119.4	128.5	137.5	146.6	155.7	166.1	178.1	190.0	201.9	213.8	221.3
102.5°	148.6	156.7	164.8	172.9	180.9	190.9	202.7	214.5	226.1	237.9	245.4
105°	195.9	202.3	208.8	215.3	221.7	230.4	241.3	252.3	263.1	274.0	281.5
107.5°	244.4	250.0	255.6	261.2	266.7	274.6	284.6	294.7	304.8	314.9	321.8
110°	275.1	280.3	285.5	290.8	296.0	303.5	313.4	323.4	333.3	343.2	349.6



TEST NUMBER: P331361-940

CATALOG NUMBER: S122DIP-S675D925U940-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	309.2	313.8	318.4	323.0	327.5	334.5	343.8	353.0	362.3	371.6	377.6
115°	359.6	363.0	366.4	369.8	373.3	379.3	388.0	396.7	405.5	414.1	420.0
117.5°	408.8	411.9	414.9	418.0	421.1	426.2	433.5	440.9	448.1	455.4	460.9
120°	442.4	444.7	447.1	449.5	451.9	456.4	462.9	469.4	475.9	482.4	488.0
122.5°	473.0	475.2	477.4	479.7	481.8	486.2	492.7	499.2	505.7	512.2	517.2
125°	519.7	521.5	523.3	525.0	526.8	530.7	536.5	542.4	548.3	554.2	559.1
127.5°	566.1	568.2	570.2	572.3	574.4	577.7	582.2	586.7	591.2	595.7	600.0
130°	595.4	597.7	600.1	602.4	604.8	608.0	611.8	615.6	619.6	623.4	627.9
132.5°	628.1	630.0	631.9	633.8	635.7	638.3	641.7	645.1	648.4	651.8	655.6
135°	671.0	673.2	675.4	677.5	679.7	682.0	684.4	686.8	689.2	691.7	695.7
137.5°	717.1	718.8	720.6	722.3	724.1	725.6	727.0	728.4	729.9	731.2	734.8
140°	744.8	746.5	748.0	749.6	751.2	752.7	754.0	755.5	756.8	758.2	761.4
142.5°	773.3	774.9	776.5	778.1	779.6	780.8	781.6	782.3	783.1	783.8	786.6
145°	813.3	814.8	816.1	817.5	818.9	820.2	821.4	822.5	823.8	824.9	826.3
147.5°	849.8	851.5	853.2	854.8	856.5	857.7	858.5	859.3	860.1	860.9	861.5
150°	874.8	875.9	877.1	878.3	879.5	880.5	881.3	882.1	882.9	883.7	884.2
152.5°	896.8	898.0	899.2	900.4	901.6	902.7	903.6	904.6	905.4	906.4	907.2
155°	930.0	930.5	931.1	931.7	932.3	932.9	933.5	934.1	934.7	935.2	936.3
157.5°	958.2	958.6	959.0	959.4	959.8	960.2	960.6	960.9	961.3	961.6	963.0
160°	975.4	975.7	976.1	976.5	976.9	977.2	977.4	977.6	977.8	977.9	979.2
162.5°	991.0	991.0	991.1	991.2	991.3	991.4	991.7	991.8	992.0	992.2	993.5
165°	1011.8	1011.6	1011.4	1011.2	1011.0	1010.9	1010.9	1010.9	1010.9	1010.9	1012.3
167.5°	1029.2	1028.7	1028.1	1027.4	1026.9	1026.5	1026.5	1026.4	1026.4	1026.4	1027.8
170°	1038.5	1037.9	1037.3	1036.7	1036.1	1035.7	1035.5	1035.4	1035.1	1034.9	1036.3
172.5°	1044.9	1044.3	1043.7	1043.1	1042.5	1042.1	1042.0	1041.7	1041.5	1041.3	1042.8
175°	1052.8	1052.1	1051.5	1051.0	1050.3	1049.9	1049.5	1049.1	1048.7	1048.3	1049.6
177.5°	1056.0	1055.4	1055.0	1054.5	1054.0	1053.6	1053.3	1053.0	1052.7	1052.4	1053.3
180°	1054.5	1054.5	1054.5	1054.5	1054.5	1054.5	1054.5	1054.5	1054.5	1054.5	1054.5

TEST NUMBER: P331361-940

CATALOG NUMBER: S122DIP-S675D925U940-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	628.1	628.1	628.1	628.1	628.1	628.1	628.1	628.1
2.5°	626.1	626.9	627.7	627.9	627.6	627.3	627.0	626.7
5°	624.2	625.4	626.6	627.1	626.9	626.7	626.5	626.2
7.5°	621.2	622.7	624.1	624.7	624.6	624.3	624.1	623.9
10°	618.6	620.2	621.9	622.5	622.3	622.1	622.0	621.7
12.5°	614.2	615.8	617.5	618.1	618.0	617.8	617.6	617.3
15°	606.3	608.1	609.9	610.7	610.6	610.3	610.1	609.9
17.5°	596.0	598.0	599.9	600.8	600.8	600.8	600.8	600.8
20°	588.0	590.2	592.4	593.5	593.5	593.5	593.5	593.5
22.5°	579.3	581.5	583.6	585.0	585.2	585.6	585.9	586.2
25°	565.6	568.0	570.4	571.9	572.6	573.2	573.8	574.4
27.5°	550.5	553.6	556.7	558.4	558.8	559.3	559.7	560.2
30°	539.9	543.1	546.4	548.3	548.9	549.6	550.1	550.7
32.5°	528.5	532.3	535.9	538.3	539.5	540.6	541.6	542.7
35°	512.3	516.7	521.2	524.1	525.6	527.0	528.3	529.8
37.5°	495.6	500.5	505.5	508.7	510.2	511.7	513.2	514.7
40°	483.8	489.1	494.4	497.9	499.7	501.6	503.4	505.2
42.5°	472.4	478.2	483.9	487.8	489.5	491.4	493.2	495.0
45°	455.0	461.2	467.5	471.6	473.7	475.7	477.7	479.7
47.5°	436.8	443.4	449.9	454.2	456.5	458.7	460.9	463.2
50°	424.3	431.1	438.1	442.6	444.9	447.1	449.2	451.5
52.5°	410.8	417.9	424.9	429.6	431.9	434.4	436.8	439.2
55°	390.5	397.8	405.1	410.0	412.7	415.3	417.9	420.5
57.5°	369.1	376.9	384.8	390.0	392.7	395.4	398.1	400.7
60°	354.9	362.6	370.3	375.6	378.4	381.2	384.1	386.9
62.5°	339.8	348.0	356.2	361.7	364.3	366.9	369.6	372.3
65°	317.0	325.3	333.6	339.0	341.7	344.3	347.0	349.6
67.5°	293.8	302.2	310.6	316.2	318.9	321.6	324.4	327.2
70°	277.8	286.4	295.2	300.7	303.1	305.6	308.0	310.4
72.5°	262.2	270.6	279.2	284.9	287.8	290.8	293.6	296.6
75°	238.6	247.3	256.0	261.6	264.3	266.9	269.6	272.2
77.5°	215.6	224.3	232.9	238.6	241.5	244.3	247.1	249.9
80°	199.9	208.5	217.0	222.7	225.4	228.3	231.1	234.0
82.5°	185.4	193.9	202.4	207.9	210.6	213.3	216.0	218.6
85°	164.4	173.0	181.5	187.1	189.9	192.8	195.6	198.4
87.5°	152.9	161.1	169.2	174.7	177.3	179.9	182.5	185.2
90°	166.7	174.4	182.1	187.3	189.8	192.5	195.1	197.8
92.5°	157.9	165.9	174.0	179.1	181.6	184.1	186.5	189.0
95°	177.0	184.7	192.3	197.2	199.3	201.3	203.3	205.4
97.5°	207.6	215.1	222.6	227.5	229.8	232.2	234.5	236.8
100°	228.8	236.3	243.8	248.5	250.6	252.6	254.6	256.6
102.5°	252.9	260.4	267.9	272.6	274.6	276.7	278.7	280.7
105°	289.0	296.5	304.0	308.8	311.0	313.3	315.5	317.7
107.5°	328.8	335.7	342.7	346.8	348.1	349.4	350.7	352.0
110°	356.1	362.7	369.1	373.2	374.8	376.4	378.1	379.7



TEST NUMBER: P331361-940

CATALOG NUMBER: S122DIP-S675D925U940-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	383.5	389.6	395.6	399.5	401.3	403.1	404.8	406.6
115°	425.9	431.8	437.7	441.4	443.0	444.6	446.3	447.9
117.5°	466.5	472.0	477.5	481.0	482.4	483.9	485.4	486.9
120°	493.7	499.4	505.1	508.7	510.3	511.9	513.6	515.2
122.5°	522.3	527.3	532.3	535.6	537.0	538.5	539.9	541.4
125°	563.9	568.8	573.6	576.9	578.5	580.1	581.8	583.4
127.5°	604.3	608.6	613.0	615.6	616.8	618.0	619.1	620.3
130°	632.3	636.8	641.2	643.8	644.7	645.5	646.3	647.1
132.5°	659.4	663.3	667.0	669.4	670.4	671.5	672.4	673.4
135°	699.7	703.8	707.8	710.4	711.4	712.5	713.5	714.5
137.5°	738.3	741.9	745.5	747.5	748.1	748.8	749.3	749.9
140°	764.7	767.9	771.2	773.0	773.4	773.8	774.3	774.7
142.5°	789.3	792.0	794.8	796.3	796.6	796.8	797.1	797.4
145°	827.8	829.2	830.5	831.3	831.6	831.8	832.1	832.2
147.5°	862.1	862.6	863.3	863.4	863.2	862.9	862.6	862.4
150°	884.8	885.5	886.0	886.0	885.5	884.8	884.2	883.7
152.5°	907.9	908.7	909.5	909.5	908.7	907.9	907.2	906.4
155°	937.3	938.3	939.2	939.4	938.8	938.3	937.6	937.0
157.5°	964.3	965.6	967.0	967.1	966.3	965.3	964.3	963.4
160°	980.3	981.5	982.8	982.9	982.1	981.3	980.5	979.7
162.5°	994.9	996.2	997.6	997.8	996.8	995.9	995.0	994.0
165°	1013.7	1015.0	1016.5	1016.6	1015.7	1014.7	1013.7	1012.7
167.5°	1029.1	1030.6	1031.9	1032.1	1031.1	1030.0	1029.0	1028.0
170°	1037.7	1039.1	1040.4	1040.5	1039.4	1038.2	1037.0	1035.8
172.5°	1044.1	1045.5	1046.9	1047.0	1045.8	1044.6	1043.4	1042.2
175°	1051.1	1052.4	1053.8	1053.9	1052.8	1051.5	1050.3	1049.2
177.5°	1054.3	1055.3	1056.1	1056.1	1055.3	1054.3	1053.3	1052.4
180°	1054.5	1054.5	1054.5	1054.5	1054.5	1054.5	1054.5	1054.5

(END OF REPORT)