

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331418-940

Luminaire Tested: **S122DIP-S865D1080U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331418-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S865D1080U940-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6567.8 lumens
Efficiency: N/A
Efficacy: 100.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331418-940

CATALOG NUMBER: S122DIP-S865D1080U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

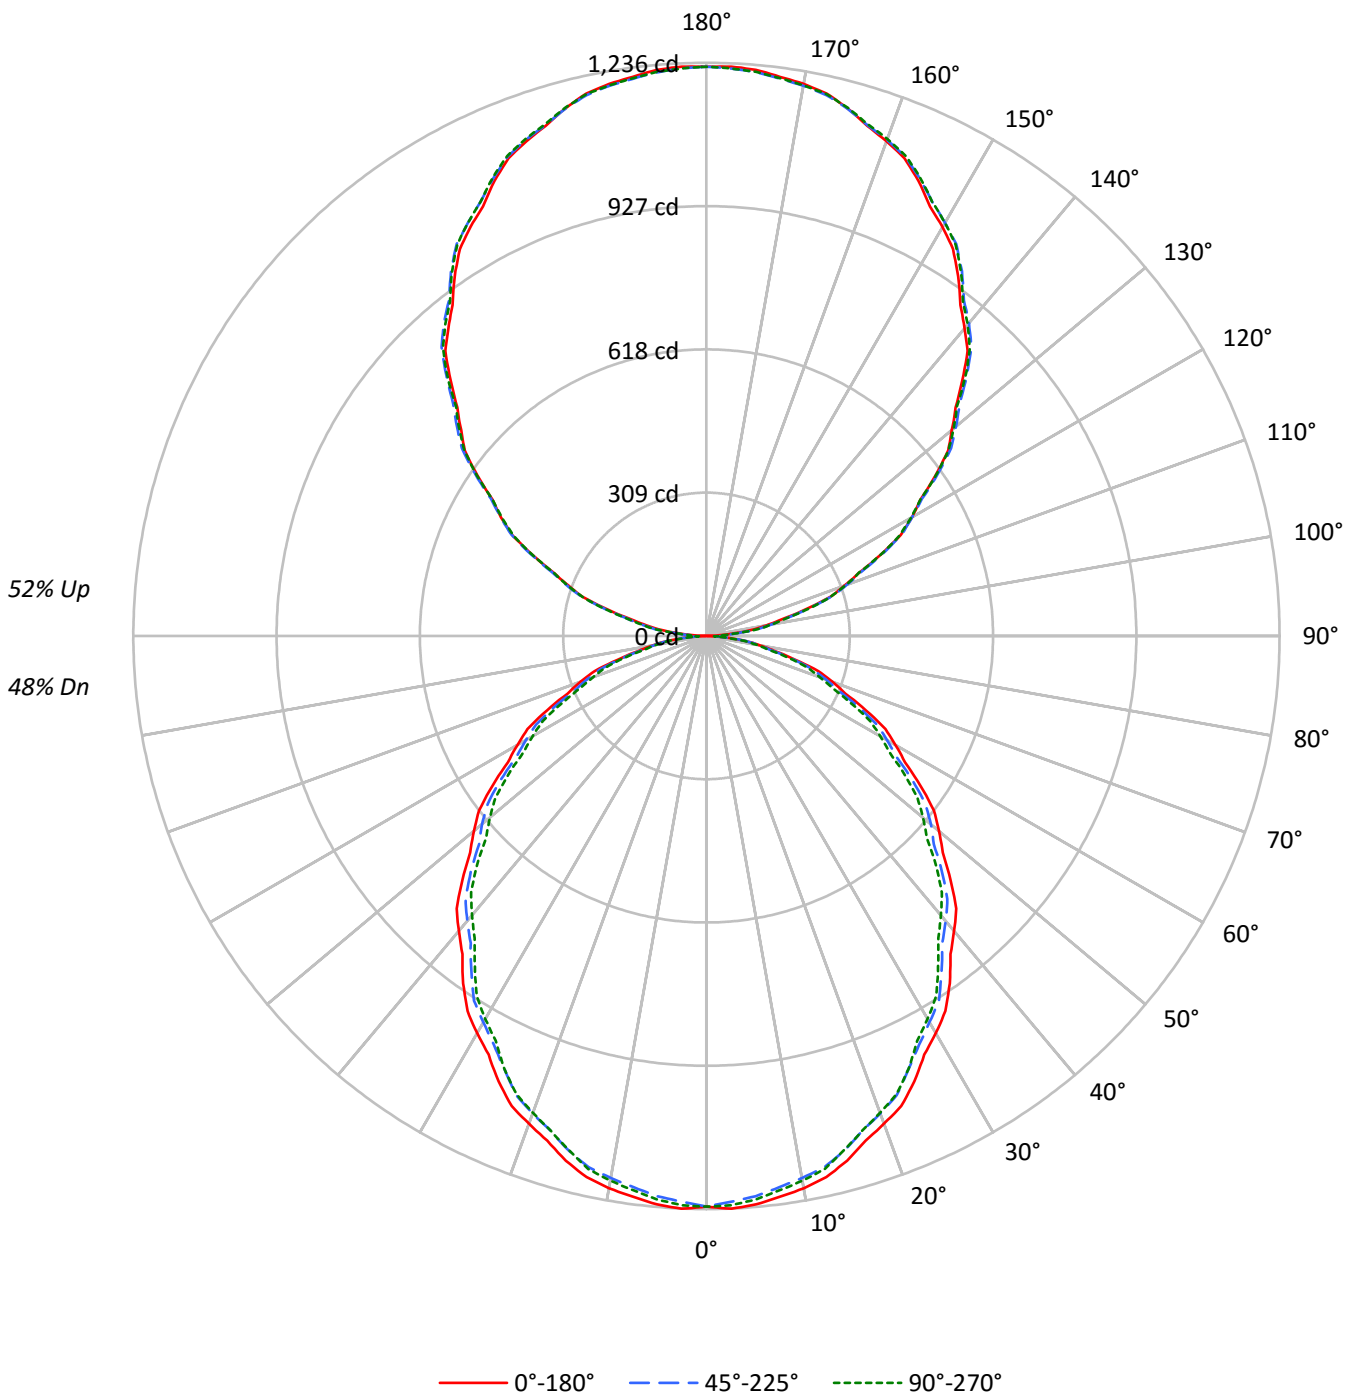



TEST NUMBER: P331418-940

CATALOG NUMBER: S122DIP-S865D1080U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	82	82	82	67	67	67	54	54	54	48
1	97	93	89	86	89	86	82	79	72	70	67	59	58	56	48	47	46	40
2	89	81	75	70	81	75	70	65	63	59	56	52	49	47	42	40	38	34
3	81	71	64	58	74	66	59	54	56	51	47	46	43	40	37	35	33	29
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	30	28	24
5	68	56	48	42	62	52	45	40	44	39	34	37	33	29	30	27	25	21
6	62	50	42	37	57	47	40	34	40	34	30	33	29	26	27	24	22	19
7	58	46	38	32	53	42	35	30	36	30	26	30	26	23	25	22	19	17
8	54	41	34	28	49	38	31	27	33	27	23	28	23	20	23	20	17	15
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	16	13
10	47	35	27	23	43	32	26	21	28	23	19	24	19	17	20	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	19869	19869	19869
5°	19945	19656	19772
10°	19825	19457	19556
15°	19580	19206	19184
20°	19234	18826	18806
25°	18887	18360	18360
30°	18442	17935	17780
35°	18027	17422	17164
40°	17506	16910	16583
45°	16993	16401	15995
50°	16435	15872	15307
55°	15854	15254	14688
60°	15206	14518	13986
65°	14514	13788	13154
70°	13629	12902	12288
75°	12402	11884	11584
80°	11000	10674	10126
85°	8985	8559	7669



TEST NUMBER: P331418-940

CATALOG NUMBER: S122DIP-S865D1080U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.7	1.8
10°-20°	325.6	5.0
20°-30°	478.6	7.3
30°-40°	555.9	8.5
40°-50°	555.3	8.5
50°-60°	484.3	7.4
60°-70°	358.1	5.5
70°-80°	202.8	3.1
80°-90°	59.4	0.9
90°-100°	77.8	1.2
100°-110°	241.6	3.7
110°-120°	412.9	6.3
120°-130°	543.0	8.3
130°-140°	609.4	9.3
140°-150°	597.6	9.1
150°-160°	501.2	7.6
160°-170°	332.4	5.1
170°-180°	116.2	1.8
0°-30°	919.9	14.0
0°-40°	1475.8	22.5
0°-60°	2515.4	38.3
0°-90°	3135.7	47.7
90°-120°	732.3	11.1
90°-150°	2482.3	37.8
90°-180°	3432.0	52.3
0°-180°	6567.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1231	1231	1231	1231	1231	
5°	1231	1225	1213	1222	1220	117
15°	1171	1164	1149	1153	1148	330
25°	1060	1050	1031	1033	1031	488
35°	915	902	884	877	871	571
45°	744	735	718	706	700	574
55°	563	556	542	528	522	503
65°	380	372	361	350	344	376
75°	199	196	190	184	186	212
85°	48	47	46	43	41	56
90°	1	14	36	34	35	5
95°	54	64	66	66	64	62
105°	223	226	228	230	230	235
115°	414	420	418	417	414	410
125°	603	611	609	606	605	538
135°	780	791	793	792	789	602
145°	947	954	960	961	957	591
155°	1082	1086	1089	1093	1091	498
165°	1178	1177	1177	1183	1179	332
175°	1225	1222	1220	1227	1221	116
180°	1227	1227	1227	1227	1227	



TEST NUMBER: P331418-940

CATALOG NUMBER: S122DIP-S865D1080U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6
2.5°	1236.3	1235.2	1234.1	1233.1	1232.1	1230.4	1228.1	1225.7	1223.4	1221.1	1223.2
5°	1230.6	1229.5	1228.5	1227.4	1226.4	1224.4	1221.6	1218.6	1215.8	1212.8	1215.0
7.5°	1219.7	1218.1	1216.5	1214.8	1213.2	1210.9	1207.9	1205.0	1202.0	1199.1	1201.2
10°	1209.2	1207.5	1205.6	1203.7	1201.9	1199.4	1196.2	1193.1	1190.0	1186.8	1188.9
12.5°	1195.1	1193.5	1191.9	1190.2	1188.6	1186.2	1183.0	1179.8	1176.7	1173.6	1175.0
15°	1171.4	1169.8	1168.2	1166.7	1165.1	1162.6	1159.2	1155.7	1152.4	1149.0	1150.0
17.5°	1141.1	1139.5	1138.0	1136.4	1134.8	1132.3	1128.8	1125.3	1121.9	1118.4	1119.6
20°	1119.4	1117.8	1116.2	1114.6	1113.0	1110.4	1106.7	1103.0	1099.4	1095.7	1096.4
22.5°	1097.6	1095.4	1093.1	1090.9	1088.8	1085.9	1082.4	1079.0	1075.5	1072.0	1072.2
25°	1060.2	1058.1	1056.0	1053.9	1051.8	1048.5	1044.0	1039.6	1035.1	1030.6	1031.2
27.5°	1017.6	1015.7	1013.8	1011.9	1010.0	1007.3	1003.8	1000.2	996.8	993.2	992.5
30°	989.2	987.1	985.0	982.9	980.8	977.8	973.8	969.9	965.9	962.0	961.2
32.5°	958.9	957.3	955.6	953.9	952.2	949.2	945.1	940.9	936.8	932.6	931.2
35°	914.6	912.0	909.4	906.8	904.1	900.7	896.5	892.3	888.1	883.9	882.3
37.5°	864.7	862.4	860.1	857.7	855.5	852.2	848.0	843.8	839.5	835.4	833.4
40°	830.6	828.6	826.4	824.3	822.2	819.0	814.8	810.7	806.5	802.3	799.9
42.5°	797.5	795.4	793.3	791.2	789.1	786.0	781.8	777.6	773.3	769.1	766.5
45°	744.2	742.4	740.6	738.8	736.9	734.0	730.0	726.1	722.2	718.3	715.3
47.5°	691.3	689.6	687.8	686.1	684.3	681.4	677.3	673.2	669.1	664.9	661.9
50°	654.3	653.0	651.8	650.4	649.1	646.6	642.9	639.2	635.5	631.9	628.2
52.5°	618.4	616.6	614.9	613.1	611.4	608.9	605.4	601.9	598.4	594.9	591.9
55°	563.2	561.7	560.1	558.5	556.9	554.6	551.4	548.2	545.1	541.9	538.8
57.5°	507.8	506.6	505.3	504.1	502.8	500.4	497.0	493.5	490.0	486.5	483.5
60°	470.9	469.8	468.9	467.8	466.7	464.4	460.7	457.0	453.3	449.6	446.7
62.5°	435.0	433.3	431.6	429.9	428.2	426.0	423.1	420.3	417.4	414.6	412.0
65°	379.9	378.3	376.7	375.1	373.5	371.4	368.8	366.1	363.6	360.9	358.6
67.5°	323.8	322.4	321.2	319.9	318.7	316.9	314.5	312.1	309.8	307.4	305.6
70°	288.7	287.7	286.6	285.5	284.5	282.8	280.4	278.0	275.7	273.3	271.5
72.5°	252.7	251.7	250.7	249.6	248.5	247.3	245.8	244.2	242.6	241.1	239.3
75°	198.8	198.2	197.7	197.2	196.7	195.7	194.5	193.1	191.8	190.5	189.0
77.5°	150.5	149.6	148.7	147.8	147.0	146.2	145.7	145.2	144.6	144.1	143.3
80°	118.3	118.1	117.8	117.5	117.3	116.9	116.4	115.8	115.3	114.8	114.0
82.5°	88.0	88.0	87.9	87.8	87.8	87.7	87.3	87.0	86.7	86.4	85.3
85°	48.5	48.2	48.0	47.7	47.4	47.2	46.9	46.6	46.4	46.2	45.4
87.5°	17.2	17.4	17.5	17.7	17.7	18.1	18.7	19.4	19.9	20.5	19.8
90°	1.1	3.8	6.6	9.4	12.1	16.0	21.0	26.1	31.2	36.3	35.8
92.5°	18.5	20.4	22.5	24.5	26.6	28.2	29.3	30.6	31.7	32.9	33.0
95°	53.9	56.2	58.5	60.7	63.0	64.5	64.9	65.4	65.8	66.3	66.3
97.5°	98.4	100.4	102.5	104.5	106.5	108.0	108.8	109.7	110.6	111.5	111.5
100°	131.5	133.4	135.3	137.1	138.9	140.2	140.9	141.5	142.2	142.9	142.9
102.5°	166.4	167.8	169.3	170.8	172.3	173.4	174.3	175.1	176.0	176.9	177.1
105°	222.7	223.4	224.1	224.8	225.4	226.0	226.5	226.9	227.4	227.8	228.4
107.5°	279.5	280.4	281.5	282.5	283.5	284.0	284.0	284.0	284.0	284.0	284.2
110°	315.9	317.3	318.7	320.0	321.5	322.2	322.2	322.2	322.2	322.2	322.2



TEST NUMBER: P331418-940

CATALOG NUMBER: S122DIP-S865D1080U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	355.7	357.0	358.5	359.8	361.2	361.9	361.6	361.4	361.2	361.1	360.5
115°	414.3	415.7	417.1	418.5	419.8	420.3	419.8	419.4	418.9	418.5	418.2
117.5°	472.7	474.6	476.4	478.2	480.1	480.4	479.1	477.8	476.5	475.2	474.7
120°	511.7	513.5	515.4	517.2	519.1	519.1	517.2	515.4	513.5	511.7	511.7
122.5°	547.3	549.6	551.7	553.9	556.2	556.6	555.4	554.0	552.8	551.4	550.9
125°	602.8	604.9	607.0	609.0	611.1	611.8	611.1	610.5	609.8	609.0	608.3
127.5°	656.9	659.5	662.2	664.8	667.4	668.3	667.4	666.6	665.8	664.9	664.1
130°	690.9	693.8	696.9	699.8	702.8	704.1	703.6	703.2	702.8	702.3	701.8
132.5°	729.0	731.5	733.9	736.3	738.8	740.0	740.1	740.2	740.3	740.4	739.4
135°	780.0	782.5	785.1	787.6	790.1	791.6	792.0	792.5	793.0	793.4	793.2
137.5°	833.6	835.7	837.8	839.8	841.9	843.2	843.8	844.5	845.0	845.6	845.4
140°	865.9	868.0	870.0	872.2	874.2	875.8	877.0	878.2	879.3	880.4	880.4
142.5°	899.1	901.2	903.2	905.3	907.3	908.7	909.5	910.3	911.2	912.0	912.1
145°	946.7	948.3	949.9	951.5	953.1	954.7	956.0	957.4	958.8	960.2	960.4
147.5°	989.2	991.1	993.0	995.0	996.9	998.4	999.3	1000.2	1001.1	1002.0	1002.6
150°	1018.2	1019.6	1020.9	1022.3	1023.7	1024.8	1025.8	1026.7	1027.6	1028.6	1029.2
152.5°	1043.8	1045.3	1046.6	1048.0	1049.4	1050.6	1051.8	1052.8	1054.0	1055.1	1056.0
155°	1082.4	1083.1	1083.8	1084.5	1085.2	1085.8	1086.5	1087.3	1088.0	1088.6	1089.8
157.5°	1115.4	1115.8	1116.2	1116.7	1117.2	1117.6	1118.0	1118.5	1118.8	1119.3	1120.9
160°	1135.2	1135.7	1136.1	1136.6	1137.1	1137.4	1137.6	1137.9	1138.1	1138.4	1139.7
162.5°	1153.4	1153.5	1153.6	1153.7	1153.9	1154.0	1154.2	1154.4	1154.7	1154.9	1156.5
165°	1177.7	1177.5	1177.2	1177.0	1176.8	1176.7	1176.7	1176.7	1176.7	1176.7	1178.3
167.5°	1198.0	1197.3	1196.6	1196.0	1195.2	1194.9	1194.8	1194.8	1194.7	1194.7	1196.3
170°	1208.8	1208.1	1207.4	1206.7	1206.0	1205.6	1205.3	1205.1	1204.9	1204.6	1206.2
172.5°	1216.2	1215.6	1214.9	1214.2	1213.4	1213.0	1212.8	1212.5	1212.3	1212.1	1213.7
175°	1225.4	1224.7	1224.0	1223.2	1222.6	1222.0	1221.6	1221.1	1220.7	1220.1	1221.8
177.5°	1229.0	1228.5	1228.0	1227.4	1226.9	1226.4	1226.0	1225.7	1225.3	1224.9	1226.0
180°	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4



TEST NUMBER: P331418-940

CATALOG NUMBER: S122DIP-S865D1080U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6
2.5°	1225.3	1227.4	1229.5	1230.4	1229.9	1229.5	1229.1	1228.7
5°	1217.0	1219.1	1221.3	1222.0	1221.6	1221.0	1220.5	1219.9
7.5°	1203.3	1205.4	1207.6	1208.3	1207.7	1207.1	1206.6	1205.9
10°	1191.0	1193.1	1195.2	1195.9	1195.1	1194.3	1193.5	1192.8
12.5°	1176.5	1177.9	1179.5	1179.9	1179.3	1178.8	1178.1	1177.6
15°	1151.0	1152.1	1153.2	1153.0	1151.7	1150.4	1149.1	1147.7
17.5°	1120.8	1122.0	1123.3	1123.2	1122.0	1120.7	1119.5	1118.2
20°	1097.3	1098.1	1098.9	1098.7	1097.7	1096.6	1095.6	1094.5
22.5°	1072.4	1072.5	1072.6	1072.5	1071.7	1071.1	1070.5	1069.9
25°	1031.7	1032.2	1032.7	1032.7	1032.2	1031.7	1031.2	1030.6
27.5°	991.7	990.9	990.1	989.1	987.7	986.5	985.3	984.0
30°	960.4	959.7	958.9	957.9	956.9	955.8	954.8	953.7
32.5°	929.8	928.4	926.9	925.7	924.7	923.6	922.6	921.5
35°	880.7	879.1	877.6	876.1	874.9	873.5	872.2	870.8
37.5°	831.5	829.6	827.6	826.0	824.7	823.5	822.2	820.9
40°	797.5	795.1	792.8	791.0	790.1	789.0	787.9	786.8
42.5°	763.9	761.3	758.8	756.8	755.3	753.9	752.3	750.9
45°	712.5	709.5	706.7	704.7	703.6	702.6	701.5	700.5
47.5°	658.9	655.9	652.8	650.5	649.0	647.5	646.0	644.4
50°	624.5	620.8	617.2	614.7	613.3	612.0	610.7	609.4
52.5°	588.8	585.8	582.7	580.3	578.6	576.8	575.2	573.4
55°	535.7	532.4	529.3	527.1	525.8	524.4	523.2	521.8
57.5°	480.4	477.2	474.1	472.1	471.1	470.1	469.1	468.1
60°	443.9	441.0	438.1	436.2	435.4	434.6	433.8	433.1
62.5°	409.2	406.5	403.9	402.1	401.0	400.0	399.0	398.1
65°	356.1	353.8	351.4	349.6	348.3	347.0	345.6	344.3
67.5°	303.7	301.8	300.1	298.6	297.6	296.5	295.4	294.4
70°	269.7	267.8	266.0	264.5	263.5	262.4	261.4	260.3
72.5°	237.5	235.6	233.8	232.5	231.6	230.8	229.9	229.1
75°	187.3	185.7	184.2	183.7	184.2	184.8	185.2	185.7
77.5°	142.6	141.8	141.0	140.2	139.5	138.8	138.0	137.2
80°	113.2	112.4	111.6	110.9	110.4	109.9	109.4	108.9
82.5°	84.4	83.4	82.4	81.9	81.7	81.6	81.5	81.4
85°	44.6	43.8	43.0	42.4	42.2	41.9	41.6	41.4
87.5°	19.1	18.4	17.6	17.2	17.0	16.9	16.7	16.5
90°	35.3	34.9	34.4	34.3	34.5	34.8	35.0	35.2
92.5°	33.1	33.2	33.3	33.3	33.4	33.4	33.5	33.5
95°	66.3	66.3	66.3	66.1	65.6	65.2	64.6	64.2
97.5°	111.5	111.5	111.5	111.5	111.4	111.4	111.3	111.3
100°	142.9	142.9	142.9	142.9	142.6	142.4	142.1	141.9
102.5°	177.3	177.5	177.6	177.6	177.4	177.2	176.9	176.7
105°	228.8	229.3	229.7	230.0	230.0	230.0	230.0	230.0
107.5°	284.4	284.5	284.7	284.3	283.3	282.2	281.2	280.1
110°	322.2	322.2	322.2	321.8	321.1	320.4	319.7	319.1



TEST NUMBER: P331418-940

CATALOG NUMBER: S122DIP-S865D1080U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	360.0	359.4	358.9	358.4	357.8	357.3	356.9	356.3
115°	418.0	417.8	417.5	417.1	416.4	415.7	415.0	414.3
117.5°	474.1	473.6	473.1	472.4	471.7	471.0	470.3	469.7
120°	511.7	511.7	511.7	511.3	510.7	510.0	509.3	508.5
122.5°	550.4	549.8	549.2	548.8	548.2	547.7	547.2	546.7
125°	607.7	607.0	606.3	605.8	605.6	605.4	605.1	604.9
127.5°	663.3	662.5	661.6	660.8	660.1	659.4	658.7	657.9
130°	701.3	700.9	700.4	699.7	698.8	697.9	697.0	696.1
132.5°	738.3	737.4	736.4	735.5	734.8	734.0	733.3	732.5
135°	793.0	792.7	792.5	792.0	791.3	790.7	790.0	789.3
137.5°	845.3	845.1	844.9	844.4	843.4	842.5	841.6	840.6
140°	880.4	880.4	880.4	879.9	879.0	878.2	877.2	876.3
142.5°	912.3	912.5	912.7	912.3	911.3	910.4	909.5	908.6
145°	960.6	960.9	961.1	960.7	959.8	958.9	958.0	957.1
147.5°	1003.1	1003.5	1004.1	1003.9	1003.0	1002.1	1001.2	1000.4
150°	1029.9	1030.6	1031.4	1031.4	1030.6	1029.9	1029.2	1028.6
152.5°	1056.9	1057.7	1058.5	1058.5	1057.7	1056.9	1056.0	1055.1
155°	1090.9	1092.1	1093.2	1093.4	1092.8	1092.1	1091.4	1090.7
157.5°	1122.4	1124.0	1125.5	1125.8	1124.6	1123.6	1122.5	1121.3
160°	1141.1	1142.5	1143.9	1144.1	1143.2	1142.3	1141.3	1140.4
162.5°	1158.1	1159.6	1161.2	1161.4	1160.3	1159.2	1158.1	1157.0
165°	1179.9	1181.5	1183.1	1183.3	1182.2	1181.1	1179.9	1178.8
167.5°	1197.9	1199.5	1201.1	1201.3	1200.2	1198.9	1197.7	1196.6
170°	1207.8	1209.4	1211.0	1211.2	1209.8	1208.4	1207.0	1205.7
172.5°	1215.3	1216.9	1218.5	1218.6	1217.3	1215.8	1214.5	1213.1
175°	1223.4	1225.0	1226.6	1226.7	1225.4	1224.0	1222.6	1221.2
177.5°	1227.2	1228.2	1229.3	1229.3	1228.2	1227.2	1226.0	1224.9
180°	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4

(END OF REPORT)