

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331762-940

Luminaire Tested: **S122RDIP-S1005D1080U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331762-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIP-S1005D1080U940-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1080 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6948.2 lumens
Efficiency: N/A
Efficacy: 96.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331762-940

CATALOG NUMBER: S122RDIP-S1005D1080U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

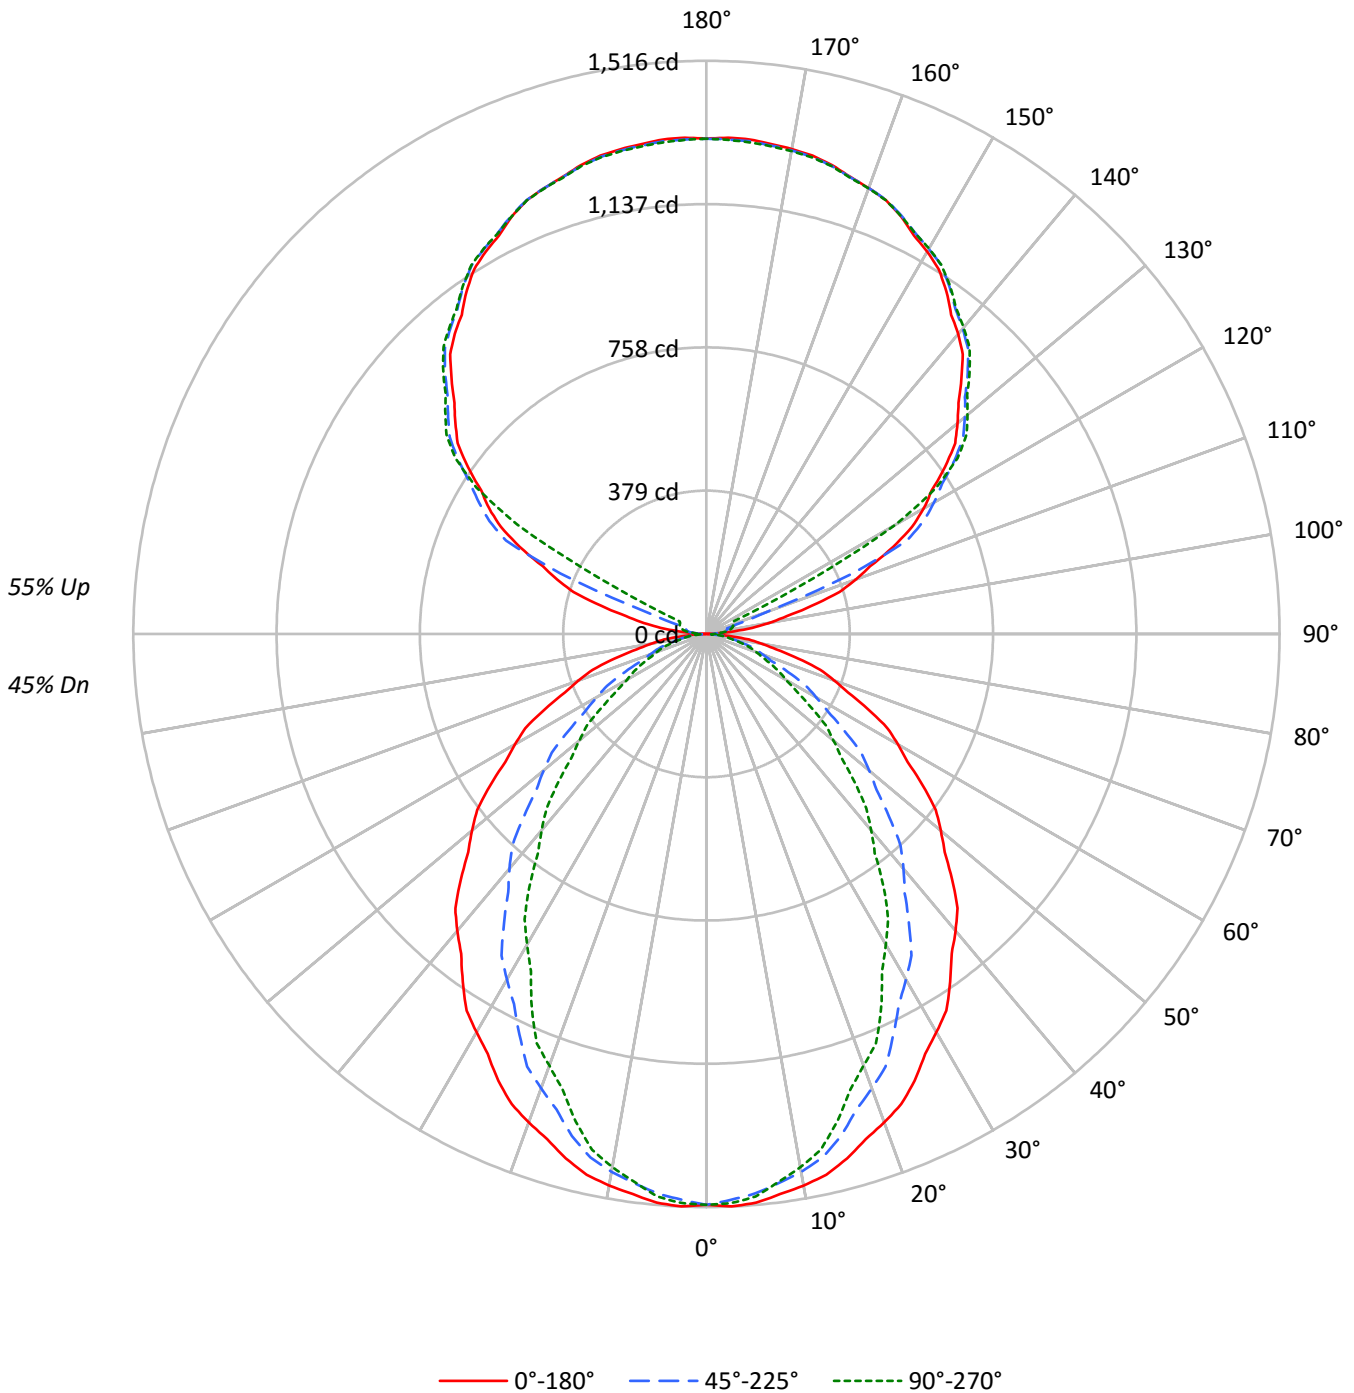



TEST NUMBER: P331762-940

CATALOG NUMBER: S122RDIP-S1005D1080U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45				
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	46	45	44	39				
2	89	82	76	71	81	75	70	66	63	59	56	51	49	47	41	39	38	33				
3	81	72	65	59	74	66	60	55	56	51	48	46	43	40	37	35	33	28				
4	74	64	56	51	68	59	52	47	50	45	41	41	38	35	33	31	29	25				
5	68	57	49	44	63	53	46	41	45	40	36	37	33	30	30	27	25	22				
6	63	51	44	38	58	48	41	36	40	35	31	34	30	27	27	25	22	19				
7	58	47	39	33	54	43	36	32	37	31	28	31	27	24	25	22	20	17				
8	54	42	35	30	50	39	33	28	34	28	25	28	24	21	23	20	18	16				
9	51	39	31	27	46	36	30	25	31	26	22	26	22	19	21	19	16	14				
10	47	36	29	24	43	33	27	23	28	23	20	24	20	17	20	17	15	13				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	24380	24380	24380
5°	24473	24076	24209
10°	24287	23682	23481
15°	24008	22980	22318
20°	23622	21978	20874
25°	23225	20838	19475
30°	22676	19669	17682
35°	22141	18398	16109
40°	21602	17081	14286
45°	20970	15602	12638
50°	20321	14109	11017
55°	19657	12504	9464
60°	18887	10811	7857
65°	18010	9085	7156
70°	16966	7482	6581
75°	15689	6818	6138
80°	13845	6100	5588
85°	10893	4798	4798



TEST NUMBER: P331762-940

CATALOG NUMBER: S122RDIP-S1005D1080U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	141.3	2.0
10°-20°	388.1	5.6
20°-30°	545.0	7.8
30°-40°	594.3	8.6
40°-50°	546.4	7.9
50°-60°	429.2	6.2
60°-70°	279.8	4.0
70°-80°	144.3	2.1
80°-90°	40.6	0.6
90°-100°	43.7	0.6
100°-110°	160.2	2.3
110°-120°	428.4	6.2
120°-130°	707.1	10.2
130°-140°	752.0	10.8
140°-150°	699.0	10.1
150°-160°	562.0	8.1
160°-170°	362.1	5.2
170°-180°	124.6	1.8
0°-30°	1074.4	15.5
0°-40°	1668.7	24.0
0°-60°	2644.3	38.1
0°-90°	3109.0	44.7
90°-120°	632.3	9.1
90°-150°	2790.4	40.2
90°-180°	3839.0	55.3
0°-180°	6948.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1510	1510	1510	1510	1510	
5°	1510	1503	1486	1497	1494	143
15°	1436	1419	1375	1350	1335	404
25°	1304	1257	1170	1116	1093	599
35°	1123	1051	933	850	817	703
45°	918	824	683	590	554	709
55°	698	589	444	365	336	624
65°	471	360	238	194	187	467
75°	252	158	109	100	98	266
85°	59	31	26	26	26	69
90°	1	11	19	24	26	5
95°	62	32	37	41	41	75
105°	288	301	58	68	72	308
115°	545	562	585	167	78	537
125°	771	783	801	807	810	687
135°	954	968	977	986	985	736
145°	1106	1106	1121	1127	1123	692
155°	1218	1211	1221	1226	1219	561
165°	1284	1278	1281	1287	1281	362
175°	1313	1307	1308	1314	1305	125
180°	1310	1310	1310	1310	1310	



TEST NUMBER: P331762-940

CATALOG NUMBER: S122RDIP-S1005D1080U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0
2.5°	1515.6	1514.3	1513.1	1511.9	1510.6	1508.7	1506.0	1503.4	1500.7	1498.1	1500.5
5°	1510.0	1508.5	1507.0	1505.5	1504.0	1501.3	1497.3	1493.3	1489.4	1485.5	1488.2
7.5°	1494.5	1492.6	1490.8	1488.8	1486.9	1483.7	1479.1	1474.4	1469.9	1465.3	1466.1
10°	1481.4	1479.3	1477.1	1475.0	1472.8	1468.7	1462.7	1456.6	1450.5	1444.5	1443.6
12.5°	1465.0	1462.3	1459.7	1457.1	1454.6	1449.3	1441.5	1433.8	1426.0	1418.3	1416.6
15°	1436.3	1432.9	1429.6	1426.2	1422.9	1416.0	1405.8	1395.4	1385.1	1374.8	1369.0
17.5°	1401.0	1395.9	1390.8	1385.7	1380.6	1371.5	1358.2	1345.0	1331.7	1318.5	1311.6
20°	1374.8	1368.7	1362.6	1356.6	1350.5	1339.9	1324.6	1309.5	1294.3	1279.1	1271.5
22.5°	1346.3	1339.5	1332.8	1326.0	1319.1	1307.2	1290.0	1272.9	1255.8	1238.7	1228.9
25°	1303.7	1294.0	1284.2	1274.5	1264.8	1250.0	1229.9	1209.9	1189.8	1169.7	1157.4
27.5°	1252.3	1241.8	1231.2	1220.7	1210.1	1193.5	1170.9	1148.3	1125.7	1103.1	1088.6
30°	1216.3	1204.7	1193.2	1181.6	1170.1	1152.2	1127.8	1103.6	1079.3	1055.0	1039.5
32.5°	1181.2	1167.8	1154.3	1140.9	1127.3	1108.2	1083.4	1058.6	1033.8	1009.1	991.4
35°	1123.3	1107.9	1092.3	1076.8	1061.4	1040.3	1013.5	986.9	960.1	933.4	914.3
37.5°	1065.4	1048.4	1031.4	1014.3	997.4	974.6	946.1	917.7	889.1	860.7	839.6
40°	1024.9	1006.7	988.5	970.3	952.1	928.2	898.8	869.3	839.8	810.4	788.8
42.5°	983.4	964.2	945.0	925.8	906.6	881.8	851.4	820.9	790.5	760.1	737.8
45°	918.4	898.0	877.6	857.3	837.0	810.8	778.9	747.1	715.2	683.3	661.7
47.5°	854.9	833.4	811.8	790.2	768.7	741.5	708.6	675.6	642.7	609.8	588.4
50°	809.0	787.5	765.9	744.3	722.7	695.3	661.9	628.5	595.0	561.7	540.7
52.5°	764.2	741.6	719.2	696.6	674.0	646.5	613.8	581.1	548.4	515.8	495.5
55°	698.3	674.7	650.9	627.2	603.6	575.3	542.5	509.7	477.0	444.2	425.9
57.5°	630.8	606.5	582.2	557.9	533.6	505.7	474.2	442.6	411.2	379.6	362.9
60°	584.9	560.6	536.3	512.0	487.7	459.9	428.6	397.3	366.0	334.8	319.3
62.5°	540.1	515.8	491.5	467.2	442.9	415.8	386.0	356.1	326.4	296.6	281.8
65°	471.4	446.8	422.3	397.7	373.1	347.1	319.8	292.5	265.1	237.8	227.5
67.5°	405.3	380.9	356.5	332.1	307.6	283.1	258.6	234.0	209.4	184.8	180.0
70°	359.4	335.7	312.0	288.4	264.7	242.4	221.4	200.5	179.5	158.5	155.5
72.5°	315.7	292.9	270.3	247.5	224.8	205.0	188.2	171.4	154.5	137.8	135.2
75°	251.5	230.2	208.9	187.7	166.4	150.6	140.3	130.0	119.7	109.3	107.2
77.5°	188.3	169.7	151.1	132.4	113.7	101.9	96.9	91.9	86.9	82.0	80.8
80°	148.9	133.5	118.0	102.5	87.0	77.8	74.7	71.7	68.7	65.6	64.4
82.5°	112.9	100.8	88.7	76.6	64.6	57.4	55.4	53.3	51.3	49.2	48.5
85°	58.8	52.3	46.0	39.6	33.3	29.6	28.7	27.8	26.8	25.9	25.9
87.5°	17.7	16.2	14.7	13.2	11.8	11.1	11.5	11.9	12.2	12.6	12.5
90°	1.0	3.3	5.6	7.9	10.3	12.2	13.9	15.6	17.3	19.0	20.0
92.5°	19.2	18.9	18.7	18.5	18.3	18.6	19.4	20.3	21.1	22.0	22.6
95°	61.6	54.7	47.7	40.8	33.8	31.0	32.5	34.1	35.5	37.0	38.0
97.5°	122.3	102.7	83.1	63.5	44.0	35.8	39.2	42.6	46.1	49.5	50.3
100°	167.8	138.9	110.0	81.2	52.3	39.7	43.2	46.9	50.5	54.0	55.7
102.5°	217.8	211.7	205.6	199.5	193.4	175.4	145.4	115.5	85.5	55.6	57.8
105°	288.2	294.5	300.8	307.1	313.4	287.8	230.3	172.8	115.3	57.8	60.1
107.5°	368.4	373.4	378.5	383.6	388.8	356.9	287.8	218.9	149.9	81.0	78.6
110°	419.9	424.4	428.8	433.2	437.7	409.4	348.5	287.7	226.8	165.9	144.8



TEST NUMBER: P331762-940

CATALOG NUMBER: S122RDIP-S1005D1080U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	468.5	472.4	476.3	480.2	484.1	478.6	463.5	448.5	433.5	418.4	341.6
115°	545.1	548.7	552.2	555.8	559.4	563.8	569.1	574.4	579.6	584.9	487.3
117.5°	613.5	617.5	621.5	625.5	629.5	633.3	636.9	640.6	644.2	647.8	624.2
120°	663.5	666.7	669.9	673.1	676.2	679.7	683.5	687.2	691.1	694.8	697.3
122.5°	706.1	709.4	712.7	716.0	719.3	723.1	727.2	731.3	735.5	739.6	741.1
125°	770.7	773.4	776.1	778.9	781.6	785.0	789.0	793.0	797.0	801.0	802.5
127.5°	829.3	832.3	835.4	838.4	841.4	844.4	847.4	850.3	853.4	856.4	858.5
130°	866.4	869.8	873.2	876.6	879.9	882.7	885.0	887.3	889.7	892.0	894.3
132.5°	904.3	907.2	910.1	912.9	915.8	918.4	920.7	923.0	925.3	927.6	929.6
135°	953.6	957.0	960.4	963.8	967.1	969.7	971.6	973.5	975.4	977.3	979.5
137.5°	1003.4	1005.8	1008.2	1010.6	1012.9	1015.1	1017.4	1019.5	1021.6	1023.8	1025.8
140°	1036.1	1037.8	1039.5	1041.2	1042.9	1044.8	1047.1	1049.5	1051.8	1054.1	1056.0
142.5°	1063.4	1064.9	1066.4	1067.9	1069.4	1071.6	1074.2	1076.8	1079.5	1082.2	1083.9
145°	1106.3	1106.0	1105.8	1105.6	1105.4	1107.1	1110.6	1114.2	1117.8	1121.4	1122.8
147.5°	1143.6	1142.8	1142.0	1141.2	1140.4	1141.7	1145.3	1148.8	1152.4	1155.9	1157.0
150°	1167.9	1166.4	1164.9	1163.4	1162.0	1162.9	1166.3	1169.7	1173.0	1176.3	1177.7
152.5°	1188.3	1186.7	1185.0	1183.4	1181.8	1182.5	1185.7	1188.9	1192.1	1195.3	1196.6
155°	1218.1	1216.2	1214.3	1212.4	1210.5	1210.9	1213.4	1215.8	1218.4	1220.9	1222.2
157.5°	1241.4	1239.8	1238.2	1236.6	1235.0	1235.1	1236.9	1238.6	1240.4	1242.2	1243.6
160°	1255.1	1253.8	1252.5	1251.2	1250.0	1250.0	1251.2	1252.5	1253.8	1255.1	1256.3
162.5°	1267.2	1266.0	1264.6	1263.4	1262.1	1262.0	1263.1	1264.3	1265.3	1266.4	1267.8
165°	1283.5	1282.2	1280.9	1279.7	1278.4	1278.1	1278.7	1279.4	1280.1	1280.7	1282.1
167.5°	1295.7	1294.4	1293.1	1291.8	1290.6	1290.2	1290.8	1291.4	1292.0	1292.6	1294.1
170°	1302.4	1301.2	1299.9	1298.7	1297.4	1297.0	1297.4	1297.8	1298.2	1298.7	1300.1
172.5°	1307.0	1305.7	1304.5	1303.2	1302.0	1301.5	1302.0	1302.3	1302.8	1303.2	1304.7
175°	1312.9	1311.4	1309.9	1308.5	1307.0	1306.4	1306.9	1307.3	1307.7	1308.1	1309.7
177.5°	1313.8	1312.7	1311.4	1310.3	1309.1	1308.6	1308.8	1308.9	1309.1	1309.3	1310.5
180°	1310.0	1310.0	1310.0	1310.0	1310.0	1310.0	1310.0	1310.0	1310.0	1310.0	1310.0



TEST NUMBER: P331762-940

CATALOG NUMBER: S122RDIP-S1005D1080U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0
2.5°	1502.9	1505.3	1507.8	1508.7	1508.2	1507.8	1507.3	1506.8
5°	1490.9	1493.7	1496.4	1497.3	1496.4	1495.5	1494.6	1493.7
7.5°	1466.8	1467.6	1468.4	1468.0	1466.4	1464.8	1463.3	1461.7
10°	1442.6	1441.7	1440.8	1439.5	1437.6	1435.8	1434.0	1432.2
12.5°	1415.0	1413.3	1411.7	1409.3	1406.3	1403.3	1400.3	1397.2
15°	1363.2	1357.5	1351.7	1347.3	1344.3	1341.2	1338.2	1335.2
17.5°	1304.8	1297.9	1291.0	1285.0	1279.8	1274.5	1269.3	1264.1
20°	1263.9	1256.3	1248.8	1241.6	1234.9	1228.2	1221.6	1214.9
22.5°	1219.1	1209.3	1199.5	1192.1	1187.2	1182.2	1177.2	1172.2
25°	1144.9	1132.5	1120.0	1111.5	1106.9	1102.3	1097.8	1093.2
27.5°	1074.1	1059.5	1045.0	1034.1	1026.9	1019.7	1012.4	1005.2
30°	1024.0	1008.5	993.0	981.2	973.0	964.8	956.6	948.4
32.5°	973.7	956.1	938.3	925.7	918.0	910.3	902.5	894.8
35°	895.1	876.0	856.8	843.9	837.2	830.5	823.9	817.3
37.5°	818.5	797.5	776.3	762.0	754.4	746.7	739.0	731.4
40°	767.2	745.6	724.2	709.4	701.5	693.6	685.7	677.8
42.5°	715.5	693.2	670.9	655.9	648.3	640.6	633.0	625.4
45°	640.2	618.6	597.0	582.6	575.3	568.0	560.7	553.5
47.5°	566.9	545.5	524.0	510.0	503.4	496.8	490.1	483.5
50°	519.8	498.8	477.9	464.1	457.8	451.4	445.1	438.6
52.5°	475.3	455.0	434.9	421.8	415.9	410.0	404.1	398.2
55°	407.7	389.5	371.2	359.3	353.5	347.7	342.0	336.2
57.5°	346.3	329.5	312.8	302.0	297.2	292.3	287.5	282.6
60°	303.8	288.4	272.9	262.7	257.8	253.0	248.1	243.3
62.5°	267.1	252.3	237.6	228.6	225.8	222.8	219.9	217.0
65°	217.1	206.8	196.4	190.8	189.9	189.0	188.2	187.3
67.5°	175.3	170.6	165.8	162.9	162.0	161.0	160.1	159.1
70°	152.5	149.5	146.4	144.3	143.0	141.8	140.6	139.4
72.5°	132.7	130.1	127.5	125.9	125.2	124.5	123.7	123.0
75°	105.0	103.0	100.9	99.6	99.3	99.0	98.7	98.4
77.5°	79.5	78.4	77.1	76.2	75.8	75.3	74.8	74.4
80°	63.1	62.0	60.7	60.1	60.1	60.1	60.1	60.1
82.5°	47.7	47.0	46.3	45.9	45.9	45.9	45.9	45.9
85°	25.9	25.9	25.9	25.9	25.9	25.9	25.9	25.9
87.5°	12.5	12.5	12.4	12.4	12.5	12.6	12.7	12.8
90°	21.0	22.1	23.2	23.9	24.3	24.8	25.1	25.6
92.5°	23.1	23.6	24.2	24.6	24.9	25.1	25.3	25.6
95°	39.1	40.1	41.2	41.6	41.4	41.2	40.9	40.8
97.5°	51.2	52.0	52.9	53.4	53.7	53.9	54.1	54.4
100°	57.4	59.1	60.8	61.8	62.2	62.7	63.1	63.5
102.5°	59.9	62.2	64.3	65.7	66.3	66.9	67.5	68.0
105°	62.4	64.7	67.1	68.7	69.6	70.4	71.2	72.1
107.5°	76.2	73.8	71.5	70.8	71.6	72.4	73.3	74.1
110°	123.8	102.7	81.6	71.5	72.3	73.2	74.0	74.9



TEST NUMBER: P331762-940

CATALOG NUMBER: S122RDIP-S1005D1080U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	264.7	187.9	111.0	72.9	73.7	74.3	75.0	75.6
115°	389.8	292.3	194.7	138.4	123.2	108.1	92.9	77.8
117.5°	600.7	577.0	553.5	516.7	466.9	417.1	367.2	317.4
120°	699.9	702.4	705.0	692.0	663.5	635.1	606.6	578.3
122.5°	742.6	744.1	745.6	743.6	738.2	732.6	727.1	721.6
125°	804.0	805.4	806.9	808.0	808.6	809.2	809.9	810.5
127.5°	860.7	862.8	865.0	866.1	866.2	866.4	866.5	866.6
130°	896.6	898.9	901.3	902.3	902.1	901.9	901.7	901.5
132.5°	931.6	933.6	935.6	936.5	936.2	936.0	935.9	935.6
135°	981.5	983.6	985.7	986.6	986.1	985.7	985.3	984.9
137.5°	1027.9	1029.9	1032.0	1032.7	1032.0	1031.3	1030.6	1029.8
140°	1057.9	1059.8	1061.7	1062.1	1061.0	1060.0	1058.9	1057.9
142.5°	1085.6	1087.4	1089.0	1089.4	1088.3	1087.3	1086.3	1085.2
145°	1124.4	1125.8	1127.3	1127.5	1126.5	1125.4	1124.4	1123.3
147.5°	1158.1	1159.2	1160.3	1160.4	1159.5	1158.6	1157.7	1156.8
150°	1178.9	1180.2	1181.4	1181.5	1180.4	1179.5	1178.4	1177.3
152.5°	1197.8	1199.2	1200.4	1200.3	1198.9	1197.6	1196.1	1194.8
155°	1223.4	1224.8	1226.0	1225.7	1224.1	1222.4	1220.8	1219.1
157.5°	1245.0	1246.4	1247.9	1247.8	1246.2	1244.5	1242.9	1241.2
160°	1257.6	1258.8	1260.1	1260.0	1258.6	1257.0	1255.6	1254.1
162.5°	1269.3	1270.7	1272.2	1271.9	1270.2	1268.4	1266.5	1264.7
165°	1283.6	1285.0	1286.6	1286.6	1285.0	1283.6	1282.1	1280.7
167.5°	1295.6	1297.0	1298.5	1298.2	1296.4	1294.5	1292.6	1290.7
170°	1301.6	1303.1	1304.6	1304.3	1302.4	1300.6	1298.7	1296.7
172.5°	1306.2	1307.6	1309.1	1308.9	1307.0	1305.1	1303.2	1301.3
175°	1311.1	1312.6	1314.0	1313.8	1311.6	1309.5	1307.4	1305.3
177.5°	1311.6	1312.8	1314.0	1313.8	1312.3	1310.8	1309.3	1307.8
180°	1310.0	1310.0	1310.0	1310.0	1310.0	1310.0	1310.0	1310.0

(END OF REPORT)