

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331755-940

Luminaire Tested: **S122RDIP-S1005D925U940-4F0-1E-UDD-A4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331755-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIP-S1005D925U940-4F0-1E-UDD-A4  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 925 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6623.2 lumens  
Efficiency: N/A  
Efficacy: 99.1 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 66.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

### Luminous Intensity Polar Plot

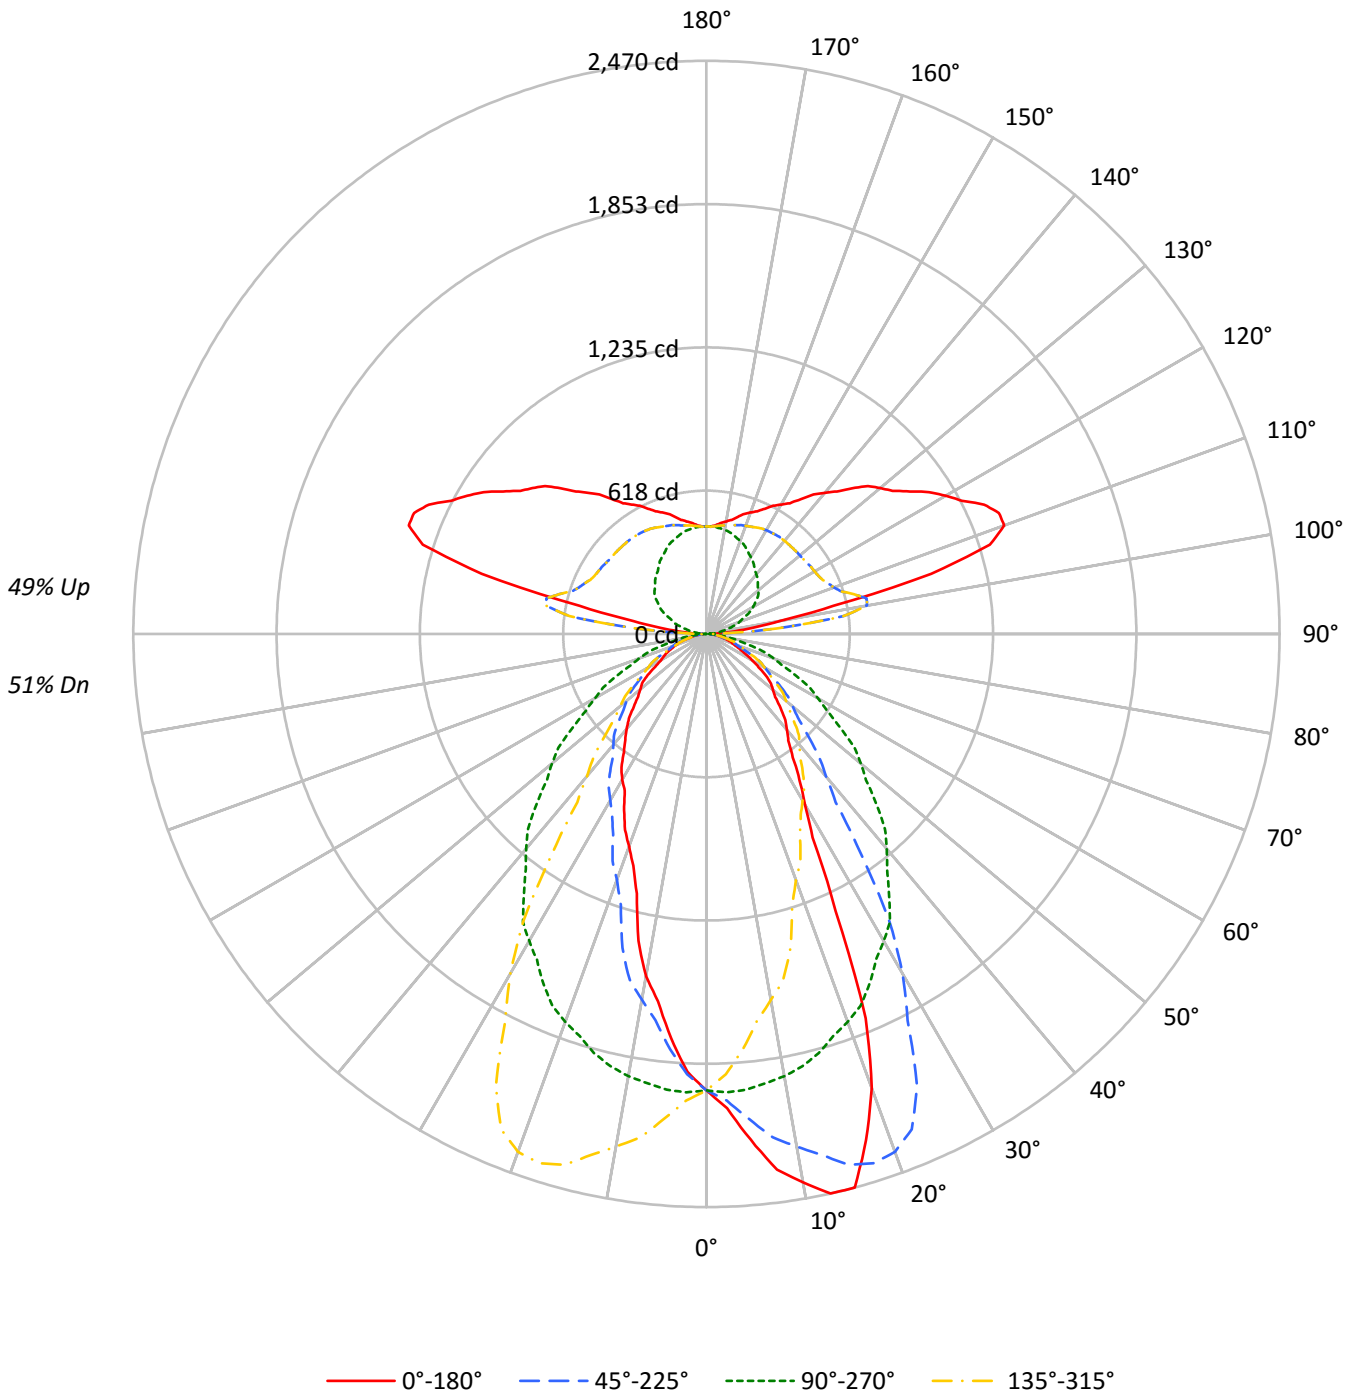



TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51
1	99	95	91	88	91	88	85	82	75	73	71	63	61	60	52	51	50	45
2	91	84	78	73	84	78	73	69	67	63	60	56	54	51	47	45	43	39
3	83	74	68	62	77	69	63	58	60	55	51	51	47	45	42	40	38	34
4	77	67	59	53	71	62	55	50	54	49	45	46	42	39	38	36	34	30
5	71	60	52	46	65	56	49	44	48	43	39	41	38	34	35	32	30	27
6	66	54	46	41	61	51	44	39	44	39	35	38	34	31	32	29	27	24
7	61	49	42	36	56	46	39	34	40	35	31	35	31	28	30	27	24	22
8	57	45	37	32	53	42	36	31	37	32	28	32	28	25	28	24	22	20
9	53	41	34	29	49	39	32	28	34	29	25	30	26	23	26	22	20	18
10	50	38	31	26	46	36	30	25	32	27	23	28	24	21	24	21	19	17

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	31752	31752	31752	31752
5°	35462	31951	28329	31951
10°	39346	31727	24556	31727
15°	41279	31263	19348	31263
20°	35787	30574	16744	30574
25°	23469	29630	14949	29630
30°	15797	28486	13530	28486
35°	12796	27045	12203	27045
40°	11377	25478	11291	25478
45°	10298	23640	10079	23640
50°	9372	21815	9339	21815
55°	8811	19792	8695	19792
60°	7369	17938	7282	17938
65°	6212	16290	7049	16290
70°	5740	14549	6647	14549
75°	5371	12664	6138	12664
80°	4956	10423	5467	10423
85°	4557	8225	4798	8225



TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	186.4	2.8
10°-20°	519.5	7.8
20°-30°	669.4	10.1
30°-40°	636.1	9.6
40°-50°	544.9	8.2
50°-60°	415.0	6.3
60°-70°	262.3	4.0
70°-80°	131.0	2.0
80°-90°	38.3	0.6
90°-100°	185.0	2.8
100°-110°	627.9	9.5
110°-120°	667.1	10.1
120°-130°	549.1	8.3
130°-140°	441.0	6.7
140°-150°	333.2	5.0
150°-160°	234.2	3.5
160°-170°	137.9	2.1
170°-180°	44.9	0.7
0°-30°	1375.3	20.8
0°-40°	2011.4	30.4
0°-60°	2971.3	44.9
0°-90°	3402.9	51.4
90°-120°	1480.0	22.3
90°-150°	2803.4	42.3
90°-180°	3220.0	48.6
0°-180°	6623.2	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1967	1967	1967	1967	1967	
5°	2188	1971	1748	1971	2188	216
15°	2470	1870	1158	1870	2470	666
25°	1317	1663	839	1663	1317	625
35°	649	1372	619	1372	649	415
45°	451	1035	441	1035	451	349
55°	313	703	309	703	313	275
65°	163	426	184	426	163	166
75°	86	203	98	203	86	91
85°	25	44	26	44	25	27
90°	29	1	29	1	29	17
95°	102	31	102	31	102	132
105°	1003	109	1003	109	1003	970
115°	1320	191	1320	191	1320	1292
125°	1071	267	1071	267	1071	967
135°	887	313	887	313	887	689
145°	708	358	708	358	708	450
155°	595	407	595	407	595	278
165°	522	443	522	443	522	149
175°	471	462	471	462	471	46
180°	463	463	463	463	463	



TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6
2.5°	2046.4	2048.1	2049.7	2045.9	2045.9	2042.6	2035.5	2030.0	2014.7	2012.5	2012.5
5°	2188.0	2186.7	2189.3	2180.5	2168.2	2165.4	2152.5	2135.4	2117.6	2097.8	2093.7
7.5°	2328.8	2326.7	2321.2	2319.8	2310.3	2289.6	2268.8	2246.5	2217.0	2188.2	2173.6
10°	2399.9	2422.4	2408.7	2384.8	2389.6	2357.5	2340.4	2311.0	2286.4	2243.4	2233.8
12.5°	2469.8	2478.7	2474.3	2460.8	2454.6	2432.3	2409.2	2383.7	2338.3	2299.6	2266.0
15°	2469.5	2482.5	2485.9	2481.8	2485.3	2483.9	2471.6	2450.4	2410.7	2368.4	2331.5
17.5°	2287.2	2296.2	2318.6	2333.8	2353.0	2393.4	2413.3	2421.2	2415.3	2391.1	2365.1
20°	2082.8	2067.7	2130.6	2162.8	2190.0	2258.3	2317.1	2339.7	2375.9	2375.3	2368.4
22.5°	1793.1	1796.6	1856.2	1894.4	1974.2	2042.5	2109.4	2194.3	2264.4	2310.7	2337.8
25°	1317.4	1343.5	1402.8	1454.8	1543.6	1670.7	1786.2	1920.1	2046.6	2146.3	2241.3
27.5°	989.4	991.4	1038.5	1086.5	1139.2	1243.4	1388.8	1548.7	1728.9	1877.7	2048.7
30°	847.3	843.2	863.0	892.4	937.5	1018.2	1127.5	1284.7	1464.4	1688.5	1888.0
32.5°	746.7	747.0	761.9	783.6	821.1	875.5	950.4	1078.0	1247.9	1468.2	1702.2
35°	649.2	648.5	659.4	675.1	690.8	725.7	776.9	843.9	960.7	1166.4	1405.6
37.5°	579.2	582.2	587.5	597.4	614.7	634.1	664.9	709.8	793.1	914.7	1115.7
40°	539.8	541.2	548.7	556.9	567.1	582.2	607.4	643.7	704.5	801.6	948.4
42.5°	503.7	505.2	510.4	518.1	526.2	541.2	562.1	593.4	642.7	718.5	839.6
45°	451.0	451.0	455.8	459.2	468.1	481.7	498.8	524.8	558.9	615.0	695.6
47.5°	401.5	401.6	404.8	410.7	416.3	427.0	443.7	464.9	489.8	533.2	602.0
50°	373.1	373.8	375.9	380.6	384.1	393.6	406.6	425.0	451.0	484.5	541.9
52.5°	350.2	349.7	352.3	354.4	356.7	363.6	373.3	389.5	412.7	441.8	489.4
55°	313.0	310.2	314.3	317.7	319.8	322.5	328.0	338.2	358.0	382.6	418.2
57.5°	266.5	265.4	268.3	271.4	277.9	285.3	289.9	296.4	306.7	324.3	359.5
60°	228.2	228.2	234.3	236.4	244.0	253.5	263.1	268.6	278.8	290.4	316.4
62.5°	194.3	194.9	197.8	199.8	204.0	215.8	229.2	241.2	250.9	262.0	279.2
65°	162.6	164.0	164.0	165.3	168.1	170.9	176.3	185.8	203.0	218.6	231.7
67.5°	138.0	138.5	138.8	140.2	140.9	143.9	146.1	150.3	154.3	169.2	185.3
70°	121.6	123.7	123.0	124.4	125.0	126.4	129.1	131.2	137.3	140.8	150.3
72.5°	106.3	107.8	107.7	108.5	110.3	110.6	112.7	114.8	118.8	121.6	126.8
75°	86.1	85.4	86.1	87.5	88.2	88.8	88.8	91.6	93.6	96.3	99.8
77.5°	66.4	67.1	67.0	67.1	67.2	68.5	68.3	69.6	71.6	72.9	74.6
80°	53.3	53.9	53.3	53.9	54.7	55.4	54.7	55.4	57.4	58.8	58.8
82.5°	41.3	41.4	41.8	42.0	42.1	42.3	43.2	43.3	44.9	44.6	45.1
85°	24.6	23.9	23.9	23.9	24.6	25.3	24.6	24.6	25.3	25.3	25.3
87.5°	14.6	15.2	15.2	15.2	15.2	15.0	14.6	15.5	15.2	15.9	15.2
90°	29.3	29.3	29.3	29.3	29.3	28.4	26.7	28.4	29.3	30.2	29.3
92.5°	49.3	50.7	50.0	52.9	53.6	59.1	66.6	77.6	97.7	115.7	114.0
95°	101.5	100.6	103.3	110.4	121.9	141.5	178.9	233.2	305.2	348.8	308.8
97.5°	199.7	207.1	220.2	242.1	284.6	348.8	445.1	544.1	624.7	595.6	448.5
100°	318.6	334.7	360.4	398.7	472.6	580.2	702.1	812.5	831.3	703.0	484.1
102.5°	560.7	582.4	614.6	679.9	760.2	874.3	963.5	988.4	908.1	706.6	470.6
105°	1003.0	1015.4	1053.7	1108.8	1164.0	1193.5	1181.9	1081.3	896.2	659.4	444.1
107.5°	1281.2	1297.7	1305.4	1308.4	1301.5	1258.4	1165.8	1014.4	818.1	608.9	430.9
110°	1365.2	1366.1	1358.1	1341.1	1302.9	1229.9	1116.0	956.7	768.9	584.7	428.1



TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	1363.8	1359.0	1343.8	1315.5	1262.3	1178.7	1056.9	904.0	734.8	569.0	428.7
115°	1319.8	1311.8	1288.6	1247.7	1184.5	1092.9	976.2	839.2	692.4	551.8	432.5
117.5°	1241.3	1234.6	1210.1	1166.9	1102.5	1016.5	910.8	790.4	665.7	543.4	438.9
120°	1190.8	1181.9	1156.0	1114.2	1052.0	970.9	876.6	766.2	651.5	538.4	443.2
122.5°	1138.1	1130.6	1107.6	1066.5	1010.7	937.5	848.1	747.0	639.4	535.6	448.2
125°	1070.6	1063.5	1041.3	1007.5	955.8	889.0	810.7	719.1	622.1	530.4	455.7
127.5°	1011.6	1005.8	986.6	954.9	909.9	848.3	774.5	691.5	606.1	527.4	463.3
130°	978.0	970.9	953.1	922.9	879.3	820.6	750.2	673.7	595.4	525.9	469.0
132.5°	943.2	936.7	920.4	890.1	847.2	792.0	727.5	656.6	586.8	525.2	474.7
135°	887.3	883.7	867.7	838.3	800.0	750.2	691.5	632.8	574.9	524.1	481.4
137.5°	832.5	827.2	813.1	787.8	752.9	709.4	662.8	613.7	566.5	524.0	487.5
140°	794.7	789.4	776.1	752.9	724.4	685.3	644.4	601.6	561.6	523.3	490.4
142.5°	757.0	755.9	744.0	723.0	696.0	663.2	627.9	591.7	556.6	523.3	492.5
145°	708.4	705.7	696.9	681.7	660.3	634.5	607.0	577.6	550.0	521.5	494.8
147.5°	667.6	666.0	660.0	647.9	630.3	611.4	589.9	566.7	543.2	518.4	495.5
150°	643.5	642.6	637.2	626.5	613.1	597.2	578.5	558.9	537.5	516.2	494.8
152.5°	622.8	622.6	618.7	609.4	599.0	585.1	569.2	551.1	532.5	512.6	493.4
155°	595.4	597.2	593.6	587.4	577.6	567.8	554.5	540.2	523.3	506.4	491.2
157.5°	572.0	572.0	570.4	565.3	558.4	550.7	539.5	527.5	514.6	500.0	487.1
160°	557.1	557.1	556.2	551.8	545.5	539.3	529.5	519.7	508.2	495.7	485.0
162.5°	542.9	543.6	542.7	539.7	533.4	528.6	520.2	511.9	502.5	492.1	482.9
165°	522.4	523.3	523.3	519.7	516.2	512.6	506.4	500.2	493.0	485.0	478.8
167.5°	503.5	504.6	504.8	502.8	501.2	498.0	493.7	488.9	483.8	478.8	474.7
170°	492.1	493.9	494.8	492.1	491.2	489.5	485.9	483.2	478.8	475.2	472.6
172.5°	482.9	483.9	484.8	483.6	482.7	481.6	478.8	476.8	473.9	471.0	469.8
175°	470.8	472.6	473.5	472.6	472.6	471.7	470.8	469.9	467.3	466.4	465.5
177.5°	463.5	464.9	465.7	465.7	465.7	465.7	464.9	464.9	463.5	462.8	463.5
180°	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8



TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6
2.5°	2013.7	2009.2	2005.5	1995.6	1990.7	1979.7	1978.1	1977.5	1963.4	1949.6	1945.8
5°	2082.8	2071.8	2055.5	2036.3	2016.5	1996.0	1982.4	1971.4	1944.0	1918.1	1903.1
7.5°	2152.5	2129.0	2100.7	2064.5	2034.3	2000.4	1975.2	1952.7	1913.9	1876.7	1851.6
10°	2204.4	2166.1	2128.5	2078.7	2039.7	2001.4	1966.0	1935.2	1891.4	1842.3	1807.4
12.5°	2236.7	2194.6	2142.8	2094.0	2043.5	1994.9	1947.3	1907.8	1856.5	1805.6	1764.2
15°	2280.3	2235.2	2172.3	2102.6	2037.6	1974.2	1919.5	1870.3	1803.3	1742.5	1691.9
17.5°	2316.0	2253.9	2186.4	2105.8	2030.6	1949.8	1879.5	1816.6	1742.0	1668.7	1609.1
20°	2327.4	2265.9	2188.0	2107.4	2018.6	1923.6	1847.7	1779.4	1699.4	1619.4	1551.1
22.5°	2320.3	2272.4	2185.9	2089.4	1998.3	1899.0	1813.3	1734.0	1645.3	1563.7	1484.4
25°	2272.1	2255.7	2173.6	2068.4	1964.5	1849.1	1750.0	1663.2	1562.1	1474.6	1388.5
27.5°	2159.5	2194.9	2144.1	2032.0	1916.6	1792.8	1681.4	1582.6	1477.7	1379.2	1293.4
30°	2051.4	2132.6	2110.8	2006.9	1877.8	1756.1	1631.1	1527.9	1415.9	1314.7	1230.0
32.5°	1903.2	2037.6	2058.9	1971.9	1838.4	1704.8	1573.7	1471.1	1354.1	1247.5	1164.9
35°	1667.3	1868.2	1960.4	1905.1	1771.2	1627.0	1491.7	1372.1	1254.5	1149.3	1067.4
37.5°	1385.9	1659.6	1813.3	1817.2	1694.3	1544.4	1397.0	1278.3	1158.0	1054.6	966.0
40°	1203.4	1499.9	1700.1	1744.5	1640.7	1478.7	1329.7	1208.8	1091.3	990.2	888.3
42.5°	1039.4	1334.8	1580.9	1658.1	1575.7	1414.8	1265.2	1138.8	1024.6	928.9	824.9
45°	840.5	1098.8	1370.0	1508.1	1462.3	1313.3	1155.5	1035.3	927.9	845.3	745.5
47.5°	709.0	891.1	1153.6	1340.2	1339.4	1203.5	1048.2	933.0	833.5	756.0	675.3
50°	634.1	792.6	1014.8	1226.5	1244.3	1130.2	982.6	868.5	775.6	694.3	629.4
52.5°	566.9	697.5	897.2	1100.3	1150.8	1052.0	908.8	803.4	713.3	638.5	582.9
55°	479.0	580.1	731.8	921.8	998.4	928.6	801.6	703.1	630.0	567.1	519.3
57.5°	405.2	481.1	602.8	755.7	844.9	801.0	696.2	616.3	553.7	496.8	459.1
60°	358.7	420.9	524.1	651.9	750.3	719.5	630.0	555.5	502.2	453.1	417.5
62.5°	315.0	368.5	456.9	560.6	650.8	638.1	565.0	502.5	455.8	411.0	380.8
65°	253.5	292.5	361.5	442.8	515.2	521.4	468.8	426.4	384.7	349.2	322.5
67.5°	201.9	227.3	275.9	344.4	398.7	418.0	385.9	353.6	320.5	293.0	269.9
70°	170.1	190.6	226.1	281.5	331.4	351.9	333.5	308.2	279.5	256.9	237.1
72.5°	137.9	157.8	184.0	224.7	267.4	289.6	283.2	265.0	241.7	223.0	204.3
75°	103.9	110.0	127.8	155.2	188.6	207.8	212.5	203.0	184.5	170.1	159.2
77.5°	76.8	80.5	89.0	103.3	125.2	142.2	149.3	148.1	135.5	127.1	116.8
80°	61.5	63.6	67.7	73.8	90.2	107.3	112.1	112.1	103.2	99.8	89.5
82.5°	46.7	48.2	50.7	54.1	61.8	76.7	82.0	83.1	77.5	72.9	64.9
85°	26.7	25.9	27.4	29.4	30.8	34.9	43.1	44.4	43.1	37.5	35.5
87.5°	14.1	13.4	12.5	11.4	11.6	11.8	13.8	16.1	14.4	13.5	12.8
90°	24.0	17.8	13.4	10.7	8.9	7.1	3.6	0.9	3.6	7.1	8.9
92.5°	88.8	60.5	40.4	32.0	25.9	22.1	15.7	10.9	15.7	22.1	25.9
95°	205.5	128.1	87.2	65.9	51.6	43.6	34.7	31.1	34.7	43.6	51.6
97.5°	277.0	169.1	117.6	93.5	77.0	65.0	55.6	50.7	55.6	65.0	77.0
100°	291.9	183.3	136.2	111.3	93.5	79.2	71.2	68.5	71.2	79.2	93.5
102.5°	292.7	196.2	152.6	127.6	109.1	94.9	86.9	84.9	86.9	94.9	109.1
105°	297.2	218.0	176.2	151.3	131.7	118.3	112.2	108.6	112.2	118.3	131.7
107.5°	309.5	240.5	199.9	174.8	155.4	143.1	137.1	134.2	137.1	143.1	155.4
110°	319.5	255.4	216.2	190.5	171.7	160.2	154.9	151.3	154.9	160.2	171.7





TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	330.2	269.7	231.9	205.4	187.4	176.6	170.5	166.9	170.5	176.6	187.4
115°	346.2	291.9	253.6	229.6	211.8	201.2	195.8	191.4	195.8	201.2	211.8
117.5°	363.3	312.4	277.0	252.0	235.0	225.5	220.2	216.6	220.2	225.5	235.0
120°	374.7	326.6	291.9	267.0	249.1	241.2	235.9	232.3	235.9	241.2	249.1
122.5°	384.6	340.1	307.6	282.0	264.1	255.4	250.0	247.3	250.0	255.4	264.1
125°	400.5	360.4	328.4	303.4	285.7	275.0	269.7	267.0	269.7	275.0	285.7
127.5°	415.3	379.3	348.1	322.5	305.4	293.6	286.2	282.7	286.2	293.6	305.4
130°	424.5	390.7	359.5	334.7	316.8	304.3	295.4	291.9	295.4	304.3	316.8
132.5°	433.7	400.6	371.0	346.0	327.5	314.3	304.7	300.4	304.7	314.3	327.5
135°	445.9	414.7	386.2	361.3	340.8	327.5	316.8	313.3	316.8	327.5	340.8
137.5°	455.1	426.1	398.0	374.9	354.5	340.3	329.7	325.4	329.7	340.3	354.5
140°	460.1	432.5	405.8	382.7	363.1	348.8	338.2	334.7	338.2	348.8	363.1
142.5°	464.4	437.5	411.5	389.8	371.0	356.7	346.7	343.8	346.7	356.7	371.0
145°	469.9	445.0	421.0	401.4	383.6	370.2	361.3	357.8	361.3	370.2	383.6
147.5°	473.0	451.0	428.5	411.0	396.2	383.9	375.4	372.7	375.4	383.9	396.2
150°	474.3	453.9	433.4	417.4	404.0	392.4	385.3	382.7	385.3	392.4	404.0
152.5°	475.0	456.7	438.4	423.8	411.2	401.0	393.9	392.6	393.9	401.0	411.2
155°	476.1	461.0	445.9	432.5	422.8	413.0	407.6	406.7	407.6	413.0	422.8
157.5°	476.1	464.0	451.2	440.0	432.1	423.7	419.4	418.5	419.4	423.7	432.1
160°	476.1	465.5	454.8	445.0	437.8	430.7	427.2	426.3	427.2	430.7	437.8
162.5°	475.4	466.2	456.9	449.2	442.8	437.1	433.5	434.1	433.5	437.1	442.8
165°	473.5	467.3	459.2	453.9	449.4	444.1	442.3	443.2	442.3	444.1	449.4
167.5°	472.3	467.1	461.2	457.8	454.6	451.2	449.6	450.7	449.6	451.2	454.6
170°	470.8	466.4	461.9	459.2	457.4	454.8	453.9	455.7	453.9	454.8	457.4
172.5°	468.7	465.7	462.6	460.7	459.6	456.9	457.4	458.5	457.4	456.9	459.6
175°	466.4	464.6	462.8	461.9	461.9	460.1	461.0	461.9	461.0	460.1	461.9
177.5°	464.9	463.5	462.8	462.8	462.8	461.4	462.1	463.5	462.1	461.4	462.8
180°	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8



TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6
2.5°	1938.8	1934.9	1927.8	1916.8	1910.3	1898.8	1891.1	1895.5	1896.7	1895.5	1894.4
5°	1886.7	1872.3	1852.5	1833.4	1815.6	1796.4	1785.6	1780.7	1771.2	1765.7	1763.0
7.5°	1823.6	1798.9	1770.9	1737.6	1709.2	1679.6	1664.5	1656.9	1637.4	1626.7	1617.4
10°	1776.6	1737.7	1709.7	1666.0	1639.3	1600.4	1573.7	1574.4	1547.7	1532.7	1521.8
12.5°	1724.7	1681.9	1635.3	1596.0	1559.0	1527.7	1495.5	1482.6	1454.3	1439.8	1410.2
15°	1638.6	1588.8	1539.5	1486.2	1448.7	1400.2	1353.7	1297.0	1251.2	1211.6	1200.6
17.5°	1544.6	1482.8	1433.5	1370.9	1306.5	1224.9	1171.1	1138.2	1110.5	1089.7	1074.1
20°	1480.1	1417.2	1364.6	1270.3	1183.5	1128.2	1088.5	1063.3	1034.6	1012.0	999.7
22.5°	1412.3	1346.7	1275.0	1169.7	1102.1	1057.7	1022.3	993.3	973.8	956.3	945.0
25°	1316.1	1244.3	1126.1	1053.6	999.0	952.5	927.9	910.2	889.7	865.8	854.9
27.5°	1214.4	1100.3	1015.4	961.5	909.4	879.1	857.0	830.5	812.2	801.4	790.1
30°	1138.4	1024.3	958.1	899.3	862.4	828.8	802.9	787.9	770.1	751.6	744.1
32.5°	1053.6	962.5	899.0	850.1	812.6	784.1	763.6	739.2	726.4	715.1	699.3
35°	948.4	879.4	821.4	781.8	746.2	723.0	699.0	684.7	661.5	651.9	645.8
37.5°	859.3	799.5	756.2	714.3	686.2	660.5	645.9	623.0	613.0	599.7	586.7
40°	809.0	750.3	708.6	674.4	643.0	623.8	605.4	587.0	571.9	565.8	550.1
42.5°	757.7	709.8	668.2	630.7	609.7	589.4	566.1	552.5	537.0	527.0	517.3
45°	686.7	644.4	608.9	578.1	554.8	533.7	518.6	496.1	487.2	467.4	459.2
47.5°	624.5	585.1	551.2	521.9	499.3	485.4	463.4	445.8	431.6	419.5	408.9
50°	580.1	547.3	514.5	488.6	468.1	448.3	425.7	416.8	394.9	388.8	382.6
52.5°	539.7	508.5	478.5	453.1	432.6	413.3	393.4	381.8	367.1	361.0	356.4
55°	483.1	453.1	424.4	401.8	381.3	361.5	349.2	334.8	328.0	323.2	317.7
57.5°	426.2	399.2	377.2	354.4	333.8	318.0	303.8	295.2	288.1	281.8	275.3
60°	390.2	364.2	344.4	323.2	302.0	289.0	278.1	267.9	259.7	250.1	247.4
62.5°	351.9	329.2	311.0	290.4	272.0	260.1	249.7	240.0	230.2	216.2	212.4
65°	299.3	281.5	262.4	245.3	228.9	217.3	202.2	191.4	187.3	185.8	185.2
67.5°	251.7	235.0	218.6	201.0	186.1	175.3	167.7	166.0	163.2	162.4	160.4
70°	220.1	204.3	187.9	171.5	157.2	155.2	152.4	149.6	146.2	144.9	143.5
72.5°	191.6	175.3	158.9	145.8	139.6	137.1	134.4	131.6	129.3	128.0	127.1
75°	147.0	131.9	120.9	116.2	112.7	110.7	106.6	104.5	103.2	101.1	100.4
77.5°	105.8	97.3	92.3	89.3	85.7	83.5	81.1	79.1	77.7	77.2	76.2
80°	80.6	76.5	73.1	69.0	67.7	64.9	64.2	62.2	62.9	60.8	60.8
82.5°	62.6	57.4	54.6	52.6	51.3	49.0	48.4	47.4	47.5	46.0	46.0
85°	32.1	30.8	29.4	28.0	28.0	25.9	26.7	25.9	25.9	24.6	23.9
87.5°	12.5	12.5	12.3	13.6	14.6	14.3	14.1	13.4	13.0	13.4	13.0
90°	10.7	13.4	17.8	24.0	29.3	30.2	29.3	28.4	26.7	28.4	29.3
92.5°	32.0	40.4	60.5	88.8	114.0	115.7	97.7	77.6	66.6	59.1	53.6
95°	65.9	87.2	128.1	205.5	308.8	348.8	305.2	233.2	178.9	141.5	121.9
97.5°	93.5	117.6	169.1	277.0	448.5	595.6	624.7	544.1	445.1	348.8	284.6
100°	111.3	136.2	183.3	291.9	484.1	703.0	831.3	812.5	702.1	580.2	472.6
102.5°	127.6	152.6	196.2	292.7	470.6	706.6	908.1	988.4	963.5	874.3	760.2
105°	151.3	176.2	218.0	297.2	444.1	659.4	896.2	1081.3	1181.9	1193.5	1164.0
107.5°	174.8	199.9	240.5	309.5	430.9	608.9	818.1	1014.4	1165.8	1258.4	1301.5
110°	190.5	216.2	255.4	319.5	428.1	584.7	768.9	956.7	1116.0	1229.9	1302.9



TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	205.4	231.9	269.7	330.2	428.7	569.0	734.8	904.0	1056.9	1178.7	1262.3
115°	229.6	253.6	291.9	346.2	432.5	551.8	692.4	839.2	976.2	1092.9	1184.5
117.5°	252.0	277.0	312.4	363.3	438.9	543.4	665.7	790.4	910.8	1016.5	1102.5
120°	267.0	291.9	326.6	374.7	443.2	538.4	651.5	766.2	876.6	970.9	1052.0
122.5°	282.0	307.6	340.1	384.6	448.2	535.6	639.4	747.0	848.1	937.5	1010.7
125°	303.4	328.4	360.4	400.5	455.7	530.4	622.1	719.1	810.7	889.0	955.8
127.5°	322.5	348.1	379.3	415.3	463.3	527.4	606.1	691.5	774.5	848.3	909.9
130°	334.7	359.5	390.7	424.5	469.0	525.9	595.4	673.7	750.2	820.6	879.3
132.5°	346.0	371.0	400.6	433.7	474.7	525.2	586.8	656.6	727.5	792.0	847.2
135°	361.3	386.2	414.7	445.9	481.4	524.1	574.9	632.8	691.5	750.2	800.0
137.5°	374.9	398.0	426.1	455.1	487.5	524.0	566.5	613.7	662.8	709.4	752.9
140°	382.7	405.8	432.5	460.1	490.4	523.3	561.6	601.6	644.4	685.3	724.4
142.5°	389.8	411.5	437.5	464.4	492.5	523.3	556.6	591.7	627.9	663.2	696.0
145°	401.4	421.0	445.0	469.9	494.8	521.5	550.0	577.6	607.0	634.5	660.3
147.5°	411.0	428.5	451.0	473.0	495.5	518.4	543.2	566.7	589.9	611.4	630.3
150°	417.4	433.4	453.9	474.3	494.8	516.2	537.5	558.9	578.5	597.2	613.1
152.5°	423.8	438.4	456.7	475.0	493.4	512.6	532.5	551.1	569.2	585.1	599.0
155°	432.5	445.9	461.0	476.1	491.2	506.4	523.3	540.2	554.5	567.8	577.6
157.5°	440.0	451.2	464.0	476.1	487.1	500.0	514.6	527.5	539.5	550.7	558.4
160°	445.0	454.8	465.5	476.1	485.0	495.7	508.2	519.7	529.5	539.3	545.5
162.5°	449.2	456.9	466.2	475.4	482.9	492.1	502.5	511.9	520.2	528.6	533.4
165°	453.9	459.2	467.3	473.5	478.8	485.0	493.0	500.2	506.4	512.6	516.2
167.5°	457.8	461.2	467.1	472.3	474.7	478.8	483.8	488.9	493.7	498.0	501.2
170°	459.2	461.9	466.4	470.8	472.6	475.2	478.8	483.2	485.9	489.5	491.2
172.5°	460.7	462.6	465.7	468.7	469.8	471.0	473.9	476.8	478.8	481.6	482.7
175°	461.9	462.8	464.6	466.4	465.5	466.4	467.3	469.9	470.8	471.7	472.6
177.5°	462.8	462.8	463.5	464.9	463.5	462.8	463.5	464.9	464.9	465.7	465.7
180°	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8



TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6
2.5°	1888.5	1889.5	1887.9	1889.0	1887.9	1889.5	1888.5	1894.4	1895.5	1896.7	1895.5
5°	1759.5	1751.3	1750.0	1747.9	1750.0	1751.3	1759.5	1763.0	1765.7	1771.2	1780.7
7.5°	1605.7	1604.5	1601.1	1596.3	1601.1	1604.5	1605.7	1617.4	1626.7	1637.4	1656.9
10°	1506.7	1503.3	1502.6	1497.8	1502.6	1503.3	1506.7	1521.8	1532.7	1547.7	1574.4
12.5°	1390.8	1368.9	1366.5	1354.6	1366.5	1368.9	1390.8	1410.2	1439.8	1454.3	1482.6
15°	1184.2	1180.1	1166.4	1157.5	1166.4	1180.1	1184.2	1200.6	1211.6	1251.2	1297.0
17.5°	1066.1	1052.8	1048.5	1046.6	1048.5	1052.8	1066.1	1074.1	1089.7	1110.5	1138.2
20°	990.2	977.9	975.8	974.5	975.8	977.9	990.2	999.7	1012.0	1034.6	1063.3
22.5°	937.6	924.8	919.4	915.3	919.4	924.8	937.6	945.0	956.3	973.8	993.3
25°	848.0	843.2	840.5	839.1	840.5	843.2	848.0	854.9	865.8	889.7	910.2
27.5°	777.9	767.4	765.4	761.8	765.4	767.4	777.9	790.1	801.4	812.2	830.5
30°	738.0	734.6	729.8	725.7	729.8	734.6	738.0	744.1	751.6	770.1	787.9
32.5°	691.0	688.1	683.9	682.0	683.9	688.1	691.0	699.3	715.1	726.4	739.2
35°	638.9	629.4	625.3	619.1	625.3	629.4	638.9	645.8	651.9	661.5	684.7
37.5°	583.8	578.8	573.0	575.1	573.0	578.8	583.8	586.7	599.7	613.0	623.0
40°	541.2	537.8	536.5	535.7	536.5	537.8	541.2	550.1	565.8	571.9	587.0
42.5°	507.3	497.8	494.3	494.2	494.3	497.8	507.3	517.3	527.0	537.0	552.5
45°	455.8	446.9	440.8	441.4	440.8	446.9	455.8	459.2	467.4	487.2	496.1
47.5°	403.1	402.8	399.0	400.1	399.0	402.8	403.1	408.9	419.5	431.6	445.8
50°	377.9	373.8	371.0	371.8	371.0	373.8	377.9	382.6	388.8	394.9	416.8
52.5°	353.8	350.3	348.1	351.0	348.1	350.3	353.8	356.4	361.0	367.1	381.8
55°	314.3	310.2	309.5	308.9	309.5	310.2	314.3	317.7	323.2	328.0	334.8
57.5°	270.2	267.4	263.3	261.5	263.3	267.4	270.2	275.3	281.8	288.1	295.2
60°	238.4	233.0	226.1	225.5	226.1	233.0	238.4	247.4	250.1	259.7	267.9
62.5°	209.5	208.4	207.1	206.9	207.1	208.4	209.5	212.4	216.2	230.2	240.0
65°	183.8	183.2	183.8	184.5	183.8	183.2	183.8	185.2	185.8	187.3	191.4
67.5°	160.2	158.9	157.7	158.3	157.7	158.9	160.2	160.4	162.4	163.2	166.0
70°	142.1	141.4	140.8	140.8	140.8	141.4	142.1	143.5	144.9	146.2	149.6
72.5°	124.7	124.5	123.9	123.2	123.9	124.5	124.7	127.1	128.0	129.3	131.6
75°	99.8	98.4	98.4	98.4	98.4	98.4	99.8	100.4	101.1	103.2	104.5
77.5°	76.0	75.3	74.6	74.1	74.6	75.3	76.0	76.2	77.2	77.7	79.1
80°	60.1	59.5	58.8	58.8	58.8	59.5	60.1	60.8	60.8	62.9	62.2
82.5°	45.9	45.2	45.1	44.6	45.1	45.2	45.9	46.0	46.0	47.5	47.4
85°	24.6	25.3	24.6	25.9	24.6	25.3	24.6	23.9	24.6	25.9	25.9
87.5°	13.0	12.4	13.0	12.4	13.0	12.4	13.0	13.0	13.4	13.0	13.4
90°	29.3	29.3	29.3	29.3	29.3	29.3	29.3	29.3	28.4	26.7	28.4
92.5°	52.9	50.0	50.7	49.3	50.7	50.0	52.9	53.6	59.1	66.6	77.6
95°	110.4	103.3	100.6	101.5	100.6	103.3	110.4	121.9	141.5	178.9	233.2
97.5°	242.1	220.2	207.1	199.7	207.1	220.2	242.1	284.6	348.8	445.1	544.1
100°	398.7	360.4	334.7	318.6	334.7	360.4	398.7	472.6	580.2	702.1	812.5
102.5°	679.9	614.6	582.4	560.7	582.4	614.6	679.9	760.2	874.3	963.5	988.4
105°	1108.8	1053.7	1015.4	1003.0	1015.4	1053.7	1108.8	1164.0	1193.5	1181.9	1081.3
107.5°	1308.4	1305.4	1297.7	1281.2	1297.7	1305.4	1308.4	1301.5	1258.4	1165.8	1014.4
110°	1341.1	1358.1	1366.1	1365.2	1366.1	1358.1	1341.1	1302.9	1229.9	1116.0	956.7



TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	1315.5	1343.8	1359.0	1363.8	1359.0	1343.8	1315.5	1262.3	1178.7	1056.9	904.0
115°	1247.7	1288.6	1311.8	1319.8	1311.8	1288.6	1247.7	1184.5	1092.9	976.2	839.2
117.5°	1166.9	1210.1	1234.6	1241.3	1234.6	1210.1	1166.9	1102.5	1016.5	910.8	790.4
120°	1114.2	1156.0	1181.9	1190.8	1181.9	1156.0	1114.2	1052.0	970.9	876.6	766.2
122.5°	1066.5	1107.6	1130.6	1138.1	1130.6	1107.6	1066.5	1010.7	937.5	848.1	747.0
125°	1007.5	1041.3	1063.5	1070.6	1063.5	1041.3	1007.5	955.8	889.0	810.7	719.1
127.5°	954.9	986.6	1005.8	1011.6	1005.8	986.6	954.9	909.9	848.3	774.5	691.5
130°	922.9	953.1	970.9	978.0	970.9	953.1	922.9	879.3	820.6	750.2	673.7
132.5°	890.1	920.4	936.7	943.2	936.7	920.4	890.1	847.2	792.0	727.5	656.6
135°	838.3	867.7	883.7	887.3	883.7	867.7	838.3	800.0	750.2	691.5	632.8
137.5°	787.8	813.1	827.2	832.5	827.2	813.1	787.8	752.9	709.4	662.8	613.7
140°	752.9	776.1	789.4	794.7	789.4	776.1	752.9	724.4	685.3	644.4	601.6
142.5°	723.0	744.0	755.9	757.0	755.9	744.0	723.0	696.0	663.2	627.9	591.7
145°	681.7	696.9	705.7	708.4	705.7	696.9	681.7	660.3	634.5	607.0	577.6
147.5°	647.9	660.0	666.0	667.6	666.0	660.0	647.9	630.3	611.4	589.9	566.7
150°	626.5	637.2	642.6	643.5	642.6	637.2	626.5	613.1	597.2	578.5	558.9
152.5°	609.4	618.7	622.6	622.8	622.6	618.7	609.4	599.0	585.1	569.2	551.1
155°	587.4	593.6	597.2	595.4	597.2	593.6	587.4	577.6	567.8	554.5	540.2
157.5°	565.3	570.4	572.0	572.0	572.0	570.4	565.3	558.4	550.7	539.5	527.5
160°	551.8	556.2	557.1	557.1	557.1	556.2	551.8	545.5	539.3	529.5	519.7
162.5°	539.7	542.7	543.6	542.9	543.6	542.7	539.7	533.4	528.6	520.2	511.9
165°	519.7	523.3	523.3	522.4	523.3	523.3	519.7	516.2	512.6	506.4	500.2
167.5°	502.8	504.8	504.6	503.5	504.6	504.8	502.8	501.2	498.0	493.7	488.9
170°	492.1	494.8	493.9	492.1	493.9	494.8	492.1	491.2	489.5	485.9	483.2
172.5°	483.6	484.8	483.9	482.9	483.9	484.8	483.6	482.7	481.6	478.8	476.8
175°	472.6	473.5	472.6	470.8	472.6	473.5	472.6	472.6	471.7	470.8	469.9
177.5°	465.7	465.7	464.9	463.5	464.9	465.7	465.7	465.7	465.7	464.9	464.9
180°	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8



TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6
2.5°	1891.1	1898.8	1910.3	1916.8	1927.8	1934.9	1938.8	1945.8	1949.6	1963.4	1977.5
5°	1785.6	1796.4	1815.6	1833.4	1852.5	1872.3	1886.7	1903.1	1918.1	1944.0	1971.4
7.5°	1664.5	1679.6	1709.2	1737.6	1770.9	1798.9	1823.6	1851.6	1876.7	1913.9	1952.7
10°	1573.7	1600.4	1639.3	1666.0	1709.7	1737.7	1776.6	1807.4	1842.3	1891.4	1935.2
12.5°	1495.5	1527.7	1559.0	1596.0	1635.3	1681.9	1724.7	1764.2	1805.6	1856.5	1907.8
15°	1353.7	1400.2	1448.7	1486.2	1539.5	1588.8	1638.6	1691.9	1742.5	1803.3	1870.3
17.5°	1171.1	1224.9	1306.5	1370.9	1433.5	1482.8	1544.6	1609.1	1668.7	1742.0	1816.6
20°	1088.5	1128.2	1183.5	1270.3	1364.6	1417.2	1480.1	1551.1	1619.4	1699.4	1779.4
22.5°	1022.3	1057.7	1102.1	1169.7	1275.0	1346.7	1412.3	1484.4	1563.7	1645.3	1734.0
25°	927.9	952.5	999.0	1053.6	1126.1	1244.3	1316.1	1388.5	1474.6	1562.1	1663.2
27.5°	857.0	879.1	909.4	961.5	1015.4	1100.3	1214.4	1293.4	1379.2	1477.7	1582.6
30°	802.9	828.8	862.4	899.3	958.1	1024.3	1138.4	1230.0	1314.7	1415.9	1527.9
32.5°	763.6	784.1	812.6	850.1	899.0	962.5	1053.6	1164.9	1247.5	1354.1	1471.1
35°	699.0	723.0	746.2	781.8	821.4	879.4	948.4	1067.4	1149.3	1254.5	1372.1
37.5°	645.9	660.5	686.2	714.3	756.2	799.5	859.3	966.0	1054.6	1158.0	1278.3
40°	605.4	623.8	643.0	674.4	708.6	750.3	809.0	888.3	990.2	1091.3	1208.8
42.5°	566.1	589.4	609.7	630.7	668.2	709.8	757.7	824.9	928.9	1024.6	1138.8
45°	518.6	533.7	554.8	578.1	608.9	644.4	686.7	745.5	845.3	927.9	1035.3
47.5°	463.4	485.4	499.3	521.9	551.2	585.1	624.5	675.3	756.0	833.5	933.0
50°	425.7	448.3	468.1	488.6	514.5	547.3	580.1	629.4	694.3	775.6	868.5
52.5°	393.4	413.3	432.6	453.1	478.5	508.5	539.7	582.9	638.5	713.3	803.4
55°	349.2	361.5	381.3	401.8	424.4	453.1	483.1	519.3	567.1	630.0	703.1
57.5°	303.8	318.0	333.8	354.4	377.2	399.2	426.2	459.1	496.8	553.7	616.3
60°	278.1	289.0	302.0	323.2	344.4	364.2	390.2	417.5	453.1	502.2	555.5
62.5°	249.7	260.1	272.0	290.4	311.0	329.2	351.9	380.8	411.0	455.8	502.5
65°	202.2	217.3	228.9	245.3	262.4	281.5	299.3	322.5	349.2	384.7	426.4
67.5°	167.7	175.3	186.1	201.0	218.6	235.0	251.7	269.9	293.0	320.5	353.6
70°	152.4	155.2	157.2	171.5	187.9	204.3	220.1	237.1	256.9	279.5	308.2
72.5°	134.4	137.1	139.6	145.8	158.9	175.3	191.6	204.3	223.0	241.7	265.0
75°	106.6	110.7	112.7	116.2	120.9	131.9	147.0	159.2	170.1	184.5	203.0
77.5°	81.1	83.5	85.7	89.3	92.3	97.3	105.8	116.8	127.1	135.5	148.1
80°	64.2	64.9	67.7	69.0	73.1	76.5	80.6	89.5	99.8	103.2	112.1
82.5°	48.4	49.0	51.3	52.6	54.6	57.4	62.6	64.9	72.9	77.5	83.1
85°	26.7	25.9	28.0	28.0	29.4	30.8	32.1	35.5	37.5	43.1	44.4
87.5°	14.1	14.3	14.6	13.6	12.3	12.5	12.5	12.8	13.5	14.4	16.1
90°	29.3	30.2	29.3	24.0	17.8	13.4	10.7	8.9	7.1	3.6	0.9
92.5°	97.7	115.7	114.0	88.8	60.5	40.4	32.0	25.9	22.1	15.7	10.9
95°	305.2	348.8	308.8	205.5	128.1	87.2	65.9	51.6	43.6	34.7	31.1
97.5°	624.7	595.6	448.5	277.0	169.1	117.6	93.5	77.0	65.0	55.6	50.7
100°	831.3	703.0	484.1	291.9	183.3	136.2	111.3	93.5	79.2	71.2	68.5
102.5°	908.1	706.6	470.6	292.7	196.2	152.6	127.6	109.1	94.9	86.9	84.9
105°	896.2	659.4	444.1	297.2	218.0	176.2	151.3	131.7	118.3	112.2	108.6
107.5°	818.1	608.9	430.9	309.5	240.5	199.9	174.8	155.4	143.1	137.1	134.2
110°	768.9	584.7	428.1	319.5	255.4	216.2	190.5	171.7	160.2	154.9	151.3



TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	734.8	569.0	428.7	330.2	269.7	231.9	205.4	187.4	176.6	170.5	166.9
115°	692.4	551.8	432.5	346.2	291.9	253.6	229.6	211.8	201.2	195.8	191.4
117.5°	665.7	543.4	438.9	363.3	312.4	277.0	252.0	235.0	225.5	220.2	216.6
120°	651.5	538.4	443.2	374.7	326.6	291.9	267.0	249.1	241.2	235.9	232.3
122.5°	639.4	535.6	448.2	384.6	340.1	307.6	282.0	264.1	255.4	250.0	247.3
125°	622.1	530.4	455.7	400.5	360.4	328.4	303.4	285.7	275.0	269.7	267.0
127.5°	606.1	527.4	463.3	415.3	379.3	348.1	322.5	305.4	293.6	286.2	282.7
130°	595.4	525.9	469.0	424.5	390.7	359.5	334.7	316.8	304.3	295.4	291.9
132.5°	586.8	525.2	474.7	433.7	400.6	371.0	346.0	327.5	314.3	304.7	300.4
135°	574.9	524.1	481.4	445.9	414.7	386.2	361.3	340.8	327.5	316.8	313.3
137.5°	566.5	524.0	487.5	455.1	426.1	398.0	374.9	354.5	340.3	329.7	325.4
140°	561.6	523.3	490.4	460.1	432.5	405.8	382.7	363.1	348.8	338.2	334.7
142.5°	556.6	523.3	492.5	464.4	437.5	411.5	389.8	371.0	356.7	346.7	343.8
145°	550.0	521.5	494.8	469.9	445.0	421.0	401.4	383.6	370.2	361.3	357.8
147.5°	543.2	518.4	495.5	473.0	451.0	428.5	411.0	396.2	383.9	375.4	372.7
150°	537.5	516.2	494.8	474.3	453.9	433.4	417.4	404.0	392.4	385.3	382.7
152.5°	532.5	512.6	493.4	475.0	456.7	438.4	423.8	411.2	401.0	393.9	392.6
155°	523.3	506.4	491.2	476.1	461.0	445.9	432.5	422.8	413.0	407.6	406.7
157.5°	514.6	500.0	487.1	476.1	464.0	451.2	440.0	432.1	423.7	419.4	418.5
160°	508.2	495.7	485.0	476.1	465.5	454.8	445.0	437.8	430.7	427.2	426.3
162.5°	502.5	492.1	482.9	475.4	466.2	456.9	449.2	442.8	437.1	433.5	434.1
165°	493.0	485.0	478.8	473.5	467.3	459.2	453.9	449.4	444.1	442.3	443.2
167.5°	483.8	478.8	474.7	472.3	467.1	461.2	457.8	454.6	451.2	449.6	450.7
170°	478.8	475.2	472.6	470.8	466.4	461.9	459.2	457.4	454.8	453.9	455.7
172.5°	473.9	471.0	469.8	468.7	465.7	462.6	460.7	459.6	456.9	457.4	458.5
175°	467.3	466.4	465.5	466.4	464.6	462.8	461.9	461.9	460.1	461.0	461.9
177.5°	463.5	462.8	463.5	464.9	463.5	462.8	462.8	462.8	461.4	462.1	463.5
180°	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8



TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6
2.5°	1978.1	1979.7	1990.7	1995.6	2005.5	2009.2	2013.7	2012.5	2012.5	2014.7	2030.0
5°	1982.4	1996.0	2016.5	2036.3	2055.5	2071.8	2082.8	2093.7	2097.8	2117.6	2135.4
7.5°	1975.2	2000.4	2034.3	2064.5	2100.7	2129.0	2152.5	2173.6	2188.2	2217.0	2246.5
10°	1966.0	2001.4	2039.7	2078.7	2128.5	2166.1	2204.4	2233.8	2243.4	2286.4	2311.0
12.5°	1947.3	1994.9	2043.5	2094.0	2142.8	2194.6	2236.7	2266.0	2299.6	2338.3	2383.7
15°	1919.5	1974.2	2037.6	2102.6	2172.3	2235.2	2280.3	2331.5	2368.4	2410.7	2450.4
17.5°	1879.5	1949.8	2030.6	2105.8	2186.4	2253.9	2316.0	2365.1	2391.1	2415.3	2421.2
20°	1847.7	1923.6	2018.6	2107.4	2188.0	2265.9	2327.4	2368.4	2375.3	2375.9	2339.7
22.5°	1813.3	1899.0	1998.3	2089.4	2185.9	2272.4	2320.3	2337.8	2310.7	2264.4	2194.3
25°	1750.0	1849.1	1964.5	2068.4	2173.6	2255.7	2272.1	2241.3	2146.3	2046.6	1920.1
27.5°	1681.4	1792.8	1916.6	2032.0	2144.1	2194.9	2159.5	2048.7	1877.7	1728.9	1548.7
30°	1631.1	1756.1	1877.8	2006.9	2110.8	2132.6	2051.4	1888.0	1688.5	1464.4	1284.7
32.5°	1573.7	1704.8	1838.4	1971.9	2058.9	2037.6	1903.2	1702.2	1468.2	1247.9	1078.0
35°	1491.7	1627.0	1771.2	1905.1	1960.4	1868.2	1667.3	1405.6	1166.4	960.7	843.9
37.5°	1397.0	1544.4	1694.3	1817.2	1813.3	1659.6	1385.9	1115.7	914.7	793.1	709.8
40°	1329.7	1478.7	1640.7	1744.5	1700.1	1499.9	1203.4	948.4	801.6	704.5	643.7
42.5°	1265.2	1414.8	1575.7	1658.1	1580.9	1334.8	1039.4	839.6	718.5	642.7	593.4
45°	1155.5	1313.3	1462.3	1508.1	1370.0	1098.8	840.5	695.6	615.0	558.9	524.8
47.5°	1048.2	1203.5	1339.4	1340.2	1153.6	891.1	709.0	602.0	533.2	489.8	464.9
50°	982.6	1130.2	1244.3	1226.5	1014.8	792.6	634.1	541.9	484.5	451.0	425.0
52.5°	908.8	1052.0	1150.8	1100.3	897.2	697.5	566.9	489.4	441.8	412.7	389.5
55°	801.6	928.6	998.4	921.8	731.8	580.1	479.0	418.2	382.6	358.0	338.2
57.5°	696.2	801.0	844.9	755.7	602.8	481.1	405.2	359.5	324.3	306.7	296.4
60°	630.0	719.5	750.3	651.9	524.1	420.9	358.7	316.4	290.4	278.8	268.6
62.5°	565.0	638.1	650.8	560.6	456.9	368.5	315.0	279.2	262.0	250.9	241.2
65°	468.8	521.4	515.2	442.8	361.5	292.5	253.5	231.7	218.6	203.0	185.8
67.5°	385.9	418.0	398.7	344.4	275.9	227.3	201.9	185.3	169.2	154.3	150.3
70°	333.5	351.9	331.4	281.5	226.1	190.6	170.1	150.3	140.8	137.3	131.2
72.5°	283.2	289.6	267.4	224.7	184.0	157.8	137.9	126.8	121.6	118.8	114.8
75°	212.5	207.8	188.6	155.2	127.8	110.0	103.9	99.8	96.3	93.6	91.6
77.5°	149.3	142.2	125.2	103.3	89.0	80.5	76.8	74.6	72.9	71.6	69.6
80°	112.1	107.3	90.2	73.8	67.7	63.6	61.5	58.8	58.8	57.4	55.4
82.5°	82.0	76.7	61.8	54.1	50.7	48.2	46.7	45.1	44.6	44.9	43.3
85°	43.1	34.9	30.8	29.4	27.4	25.9	26.7	25.3	25.3	25.3	24.6
87.5°	13.8	11.8	11.6	11.4	12.5	13.4	14.1	15.2	15.9	15.2	15.5
90°	3.6	7.1	8.9	10.7	13.4	17.8	24.0	29.3	30.2	29.3	28.4
92.5°	15.7	22.1	25.9	32.0	40.4	60.5	88.8	114.0	115.7	97.7	77.6
95°	34.7	43.6	51.6	65.9	87.2	128.1	205.5	308.8	348.8	305.2	233.2
97.5°	55.6	65.0	77.0	93.5	117.6	169.1	277.0	448.5	595.6	624.7	544.1
100°	71.2	79.2	93.5	111.3	136.2	183.3	291.9	484.1	703.0	831.3	812.5
102.5°	86.9	94.9	109.1	127.6	152.6	196.2	292.7	470.6	706.6	908.1	988.4
105°	112.2	118.3	131.7	151.3	176.2	218.0	297.2	444.1	659.4	896.2	1081.3
107.5°	137.1	143.1	155.4	174.8	199.9	240.5	309.5	430.9	608.9	818.1	1014.4
110°	154.9	160.2	171.7	190.5	216.2	255.4	319.5	428.1	584.7	768.9	956.7





TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	170.5	176.6	187.4	205.4	231.9	269.7	330.2	428.7	569.0	734.8	904.0
115°	195.8	201.2	211.8	229.6	253.6	291.9	346.2	432.5	551.8	692.4	839.2
117.5°	220.2	225.5	235.0	252.0	277.0	312.4	363.3	438.9	543.4	665.7	790.4
120°	235.9	241.2	249.1	267.0	291.9	326.6	374.7	443.2	538.4	651.5	766.2
122.5°	250.0	255.4	264.1	282.0	307.6	340.1	384.6	448.2	535.6	639.4	747.0
125°	269.7	275.0	285.7	303.4	328.4	360.4	400.5	455.7	530.4	622.1	719.1
127.5°	286.2	293.6	305.4	322.5	348.1	379.3	415.3	463.3	527.4	606.1	691.5
130°	295.4	304.3	316.8	334.7	359.5	390.7	424.5	469.0	525.9	595.4	673.7
132.5°	304.7	314.3	327.5	346.0	371.0	400.6	433.7	474.7	525.2	586.8	656.6
135°	316.8	327.5	340.8	361.3	386.2	414.7	445.9	481.4	524.1	574.9	632.8
137.5°	329.7	340.3	354.5	374.9	398.0	426.1	455.1	487.5	524.0	566.5	613.7
140°	338.2	348.8	363.1	382.7	405.8	432.5	460.1	490.4	523.3	561.6	601.6
142.5°	346.7	356.7	371.0	389.8	411.5	437.5	464.4	492.5	523.3	556.6	591.7
145°	361.3	370.2	383.6	401.4	421.0	445.0	469.9	494.8	521.5	550.0	577.6
147.5°	375.4	383.9	396.2	411.0	428.5	451.0	473.0	495.5	518.4	543.2	566.7
150°	385.3	392.4	404.0	417.4	433.4	453.9	474.3	494.8	516.2	537.5	558.9
152.5°	393.9	401.0	411.2	423.8	438.4	456.7	475.0	493.4	512.6	532.5	551.1
155°	407.6	413.0	422.8	432.5	445.9	461.0	476.1	491.2	506.4	523.3	540.2
157.5°	419.4	423.7	432.1	440.0	451.2	464.0	476.1	487.1	500.0	514.6	527.5
160°	427.2	430.7	437.8	445.0	454.8	465.5	476.1	485.0	495.7	508.2	519.7
162.5°	433.5	437.1	442.8	449.2	456.9	466.2	475.4	482.9	492.1	502.5	511.9
165°	442.3	444.1	449.4	453.9	459.2	467.3	473.5	478.8	485.0	493.0	500.2
167.5°	449.6	451.2	454.6	457.8	461.2	467.1	472.3	474.7	478.8	483.8	488.9
170°	453.9	454.8	457.4	459.2	461.9	466.4	470.8	472.6	475.2	478.8	483.2
172.5°	457.4	456.9	459.6	460.7	462.6	465.7	468.7	469.8	471.0	473.9	476.8
175°	461.0	460.1	461.9	461.9	462.8	464.6	466.4	465.5	466.4	467.3	469.9
177.5°	462.1	461.4	462.8	462.8	462.8	463.5	464.9	463.5	462.8	463.5	464.9
180°	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8



TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6
2.5°	2035.5	2042.6	2045.9	2045.9	2049.7	2048.1	2046.4
5°	2152.5	2165.4	2168.2	2180.5	2189.3	2186.7	2188.0
7.5°	2268.8	2289.6	2310.3	2319.8	2321.2	2326.7	2328.8
10°	2340.4	2357.5	2389.6	2384.8	2408.7	2422.4	2399.9
12.5°	2409.2	2432.3	2454.6	2460.8	2474.3	2478.7	2469.8
15°	2471.6	2483.9	2485.3	2481.8	2485.9	2482.5	2469.5
17.5°	2413.3	2393.4	2353.0	2333.8	2318.6	2296.2	2287.2
20°	2317.1	2258.3	2190.0	2162.8	2130.6	2067.7	2082.8
22.5°	2109.4	2042.5	1974.2	1894.4	1856.2	1796.6	1793.1
25°	1786.2	1670.7	1543.6	1454.8	1402.8	1343.5	1317.4
27.5°	1388.8	1243.4	1139.2	1086.5	1038.5	991.4	989.4
30°	1127.5	1018.2	937.5	892.4	863.0	843.2	847.3
32.5°	950.4	875.5	821.1	783.6	761.9	747.0	746.7
35°	776.9	725.7	690.8	675.1	659.4	648.5	649.2
37.5°	664.9	634.1	614.7	597.4	587.5	582.2	579.2
40°	607.4	582.2	567.1	556.9	548.7	541.2	539.8
42.5°	562.1	541.2	526.2	518.1	510.4	505.2	503.7
45°	498.8	481.7	468.1	459.2	455.8	451.0	451.0
47.5°	443.7	427.0	416.3	410.7	404.8	401.6	401.5
50°	406.6	393.6	384.1	380.6	375.9	373.8	373.1
52.5°	373.3	363.6	356.7	354.4	352.3	349.7	350.2
55°	328.0	322.5	319.8	317.7	314.3	310.2	313.0
57.5°	289.9	285.3	277.9	271.4	268.3	265.4	266.5
60°	263.1	253.5	244.0	236.4	234.3	228.2	228.2
62.5°	229.2	215.8	204.0	199.8	197.8	194.9	194.3
65°	176.3	170.9	168.1	165.3	164.0	164.0	162.6
67.5°	146.1	143.9	140.9	140.2	138.8	138.5	138.0
70°	129.1	126.4	125.0	124.4	123.0	123.7	121.6
72.5°	112.7	110.6	110.3	108.5	107.7	107.8	106.3
75°	88.8	88.8	88.2	87.5	86.1	85.4	86.1
77.5°	68.3	68.5	67.2	67.1	67.0	67.1	66.4
80°	54.7	55.4	54.7	53.9	53.3	53.9	53.3
82.5°	43.2	42.3	42.1	42.0	41.8	41.4	41.3
85°	24.6	25.3	24.6	23.9	23.9	23.9	24.6
87.5°	14.6	15.0	15.2	15.2	15.2	15.2	14.6
90°	26.7	28.4	29.3	29.3	29.3	29.3	29.3
92.5°	66.6	59.1	53.6	52.9	50.0	50.7	49.3
95°	178.9	141.5	121.9	110.4	103.3	100.6	101.5
97.5°	445.1	348.8	284.6	242.1	220.2	207.1	199.7
100°	702.1	580.2	472.6	398.7	360.4	334.7	318.6
102.5°	963.5	874.3	760.2	679.9	614.6	582.4	560.7
105°	1181.9	1193.5	1164.0	1108.8	1053.7	1015.4	1003.0
107.5°	1165.8	1258.4	1301.5	1308.4	1305.4	1297.7	1281.2
110°	1116.0	1229.9	1302.9	1341.1	1358.1	1366.1	1365.2



TEST NUMBER: P331755-940

CATALOG NUMBER: S122RDIP-S1005D925U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	1056.9	1178.7	1262.3	1315.5	1343.8	1359.0	1363.8
115°	976.2	1092.9	1184.5	1247.7	1288.6	1311.8	1319.8
117.5°	910.8	1016.5	1102.5	1166.9	1210.1	1234.6	1241.3
120°	876.6	970.9	1052.0	1114.2	1156.0	1181.9	1190.8
122.5°	848.1	937.5	1010.7	1066.5	1107.6	1130.6	1138.1
125°	810.7	889.0	955.8	1007.5	1041.3	1063.5	1070.6
127.5°	774.5	848.3	909.9	954.9	986.6	1005.8	1011.6
130°	750.2	820.6	879.3	922.9	953.1	970.9	978.0
132.5°	727.5	792.0	847.2	890.1	920.4	936.7	943.2
135°	691.5	750.2	800.0	838.3	867.7	883.7	887.3
137.5°	662.8	709.4	752.9	787.8	813.1	827.2	832.5
140°	644.4	685.3	724.4	752.9	776.1	789.4	794.7
142.5°	627.9	663.2	696.0	723.0	744.0	755.9	757.0
145°	607.0	634.5	660.3	681.7	696.9	705.7	708.4
147.5°	589.9	611.4	630.3	647.9	660.0	666.0	667.6
150°	578.5	597.2	613.1	626.5	637.2	642.6	643.5
152.5°	569.2	585.1	599.0	609.4	618.7	622.6	622.8
155°	554.5	567.8	577.6	587.4	593.6	597.2	595.4
157.5°	539.5	550.7	558.4	565.3	570.4	572.0	572.0
160°	529.5	539.3	545.5	551.8	556.2	557.1	557.1
162.5°	520.2	528.6	533.4	539.7	542.7	543.6	542.9
165°	506.4	512.6	516.2	519.7	523.3	523.3	522.4
167.5°	493.7	498.0	501.2	502.8	504.8	504.6	503.5
170°	485.9	489.5	491.2	492.1	494.8	493.9	492.1
172.5°	478.8	481.6	482.7	483.6	484.8	483.9	482.9
175°	470.8	471.7	472.6	472.6	473.5	472.6	470.8
177.5°	464.9	465.7	465.7	465.7	465.7	464.9	463.5
180°	462.8	462.8	462.8	462.8	462.8	462.8	462.8

(END OF REPORT)