

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331703-940

Luminaire Tested: **S122RDIP-S675D1080U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331703-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIP-S675D1080U940-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1080 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5505.8 lumens
Efficiency: N/A
Efficacy: 96.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331703-940

CATALOG NUMBER: S122RDIP-S675D1080U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

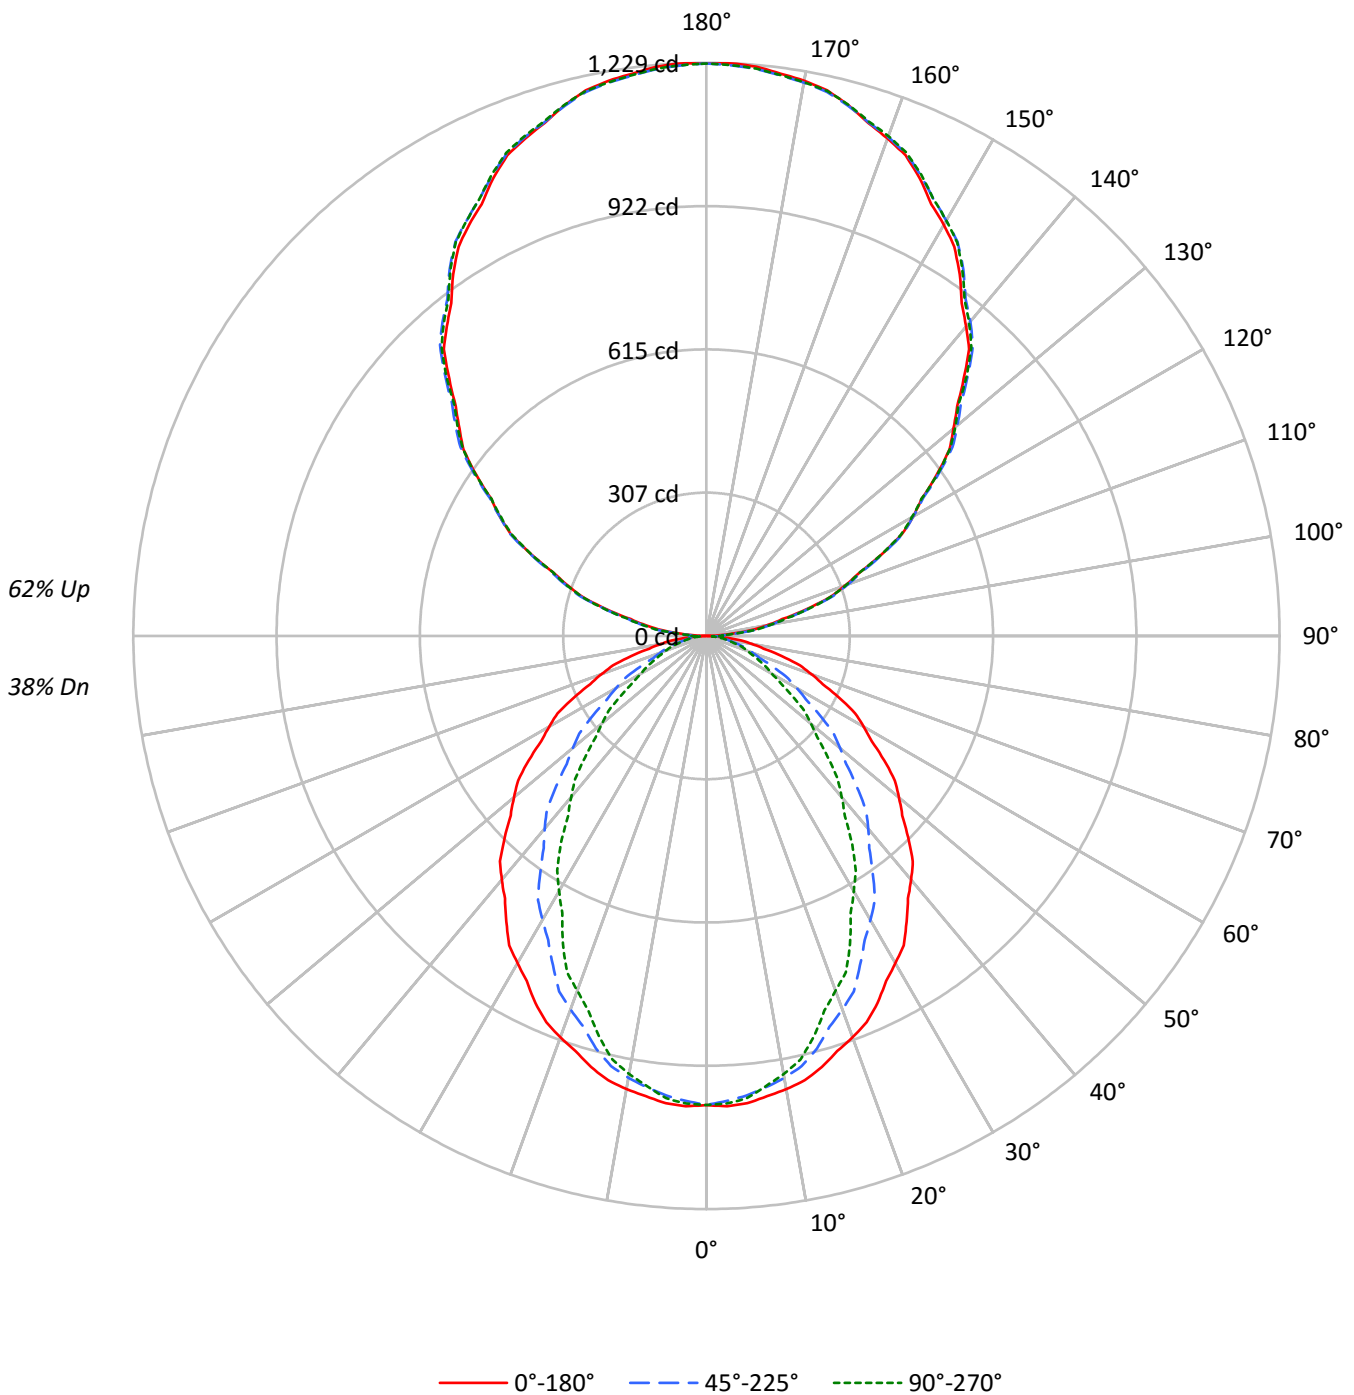



TEST NUMBER: P331703-940

CATALOG NUMBER: S122RDIP-S675D1080U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	76	76	76	60	60	60	45	45	45	38
1	95	91	88	84	86	83	80	77	67	65	63	53	52	51	40	39	38	32
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	34	33	28
3	80	71	64	58	72	64	58	54	53	48	45	42	39	37	32	30	28	24
4	73	63	55	49	66	57	51	46	47	42	39	38	34	32	29	27	25	21
5	67	56	48	42	61	51	44	39	42	37	33	34	30	28	26	24	22	18
6	62	50	42	37	56	46	39	34	38	33	29	31	27	24	24	21	19	16
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	17	15
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	18	16	13
9	49	38	30	26	45	35	28	24	29	24	21	24	20	17	19	16	14	12
10	46	35	28	23	42	32	26	21	27	22	19	22	18	16	17	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16239	16239	16239
5°	16302	16037	16126
10°	16179	15775	15641
15°	15992	15308	14867
20°	15735	14639	13904
25°	15471	13881	12975
30°	15105	13103	11779
35°	14747	12254	10730
40°	14389	11377	9516
45°	13967	10392	8416
50°	13536	9399	7340
55°	13095	8329	6303
60°	12581	7201	5231
65°	12000	6052	4768
70°	11301	4985	4381
75°	10449	4548	4086
80°	9224	4063	3719
85°	7243	3205	3205



TEST NUMBER: P331703-940

CATALOG NUMBER: S122RDIP-S675D1080U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.2	1.7
10°-20°	258.5	4.7
20°-30°	363.0	6.6
30°-40°	395.9	7.2
40°-50°	364.0	6.6
50°-60°	285.9	5.2
60°-70°	186.4	3.4
70°-80°	96.1	1.7
80°-90°	29.8	0.5
90°-100°	77.8	1.4
100°-110°	241.6	4.4
110°-120°	412.9	7.5
120°-130°	543.0	9.9
130°-140°	609.4	11.1
140°-150°	597.6	10.9
150°-160°	501.2	9.1
160°-170°	332.4	6.0
170°-180°	116.2	2.1
0°-30°	715.7	13.0
0°-40°	1111.6	20.2
0°-60°	1761.4	32.0
0°-90°	2073.8	37.7
90°-120°	732.3	13.3
90°-150°	2482.3	45.1
90°-180°	3432.0	62.3
0°-180°	5505.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1006	1006	1006	1006	1006	
5°	1006	1001	990	997	995	95
15°	957	946	916	899	889	269
25°	868	838	779	743	728	399
35°	748	700	622	566	544	468
45°	612	549	455	393	369	472
55°	465	393	296	243	224	416
65°	314	240	158	129	125	311
75°	168	106	73	67	66	177
85°	39	21	17	17	17	46
90°	1	14	36	34	35	4
95°	54	64	66	66	64	62
105°	223	226	228	230	230	235
115°	414	420	418	417	414	410
125°	603	611	609	606	605	538
135°	780	791	793	792	789	602
145°	947	954	960	961	957	591
155°	1082	1086	1089	1093	1091	498
165°	1178	1177	1177	1183	1179	332
175°	1225	1222	1220	1227	1221	116
180°	1227	1227	1227	1227	1227	



TEST NUMBER: P331703-940

CATALOG NUMBER: S122RDIP-S675D1080U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8
2.5°	1009.5	1008.7	1007.9	1007.1	1006.3	1005.0	1003.2	1001.4	999.7	997.9	999.5
5°	1005.8	1004.9	1003.9	1002.8	1001.8	1000.1	997.4	994.8	992.1	989.5	991.3
7.5°	995.5	994.3	993.0	991.8	990.5	988.3	985.3	982.2	979.1	976.1	976.5
10°	986.8	985.3	983.9	982.5	981.1	978.4	974.3	970.3	966.3	962.2	961.6
12.5°	975.8	974.1	972.3	970.6	968.8	965.5	960.3	955.1	949.9	944.7	943.6
15°	956.7	954.5	952.3	950.0	947.8	943.3	936.4	929.5	922.7	915.8	912.0
17.5°	933.3	929.9	926.5	923.0	919.6	913.6	904.7	895.9	887.1	878.2	873.7
20°	915.8	911.7	907.7	903.7	899.6	892.5	882.3	872.3	862.2	852.0	846.9
22.5°	896.8	892.3	887.8	883.2	878.7	870.8	859.3	847.9	836.5	825.1	818.6
25°	868.4	861.9	855.5	849.0	842.6	832.6	819.3	805.9	792.6	779.2	770.9
27.5°	834.2	827.2	820.1	813.1	806.0	795.0	780.0	764.9	749.8	734.8	725.1
30°	810.2	802.5	794.8	787.1	779.4	767.5	751.3	735.1	718.9	702.8	692.4
32.5°	786.8	777.8	768.9	759.9	750.9	738.2	721.7	705.2	688.7	672.2	660.4
35°	748.2	738.0	727.6	717.3	707.0	692.9	675.1	657.4	639.5	621.7	608.9
37.5°	709.7	698.3	687.0	675.6	664.3	649.2	630.3	611.3	592.3	573.3	559.3
40°	682.7	670.6	658.4	646.3	634.2	618.3	598.7	579.1	559.5	539.8	525.5
42.5°	655.1	642.3	629.5	616.7	604.0	587.4	567.1	546.9	526.6	506.3	491.4
45°	611.7	598.2	584.6	571.1	557.5	540.1	518.9	497.7	476.4	455.1	440.8
47.5°	569.4	555.1	540.7	526.4	512.0	493.9	472.0	450.0	428.1	406.2	391.9
50°	538.9	524.5	510.1	495.8	481.4	463.2	440.9	418.7	396.4	374.2	360.2
52.5°	509.1	494.0	479.0	464.0	449.0	430.6	408.8	387.1	365.3	343.6	330.1
55°	465.2	449.4	433.6	417.9	402.1	383.3	361.4	339.6	317.7	295.9	283.7
57.5°	420.2	404.0	387.8	371.7	355.4	336.9	315.8	294.9	273.8	252.9	241.7
60°	389.6	373.4	357.2	341.1	324.9	306.4	285.5	264.7	243.9	223.0	212.7
62.5°	359.7	343.6	327.3	311.2	295.0	277.0	257.2	237.3	217.4	197.5	187.7
65°	314.1	297.7	281.2	264.9	248.5	231.2	213.0	194.8	176.6	158.4	151.5
67.5°	270.0	253.7	237.5	221.2	204.9	188.6	172.2	155.9	139.5	123.1	119.9
70°	239.4	223.6	207.9	192.1	176.3	161.4	147.5	133.5	119.6	105.6	103.5
72.5°	210.3	195.1	180.0	164.9	149.7	136.6	125.4	114.1	103.0	91.8	90.1
75°	167.5	153.4	139.2	125.0	110.8	100.3	93.5	86.6	79.7	72.9	71.4
77.5°	125.5	113.0	100.6	88.2	75.8	67.9	64.6	61.3	58.0	54.7	53.8
80°	99.2	88.9	78.6	68.3	58.0	51.8	49.8	47.7	45.7	43.7	42.9
82.5°	75.2	67.1	59.1	51.0	43.0	38.3	36.9	35.5	34.2	32.8	32.3
85°	39.1	34.9	30.7	26.4	22.1	19.7	19.1	18.5	17.9	17.3	17.3
87.5°	11.9	11.1	10.3	9.6	8.9	9.0	10.1	11.1	12.0	13.1	12.8
90°	1.1	3.8	6.6	9.4	12.1	16.0	21.0	26.1	31.2	36.3	35.8
92.5°	18.5	20.4	22.5	24.5	26.6	28.2	29.3	30.6	31.7	32.9	33.0
95°	53.9	56.2	58.5	60.7	63.0	64.5	64.9	65.4	65.8	66.3	66.3
97.5°	98.4	100.4	102.5	104.5	106.5	108.0	108.8	109.7	110.6	111.5	111.5
100°	131.5	133.4	135.3	137.1	138.9	140.2	140.9	141.5	142.2	142.9	142.9
102.5°	166.4	167.8	169.3	170.8	172.3	173.4	174.3	175.1	176.0	176.9	177.1
105°	222.7	223.4	224.1	224.8	225.4	226.0	226.5	226.9	227.4	227.8	228.4
107.5°	279.5	280.4	281.5	282.5	283.5	284.0	284.0	284.0	284.0	284.0	284.2
110°	315.9	317.3	318.7	320.0	321.5	322.2	322.2	322.2	322.2	322.2	322.2



TEST NUMBER: P331703-940

CATALOG NUMBER: S122RDIP-S675D1080U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	355.7	357.0	358.5	359.8	361.2	361.9	361.6	361.4	361.2	361.1	360.5
115°	414.3	415.7	417.1	418.5	419.8	420.3	419.8	419.4	418.9	418.5	418.2
117.5°	472.7	474.6	476.4	478.2	480.1	480.4	479.1	477.8	476.5	475.2	474.7
120°	511.7	513.5	515.4	517.2	519.1	519.1	517.2	515.4	513.5	511.7	511.7
122.5°	547.3	549.6	551.7	553.9	556.2	556.6	555.4	554.0	552.8	551.4	550.9
125°	602.8	604.9	607.0	609.0	611.1	611.8	611.1	610.5	609.8	609.0	608.3
127.5°	656.9	659.5	662.2	664.8	667.4	668.3	667.4	666.6	665.8	664.9	664.1
130°	690.9	693.8	696.9	699.8	702.8	704.1	703.6	703.2	702.8	702.3	701.8
132.5°	729.0	731.5	733.9	736.3	738.8	740.0	740.1	740.2	740.3	740.4	739.4
135°	780.0	782.5	785.1	787.6	790.1	791.6	792.0	792.5	793.0	793.4	793.2
137.5°	833.6	835.7	837.8	839.8	841.9	843.2	843.8	844.5	845.0	845.6	845.4
140°	865.9	868.0	870.0	872.2	874.2	875.8	877.0	878.2	879.3	880.4	880.4
142.5°	899.1	901.2	903.2	905.3	907.3	908.7	909.5	910.3	911.2	912.0	912.1
145°	946.7	948.3	949.9	951.5	953.1	954.7	956.0	957.4	958.8	960.2	960.4
147.5°	989.2	991.1	993.0	995.0	996.9	998.4	999.3	1000.2	1001.1	1002.0	1002.6
150°	1018.2	1019.6	1020.9	1022.3	1023.7	1024.8	1025.8	1026.7	1027.6	1028.6	1029.2
152.5°	1043.8	1045.3	1046.6	1048.0	1049.4	1050.6	1051.8	1052.8	1054.0	1055.1	1056.0
155°	1082.4	1083.1	1083.8	1084.5	1085.2	1085.8	1086.5	1087.3	1088.0	1088.6	1089.8
157.5°	1115.4	1115.8	1116.2	1116.7	1117.2	1117.6	1118.0	1118.5	1118.8	1119.3	1120.9
160°	1135.2	1135.7	1136.1	1136.6	1137.1	1137.4	1137.6	1137.9	1138.1	1138.4	1139.7
162.5°	1153.4	1153.5	1153.6	1153.7	1153.9	1154.0	1154.2	1154.4	1154.7	1154.9	1156.5
165°	1177.7	1177.5	1177.2	1177.0	1176.8	1176.7	1176.7	1176.7	1176.7	1176.7	1178.3
167.5°	1198.0	1197.3	1196.6	1196.0	1195.2	1194.9	1194.8	1194.8	1194.7	1194.7	1196.3
170°	1208.8	1208.1	1207.4	1206.7	1206.0	1205.6	1205.3	1205.1	1204.9	1204.6	1206.2
172.5°	1216.2	1215.6	1214.9	1214.2	1213.4	1213.0	1212.8	1212.5	1212.3	1212.1	1213.7
175°	1225.4	1224.7	1224.0	1223.2	1222.6	1222.0	1221.6	1221.1	1220.7	1220.1	1221.8
177.5°	1229.0	1228.5	1228.0	1227.4	1226.9	1226.4	1226.0	1225.7	1225.3	1224.9	1226.0
180°	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4



TEST NUMBER: P331703-940

CATALOG NUMBER: S122RDIP-S675D1080U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8
2.5°	1001.1	1002.7	1004.3	1005.0	1004.7	1004.3	1004.1	1003.7
5°	993.1	995.0	996.8	997.4	996.8	996.1	995.6	995.0
7.5°	977.0	977.6	978.1	977.9	976.8	975.8	974.7	973.7
10°	961.0	960.4	959.7	958.9	957.6	956.4	955.2	954.0
12.5°	942.5	941.5	940.3	938.8	936.7	934.8	932.7	930.7
15°	908.1	904.2	900.4	897.4	895.5	893.4	891.4	889.4
17.5°	869.2	864.5	860.0	856.0	852.5	849.0	845.5	842.0
20°	842.0	836.9	831.8	827.1	822.6	818.1	813.7	809.2
22.5°	812.1	805.6	799.1	794.2	790.8	787.5	784.2	780.9
25°	762.6	754.3	746.0	740.4	737.4	734.3	731.3	728.3
27.5°	715.4	705.8	696.2	688.8	684.0	679.2	674.4	669.6
30°	682.2	671.8	661.5	653.6	648.1	642.7	637.2	631.8
32.5°	648.6	636.9	625.1	616.6	611.4	606.4	601.2	596.1
35°	596.3	583.5	570.8	562.1	557.7	553.2	548.8	544.4
37.5°	545.2	531.2	517.2	507.6	502.5	497.4	492.3	487.2
40°	511.0	496.7	482.3	472.5	467.3	462.0	456.7	451.5
42.5°	476.6	461.7	446.9	436.9	431.9	426.8	421.7	416.5
45°	426.4	412.1	397.7	388.1	383.3	378.4	373.5	368.6
47.5°	377.6	363.4	349.0	339.7	335.3	330.9	326.5	322.1
50°	346.3	332.3	318.3	309.2	305.0	300.7	296.5	292.2
52.5°	316.6	303.1	289.6	281.0	277.1	273.1	269.2	265.3
55°	271.6	259.4	247.3	239.3	235.5	231.6	227.7	223.9
57.5°	230.6	219.5	208.4	201.2	198.0	194.7	191.5	188.2
60°	202.4	192.1	181.7	175.0	171.7	168.5	165.2	162.0
62.5°	177.9	168.0	158.2	152.3	150.3	148.5	146.5	144.5
65°	144.6	137.8	130.9	127.2	126.5	125.9	125.3	124.8
67.5°	116.7	113.6	110.5	108.5	107.9	107.3	106.6	105.9
70°	101.6	99.5	97.5	96.1	95.2	94.4	93.6	92.8
72.5°	88.4	86.7	85.0	83.9	83.4	82.9	82.4	81.9
75°	70.0	68.6	67.1	66.3	66.2	66.0	65.7	65.5
77.5°	53.0	52.2	51.4	50.8	50.5	50.2	49.8	49.5
80°	42.1	41.3	40.5	40.0	40.0	40.0	40.0	40.0
82.5°	31.8	31.3	30.9	30.6	30.6	30.6	30.6	30.6
85°	17.3	17.3	17.3	17.3	17.3	17.3	17.3	17.3
87.5°	12.6	12.3	12.0	11.9	12.0	12.0	12.1	12.1
90°	35.3	34.9	34.4	34.3	34.5	34.8	35.0	35.2
92.5°	33.1	33.2	33.3	33.3	33.4	33.4	33.5	33.5
95°	66.3	66.3	66.3	66.1	65.6	65.2	64.6	64.2
97.5°	111.5	111.5	111.5	111.5	111.4	111.4	111.3	111.3
100°	142.9	142.9	142.9	142.9	142.6	142.4	142.1	141.9
102.5°	177.3	177.5	177.6	177.6	177.4	177.2	176.9	176.7
105°	228.8	229.3	229.7	230.0	230.0	230.0	230.0	230.0
107.5°	284.4	284.5	284.7	284.3	283.3	282.2	281.2	280.1
110°	322.2	322.2	322.2	321.8	321.1	320.4	319.7	319.1



TEST NUMBER: P331703-940

CATALOG NUMBER: S122RDIP-S675D1080U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	360.0	359.4	358.9	358.4	357.8	357.3	356.9	356.3
115°	418.0	417.8	417.5	417.1	416.4	415.7	415.0	414.3
117.5°	474.1	473.6	473.1	472.4	471.7	471.0	470.3	469.7
120°	511.7	511.7	511.7	511.3	510.7	510.0	509.3	508.5
122.5°	550.4	549.8	549.2	548.8	548.2	547.7	547.2	546.7
125°	607.7	607.0	606.3	605.8	605.6	605.4	605.1	604.9
127.5°	663.3	662.5	661.6	660.8	660.1	659.4	658.7	657.9
130°	701.3	700.9	700.4	699.7	698.8	697.9	697.0	696.1
132.5°	738.3	737.4	736.4	735.5	734.8	734.0	733.3	732.5
135°	793.0	792.7	792.5	792.0	791.3	790.7	790.0	789.3
137.5°	845.3	845.1	844.9	844.4	843.4	842.5	841.6	840.6
140°	880.4	880.4	880.4	879.9	879.0	878.2	877.2	876.3
142.5°	912.3	912.5	912.7	912.3	911.3	910.4	909.5	908.6
145°	960.6	960.9	961.1	960.7	959.8	958.9	958.0	957.1
147.5°	1003.1	1003.5	1004.1	1003.9	1003.0	1002.1	1001.2	1000.4
150°	1029.9	1030.6	1031.4	1031.4	1030.6	1029.9	1029.2	1028.6
152.5°	1056.9	1057.7	1058.5	1058.5	1057.7	1056.9	1056.0	1055.1
155°	1090.9	1092.1	1093.2	1093.4	1092.8	1092.1	1091.4	1090.7
157.5°	1122.4	1124.0	1125.5	1125.8	1124.6	1123.6	1122.5	1121.3
160°	1141.1	1142.5	1143.9	1144.1	1143.2	1142.3	1141.3	1140.4
162.5°	1158.1	1159.6	1161.2	1161.4	1160.3	1159.2	1158.1	1157.0
165°	1179.9	1181.5	1183.1	1183.3	1182.2	1181.1	1179.9	1178.8
167.5°	1197.9	1199.5	1201.1	1201.3	1200.2	1198.9	1197.7	1196.6
170°	1207.8	1209.4	1211.0	1211.2	1209.8	1208.4	1207.0	1205.7
172.5°	1215.3	1216.9	1218.5	1218.6	1217.3	1215.8	1214.5	1213.1
175°	1223.4	1225.0	1226.6	1226.7	1225.4	1224.0	1222.6	1221.2
177.5°	1227.2	1228.2	1229.3	1229.3	1228.2	1227.2	1226.0	1224.9
180°	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4	1227.4

(END OF REPORT)