

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332044-927

Luminaire Tested: **S123DIP-S1000D1195U927-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332044-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S1000D1195U927-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1195 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6687.1 lumens
Efficiency: N/A
Efficacy: 102.2 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332044-927

CATALOG NUMBER: S123DIP-S1000D1195U927-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

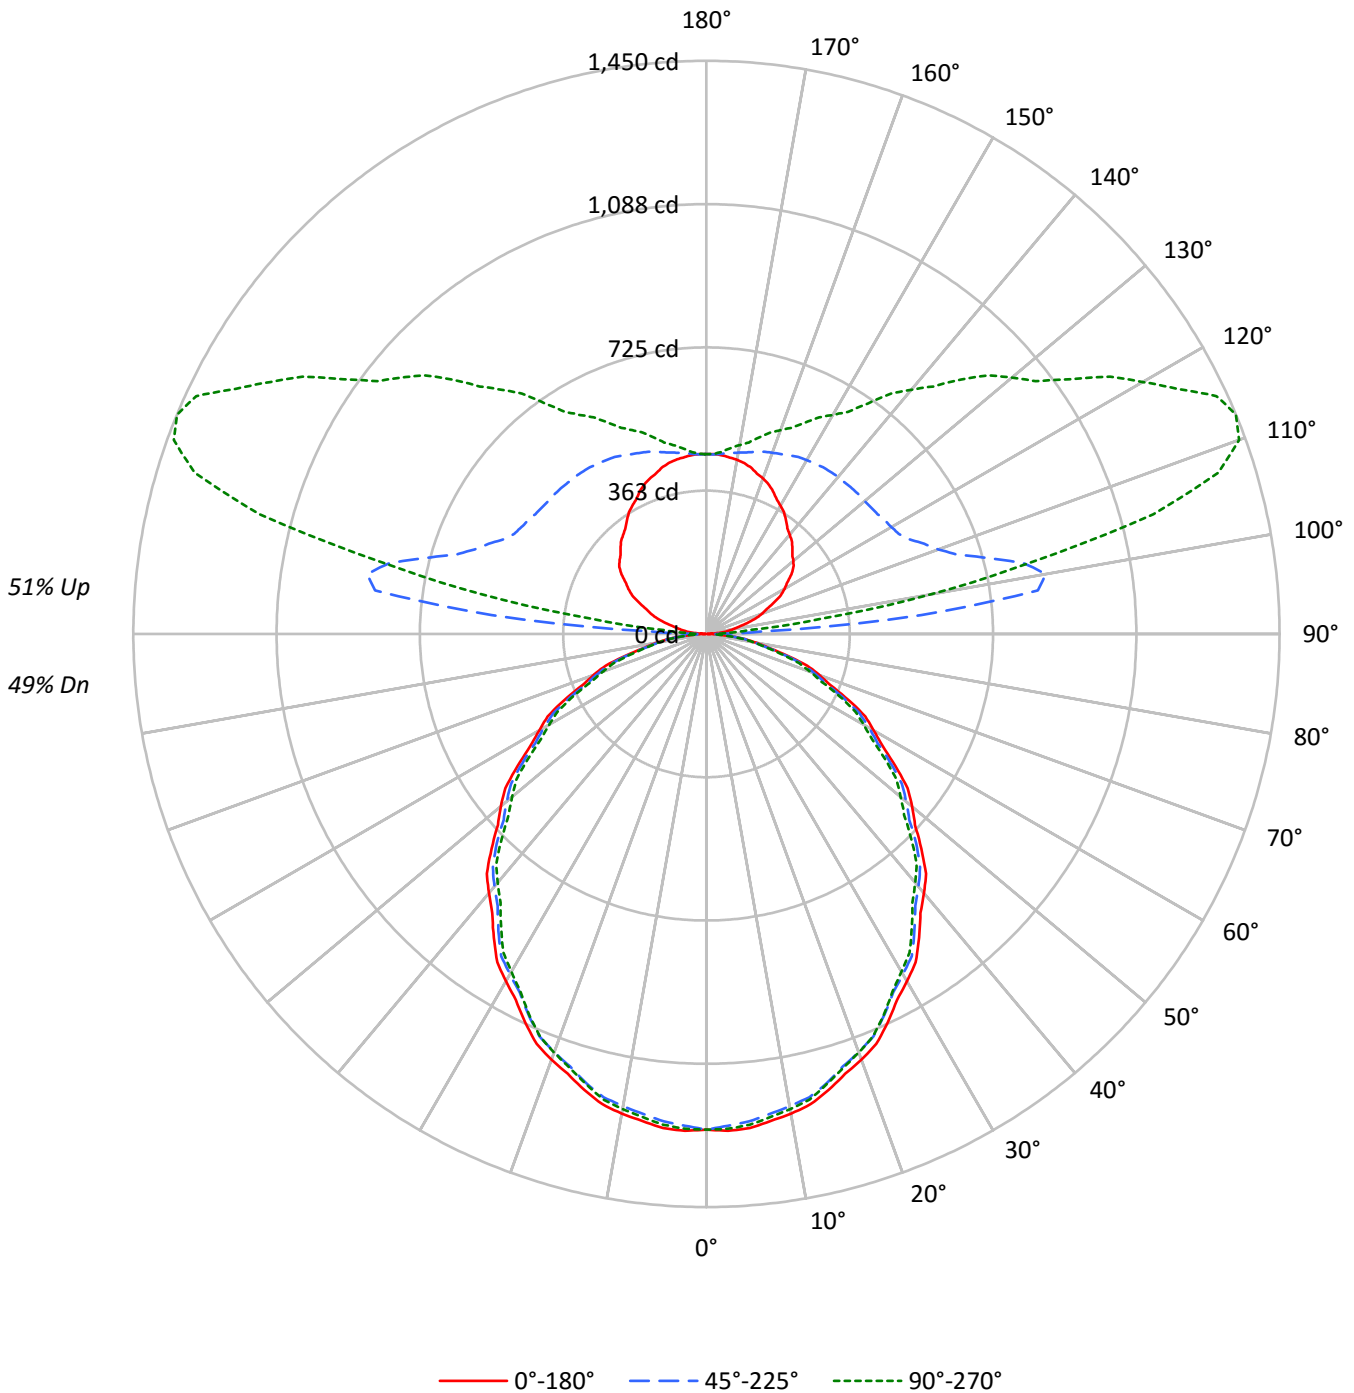



TEST NUMBER: P332044-927

CATALOG NUMBER: S123DIP-S1000D1195U927-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	83	83	83	68	68	68	55	55	55	49
1	97	93	89	86	90	86	83	80	72	70	68	60	58	57	49	47	46	41
2	89	81	75	70	81	75	70	65	63	59	56	53	50	47	43	41	39	34
3	81	71	64	58	74	66	60	54	56	51	47	47	43	40	38	35	33	29
4	74	63	55	49	68	58	52	46	50	44	40	41	37	34	34	31	29	25
5	68	56	48	42	62	52	45	40	44	39	35	37	33	30	30	27	25	22
6	63	50	42	36	57	47	40	34	40	34	30	34	29	26	28	24	22	19
7	58	46	38	32	53	42	35	30	36	31	27	31	26	23	25	22	19	17
8	54	41	34	28	49	38	31	27	33	27	24	28	24	20	23	20	17	15
9	50	38	30	25	46	35	28	24	30	25	21	26	21	18	21	18	16	14
10	47	35	27	23	43	32	26	21	28	23	19	24	20	17	20	17	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13497	13497	13497
5°	13560	13374	13467
10°	13470	13258	13340
15°	13312	13108	13133
20°	13128	12893	12906
25°	12883	12638	12613
30°	12609	12356	12261
35°	12326	12056	11901
40°	12029	11726	11545
45°	11702	11423	11144
50°	11375	11050	10742
55°	10946	10663	10340
60°	10514	10213	9888
65°	10132	9722	9419
70°	9567	9161	8752
75°	8742	8430	8072
80°	7885	7550	7482
85°	6928	6657	6385



TEST NUMBER: P332044-927

CATALOG NUMBER: S123DIP-S1000D1195U927-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	118.1	1.8
10°-20°	333.5	5.0
20°-30°	492.7	7.4
30°-40°	575.5	8.6
40°-50°	578.6	8.7
50°-60°	508.2	7.6
60°-70°	378.6	5.7
70°-80°	215.7	3.2
80°-90°	65.4	1.0
90°-100°	253.0	3.8
100°-110°	716.5	10.7
110°-120°	704.8	10.5
120°-130°	562.2	8.4
130°-140°	443.3	6.6
140°-150°	330.8	4.9
150°-160°	230.6	3.4
160°-170°	135.5	2.0
170°-180°	44.1	0.7
0°-30°	944.3	14.1
0°-40°	1519.8	22.7
0°-60°	2606.6	39.0
0°-90°	3266.4	48.8
90°-120°	1674.3	25.0
90°-150°	3010.6	45.0
90°-180°	3421.0	51.2
0°-180°	6687.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1254	1254	1254	1254	1254	
5°	1255	1249	1238	1248	1246	119
15°	1195	1190	1176	1184	1178	337
25°	1085	1078	1064	1065	1062	499
35°	938	931	918	911	906	587
45°	769	764	750	738	732	593
55°	583	582	568	557	551	522
65°	398	392	382	373	370	392
75°	210	206	203	197	194	225
85°	56	54	54	52	52	62
90°	2	11	23	26	27	5
95°	31	102	546	159	107	34
105°	107	158	740	1294	1171	113
115°	189	235	566	1241	1424	187
125°	262	310	528	957	1123	233
135°	307	367	521	788	910	237
145°	351	402	514	647	712	220
155°	398	430	498	566	590	183
165°	435	448	477	506	514	123
175°	454	454	457	464	463	43
180°	455	455	455	455	455	



TEST NUMBER: P332044-927

CATALOG NUMBER: S123DIP-S1000D1195U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9
2.5°	1258.2	1257.5	1256.7	1255.9	1255.2	1253.7	1251.6	1249.5	1247.4	1245.3	1247.2
5°	1255.0	1253.8	1252.6	1251.4	1250.2	1248.3	1245.7	1243.0	1240.4	1237.8	1240.2
7.5°	1242.7	1241.5	1240.3	1239.1	1237.9	1236.0	1233.3	1230.5	1227.8	1225.0	1227.2
10°	1232.4	1231.2	1229.9	1228.8	1227.6	1225.4	1222.3	1219.2	1216.1	1213.0	1215.1
12.5°	1218.5	1217.6	1216.6	1215.5	1214.6	1212.6	1209.7	1206.7	1203.8	1200.9	1202.5
15°	1194.6	1193.7	1192.7	1191.8	1190.8	1188.7	1185.7	1182.6	1179.4	1176.3	1178.2
17.5°	1166.8	1165.5	1164.3	1163.1	1161.8	1159.7	1156.5	1153.4	1150.3	1147.2	1148.5
20°	1146.1	1144.7	1143.3	1141.8	1140.3	1138.0	1135.0	1131.9	1128.8	1125.6	1126.6
22.5°	1122.8	1121.4	1120.0	1118.5	1117.1	1114.8	1111.7	1108.6	1105.5	1102.3	1103.1
25°	1084.7	1083.2	1081.8	1080.4	1078.9	1076.7	1073.5	1070.4	1067.3	1064.1	1064.4
27.5°	1043.9	1042.5	1041.1	1039.7	1038.3	1035.9	1032.6	1029.3	1025.9	1022.5	1022.7
30°	1014.5	1013.4	1012.2	1011.0	1009.8	1007.5	1004.2	1000.8	997.4	994.1	994.1
32.5°	985.2	983.7	982.1	980.5	978.9	976.8	974.2	971.7	969.1	966.5	965.1
35°	938.0	936.6	935.2	933.7	932.2	930.0	926.9	923.8	920.7	917.5	916.1
37.5°	889.7	887.9	886.1	884.2	882.4	880.0	876.8	873.6	870.4	867.3	865.5
40°	856.1	854.6	853.2	851.8	850.3	848.0	844.5	841.2	837.9	834.5	832.6
42.5°	822.4	820.8	819.2	817.5	815.9	813.4	810.1	806.8	803.4	800.0	798.1
45°	768.7	767.8	766.8	765.9	764.9	762.9	759.8	756.6	753.5	750.4	747.6
47.5°	715.5	714.1	712.7	711.3	710.0	707.7	704.9	702.0	699.0	696.1	693.2
50°	679.3	678.0	676.8	675.7	674.5	672.3	669.2	666.1	663.0	659.9	657.2
52.5°	641.3	640.5	639.7	638.9	638.0	636.0	632.7	629.4	626.1	622.7	620.5
55°	583.3	583.0	582.8	582.6	582.3	580.7	577.6	574.4	571.3	568.2	565.5
57.5°	528.1	527.3	526.5	525.7	524.8	523.2	520.7	518.2	515.7	513.3	510.9
60°	488.4	488.1	487.9	487.7	487.4	485.9	483.0	480.1	477.3	474.4	472.2
62.5°	453.0	452.4	451.8	451.1	450.6	448.9	445.9	443.1	440.2	437.3	435.1
65°	397.8	396.6	395.5	394.3	393.1	391.3	388.9	386.5	384.0	381.7	379.8
67.5°	339.5	338.3	337.3	336.3	335.2	333.7	331.9	330.1	328.3	326.5	324.8
70°	304.0	302.6	301.2	299.8	298.3	296.8	295.4	294.0	292.6	291.1	289.5
72.5°	267.0	265.9	264.8	263.8	262.8	261.4	259.8	258.2	256.5	254.8	253.4
75°	210.2	209.3	208.3	207.4	206.4	205.6	204.9	204.1	203.4	202.7	201.5
77.5°	160.0	159.5	158.9	158.4	157.9	157.2	156.4	155.5	154.6	153.8	153.0
80°	127.2	126.5	125.8	125.1	124.4	123.7	123.3	122.8	122.3	121.8	121.6
82.5°	95.3	95.1	95.1	94.9	94.7	94.6	94.5	94.4	94.3	94.3	93.8
85°	56.1	55.6	55.1	54.7	54.2	53.9	53.9	53.9	53.9	53.9	53.4
87.5°	22.8	22.6	22.4	22.3	22.2	22.1	22.5	22.9	23.2	23.6	23.2
90°	1.8	3.6	5.5	8.3	10.1	12.0	14.7	17.5	20.3	23.0	22.1
92.5°	11.4	17.0	24.6	31.8	39.6	53.2	77.3	116.9	155.7	141.6	106.8
95°	31.3	34.1	44.2	59.8	83.7	119.6	197.9	335.0	486.0	545.8	442.7
97.5°	53.4	54.3	62.2	75.8	99.4	138.2	213.0	367.6	619.2	845.8	904.9
100°	68.1	69.0	75.5	88.3	110.4	146.3	210.8	347.0	589.1	871.6	1053.0
102.5°	83.6	85.2	90.9	103.1	122.9	155.9	213.7	329.3	544.9	823.8	1060.3
105°	106.8	109.6	115.0	126.1	143.5	172.1	221.8	316.6	490.6	740.0	1004.2
107.5°	131.4	134.2	139.5	150.4	166.8	193.3	236.9	315.7	456.0	666.0	905.9
110°	149.1	151.9	156.5	166.6	182.2	208.0	249.5	319.4	442.7	624.0	844.0



TEST NUMBER: P332044-927

CATALOG NUMBER: S123DIP-S1000D1195U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	165.3	168.1	172.7	182.8	198.4	223.5	262.0	326.8	435.4	596.0	790.3
115°	188.7	192.3	197.9	207.1	222.8	247.6	282.6	338.7	432.6	566.0	725.2
117.5°	212.1	216.3	220.9	229.3	246.8	269.9	304.4	354.5	434.3	548.3	686.0
120°	228.2	231.0	235.6	244.9	262.3	285.3	318.5	366.3	437.2	540.3	665.4
122.5°	242.2	245.0	249.6	259.5	276.3	300.8	333.2	377.4	442.4	535.1	648.5
125°	262.3	264.2	269.7	279.8	297.3	322.1	354.3	394.8	450.0	528.3	626.8
127.5°	277.6	280.4	287.2	297.5	316.8	341.7	372.7	409.2	458.9	525.0	607.7
130°	287.2	289.9	298.2	309.3	328.6	353.4	383.8	418.7	464.8	522.8	597.3
132.5°	294.5	298.0	307.0	320.3	339.6	363.8	393.4	427.6	469.2	522.0	587.8
135°	307.4	311.1	321.2	335.0	354.3	379.2	407.7	439.0	475.9	520.9	575.3
137.5°	319.6	323.4	333.4	348.1	367.3	390.2	417.6	447.5	480.3	518.9	564.4
140°	327.6	332.2	341.4	356.2	374.6	397.6	424.3	451.9	483.2	518.2	557.8
142.5°	336.5	340.4	350.3	363.5	382.0	403.5	429.4	456.3	485.4	516.7	551.8
145°	350.7	353.4	361.7	375.5	391.2	412.3	436.3	461.1	486.9	514.5	544.0
147.5°	365.0	366.7	374.8	386.7	401.9	419.9	441.8	464.1	486.9	511.0	536.2
150°	374.6	375.5	382.9	394.8	407.7	424.3	445.4	464.8	486.9	508.0	531.1
152.5°	384.2	384.4	391.7	402.2	413.6	429.4	447.7	466.3	484.7	504.4	525.2
155°	398.5	398.5	404.1	413.3	423.3	436.3	451.9	466.7	482.3	498.0	516.3
157.5°	410.0	410.7	415.1	423.2	431.8	441.8	454.3	467.5	479.2	492.3	506.4
160°	418.7	418.7	422.5	429.8	436.3	445.4	456.5	467.5	477.7	487.8	499.8
162.5°	425.4	425.4	428.3	434.3	440.0	447.7	457.2	466.8	474.8	483.4	493.1
165°	435.4	434.4	436.3	440.8	444.6	451.0	458.4	464.8	470.3	476.7	484.1
167.5°	442.9	441.8	442.7	446.2	448.8	452.8	458.2	463.3	465.9	470.2	475.5
170°	447.3	445.4	446.4	449.2	451.0	452.8	457.4	461.1	463.0	465.7	470.3
172.5°	450.3	449.2	449.3	451.4	452.5	453.6	457.4	460.4	460.7	462.0	465.2
175°	453.8	452.8	451.9	453.8	453.8	454.7	456.5	458.4	457.4	457.4	459.3
177.5°	455.4	454.7	453.9	454.7	454.7	454.7	455.4	456.9	455.4	454.7	455.4
180°	454.7	454.7	454.7	454.7	454.7	454.7	454.7	454.7	454.7	454.7	454.7



TEST NUMBER: P332044-927

CATALOG NUMBER: S123DIP-S1000D1195U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9
2.5°	1249.1	1251.1	1253.0	1253.9	1253.6	1253.5	1253.2	1253.1
5°	1242.5	1244.9	1247.4	1248.3	1247.8	1247.4	1246.9	1246.4
7.5°	1229.4	1231.5	1233.7	1234.6	1234.3	1234.1	1233.7	1233.4
10°	1217.3	1219.4	1221.6	1222.4	1221.9	1221.5	1221.0	1220.5
12.5°	1204.0	1205.6	1207.2	1207.8	1207.6	1207.3	1207.0	1206.7
15°	1180.1	1182.0	1184.0	1184.2	1182.8	1181.3	1179.9	1178.5
17.5°	1149.9	1151.2	1152.5	1152.9	1152.5	1151.9	1151.4	1150.9
20°	1127.5	1128.5	1129.5	1129.6	1128.9	1128.1	1127.4	1126.7
22.5°	1103.9	1104.6	1105.4	1105.3	1104.5	1103.5	1102.6	1101.7
25°	1064.6	1064.9	1065.2	1064.9	1064.1	1063.4	1062.7	1062.0
27.5°	1022.9	1023.1	1023.3	1022.9	1022.1	1021.1	1020.3	1019.3
30°	994.1	994.1	994.1	993.2	991.6	989.9	988.2	986.5
32.5°	963.8	962.5	961.2	960.0	959.1	958.1	957.3	956.3
35°	914.7	913.2	911.8	910.5	909.3	908.1	906.9	905.7
37.5°	863.9	862.1	860.4	859.1	858.4	857.6	856.8	856.1
40°	830.7	828.8	826.9	825.4	824.4	823.5	822.5	821.6
42.5°	796.1	794.2	792.3	790.9	790.0	789.0	788.1	787.1
45°	744.7	741.8	738.9	736.9	735.7	734.5	733.3	732.1
47.5°	690.4	687.6	684.8	682.9	681.8	680.7	679.7	678.6
50°	654.6	652.0	649.3	647.3	645.9	644.4	642.9	641.5
52.5°	618.2	616.0	613.8	611.9	610.5	609.0	607.6	606.2
55°	562.9	560.3	557.7	555.7	554.5	553.3	552.2	551.0
57.5°	508.5	506.2	503.8	501.9	500.6	499.2	497.8	496.4
60°	470.1	467.9	465.8	464.1	462.9	461.7	460.5	459.3
62.5°	433.0	430.9	428.6	427.2	426.4	425.6	424.8	424.0
65°	377.9	375.9	374.0	372.7	372.0	371.3	370.5	369.8
67.5°	323.1	321.5	319.8	318.5	317.4	316.4	315.4	314.4
70°	287.7	286.1	284.4	283.0	281.8	280.6	279.4	278.1
72.5°	251.9	250.4	248.9	247.9	247.2	246.6	246.1	245.4
75°	200.3	199.1	197.9	196.9	196.2	195.5	194.8	194.1
77.5°	152.1	151.3	150.5	150.1	150.1	150.1	150.1	150.1
80°	121.4	121.1	120.9	120.7	120.7	120.7	120.7	120.7
82.5°	93.4	92.9	92.5	92.2	92.0	91.8	91.7	91.4
85°	52.9	52.4	52.0	51.7	51.7	51.7	51.7	51.7
87.5°	23.2	23.2	23.2	23.4	23.3	23.4	23.6	23.4
90°	23.0	23.9	24.9	26.7	25.7	26.7	27.6	26.7
92.5°	77.5	61.5	54.3	49.5	47.8	45.1	46.0	44.4
95°	331.4	224.6	175.8	142.7	125.2	116.9	110.4	106.8
97.5°	825.9	661.6	542.9	432.8	364.9	323.4	298.6	290.7
100°	1085.1	1010.6	902.9	772.2	679.2	612.0	576.2	577.1
102.5°	1171.3	1168.9	1106.1	1023.3	950.9	897.8	867.8	846.6
105°	1196.5	1288.6	1306.1	1282.1	1239.8	1204.8	1175.4	1170.8
107.5°	1123.9	1273.4	1354.1	1386.9	1387.6	1375.8	1365.9	1357.4
110°	1054.8	1224.2	1340.1	1404.5	1430.3	1437.7	1435.8	1434.0



TEST NUMBER: P332044-927

CATALOG NUMBER: S123DIP-S1000D1195U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	986.3	1159.4	1289.3	1372.1	1419.3	1442.1	1449.1	1449.5
115°	895.6	1055.7	1191.0	1291.3	1360.3	1400.8	1419.3	1423.9
117.5°	829.8	968.0	1089.6	1191.4	1263.4	1309.7	1336.3	1342.5
120°	795.2	919.5	1029.9	1122.9	1195.6	1247.1	1269.2	1274.8
122.5°	767.9	880.4	982.8	1069.1	1133.8	1180.1	1204.4	1211.4
125°	731.7	832.0	920.4	994.0	1053.0	1093.4	1116.4	1122.9
127.5°	700.1	789.5	869.2	936.2	988.7	1023.3	1044.1	1050.0
130°	680.2	763.0	837.6	900.2	949.0	982.1	1001.4	1008.8
132.5°	661.8	738.0	807.4	867.0	912.8	945.9	963.1	968.3
135°	636.9	702.3	762.1	814.5	859.7	887.2	903.8	910.3
137.5°	614.3	667.8	719.4	764.9	802.8	830.8	844.7	849.0
140°	601.0	647.9	692.1	731.7	766.7	792.5	807.2	806.3
142.5°	588.5	628.8	667.1	701.6	731.3	754.2	767.4	766.5
145°	573.4	603.8	633.3	659.9	682.9	702.3	709.6	711.5
147.5°	561.1	585.2	609.0	627.9	645.4	658.5	665.4	666.1
150°	552.2	573.4	592.7	610.2	624.0	634.1	639.7	639.7
152.5°	544.2	562.4	579.5	594.1	604.9	614.3	617.6	617.6
155°	532.0	546.7	560.5	571.6	579.9	587.2	589.1	589.9
157.5°	519.1	531.5	542.1	550.7	557.9	563.5	564.9	564.7
160°	511.7	521.9	531.1	537.5	544.0	549.5	549.5	548.6
162.5°	502.9	511.6	520.0	525.7	530.0	534.7	534.7	533.9
165°	491.5	497.0	503.4	508.0	511.7	515.4	514.5	514.5
167.5°	481.6	485.8	489.5	492.8	494.4	497.0	496.1	496.1
170°	474.9	477.7	481.3	483.2	484.1	486.0	485.1	485.1
172.5°	469.1	471.0	474.0	475.1	475.3	477.1	475.5	474.8
175°	461.1	462.0	463.9	463.9	463.9	464.8	463.9	463.0
177.5°	456.1	456.9	457.6	457.6	456.9	457.6	456.1	456.1
180°	454.7	454.7	454.7	454.7	454.7	454.7	454.7	454.7

(END OF REPORT)