

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332024-927

Luminaire Tested: **S123DIP-S1000D805U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332024-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S1000D805U927-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 805 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5807.3 lumens
Efficiency: N/A
Efficacy: 106.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332024-927

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

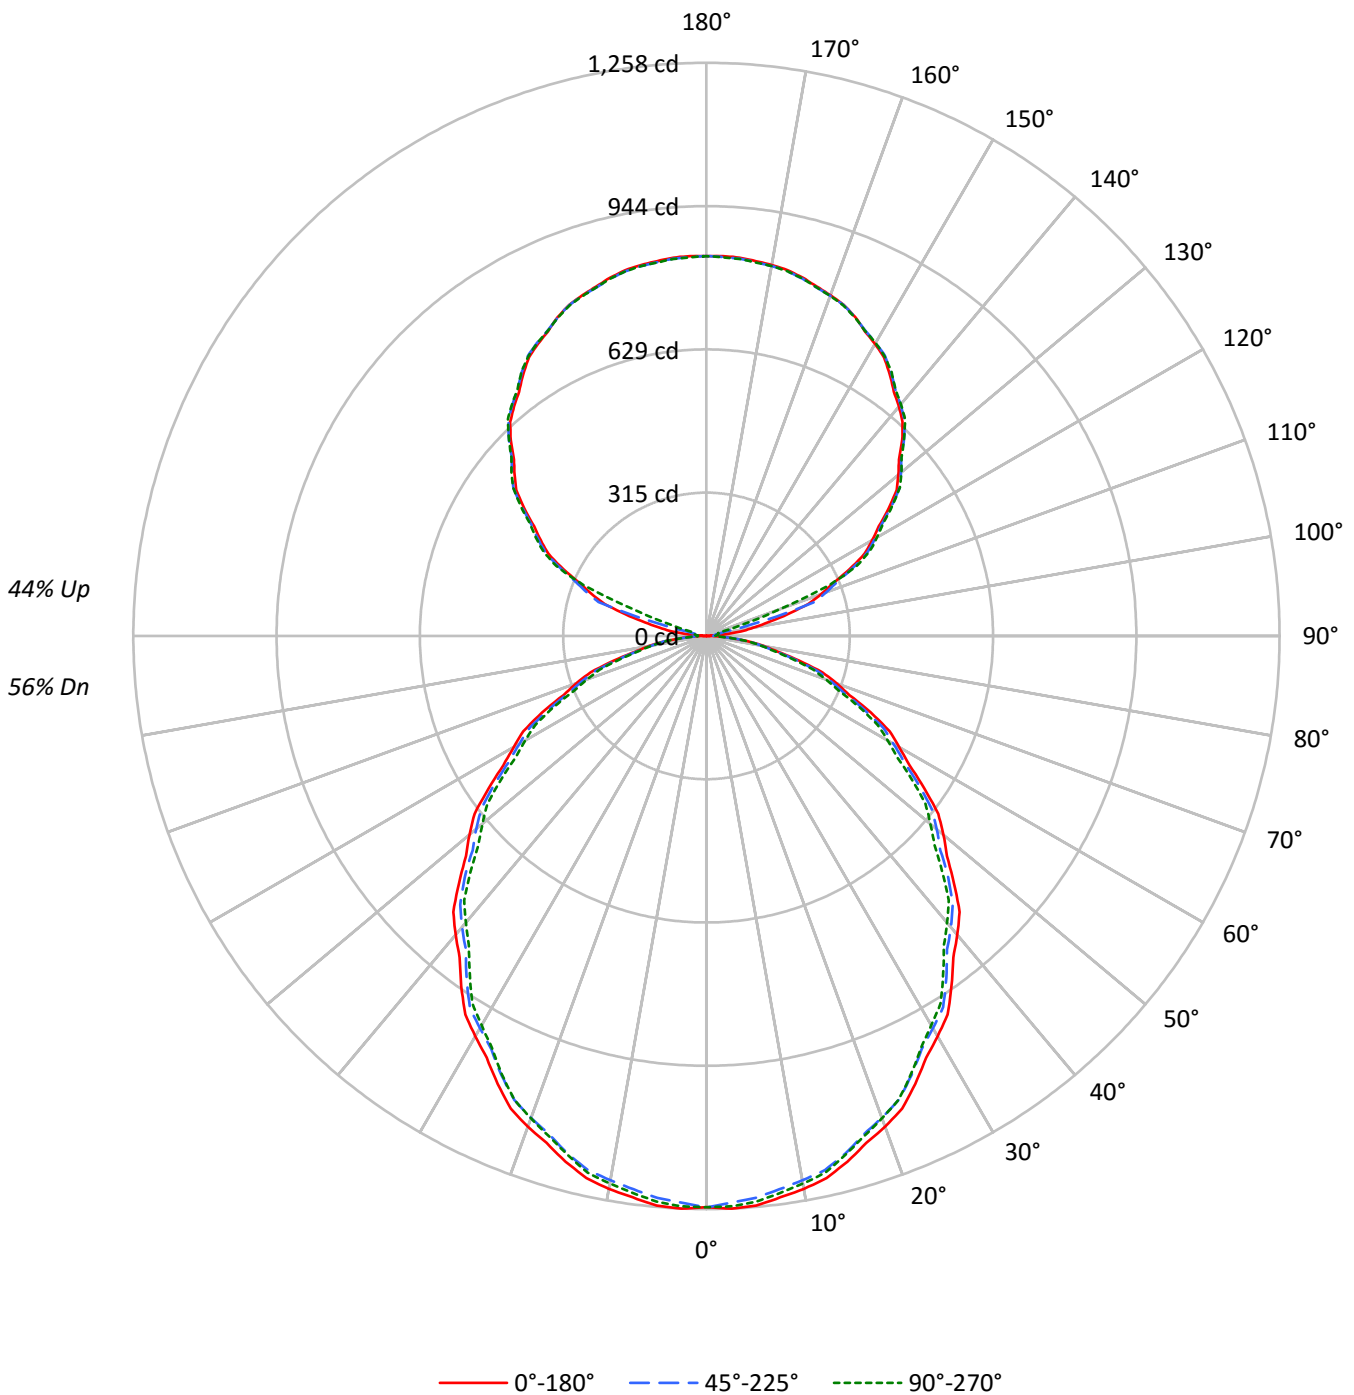



TEST NUMBER: P332024-927

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	56
1	99	95	91	87	92	88	85	82	76	74	71	65	63	61	55	53	52	47
2	90	83	76	71	84	77	72	67	67	62	59	57	54	51	48	46	44	39
3	82	73	65	59	76	68	61	56	59	54	49	50	46	43	42	40	37	33
4	75	64	56	50	70	60	53	47	52	47	42	45	41	37	38	35	32	29
5	69	57	49	43	64	54	46	41	47	41	36	40	36	32	34	31	28	25
6	64	51	43	37	59	48	41	35	42	36	32	36	32	28	31	27	25	22
7	59	46	38	33	55	44	36	31	38	32	28	33	28	25	28	25	22	19
8	55	42	34	29	51	40	33	28	35	29	25	30	26	22	26	22	20	17
9	51	39	31	26	47	36	29	25	32	26	22	28	23	20	24	20	18	16
10	48	35	28	23	44	33	27	22	29	24	20	26	21	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13497	13497	13497
5°	13560	13374	13467
10°	13470	13258	13340
15°	13312	13108	13133
20°	13128	12893	12906
25°	12883	12638	12613
30°	12609	12356	12261
35°	12326	12056	11901
40°	12029	11726	11545
45°	11702	11423	11144
50°	11375	11050	10742
55°	10946	10663	10340
60°	10514	10213	9888
65°	10132	9722	9419
70°	9567	9161	8752
75°	8742	8430	8072
80°	7885	7550	7482
85°	6928	6657	6385



TEST NUMBER: P332024-927

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	118.1	2.0
10°-20°	333.5	5.7
20°-30°	492.7	8.5
30°-40°	575.5	9.9
40°-50°	578.6	10.0
50°-60°	508.2	8.8
60°-70°	378.6	6.5
70°-80°	215.7	3.7
80°-90°	64.2	1.1
90°-100°	30.3	0.5
100°-110°	144.4	2.5
110°-120°	347.0	6.0
120°-130°	441.8	7.6
130°-140°	472.1	8.1
140°-150°	441.4	7.6
150°-160°	356.1	6.1
160°-170°	229.8	4.0
170°-180°	79.2	1.4
0°-30°	944.3	16.3
0°-40°	1519.8	26.2
0°-60°	2606.6	44.9
0°-90°	3265.2	56.2
90°-120°	521.7	9.0
90°-150°	1877.0	32.3
90°-180°	2542.0	43.8
0°-180°	5807.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1254	1254	1254	1254	1254	
5°	1255	1249	1238	1248	1246	119
15°	1195	1190	1176	1184	1178	337
25°	1085	1078	1064	1065	1062	499
35°	938	931	918	911	906	587
45°	769	764	750	738	732	593
55°	583	582	568	557	551	522
65°	398	392	382	373	370	392
75°	210	206	203	197	194	225
85°	56	54	54	52	52	62
90°	1	7	15	17	19	5
95°	38	14	19	23	24	47
105°	185	188	136	32	27	196
115°	346	350	356	361	364	342
125°	488	493	495	497	498	436
135°	608	611	614	615	614	468
145°	701	705	707	708	708	439
155°	772	771	772	774	771	356
165°	814	813	812	816	812	230
175°	834	831	831	835	830	79
180°	834	834	834	834	834	



TEST NUMBER: P332024-927

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9
2.5°	1258.2	1257.5	1256.7	1255.9	1255.2	1253.7	1251.6	1249.5	1247.4	1245.3	1247.2
5°	1255.0	1253.8	1252.6	1251.4	1250.2	1248.3	1245.7	1243.0	1240.4	1237.8	1240.2
7.5°	1242.7	1241.5	1240.3	1239.1	1237.9	1236.0	1233.3	1230.5	1227.8	1225.0	1227.2
10°	1232.4	1231.2	1229.9	1228.8	1227.6	1225.4	1222.3	1219.2	1216.1	1213.0	1215.1
12.5°	1218.5	1217.6	1216.6	1215.5	1214.6	1212.6	1209.7	1206.7	1203.8	1200.9	1202.5
15°	1194.6	1193.7	1192.7	1191.8	1190.8	1188.7	1185.7	1182.6	1179.4	1176.3	1178.2
17.5°	1166.8	1165.5	1164.3	1163.1	1161.8	1159.7	1156.5	1153.4	1150.3	1147.2	1148.5
20°	1146.1	1144.7	1143.3	1141.8	1140.3	1138.0	1135.0	1131.9	1128.8	1125.6	1126.6
22.5°	1122.8	1121.4	1120.0	1118.5	1117.1	1114.8	1111.7	1108.6	1105.5	1102.3	1103.1
25°	1084.7	1083.2	1081.8	1080.4	1078.9	1076.7	1073.5	1070.4	1067.3	1064.1	1064.4
27.5°	1043.9	1042.5	1041.1	1039.7	1038.3	1035.9	1032.6	1029.3	1025.9	1022.5	1022.7
30°	1014.5	1013.4	1012.2	1011.0	1009.8	1007.5	1004.2	1000.8	997.4	994.1	994.1
32.5°	985.2	983.7	982.1	980.5	978.9	976.8	974.2	971.7	969.1	966.5	965.1
35°	938.0	936.6	935.2	933.7	932.2	930.0	926.9	923.8	920.7	917.5	916.1
37.5°	889.7	887.9	886.1	884.2	882.4	880.0	876.8	873.6	870.4	867.3	865.5
40°	856.1	854.6	853.2	851.8	850.3	848.0	844.5	841.2	837.9	834.5	832.6
42.5°	822.4	820.8	819.2	817.5	815.9	813.4	810.1	806.8	803.4	800.0	798.1
45°	768.7	767.8	766.8	765.9	764.9	762.9	759.8	756.6	753.5	750.4	747.6
47.5°	715.5	714.1	712.7	711.3	710.0	707.7	704.9	702.0	699.0	696.1	693.2
50°	679.3	678.0	676.8	675.7	674.5	672.3	669.2	666.1	663.0	659.9	657.2
52.5°	641.3	640.5	639.7	638.9	638.0	636.0	632.7	629.4	626.1	622.7	620.5
55°	583.3	583.0	582.8	582.6	582.3	580.7	577.6	574.4	571.3	568.2	565.5
57.5°	528.1	527.3	526.5	525.7	524.8	523.2	520.7	518.2	515.7	513.3	510.9
60°	488.4	488.1	487.9	487.7	487.4	485.9	483.0	480.1	477.3	474.4	472.2
62.5°	453.0	452.4	451.8	451.1	450.6	448.9	445.9	443.1	440.2	437.3	435.1
65°	397.8	396.6	395.5	394.3	393.1	391.3	388.9	386.5	384.0	381.7	379.8
67.5°	339.5	338.3	337.3	336.3	335.2	333.7	331.9	330.1	328.3	326.5	324.8
70°	304.0	302.6	301.2	299.8	298.3	296.8	295.4	294.0	292.6	291.1	289.5
72.5°	267.0	265.9	264.8	263.8	262.8	261.4	259.8	258.2	256.5	254.8	253.4
75°	210.2	209.3	208.3	207.4	206.4	205.6	204.9	204.1	203.4	202.7	201.5
77.5°	160.0	159.5	158.9	158.4	157.9	157.2	156.4	155.5	154.6	153.8	153.0
80°	127.2	126.5	125.8	125.1	124.4	123.7	123.3	122.8	122.3	121.8	121.6
82.5°	95.3	95.1	95.1	94.9	94.7	94.6	94.5	94.4	94.3	94.3	93.8
85°	56.1	55.6	55.1	54.7	54.2	53.9	53.9	53.9	53.9	53.9	53.4
87.5°	22.6	22.3	21.9	21.6	21.4	21.3	21.5	21.6	21.8	21.9	21.9
90°	0.6	2.0	3.4	4.8	6.1	7.7	9.5	11.2	13.1	14.9	15.4
92.5°	11.5	11.2	10.8	10.4	10.0	10.5	11.8	13.2	14.5	15.8	16.7
95°	37.8	32.2	26.5	20.8	15.2	13.2	14.7	16.2	17.7	19.2	20.2
97.5°	75.9	73.4	70.9	68.4	65.8	59.6	49.7	39.8	29.9	20.0	21.1
100°	104.6	107.4	110.2	112.9	115.7	106.3	84.8	63.4	41.9	20.4	21.5
102.5°	137.4	139.3	141.3	143.3	145.3	134.6	111.1	87.6	64.2	40.7	37.3
105°	184.6	186.1	187.6	189.1	190.6	185.2	172.8	160.4	148.0	135.6	111.3
107.5°	234.3	235.6	236.8	238.0	239.2	240.7	242.7	244.7	246.6	248.6	230.8
110°	267.5	268.6	269.7	270.8	272.0	273.2	274.8	276.3	277.8	279.3	274.8



TEST NUMBER: P332024-927

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	299.3	300.2	301.3	302.2	303.2	304.4	306.0	307.5	309.0	310.5	310.6
115°	346.2	347.1	347.8	348.7	349.5	350.5	351.8	353.0	354.3	355.5	356.9
117.5°	391.7	392.7	393.7	394.7	395.7	396.6	397.2	397.8	398.5	399.1	400.2
120°	419.9	421.1	422.4	423.6	424.8	425.7	426.1	426.5	426.9	427.3	428.4
122.5°	448.6	449.6	450.7	451.7	452.7	453.4	454.0	454.6	455.0	455.6	456.4
125°	488.1	489.1	490.2	491.3	492.4	493.3	493.8	494.3	494.9	495.4	495.7
127.5°	526.2	527.3	528.4	529.5	530.6	531.5	532.1	532.8	533.5	534.1	534.6
130°	549.9	551.0	552.2	553.3	554.4	555.2	555.7	556.3	556.8	557.4	557.9
132.5°	572.7	573.9	575.0	576.1	577.2	577.9	578.4	578.8	579.2	579.7	580.3
135°	607.5	608.4	609.2	610.1	610.9	611.6	612.1	612.7	613.2	613.8	614.2
137.5°	637.3	638.3	639.4	640.4	641.4	642.1	642.5	642.8	643.0	643.3	644.0
140°	657.1	657.9	658.8	659.6	660.4	661.0	661.5	661.9	662.3	662.7	663.2
142.5°	675.4	676.3	677.1	677.9	678.7	679.4	679.8	680.2	680.6	681.0	681.4
145°	701.1	702.0	703.0	703.9	705.0	705.5	705.8	706.1	706.4	706.6	706.9
147.5°	725.2	725.9	726.5	727.1	727.8	728.3	728.5	728.7	729.0	729.3	729.6
150°	740.1	740.5	740.9	741.3	741.7	742.1	742.4	742.7	742.9	743.2	743.5
152.5°	753.4	753.7	753.8	754.1	754.2	754.4	754.6	754.7	754.9	755.1	755.6
155°	772.3	772.1	771.7	771.5	771.2	771.1	771.3	771.4	771.5	771.7	772.4
157.5°	786.9	786.9	786.9	786.8	786.8	786.7	786.6	786.5	786.3	786.2	787.0
160°	795.8	795.7	795.6	795.4	795.3	795.1	795.0	794.9	794.7	794.6	795.4
162.5°	804.2	803.9	803.5	803.2	802.8	802.6	802.4	802.3	802.2	802.0	803.0
165°	814.4	814.0	813.6	813.2	812.8	812.5	812.4	812.2	812.1	811.9	813.0
167.5°	822.4	821.8	821.3	820.7	820.1	819.8	819.8	819.8	819.8	819.8	820.9
170°	826.8	826.2	825.7	825.1	824.6	824.3	824.3	824.3	824.3	824.3	825.5
172.5°	829.7	829.1	828.5	827.8	827.1	826.9	827.0	827.0	827.2	827.3	828.4
175°	833.6	832.9	832.3	831.6	830.8	830.6	830.7	830.8	831.0	831.2	832.1
177.5°	834.6	834.1	833.5	833.0	832.4	832.2	832.3	832.4	832.5	832.6	833.5
180°	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6



TEST NUMBER: P332024-927

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9	1253.9
2.5°	1249.1	1251.1	1253.0	1253.9	1253.6	1253.5	1253.2	1253.1
5°	1242.5	1244.9	1247.4	1248.3	1247.8	1247.4	1246.9	1246.4
7.5°	1229.4	1231.5	1233.7	1234.6	1234.3	1234.1	1233.7	1233.4
10°	1217.3	1219.4	1221.6	1222.4	1221.9	1221.5	1221.0	1220.5
12.5°	1204.0	1205.6	1207.2	1207.8	1207.6	1207.3	1207.0	1206.7
15°	1180.1	1182.0	1184.0	1184.2	1182.8	1181.3	1179.9	1178.5
17.5°	1149.9	1151.2	1152.5	1152.9	1152.5	1151.9	1151.4	1150.9
20°	1127.5	1128.5	1129.5	1129.6	1128.9	1128.1	1127.4	1126.7
22.5°	1103.9	1104.6	1105.4	1105.3	1104.5	1103.5	1102.6	1101.7
25°	1064.6	1064.9	1065.2	1064.9	1064.1	1063.4	1062.7	1062.0
27.5°	1022.9	1023.1	1023.3	1022.9	1022.1	1021.1	1020.3	1019.3
30°	994.1	994.1	994.1	993.2	991.6	989.9	988.2	986.5
32.5°	963.8	962.5	961.2	960.0	959.1	958.1	957.3	956.3
35°	914.7	913.2	911.8	910.5	909.3	908.1	906.9	905.7
37.5°	863.9	862.1	860.4	859.1	858.4	857.6	856.8	856.1
40°	830.7	828.8	826.9	825.4	824.4	823.5	822.5	821.6
42.5°	796.1	794.2	792.3	790.9	790.0	789.0	788.1	787.1
45°	744.7	741.8	738.9	736.9	735.7	734.5	733.3	732.1
47.5°	690.4	687.6	684.8	682.9	681.8	680.7	679.7	678.6
50°	654.6	652.0	649.3	647.3	645.9	644.4	642.9	641.5
52.5°	618.2	616.0	613.8	611.9	610.5	609.0	607.6	606.2
55°	562.9	560.3	557.7	555.7	554.5	553.3	552.2	551.0
57.5°	508.5	506.2	503.8	501.9	500.6	499.2	497.8	496.4
60°	470.1	467.9	465.8	464.1	462.9	461.7	460.5	459.3
62.5°	433.0	430.9	428.6	427.2	426.4	425.6	424.8	424.0
65°	377.9	375.9	374.0	372.7	372.0	371.3	370.5	369.8
67.5°	323.1	321.5	319.8	318.5	317.4	316.4	315.4	314.4
70°	287.7	286.1	284.4	283.0	281.8	280.6	279.4	278.1
72.5°	251.9	250.4	248.9	247.9	247.2	246.6	246.1	245.4
75°	200.3	199.1	197.9	196.9	196.2	195.5	194.8	194.1
77.5°	152.1	151.3	150.5	150.1	150.1	150.1	150.1	150.1
80°	121.4	121.1	120.9	120.7	120.7	120.7	120.7	120.7
82.5°	93.4	92.9	92.5	92.2	92.0	91.8	91.7	91.4
85°	52.9	52.4	52.0	51.7	51.7	51.7	51.7	51.7
87.5°	21.8	21.7	21.6	21.6	21.6	21.7	21.8	21.9
90°	16.0	16.5	17.0	17.5	17.7	18.1	18.3	18.6
92.5°	17.6	18.5	19.4	19.9	20.0	20.2	20.4	20.6
95°	21.2	22.1	23.1	23.5	23.5	23.5	23.5	23.5
97.5°	22.2	23.2	24.3	25.0	25.1	25.3	25.3	25.5
100°	22.7	23.8	24.9	25.4	25.6	25.7	25.9	26.0
102.5°	33.9	30.5	27.1	25.5	25.7	26.0	26.2	26.5
105°	86.9	62.6	38.2	26.1	26.5	26.7	27.0	27.3
107.5°	212.9	195.0	177.1	159.0	140.7	122.3	103.9	85.6
110°	270.2	265.7	261.2	249.1	229.3	209.7	190.0	170.3



TEST NUMBER: P332024-927

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	310.7	310.8	310.9	308.8	304.7	300.5	296.4	292.2
115°	358.2	359.7	361.0	361.9	362.5	363.1	363.6	364.2
117.5°	401.3	402.4	403.5	404.1	404.3	404.3	404.4	404.6
120°	429.5	430.6	431.7	432.3	432.3	432.3	432.3	432.3
122.5°	457.1	457.9	458.7	459.1	459.2	459.3	459.5	459.5
125°	496.0	496.3	496.5	496.9	497.1	497.4	497.6	498.0
127.5°	535.0	535.4	535.8	535.9	535.7	535.4	535.1	534.9
130°	558.5	559.0	559.6	559.8	559.4	559.2	558.9	558.6
132.5°	580.7	581.3	581.9	581.9	581.6	581.2	580.8	580.4
135°	614.6	615.0	615.4	615.4	615.0	614.6	614.2	613.8
137.5°	644.7	645.3	646.0	646.2	645.9	645.6	645.4	645.1
140°	663.8	664.3	664.9	665.0	664.7	664.5	664.2	663.9
142.5°	681.9	682.3	682.8	682.8	682.4	682.0	681.7	681.3
145°	707.2	707.5	707.7	707.9	707.9	707.9	707.9	707.9
147.5°	729.8	730.2	730.4	730.2	729.6	729.0	728.3	727.7
150°	743.7	744.0	744.3	744.3	743.8	743.4	743.0	742.6
152.5°	756.1	756.5	757.1	757.0	756.4	755.7	755.1	754.5
155°	773.1	773.7	774.4	774.4	773.6	772.7	771.9	771.0
157.5°	787.8	788.6	789.5	789.3	788.3	787.2	786.2	785.1
160°	796.2	797.1	797.9	797.8	796.9	795.9	795.0	794.0
162.5°	803.9	804.9	805.7	805.8	804.9	804.1	803.3	802.4
165°	814.1	815.2	816.3	816.4	815.5	814.4	813.5	812.5
167.5°	822.0	823.2	824.3	824.3	823.2	822.0	820.9	819.8
170°	826.5	827.6	828.7	828.7	827.6	826.5	825.5	824.3
172.5°	829.5	830.6	831.7	831.6	830.4	829.3	828.0	826.8
175°	833.1	834.0	835.0	834.9	833.9	832.7	831.6	830.5
177.5°	834.4	835.3	836.1	836.1	835.0	833.9	832.7	831.6
180°	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6

(END OF REPORT)