

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831167

Luminaire Tested: S123DIP-S1000D805U927-4F0-1E-UDD-G4

Issue Date: 05/03/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P831167  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-17)  
Test Lab: INNOVATION CENTER  
Issue Date: 05/03/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S1000D805U927-4F0-1E-UDD-G4  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT, GRAZE OPTIC  
UPLIGHT 805 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5955.3 lumens  
Efficiency: N/A  
Efficacy: 106.9 lumens/watt  
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: Semi-Direct

Input Watts (W): 55.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P831167

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-G4

### Luminous Intensity Polar Plot

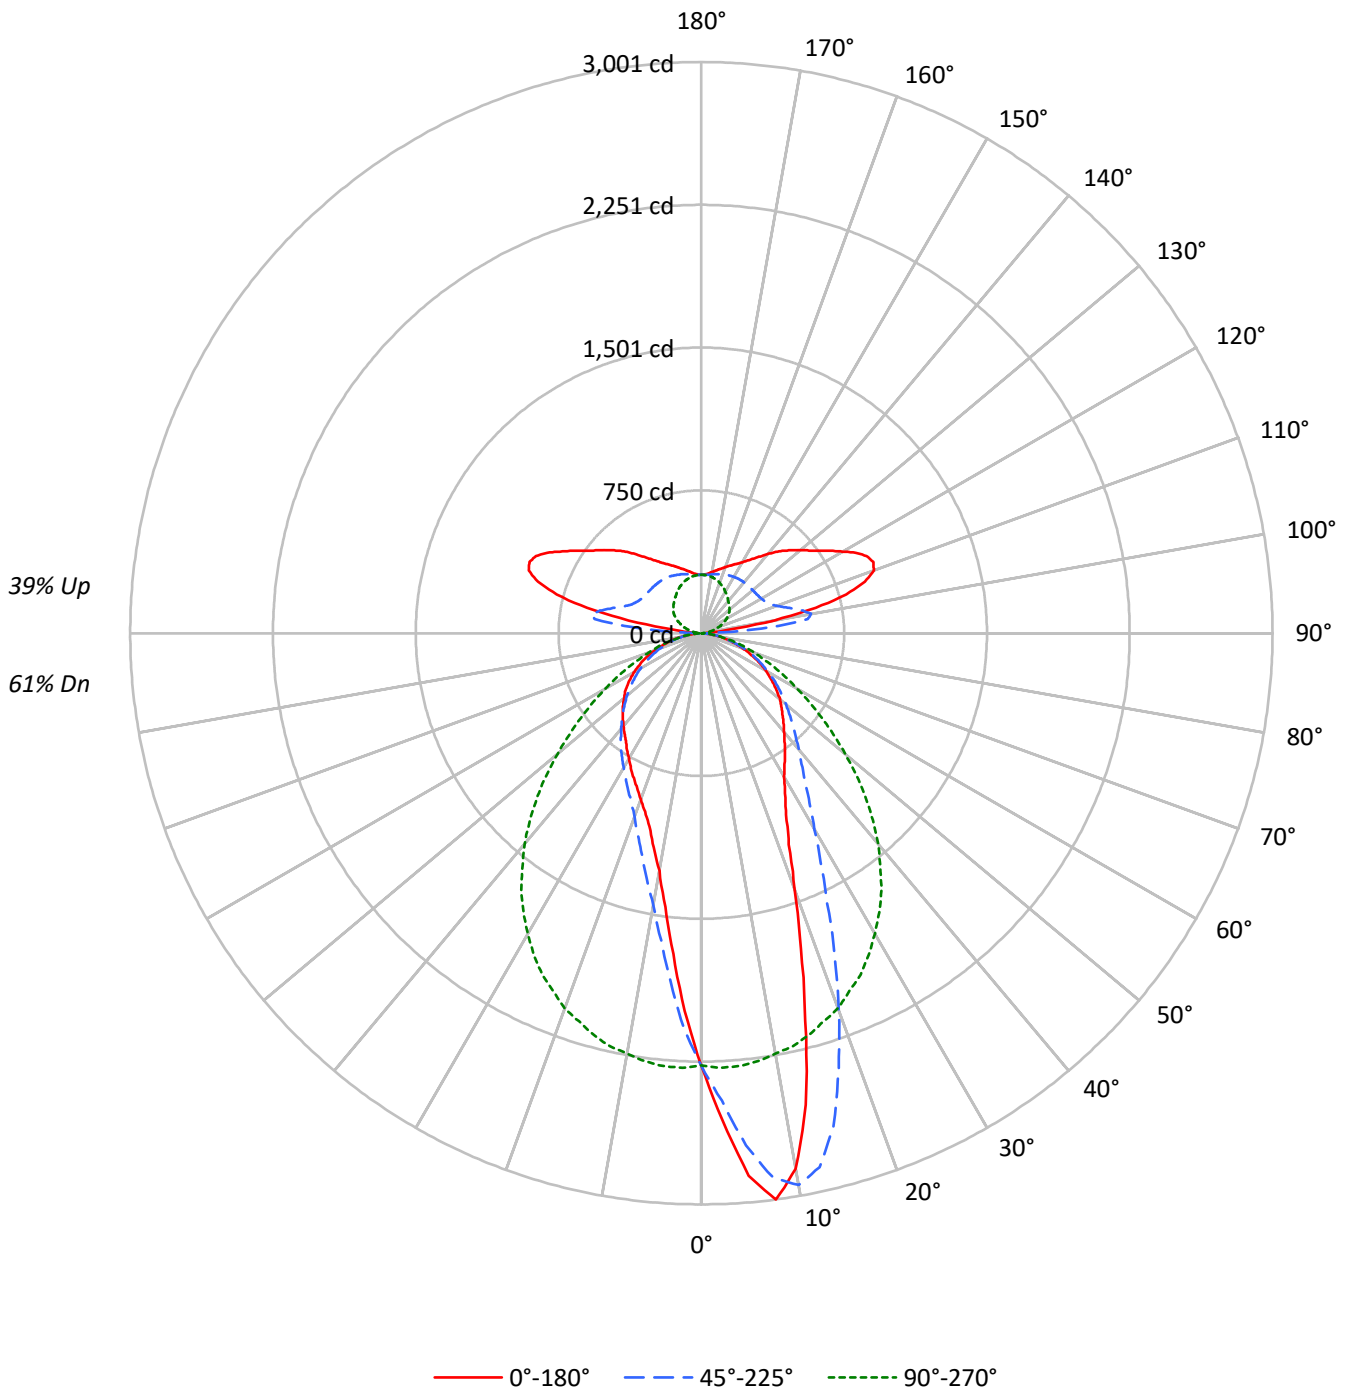



TEST NUMBER: P831167

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-G4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20				
RC	80					70					50					30				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67	61		
1	101	97	93	90	94	91	88	85	80	77	75	69	68	66	60	59	57	53		
2	92	85	79	74	86	80	75	71	71	67	63	62	59	56	53	51	49	45		
3	85	76	69	63	79	71	65	60	63	58	54	55	52	48	48	45	43	39		
4	78	68	60	54	73	64	57	52	57	51	47	50	46	42	44	40	38	35		
5	72	61	53	47	67	57	50	45	51	45	41	45	41	37	40	36	34	31		
6	67	55	47	41	63	52	45	40	47	41	36	41	37	33	36	33	30	27		
7	62	50	42	37	58	48	40	35	43	37	33	38	33	30	34	30	27	25		
8	58	46	38	33	54	44	37	32	39	34	29	35	30	27	31	28	25	23		
9	54	42	35	30	51	40	33	29	36	31	27	33	28	25	29	25	23	21		
10	51	39	32	27	48	37	31	26	34	28	25	30	26	23	27	24	21	19		

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°	135°	180°
0°	24455	24455	24455	24455	24455
5°	30927	29190	24673	19883	18271
10°	31227	32172	24509	15850	13850
15°	23520	29869	24342	13422	11713
20°	16387	24171	24032	11738	10639
25°	12495	18587	23502	10799	9979
30°	10811	14767	22656	10136	9447
35°	10030	12468	21680	9656	9073
40°	9496	11185	20310	9199	8948
45°	9179	10351	18568	8843	8891
50°	9021	9692	16506	8519	8845
55°	8685	9211	14482	8210	8884
60°	8374	8693	12482	7920	8738
65°	7868	8204	10769	7613	8565
70°	7267	7582	9158	7100	8063
75°	6575	6796	7848	6600	7365
80°	5424	5945	6211	5752	6211
85°	4298	4817	4557	4878	4952

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 80°  
 Vertical Angle: 45°  
 Luminance: 21200 cd/sqm



TEST NUMBER: P831167

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-G4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	214.8	3.6
10°-20°	534.3	9.0
20°-30°	632.7	10.6
30°-40°	636.1	10.7
40°-50°	583.6	9.8
50°-60°	481.7	8.1
60°-70°	340.8	5.7
70°-80°	181.9	3.1
80°-90°	47.8	0.8
90°-100°	166.0	2.8
100°-110°	486.1	8.2
110°-120°	474.7	8.0
120°-130°	378.0	6.3
130°-140°	298.3	5.0
140°-150°	222.5	3.7
150°-160°	155.1	2.6
160°-170°	91.1	1.5
170°-180°	29.6	0.5
0°-30°	1381.8	23.2
0°-40°	2018.0	33.9
0°-60°	3083.3	51.8
0°-90°	3653.8	61.4
90°-120°	1126.8	18.9
90°-150°	2025.5	34.0
90°-180°	2301.0	38.6
0°-180°	5955.3	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	2272	2272	2272	2272	2272	
5°	2862	2702	2284	1840	1691	273
15°	2111	2680	2184	1204	1051	583
25°	1052	1565	1979	909	840	497
35°	763	949	1650	735	690	480
45°	603	680	1220	581	584	467
55°	463	491	772	438	473	414
65°	309	322	423	299	336	307
75°	158	163	189	159	177	166
85°	35	39	37	40	40	39
90°	18	16	1	16	18	12
95°	72	367	21	367	72	117
105°	788	498	72	498	788	786
115°	958	381	127	381	958	934
125°	756	356	176	356	756	684
135°	612	350	207	350	612	475
145°	479	346	236	346	479	304
155°	397	335	268	335	397	185
165°	346	321	293	321	346	99
175°	312	308	305	308	312	30
180°	306	306	306	306	306	



TEST NUMBER: P831167

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9
2.5°	2560.8	2558.1	2555.5	2542.3	2529.1	2522.8	2516.5	2497.5	2478.5	2457.5	2436.4
5°	2862.3	2869.7	2877.0	2868.6	2860.2	2834.3	2808.5	2774.3	2740.0	2701.5	2663.0
7.5°	3001.4	3005.7	3009.9	3004.6	2999.3	2992.5	2985.6	2955.1	2924.5	2885.0	2845.4
10°	2857.0	2866.5	2876.0	2896.5	2917.1	2940.3	2963.5	2959.3	2955.1	2943.5	2931.9
12.5°	2539.7	2551.3	2562.9	2604.0	2645.1	2697.8	2750.5	2795.9	2841.2	2872.8	2904.5
15°	2110.6	2142.8	2174.9	2212.3	2249.8	2327.3	2404.7	2500.2	2595.6	2680.4	2765.3
17.5°	1738.5	1750.6	1762.7	1802.8	1842.8	1940.3	2037.9	2148.0	2258.2	2398.9	2539.7
20°	1430.6	1441.7	1452.8	1505.5	1558.2	1634.6	1711.0	1834.9	1958.8	2110.1	2261.4
22.5°	1201.8	1219.2	1236.6	1266.2	1295.7	1368.9	1442.2	1552.4	1662.5	1829.6	1996.7
25°	1052.1	1064.8	1077.4	1095.4	1113.3	1171.8	1230.3	1321.0	1411.6	1565.0	1718.4
27.5°	949.9	955.1	960.4	978.3	996.3	1034.2	1072.2	1150.2	1228.2	1358.4	1488.6
30°	869.8	873.4	877.1	892.9	908.8	934.6	960.4	1016.8	1073.2	1188.1	1303.1
32.5°	813.9	816.5	819.2	831.3	843.4	861.8	880.3	921.4	962.5	1057.4	1152.3
35°	763.3	764.9	766.4	775.4	784.4	798.1	811.8	842.9	874.0	948.8	1023.7
37.5°	719.0	721.1	723.2	728.5	733.8	745.9	758.0	782.8	807.6	865.0	922.5
40°	675.8	679.5	683.2	686.8	690.5	700.5	710.6	729.5	748.5	796.0	843.4
42.5°	638.9	642.6	646.3	647.8	649.4	655.2	661.0	678.4	695.8	731.1	766.4
45°	603.0	604.6	606.2	607.8	609.4	614.1	618.8	634.1	649.4	680.0	710.6
47.5°	570.3	570.3	570.3	571.4	572.5	576.7	580.9	592.0	603.0	626.8	650.5
50°	538.7	538.7	538.7	537.1	535.6	538.2	540.8	549.3	557.7	578.8	599.9
52.5°	500.8	500.8	500.8	501.3	501.8	501.8	501.8	509.2	516.6	535.6	554.5
55°	462.8	464.9	467.0	465.5	463.9	464.9	466.0	470.7	475.5	490.8	506.0
57.5°	424.9	425.9	427.0	426.4	425.9	426.4	427.0	431.2	435.4	447.0	458.6
60°	389.0	389.0	389.0	388.0	386.9	388.0	389.0	391.1	393.2	403.8	414.3
62.5°	349.0	349.5	350.0	350.5	351.1	350.0	349.0	351.6	354.2	362.1	370.0
65°	308.9	309.4	309.9	311.5	313.1	312.1	311.0	313.6	316.3	322.1	327.9
67.5°	273.1	272.0	270.9	271.5	272.0	273.6	275.2	275.7	276.2	282.5	288.9
70°	230.9	231.9	233.0	232.5	231.9	232.5	233.0	234.6	236.2	240.9	245.6
72.5°	192.9	193.5	194.0	194.0	194.0	195.0	196.1	197.7	199.3	201.9	204.5
75°	158.1	158.1	158.1	159.2	160.2	160.8	161.3	161.3	161.3	163.4	165.5
77.5°	120.2	122.8	125.5	124.9	124.4	125.5	126.5	128.1	129.7	130.7	131.8
80°	87.5	87.5	87.5	88.0	88.6	90.1	91.7	92.8	93.8	95.9	98.0
82.5°	55.9	56.4	56.9	58.5	60.1	61.1	62.2	63.8	65.4	65.4	65.4
85°	34.8	33.7	32.7	33.7	34.8	35.8	36.9	37.4	38.0	39.0	40.1
87.5°	16.9	16.9	16.9	16.9	16.9	17.4	17.9	17.9	17.9	17.9	17.9
90°	18.0	18.6	18.0	17.3	18.0	16.7	16.1	15.5	14.9	15.5	13.6
92.5°	32.8	34.1	33.4	35.9	37.2	41.5	47.7	61.3	86.1	115.2	127.6
95°	71.8	74.3	78.7	84.2	96.0	118.3	151.1	223.0	297.9	367.3	327.0
97.5°	147.4	154.2	169.1	192.6	234.1	304.7	386.5	512.2	584.0	564.8	421.8
100°	388.3	387.7	411.9	457.1	519.6	607.6	680.0	730.2	708.5	586.5	396.4
102.5°	615.0	633.0	652.2	685.6	730.8	778.5	813.2	802.7	714.7	546.3	359.2
105°	787.8	790.9	810.7	834.3	862.7	878.8	867.1	805.1	675.7	498.0	330.1
107.5°	900.5	907.3	915.4	926.5	930.3	913.5	865.2	768.0	620.0	455.2	309.1
110°	964.9	966.2	967.4	962.5	945.1	901.8	823.7	709.8	567.9	419.9	297.9



TEST NUMBER: P831167

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	977.9	977.3	971.1	953.2	917.9	859.0	769.2	652.2	522.7	396.4	291.7
115°	958.1	955.0	942.6	915.4	868.9	801.4	710.4	602.6	488.0	380.9	291.1
117.5°	914.8	910.4	891.9	861.5	813.2	743.2	659.6	564.2	465.1	370.4	291.7
120°	857.8	854.1	839.2	804.5	755.6	693.0	618.7	535.1	447.8	363.6	294.2
122.5°	804.5	799.6	782.8	752.5	710.4	653.4	585.9	512.2	433.5	359.2	298.5
125°	755.6	751.3	735.8	708.5	668.9	619.3	559.9	492.4	421.8	355.5	302.9
127.5°	713.5	709.8	695.5	672.0	636.1	590.2	535.7	474.4	410.6	353.6	307.8
130°	678.8	673.8	660.8	638.5	605.7	563.6	513.4	457.7	402.0	351.8	312.8
132.5°	644.7	641.6	630.5	608.2	577.8	538.2	492.4	442.2	393.9	351.2	316.5
135°	612.5	608.2	597.0	578.5	548.1	512.8	472.6	428.6	387.1	350.5	320.2
137.5°	578.5	574.8	565.5	546.3	520.2	488.7	452.7	415.6	380.9	349.3	322.7
140°	542.5	543.2	533.3	515.9	492.4	465.7	436.0	404.4	375.3	348.7	325.2
142.5°	509.1	509.7	501.0	486.2	467.0	444.7	419.9	393.9	370.4	347.5	327.0
145°	478.8	477.5	472.6	459.6	444.1	426.1	406.3	385.9	366.0	346.2	327.6
147.5°	452.7	452.1	447.2	437.9	425.5	412.5	395.8	379.0	361.7	344.4	327.6
150°	430.4	430.4	426.7	419.9	410.6	398.9	385.9	371.6	357.4	341.9	327.6
152.5°	411.9	411.9	410.0	403.8	397.0	387.7	376.6	364.8	352.4	338.8	325.8
155°	397.0	396.4	395.1	390.2	384.6	377.2	367.9	358.0	347.5	335.1	324.5
157.5°	382.8	382.8	381.5	377.8	372.8	366.7	359.2	350.5	341.9	332.0	322.7
160°	369.1	369.7	369.7	366.0	361.7	357.4	351.2	344.4	336.3	328.3	321.4
162.5°	356.7	357.4	357.4	354.3	351.8	348.1	342.5	336.9	330.7	324.5	319.0
165°	346.2	346.2	346.8	344.4	341.9	338.8	334.4	330.7	325.8	320.8	316.5
167.5°	335.7	335.7	336.3	334.4	333.2	330.7	328.3	325.2	320.8	317.1	314.0
170°	326.4	326.4	327.0	325.8	325.2	323.9	321.4	319.6	316.5	313.4	311.5
172.5°	317.7	318.3	319.6	318.3	318.3	317.7	315.9	314.6	312.1	310.3	309.7
175°	311.5	312.1	312.8	312.1	312.1	312.1	310.9	310.3	309.1	307.8	307.8
177.5°	307.2	307.2	308.4	307.8	308.4	308.4	307.8	307.2	306.6	306.0	306.6
180°	306.0	306.0	306.0	306.0	306.0	306.0	306.0	306.0	306.0	306.0	306.0



TEST NUMBER: P831167

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9
2.5°	2430.0	2423.7	2400.5	2377.3	2351.0	2324.6	2305.1	2285.6	2256.6	2227.6	2203.9
5°	2633.5	2604.0	2555.0	2505.9	2439.5	2373.1	2328.3	2283.5	2223.4	2163.3	2115.3
7.5°	2794.8	2744.2	2675.7	2607.2	2520.2	2433.2	2351.0	2268.7	2177.0	2085.3	2010.5
10°	2897.6	2863.3	2784.3	2705.2	2588.7	2472.2	2357.3	2242.4	2124.3	2006.2	1907.1
12.5°	2907.6	2910.8	2838.0	2765.3	2633.5	2501.7	2362.0	2222.4	2073.7	1925.1	1809.6
15°	2819.6	2873.9	2833.8	2793.8	2660.9	2528.1	2356.2	2184.4	2013.1	1841.8	1708.4
17.5°	2656.2	2772.7	2778.5	2784.3	2651.4	2518.6	2328.3	2138.0	1944.0	1750.1	1609.8
20°	2433.2	2605.0	2664.1	2723.1	2615.1	2507.0	2302.5	2098.0	1880.8	1663.6	1516.5
22.5°	2205.5	2414.2	2522.3	2630.3	2550.2	2470.1	2252.4	2034.7	1805.4	1576.1	1426.9
25°	1946.1	2173.9	2339.9	2505.9	2456.9	2407.9	2193.4	1978.8	1734.8	1490.7	1338.4
27.5°	1720.0	1951.4	2151.7	2352.0	2341.5	2330.9	2118.0	1905.0	1655.2	1405.3	1258.2
30°	1518.6	1734.2	1958.3	2182.3	2208.1	2234.0	2028.4	1822.8	1572.4	1322.0	1180.2
32.5°	1340.5	1528.7	1769.0	2009.4	2060.0	2110.6	1925.1	1739.5	1491.8	1244.0	1107.5
35°	1194.5	1365.3	1605.6	1846.0	1909.2	1972.5	1811.2	1649.9	1408.5	1167.1	1036.9
37.5°	1065.3	1208.2	1442.7	1677.3	1754.8	1832.3	1687.9	1543.4	1317.3	1091.1	971.5
40°	958.3	1073.2	1288.8	1504.4	1594.0	1683.6	1564.5	1445.4	1230.8	1016.3	906.1
42.5°	868.7	971.0	1166.5	1362.1	1448.0	1533.9	1433.3	1332.6	1141.8	950.9	850.3
45°	792.3	874.0	1051.6	1229.3	1311.0	1392.7	1306.2	1219.8	1051.6	883.5	789.6
47.5°	720.6	790.7	942.5	1094.3	1167.1	1239.8	1172.3	1104.9	962.5	820.2	735.3
50°	656.3	712.7	845.5	978.3	1041.6	1104.9	1045.3	985.7	868.7	751.7	677.9
52.5°	600.4	646.3	757.5	868.7	923.0	977.3	926.2	875.0	782.3	689.5	625.2
55°	545.0	584.1	680.5	777.0	813.9	850.8	811.2	771.7	696.9	622.0	567.7
57.5°	493.4	528.2	607.2	686.3	714.8	743.2	707.4	671.6	615.2	558.8	513.4
60°	442.8	471.2	537.1	603.0	620.4	637.8	608.8	579.8	540.3	500.8	460.2
62.5°	395.9	421.7	470.7	519.7	531.3	542.9	520.8	498.7	468.6	438.6	406.9
65°	347.4	366.9	406.9	447.0	454.4	461.8	442.3	422.8	400.1	377.4	354.2
67.5°	302.6	316.3	349.0	381.6	382.2	382.7	366.9	351.1	338.4	325.8	307.3
70°	258.8	272.0	293.6	315.2	315.7	316.3	303.6	291.0	281.5	272.0	258.3
72.5°	214.0	223.5	239.8	256.2	255.1	254.1	246.2	238.3	230.9	223.5	213.5
75°	173.4	181.3	192.4	203.5	200.3	197.1	192.9	188.7	182.4	176.1	169.7
77.5°	136.5	141.3	147.6	153.9	151.8	149.7	146.0	142.3	137.6	132.8	130.2
80°	100.2	102.3	106.5	110.7	109.6	108.6	104.4	100.2	99.1	98.0	94.4
82.5°	68.0	70.6	71.7	72.7	72.2	71.7	68.5	65.4	64.3	63.3	62.7
85°	40.6	41.1	41.6	42.2	40.6	39.0	38.0	36.9	36.9	36.9	36.4
87.5°	18.4	19.0	19.0	19.0	18.4	17.9	16.9	15.8	16.3	16.9	16.9
90°	11.8	9.9	8.1	6.8	5.6	3.7	2.5	1.2	2.5	3.7	5.6
92.5°	95.4	62.6	42.7	31.6	25.4	19.8	13.6	9.3	13.6	19.8	25.4
95°	225.4	133.2	80.5	56.4	40.3	29.7	22.9	21.1	22.9	29.7	40.3
97.5°	250.8	143.7	91.7	65.0	48.9	39.6	34.1	33.4	34.1	39.6	48.9
100°	233.5	141.8	98.5	74.3	59.5	50.8	46.5	45.8	46.5	50.8	59.5
102.5°	218.6	144.3	106.5	84.8	71.8	63.8	60.1	58.8	60.1	63.8	71.8
105°	213.1	149.3	115.8	96.6	84.8	77.4	73.7	71.8	73.7	77.4	84.8
107.5°	211.8	157.3	127.6	109.6	98.5	91.0	87.3	85.5	87.3	91.0	98.5
110°	214.9	167.8	140.0	122.6	112.1	105.3	102.2	100.3	102.2	105.3	112.1





TEST NUMBER: P831167

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	221.1	178.4	153.0	136.3	125.7	118.9	115.8	114.0	115.8	118.9	125.7
115°	227.9	190.1	166.6	149.9	139.4	133.2	129.4	127.0	129.4	133.2	139.4
117.5°	236.6	202.5	179.0	163.5	151.7	146.2	143.1	140.0	143.1	146.2	151.7
120°	246.5	214.3	192.0	176.5	164.7	158.6	155.5	153.6	155.5	158.6	164.7
122.5°	255.8	226.7	205.0	188.3	177.1	170.3	167.2	165.4	167.2	170.3	177.1
125°	265.7	238.4	216.8	200.0	188.3	181.5	177.8	176.5	177.8	181.5	188.3
127.5°	273.7	249.0	227.9	211.2	198.2	191.4	187.0	185.2	187.0	191.4	198.2
130°	281.8	258.3	237.8	221.1	208.1	200.7	195.1	193.2	195.1	200.7	208.1
132.5°	289.2	266.3	246.5	230.4	217.4	208.1	201.9	199.4	201.9	208.1	217.4
135°	295.4	274.4	255.2	238.4	225.4	216.2	209.3	206.9	209.3	216.2	225.4
137.5°	300.4	279.9	261.4	245.9	232.9	223.0	216.2	213.7	216.2	223.0	232.9
140°	304.1	285.5	267.6	252.1	239.7	229.8	223.6	220.5	223.6	229.8	239.7
142.5°	307.8	289.9	272.5	258.3	245.9	237.2	230.4	227.9	230.4	237.2	245.9
145°	310.3	293.6	277.5	263.2	252.7	243.4	237.8	236.0	237.8	243.4	252.7
147.5°	312.1	296.7	281.8	269.4	258.9	250.8	245.3	244.0	245.3	250.8	258.9
150°	312.8	299.8	285.5	274.4	265.7	257.6	252.7	252.1	252.7	257.6	265.7
152.5°	314.0	301.6	289.9	279.3	271.9	265.1	260.1	260.1	260.1	265.1	271.9
155°	314.0	304.1	293.6	284.9	278.1	271.9	268.2	268.2	268.2	271.9	278.1
157.5°	314.6	305.3	296.7	289.9	283.7	278.1	275.0	274.4	275.0	278.1	283.7
160°	314.6	307.2	299.8	293.6	289.2	284.3	281.8	281.8	281.8	284.3	289.2
162.5°	314.0	307.8	301.6	296.7	292.9	289.2	287.4	287.4	287.4	289.2	292.9
165°	312.8	308.4	303.5	299.1	296.7	293.6	292.3	292.9	292.3	293.6	296.7
167.5°	312.1	308.4	304.7	301.6	299.8	297.3	296.7	297.3	296.7	297.3	299.8
170°	310.3	307.8	304.7	303.5	302.2	300.4	299.8	301.0	299.8	300.4	302.2
172.5°	309.7	307.8	305.3	304.7	304.1	302.9	302.9	303.5	302.9	302.9	304.1
175°	308.4	307.2	306.0	305.3	305.3	304.1	304.7	305.3	304.7	304.1	305.3
177.5°	307.8	306.6	306.0	306.0	306.0	305.3	306.0	306.6	306.0	305.3	306.0
180°	306.0	306.0	306.0	306.0	306.0	306.0	306.0	306.0	306.0	306.0	306.0



TEST NUMBER: P831167

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9	2271.9
2.5°	2180.2	2159.6	2139.1	2123.3	2107.4	2080.6	2053.7	2047.4	2041.0	2032.1	2023.1
5°	2067.4	2016.8	1966.2	1920.8	1875.5	1840.2	1804.9	1781.7	1758.5	1741.6	1724.8
7.5°	1935.6	1859.7	1783.8	1730.0	1676.3	1625.1	1574.0	1557.7	1541.3	1519.2	1497.0
10°	1808.0	1724.2	1640.4	1570.3	1500.2	1450.1	1400.0	1380.0	1360.0	1332.0	1304.1
12.5°	1694.2	1602.5	1510.7	1440.1	1369.5	1321.0	1272.5	1243.5	1214.5	1198.7	1182.9
15°	1575.0	1477.0	1379.0	1313.6	1248.2	1204.5	1160.7	1135.4	1110.1	1094.8	1079.6
17.5°	1469.6	1372.6	1275.6	1212.9	1150.2	1110.1	1070.1	1047.9	1025.8	1014.2	1002.6
20°	1369.5	1274.6	1179.7	1118.6	1057.4	1024.7	992.0	977.8	963.6	954.1	944.6
22.5°	1277.7	1184.4	1091.1	1039.0	986.8	960.4	934.1	924.0	914.0	906.1	898.2
25°	1186.0	1102.7	1019.5	975.2	930.9	909.3	887.7	877.7	867.6	859.7	851.8
27.5°	1111.2	1031.6	952.0	914.0	876.1	859.2	842.3	834.4	826.5	819.2	811.8
30°	1038.4	967.3	896.1	863.4	830.7	815.5	800.2	792.3	784.4	777.5	770.7
32.5°	971.0	909.8	848.7	818.6	788.6	775.9	763.3	753.8	744.3	739.0	733.8
35°	906.7	851.8	797.0	772.2	747.5	734.8	722.2	714.3	706.3	702.1	697.9
37.5°	851.8	802.8	753.8	730.1	706.3	694.2	682.1	675.2	668.4	666.8	665.2
40°	796.0	753.8	711.6	688.4	665.2	654.7	644.1	639.9	635.7	634.7	633.6
42.5°	749.6	708.5	667.3	646.3	625.2	616.2	607.2	605.1	603.0	604.6	606.2
45°	695.8	661.5	627.3	607.8	588.3	580.9	573.5	571.9	570.3	573.5	576.7
47.5°	650.5	618.8	587.2	568.8	550.3	545.0	539.8	539.2	538.7	542.9	547.2
50°	604.1	573.5	542.9	528.2	513.4	508.7	503.9	505.5	507.1	513.9	520.8
52.5°	560.9	532.4	503.9	490.2	476.5	473.4	470.2	473.9	477.6	485.0	492.3
55°	513.4	487.6	461.8	451.2	440.7	437.5	434.4	441.7	449.1	456.0	462.8
57.5°	468.1	445.4	422.8	413.3	403.8	403.3	402.7	409.6	416.4	423.8	431.2
60°	419.6	400.6	381.6	374.3	366.9	367.9	369.0	376.9	384.8	390.6	396.4
62.5°	375.3	359.5	343.7	336.8	330.0	332.6	335.3	343.2	351.1	357.9	364.8
65°	331.0	317.9	304.7	299.9	295.2	298.9	302.6	309.4	316.3	321.0	325.8
67.5°	288.9	277.8	266.7	263.0	259.3	263.0	266.7	273.6	280.4	285.2	289.9
70°	244.6	235.6	226.7	224.0	221.4	225.6	229.8	235.6	241.4	246.2	250.9
72.5°	203.5	196.6	189.8	189.2	188.7	192.4	196.1	201.9	207.7	210.8	214.0
75°	163.4	159.7	156.0	155.5	155.0	158.7	162.4	165.5	168.7	171.3	174.0
77.5°	127.6	124.4	121.2	121.8	122.3	124.9	127.6	130.7	133.9	135.5	137.1
80°	90.7	89.6	88.6	89.6	90.7	92.8	94.9	97.0	99.1	100.2	101.2
82.5°	62.2	61.1	60.1	61.7	63.3	64.8	66.4	68.0	69.6	70.1	70.6
85°	35.8	37.4	39.0	39.0	39.0	39.5	40.1	40.6	41.1	40.6	40.1
87.5°	16.9	17.4	17.9	17.9	17.9	18.4	19.0	19.0	19.0	18.4	17.9
90°	6.8	8.1	9.9	11.8	13.6	15.5	14.9	15.5	16.1	16.7	18.0
92.5°	31.6	42.7	62.6	95.4	127.6	115.2	86.1	61.3	47.7	41.5	37.2
95°	56.4	80.5	133.2	225.4	327.0	367.3	297.9	223.0	151.1	118.3	96.0
97.5°	65.0	91.7	143.7	250.8	421.8	564.8	584.0	512.2	386.5	304.7	234.1
100°	74.3	98.5	141.8	233.5	396.4	586.5	708.5	730.2	680.0	607.6	519.6
102.5°	84.8	106.5	144.3	218.6	359.2	546.3	714.7	802.7	813.2	778.5	730.8
105°	96.6	115.8	149.3	213.1	330.1	498.0	675.7	805.1	867.1	878.8	862.7
107.5°	109.6	127.6	157.3	211.8	309.1	455.2	620.0	768.0	865.2	913.5	930.3
110°	122.6	140.0	167.8	214.9	297.9	419.9	567.9	709.8	823.7	901.8	945.1



TEST NUMBER: P831167

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	136.3	153.0	178.4	221.1	291.7	396.4	522.7	652.2	769.2	859.0	917.9
115°	149.9	166.6	190.1	227.9	291.1	380.9	488.0	602.6	710.4	801.4	868.9
117.5°	163.5	179.0	202.5	236.6	291.7	370.4	465.1	564.2	659.6	743.2	813.2
120°	176.5	192.0	214.3	246.5	294.2	363.6	447.8	535.1	618.7	693.0	755.6
122.5°	188.3	205.0	226.7	255.8	298.5	359.2	433.5	512.2	585.9	653.4	710.4
125°	200.0	216.8	238.4	265.7	302.9	355.5	421.8	492.4	559.9	619.3	668.9
127.5°	211.2	227.9	249.0	273.7	307.8	353.6	410.6	474.4	535.7	590.2	636.1
130°	221.1	237.8	258.3	281.8	312.8	351.8	402.0	457.7	513.4	563.6	605.7
132.5°	230.4	246.5	266.3	289.2	316.5	351.2	393.9	442.2	492.4	538.2	577.8
135°	238.4	255.2	274.4	295.4	320.2	350.5	387.1	428.6	472.6	512.8	548.1
137.5°	245.9	261.4	279.9	300.4	322.7	349.3	380.9	415.6	452.7	488.7	520.2
140°	252.1	267.6	285.5	304.1	325.2	348.7	375.3	404.4	436.0	465.7	492.4
142.5°	258.3	272.5	289.9	307.8	327.0	347.5	370.4	393.9	419.9	444.7	467.0
145°	263.2	277.5	293.6	310.3	327.6	346.2	366.0	385.9	406.3	426.1	444.1
147.5°	269.4	281.8	296.7	312.1	327.6	344.4	361.7	379.0	395.8	412.5	425.5
150°	274.4	285.5	299.8	312.8	327.6	341.9	357.4	371.6	385.9	398.9	410.6
152.5°	279.3	289.9	301.6	314.0	325.8	338.8	352.4	364.8	376.6	387.7	397.0
155°	284.9	293.6	304.1	314.0	324.5	335.1	347.5	358.0	367.9	377.2	384.6
157.5°	289.9	296.7	305.3	314.6	322.7	332.0	341.9	350.5	359.2	366.7	372.8
160°	293.6	299.8	307.2	314.6	321.4	328.3	336.3	344.4	351.2	357.4	361.7
162.5°	296.7	301.6	307.8	314.0	319.0	324.5	330.7	336.9	342.5	348.1	351.8
165°	299.1	303.5	308.4	312.8	316.5	320.8	325.8	330.7	334.4	338.8	341.9
167.5°	301.6	304.7	308.4	312.1	314.0	317.1	320.8	325.2	328.3	330.7	333.2
170°	303.5	304.7	307.8	310.3	311.5	313.4	316.5	319.6	321.4	323.9	325.2
172.5°	304.7	305.3	307.8	309.7	309.7	310.3	312.1	314.6	315.9	317.7	318.3
175°	305.3	306.0	307.2	308.4	307.8	307.8	309.1	310.3	310.9	312.1	312.1
177.5°	306.0	306.0	306.6	307.8	306.6	306.0	306.6	307.2	307.8	308.4	308.4
180°	306.0	306.0	306.0	306.0	306.0	306.0	306.0	306.0	306.0	306.0	306.0



TEST NUMBER: P831167

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
0°	2271.9	2271.9	2271.9	2271.9
2.5°	2019.4	2015.7	2001.0	1986.2
5°	1712.1	1699.4	1695.2	1691.0
7.5°	1496.0	1494.9	1472.8	1450.6
10°	1305.7	1307.3	1287.2	1267.2
12.5°	1169.7	1156.5	1154.9	1153.3
15°	1067.4	1055.3	1053.2	1051.1
17.5°	995.2	987.8	985.7	983.6
20°	940.4	936.2	932.5	928.8
22.5°	892.9	887.7	884.5	881.4
25°	847.1	842.3	841.3	840.2
27.5°	806.0	800.2	800.2	800.2
30°	767.0	763.3	761.7	760.1
32.5°	730.6	727.4	727.4	727.4
35°	696.3	694.7	692.6	690.5
37.5°	665.2	665.2	664.2	663.1
40°	635.2	636.8	636.8	636.8
42.5°	607.8	609.4	609.4	609.4
45°	579.3	581.9	583.0	584.1
47.5°	551.4	555.6	556.6	557.7
50°	524.0	527.1	527.7	528.2
52.5°	496.0	499.7	502.3	505.0
55°	466.5	470.2	471.8	473.4
57.5°	434.9	438.6	439.1	439.6
60°	400.1	403.8	404.8	405.9
62.5°	366.9	369.0	370.0	371.1
65°	328.9	332.1	334.2	336.3
67.5°	292.6	295.2	295.2	295.2
70°	252.0	253.0	254.6	256.2
72.5°	214.5	215.1	215.1	215.1
75°	175.0	176.1	176.6	177.1
77.5°	137.6	138.1	138.1	138.1
80°	100.7	100.2	100.2	100.2
82.5°	69.1	67.5	67.5	67.5
85°	39.5	39.0	39.5	40.1
87.5°	17.9	17.9	17.9	17.9
90°	17.3	18.0	18.6	18.0
92.5°	35.9	33.4	34.1	32.8
95°	84.2	78.7	74.3	71.8
97.5°	192.6	169.1	154.2	147.4
100°	457.1	411.9	387.7	388.3
102.5°	685.6	652.2	633.0	615.0
105°	834.3	810.7	790.9	787.8
107.5°	926.5	915.4	907.3	900.5
110°	962.5	967.4	966.2	964.9



TEST NUMBER: P831167

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
112.5°	953.2	971.1	977.3	977.9
115°	915.4	942.6	955.0	958.1
117.5°	861.5	891.9	910.4	914.8
120°	804.5	839.2	854.1	857.8
122.5°	752.5	782.8	799.6	804.5
125°	708.5	735.8	751.3	755.6
127.5°	672.0	695.5	709.8	713.5
130°	638.5	660.8	673.8	678.8
132.5°	608.2	630.5	641.6	644.7
135°	578.5	597.0	608.2	612.5
137.5°	546.3	565.5	574.8	578.5
140°	515.9	533.3	543.2	542.5
142.5°	486.2	501.0	509.7	509.1
145°	459.6	472.6	477.5	478.8
147.5°	437.9	447.2	452.1	452.7
150°	419.9	426.7	430.4	430.4
152.5°	403.8	410.0	411.9	411.9
155°	390.2	395.1	396.4	397.0
157.5°	377.8	381.5	382.8	382.8
160°	366.0	369.7	369.7	369.1
162.5°	354.3	357.4	357.4	356.7
165°	344.4	346.8	346.2	346.2
167.5°	334.4	336.3	335.7	335.7
170°	325.8	327.0	326.4	326.4
172.5°	318.3	319.6	318.3	317.7
175°	312.1	312.8	312.1	311.5
177.5°	307.8	308.4	307.2	307.2
180°	306.0	306.0	306.0	306.0

TEST NUMBER: P831167

CATALOG NUMBER: S123DIP-S1000D805U927-4F0-1E-UDD-G4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.68	16.60	16.54	17.48	18.58	17.91	18.84	18.77	19.71	20.82
	3H	17.33	18.16	18.20	19.04	20.17	19.34	20.17	20.21	21.06	22.19
	4H	17.91	18.69	18.80	19.58	20.72	19.79	20.58	20.68	21.47	22.61
	6H	18.28	19.00	19.18	19.90	21.05	20.07	20.79	20.97	21.69	22.85
	8H	18.38	19.07	19.29	19.98	21.13	20.14	20.82	21.05	21.74	22.89
	12H	18.43	19.08	19.34	19.99	21.17	20.16	20.81	21.07	21.72	22.90
4H	2H	16.26	17.04	17.15	17.93	19.07	18.08	18.87	18.98	19.76	20.90
	3H	18.09	18.74	19.00	19.67	20.82	19.71	20.36	20.61	21.28	22.44
	4H	18.79	19.39	19.71	20.31	21.49	20.29	20.89	21.21	21.81	22.99
	6H	19.27	19.78	20.20	20.73	21.91	20.70	21.21	21.63	22.16	23.34
	8H	19.41	19.89	20.34	20.82	22.02	20.81	21.29	21.75	22.23	23.42
	12H	19.48	19.91	20.43	20.87	22.06	20.86	21.29	21.81	22.25	23.45
8H	4H	19.06	19.54	20.00	20.48	21.67	20.40	20.88	21.34	21.82	23.01
	6H	19.65	20.05	20.61	21.03	22.22	20.91	21.30	21.87	22.28	23.48
	8H	19.86	20.21	20.83	21.18	22.39	21.09	21.44	22.06	22.41	23.62
	12H	19.99	20.29	20.96	21.26	22.52	21.19	21.50	22.16	22.46	23.72
12H	4H	19.07	19.50	20.02	20.45	21.65	20.38	20.81	21.33	21.77	22.97
	6H	19.71	20.05	20.67	21.02	22.24	20.92	21.27	21.89	22.24	23.45
	8H	19.94	20.25	20.91	21.21	22.47	21.13	21.43	22.10	22.39	23.66