

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332072-927

Luminaire Tested: **S123DIP-S1165D1025U927-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332072-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S1165D1025U927-4F0-1E-UDD-A  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 1025 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7127.1 lumens  
Efficiency: N/A  
Efficacy: 106.7 lumens/watt  
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 66.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

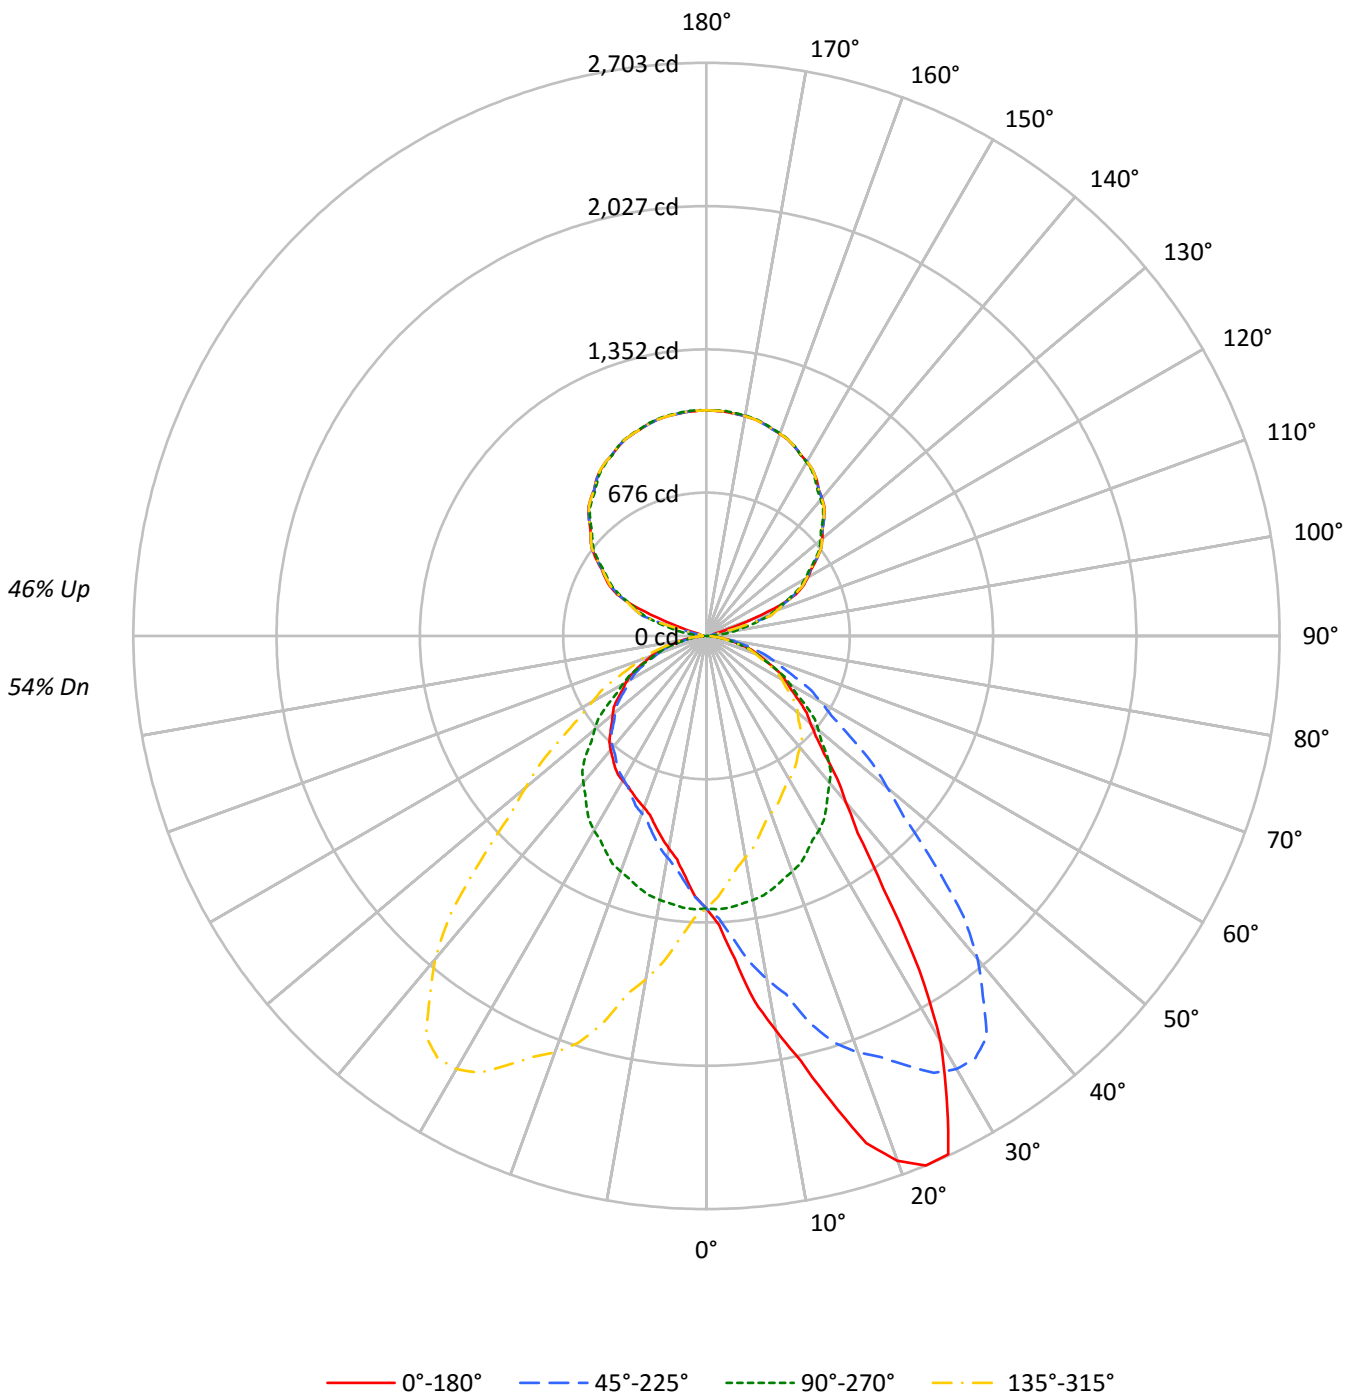



TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	86	86	86	72	72	72	60	60	60	54
1	99	95	91	88	92	88	85	82	76	73	71	64	63	61	54	53	51	46
2	90	83	77	72	84	77	72	68	67	63	59	57	54	51	48	46	44	39
3	83	73	66	60	76	68	62	57	59	54	50	50	47	44	42	40	38	34
4	76	65	57	51	70	61	54	48	53	47	43	45	41	38	38	35	33	29
5	70	58	50	44	64	54	47	42	47	42	37	41	36	33	34	31	28	25
6	64	52	44	38	59	49	42	36	43	37	33	37	32	29	31	28	25	22
7	59	47	39	34	55	44	37	32	39	33	29	33	29	26	29	25	22	20
8	55	43	35	30	51	40	33	28	35	30	26	31	26	23	26	23	20	18
9	51	39	32	27	48	37	30	25	32	27	23	28	24	21	24	21	18	16
10	48	36	29	24	45	34	27	23	30	24	21	26	22	19	22	19	16	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	13832	13832	13832	13832
5°	16495	13891	12310	13891
10°	20647	13821	11119	13821
15°	25324	13710	10351	13710
20°	30166	13536	9856	13536
25°	32033	13324	9745	13324
30°	27455	13170	9797	13170
35°	19094	12951	9900	12951
40°	14383	12694	9868	12694
45°	11942	12310	9742	12310
50°	10697	11531	9656	11531
55°	10001	10691	9533	10691
60°	9382	9810	9436	9810
65°	8818	8945	9133	8945
70°	8271	7956	8699	7956
75°	7407	6966	7977	6966
80°	6484	5709	6868	5709
85°	5076	4150	4619	4150



TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	126.6	1.8
10°-20°	405.9	5.7
20°-30°	681.2	9.6
30°-40°	771.4	10.8
40°-50°	691.7	9.7
50°-60°	558.2	7.8
60°-70°	389.0	5.5
70°-80°	204.5	2.9
80°-90°	53.0	0.7
90°-100°	38.7	0.5
100°-110°	184.4	2.6
110°-120°	443.0	6.2
120°-130°	564.1	7.9
130°-140°	602.7	8.5
140°-150°	563.6	7.9
150°-160°	454.6	6.4
160°-170°	293.4	4.1
170°-180°	101.1	1.4
0°-30°	1213.7	17.0
0°-40°	1985.1	27.9
0°-60°	3235.0	45.4
0°-90°	3881.5	54.5
90°-120°	666.1	9.3
90°-150°	2396.5	33.6
90°-180°	3246.0	45.5
0°-180°	7127.1	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1285	1285	1285	1285	1285	
5°	1527	1286	1139	1286	1527	158
15°	2272	1230	929	1230	2272	656
25°	2697	1122	820	1122	2697	1183
35°	1453	986	753	986	1453	944
45°	784	809	640	809	784	621
55°	533	570	508	570	533	478
65°	346	351	359	351	346	345
75°	178	168	192	168	178	191
85°	41	34	37	34	41	49
90°	24	1	24	1	24	13
95°	30	48	30	48	30	25
105°	35	236	35	236	35	79
115°	465	442	465	442	465	430
125°	636	623	636	623	636	568
135°	784	776	784	776	784	604
145°	904	895	904	895	904	564
155°	984	986	984	986	984	454
165°	1037	1040	1037	1040	1037	293
175°	1060	1064	1060	1064	1060	101
180°	1064	1064	1064	1064	1064	



TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0
2.5°	1363.7	1362.7	1360.3	1362.2	1358.3	1352.7	1352.3	1347.3	1332.8	1331.8	1327.9
5°	1526.6	1521.6	1521.0	1520.4	1511.6	1499.8	1477.4	1475.5	1445.7	1430.7	1412.7
7.5°	1737.5	1740.1	1731.1	1723.1	1696.5	1678.9	1654.9	1624.1	1587.4	1550.1	1525.3
10°	1889.0	1909.5	1884.0	1866.5	1850.4	1819.8	1784.4	1740.1	1695.9	1644.3	1605.0
12.5°	2051.4	2061.4	2056.3	2039.9	2014.7	1968.3	1905.4	1856.7	1816.0	1730.0	1695.2
15°	2272.5	2310.5	2286.2	2230.2	2231.3	2187.1	2105.0	2014.7	1966.8	1891.4	1788.7
17.5°	2508.0	2512.8	2502.4	2455.8	2424.6	2363.9	2288.1	2201.5	2104.4	2013.3	1904.2
20°	2633.5	2629.8	2608.0	2583.8	2530.2	2482.9	2400.1	2303.6	2179.1	2089.5	1970.5
22.5°	2703.3	2697.1	2686.8	2666.4	2621.9	2571.0	2496.7	2391.3	2272.7	2149.2	2011.8
25°	2697.1	2705.1	2706.4	2700.8	2685.3	2654.8	2596.2	2512.2	2393.9	2235.1	2091.9
27.5°	2453.0	2464.5	2497.8	2527.2	2560.3	2593.8	2589.3	2547.7	2460.1	2323.0	2147.9
30°	2208.9	2184.0	2245.7	2323.5	2376.5	2469.8	2522.1	2525.2	2476.0	2358.4	2187.8
32.5°	1870.3	1897.7	1924.9	2020.7	2136.4	2241.2	2345.3	2429.1	2438.7	2360.4	2211.2
35°	1453.1	1487.4	1537.2	1587.0	1711.5	1818.6	2001.6	2161.0	2288.1	2304.9	2213.3
37.5°	1171.0	1187.9	1219.4	1269.3	1350.8	1477.8	1619.4	1820.8	2004.9	2141.7	2147.7
40°	1023.6	1028.5	1064.0	1102.0	1168.0	1272.6	1400.2	1578.3	1798.6	1989.8	2069.5
42.5°	913.0	923.9	939.0	975.5	1028.0	1106.8	1225.4	1372.5	1574.5	1794.5	1950.4
45°	784.5	796.9	806.3	830.5	867.9	920.8	1003.6	1138.1	1291.9	1519.1	1728.9
47.5°	699.6	700.5	707.5	725.8	751.2	790.9	849.5	935.9	1077.1	1261.4	1476.8
50°	638.8	648.7	651.3	665.5	685.5	714.7	763.3	836.8	952.6	1114.4	1312.4
52.5°	596.0	599.0	605.9	616.2	633.7	656.5	698.5	756.1	847.0	984.9	1167.0
55°	532.9	532.9	539.8	547.9	557.9	578.4	606.4	648.7	717.9	824.9	975.6
57.5°	474.7	477.8	482.6	485.1	493.6	507.2	530.6	562.7	614.3	696.6	816.5
60°	435.8	441.4	440.8	445.8	453.3	463.8	483.8	509.9	556.0	621.9	722.9
62.5°	402.0	401.6	401.5	407.4	414.9	425.0	437.9	460.6	499.7	558.3	644.1
65°	346.2	344.9	349.3	353.0	355.5	363.0	373.0	392.8	419.0	462.6	529.2
67.5°	296.6	293.0	295.3	296.6	300.9	306.7	316.0	328.4	349.1	384.1	434.4
70°	262.8	259.6	259.0	260.2	264.0	268.3	275.2	287.0	306.3	334.3	371.1
72.5°	227.8	225.8	225.6	228.4	230.1	233.0	237.8	248.7	264.0	285.0	319.2
75°	178.1	178.1	178.1	178.7	180.5	183.1	186.8	192.3	204.2	219.1	242.2
77.5°	133.5	133.3	132.6	132.5	135.2	136.3	137.2	142.4	149.0	159.1	175.9
80°	104.6	101.5	102.7	104.6	105.8	106.5	108.4	109.6	115.2	120.8	132.6
82.5°	77.7	75.1	75.3	78.2	78.4	79.1	81.0	82.7	84.8	89.9	96.3
85°	41.1	41.1	41.7	41.7	42.3	41.7	43.6	44.2	44.2	47.3	51.0
87.5°	19.7	18.6	19.0	19.5	18.9	19.3	19.6	20.0	20.4	20.8	20.8
90°	23.7	23.4	23.1	22.7	22.3	21.8	21.1	20.4	19.6	19.0	16.7
92.5°	26.2	26.1	25.8	25.6	25.4	24.7	23.6	22.5	21.4	20.3	18.5
95°	30.0	30.0	30.0	30.0	30.0	29.5	28.2	26.9	25.7	24.5	22.6
97.5°	32.6	32.4	32.2	32.1	31.8	31.1	29.7	28.3	26.9	25.4	38.1
100°	33.2	33.0	32.9	32.7	32.5	31.7	30.3	28.9	27.5	26.1	53.5
102.5°	33.8	33.5	33.2	32.9	32.6	34.6	39.0	43.3	47.7	52.0	82.0
105°	34.8	34.5	34.1	33.7	33.4	48.8	79.9	111.0	142.0	173.2	189.0
107.5°	109.2	132.7	156.1	179.6	203.0	226.2	249.0	271.8	294.6	317.4	314.9
110°	217.5	242.6	267.7	292.8	318.0	333.4	339.2	345.0	350.8	356.6	354.7



TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	373.0	378.3	383.7	389.0	394.3	396.9	396.8	396.6	396.6	396.5	394.5
115°	464.9	464.2	463.5	462.8	462.2	460.9	459.1	457.4	455.7	453.8	452.3
117.5°	516.5	516.3	516.2	516.1	515.9	515.2	513.7	512.4	511.0	509.5	508.7
120°	551.9	551.9	551.9	551.9	551.9	551.2	549.8	548.4	547.0	545.6	545.1
122.5°	586.7	586.5	586.5	586.3	586.1	585.6	584.6	583.6	582.7	581.6	581.0
125°	635.7	635.4	635.0	634.7	634.3	634.0	633.6	633.3	633.0	632.6	631.8
127.5°	682.9	683.2	683.6	683.9	684.3	684.1	683.6	683.0	682.5	681.9	681.0
130°	713.2	713.6	713.9	714.3	714.6	714.5	713.8	713.0	712.3	711.6	710.9
132.5°	741.1	741.6	742.0	742.5	743.0	742.9	742.2	741.5	740.8	740.1	739.6
135°	783.6	784.1	784.7	785.2	785.7	785.7	785.2	784.7	784.1	783.6	782.9
137.5°	823.6	823.9	824.3	824.7	825.0	824.7	823.9	823.1	822.2	821.4	821.0
140°	847.6	848.0	848.3	848.7	849.1	848.9	848.2	847.5	846.8	846.1	845.6
142.5°	869.8	870.3	870.8	871.2	871.7	871.7	871.2	870.6	870.1	869.5	868.9
145°	903.8	903.8	903.8	903.8	903.8	903.6	903.2	902.9	902.5	902.2	901.8
147.5°	929.1	929.9	930.7	931.5	932.3	932.6	932.2	931.8	931.5	931.1	930.8
150°	948.1	948.6	949.1	949.7	950.1	950.3	949.9	949.6	949.2	948.9	948.5
152.5°	963.2	964.1	964.9	965.7	966.5	966.5	965.9	965.3	964.6	964.0	963.8
155°	984.4	985.5	986.6	987.6	988.6	988.7	987.9	987.0	986.1	985.2	985.1
157.5°	1002.3	1003.7	1005.0	1006.4	1007.8	1008.0	1006.9	1005.8	1004.8	1003.7	1003.9
160°	1013.7	1014.9	1016.1	1017.4	1018.6	1018.7	1017.6	1016.6	1015.6	1014.5	1014.6
162.5°	1024.5	1025.6	1026.6	1027.7	1028.8	1028.7	1027.5	1026.4	1025.2	1024.0	1024.1
165°	1037.4	1038.6	1039.9	1041.1	1042.4	1042.3	1040.8	1039.4	1038.0	1036.6	1036.8
167.5°	1046.7	1048.1	1049.6	1051.0	1052.3	1052.3	1051.0	1049.6	1048.1	1046.7	1046.7
170°	1052.4	1053.8	1055.3	1056.7	1058.0	1058.0	1056.7	1055.3	1053.8	1052.4	1052.4
172.5°	1055.6	1057.2	1058.7	1060.3	1061.8	1061.8	1060.4	1059.1	1057.6	1056.2	1056.1
175°	1060.3	1061.8	1063.2	1064.5	1066.0	1066.0	1064.9	1063.6	1062.4	1061.1	1061.0
177.5°	1061.8	1063.2	1064.6	1066.0	1067.4	1067.5	1066.4	1065.2	1064.1	1063.0	1062.9
180°	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3



TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0
2.5°	1324.8	1320.9	1316.9	1310.0	1303.9	1295.5	1293.0	1290.0	1281.0	1273.1	1267.1
5°	1405.8	1390.8	1369.0	1349.2	1333.0	1311.2	1298.7	1285.6	1266.9	1250.1	1236.4
7.5°	1490.5	1461.1	1427.2	1390.6	1356.5	1323.7	1297.1	1273.4	1247.3	1222.5	1203.2
10°	1557.7	1515.4	1468.1	1417.1	1373.4	1331.1	1295.6	1264.5	1230.9	1201.6	1177.3
12.5°	1634.4	1571.7	1506.4	1444.4	1392.9	1334.1	1291.1	1251.6	1213.5	1178.2	1151.0
15°	1725.2	1645.5	1568.3	1483.0	1404.5	1331.1	1280.1	1230.3	1186.1	1149.9	1115.1
17.5°	1807.9	1717.6	1615.9	1512.1	1417.5	1330.4	1258.9	1202.6	1147.3	1103.1	1068.3
20°	1854.7	1752.0	1636.8	1529.1	1424.5	1327.4	1249.0	1181.7	1121.9	1075.2	1036.0
22.5°	1895.1	1774.9	1655.7	1540.6	1424.0	1319.4	1230.5	1161.3	1096.5	1050.8	1009.1
25°	1936.9	1793.1	1673.6	1538.4	1408.3	1300.0	1200.4	1121.9	1057.2	1003.6	960.7
27.5°	1972.8	1791.8	1650.0	1504.7	1383.6	1275.1	1168.7	1084.6	1015.8	957.7	914.1
30°	1996.6	1794.3	1625.6	1481.8	1359.8	1247.7	1144.3	1059.6	987.5	928.3	887.2
32.5°	2011.6	1792.8	1603.1	1449.9	1321.9	1222.7	1117.9	1030.2	956.1	897.9	858.3
35°	2020.3	1781.9	1564.6	1384.0	1260.8	1164.3	1076.5	985.6	907.8	853.6	808.7
37.5°	2002.9	1758.8	1519.7	1320.5	1185.6	1090.5	1016.7	939.2	864.7	805.2	766.5
40°	1975.5	1743.9	1484.9	1275.7	1133.8	1042.2	979.4	903.4	829.9	773.2	737.1
42.5°	1923.2	1713.5	1446.5	1225.9	1080.0	988.4	930.5	867.0	797.6	744.3	708.3
45°	1795.6	1647.3	1389.0	1151.2	1000.5	905.9	854.8	808.7	745.8	694.2	663.1
47.5°	1618.5	1547.9	1305.8	1072.4	917.6	826.6	773.5	736.4	690.5	648.7	618.9
50°	1495.5	1466.2	1249.5	1018.6	862.3	773.2	722.2	688.6	655.6	613.9	586.5
52.5°	1353.5	1371.6	1183.8	962.7	806.0	718.5	670.4	643.7	613.8	579.5	555.6
55°	1153.7	1219.0	1070.2	869.1	722.2	638.8	593.3	569.7	552.2	526.7	506.2
57.5°	966.5	1049.7	947.5	772.6	639.9	567.9	524.3	498.6	487.4	474.0	457.9
60°	855.5	937.6	859.8	707.9	584.6	516.1	477.5	455.7	444.5	435.2	421.5
62.5°	756.3	839.5	774.1	642.1	530.3	466.8	433.2	411.9	403.2	398.3	386.7
65°	620.1	691.7	648.1	539.8	452.7	396.6	366.1	351.2	343.0	341.2	333.7
67.5°	504.7	559.2	527.4	447.7	379.1	330.7	304.8	292.2	285.9	285.3	279.6
70°	429.0	480.0	455.7	383.5	324.4	286.4	264.0	252.8	249.1	248.4	245.3
72.5°	370.2	405.8	386.5	326.2	280.5	246.1	229.6	217.9	213.7	214.5	212.5
75°	273.9	300.7	289.5	247.8	211.0	188.6	174.9	167.5	163.7	165.6	163.1
77.5°	197.1	214.0	204.0	175.1	152.4	136.3	126.1	121.5	118.2	118.0	116.9
80°	148.8	158.8	153.1	135.7	117.1	103.4	95.2	92.1	90.3	89.7	89.0
82.5°	106.0	114.5	107.8	95.9	83.2	74.9	70.3	66.2	64.9	65.3	64.6
85°	53.6	56.6	54.2	46.7	41.7	37.9	35.5	33.6	32.4	33.0	31.8
87.5°	21.3	21.4	19.4	17.0	15.7	13.8	13.5	12.1	11.5	11.8	11.6
90°	14.4	12.1	9.8	7.8	6.1	4.3	2.5	0.8	2.5	4.3	6.1
92.5°	16.8	15.1	13.4	12.8	13.2	13.7	14.2	14.7	14.2	13.7	13.2
95°	20.7	18.7	16.8	19.4	26.6	33.8	41.0	48.2	41.0	33.8	26.6
97.5°	50.8	63.5	76.0	84.0	87.2	90.5	93.7	97.0	93.7	90.5	87.2
100°	80.9	108.3	135.7	147.7	144.2	140.7	137.1	133.6	137.1	140.7	144.2
102.5°	111.9	141.9	171.8	185.5	183.0	180.5	177.9	175.4	177.9	180.5	183.0
105°	204.8	220.6	236.4	243.4	241.5	239.5	237.6	235.6	237.6	239.5	241.5
107.5°	312.4	309.9	307.4	305.4	303.9	302.3	300.8	299.2	300.8	302.3	303.9
110°	352.8	350.8	348.9	347.2	345.8	344.4	343.0	341.6	343.0	344.4	345.8





TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	392.6	390.7	388.7	387.1	385.9	384.6	383.3	382.1	383.3	384.6	385.9
115°	450.7	449.1	447.6	446.2	445.2	444.1	443.1	442.0	443.1	444.1	445.2
117.5°	507.9	507.1	506.3	505.3	504.0	502.6	501.4	500.0	501.4	502.6	504.0
120°	544.5	544.0	543.5	542.4	540.8	539.2	537.7	536.1	537.7	539.2	540.8
122.5°	580.4	579.6	579.0	578.0	576.7	575.4	574.1	572.8	574.1	575.4	576.7
125°	631.1	630.5	629.8	628.7	627.3	625.9	624.5	623.1	624.5	625.9	627.3
127.5°	680.2	679.4	678.5	677.4	676.0	674.6	673.2	671.8	673.2	674.6	676.0
130°	710.3	709.6	708.8	707.8	706.4	705.0	703.5	702.2	703.5	705.0	706.4
132.5°	738.9	738.4	737.8	736.9	735.5	734.0	732.7	731.3	732.7	734.0	735.5
135°	782.2	781.5	780.8	779.9	778.9	777.8	776.7	775.7	776.7	777.8	778.9
137.5°	820.6	820.2	819.8	819.0	817.7	816.3	815.0	813.7	815.0	816.3	817.7
140°	845.0	844.5	844.0	843.2	842.1	841.1	840.0	838.9	840.0	841.1	842.1
142.5°	868.4	867.9	867.4	866.6	865.5	864.4	863.4	862.4	863.4	864.4	865.5
145°	901.5	901.2	900.8	900.0	898.8	897.5	896.4	895.1	896.4	897.5	898.8
147.5°	930.4	930.1	929.7	929.2	928.4	927.6	926.8	925.9	926.8	927.6	928.4
150°	948.2	947.8	947.5	947.0	946.5	945.9	945.5	944.9	945.5	945.9	946.5
152.5°	963.6	963.4	963.2	963.0	962.7	962.5	962.3	961.9	962.3	962.5	962.7
155°	984.8	984.7	984.5	984.6	985.0	985.3	985.6	986.0	985.6	985.3	985.0
157.5°	1004.1	1004.2	1004.4	1004.6	1004.6	1004.6	1004.6	1004.6	1004.6	1004.6	1004.6
160°	1014.9	1015.0	1015.2	1015.3	1015.6	1015.7	1015.9	1016.1	1015.9	1015.7	1015.6
162.5°	1024.3	1024.5	1024.7	1025.0	1025.5	1025.9	1026.4	1026.8	1026.4	1025.9	1025.5
165°	1037.0	1037.1	1037.4	1037.7	1038.2	1038.7	1039.3	1039.8	1039.3	1038.7	1038.2
167.5°	1046.7	1046.7	1046.7	1047.1	1047.8	1048.5	1049.2	1049.9	1049.2	1048.5	1047.8
170°	1052.4	1052.4	1052.4	1052.8	1053.5	1054.2	1054.9	1055.6	1054.9	1054.2	1053.5
172.5°	1056.0	1055.8	1055.7	1056.1	1056.9	1057.7	1058.6	1059.4	1058.6	1057.7	1056.9
175°	1060.8	1060.6	1060.4	1060.8	1061.7	1062.6	1063.4	1064.3	1063.4	1062.6	1061.7
177.5°	1062.8	1062.6	1062.5	1062.8	1063.4	1064.1	1064.9	1065.6	1064.9	1064.1	1063.4
180°	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3



TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0
2.5°	1263.6	1260.1	1255.1	1247.7	1241.7	1232.2	1232.2	1233.7	1233.7	1233.3	1232.2
5°	1225.3	1215.9	1204.8	1191.7	1178.0	1164.3	1161.7	1156.7	1153.0	1150.6	1147.5
7.5°	1184.8	1168.2	1151.9	1133.6	1116.9	1103.1	1093.5	1085.5	1080.5	1075.0	1071.0
10°	1157.4	1136.9	1117.5	1098.3	1077.1	1060.3	1049.7	1042.2	1036.6	1031.7	1029.1
12.5°	1125.1	1101.5	1080.2	1061.9	1038.7	1021.4	1011.4	1007.8	1001.2	990.8	985.3
15°	1077.7	1055.9	1030.4	1002.3	991.2	970.0	958.1	952.6	948.8	940.7	938.3
17.5°	1037.2	1008.7	980.1	959.2	938.3	921.1	914.6	907.6	902.6	896.0	894.1
20°	1004.9	979.4	953.2	930.8	908.9	890.3	884.7	879.7	874.7	871.6	869.1
22.5°	972.0	946.5	924.8	903.9	880.6	868.4	862.3	856.8	853.3	851.2	848.7
25°	925.8	903.4	879.1	860.4	841.8	833.6	829.9	826.8	824.3	821.2	820.5
27.5°	884.5	860.1	840.3	822.9	809.5	802.8	799.2	797.6	798.2	799.3	800.0
30°	853.6	831.2	815.0	800.0	787.6	781.3	780.7	780.7	783.2	783.9	785.1
32.5°	825.2	806.8	790.6	776.1	766.7	762.4	764.8	764.8	766.8	768.4	770.6
35°	783.9	767.6	755.2	742.8	734.7	736.5	737.8	739.0	742.1	745.8	748.4
37.5°	744.3	730.3	717.3	707.7	703.9	707.3	710.3	712.9	716.4	719.4	721.8
40°	716.0	705.4	692.9	684.2	685.5	687.4	689.8	692.9	696.1	697.9	700.4
42.5°	689.6	678.5	669.1	661.8	663.5	665.9	667.4	669.1	672.6	676.0	677.5
45°	649.4	640.6	631.9	627.6	628.8	630.1	631.3	633.2	636.3	638.8	639.4
47.5°	604.2	598.1	592.2	588.0	589.9	589.5	591.1	595.1	596.0	597.5	601.0
50°	575.3	569.7	562.8	561.6	561.6	561.6	562.2	567.2	567.2	569.7	572.2
52.5°	543.4	539.8	535.4	533.2	532.2	532.2	534.8	537.3	538.3	541.8	544.3
55°	496.2	492.5	488.7	486.9	485.6	486.9	491.9	493.1	496.2	498.0	499.9
57.5°	447.0	444.2	441.2	440.1	439.9	441.6	444.3	448.0	448.8	454.5	457.3
60°	414.6	410.3	407.8	407.8	406.5	412.2	410.9	417.2	418.4	422.2	426.5
62.5°	381.3	375.4	374.5	374.5	376.2	377.8	379.5	382.3	385.5	390.2	393.6
65°	327.5	324.4	328.8	328.1	326.9	330.6	330.6	333.7	337.5	341.8	348.6
67.5°	276.6	275.0	275.3	275.3	277.2	279.3	281.1	283.8	288.3	292.9	297.4
70°	242.2	244.1	241.0	243.4	245.3	245.9	247.2	250.9	255.9	259.0	264.0
72.5°	208.8	208.7	209.1	210.1	211.9	213.0	214.3	218.6	224.0	226.6	230.6
75°	160.7	160.0	161.8	161.8	165.0	166.2	167.5	169.4	174.4	178.1	181.2
77.5°	117.3	118.0	117.6	119.8	118.9	119.1	123.0	124.9	125.4	132.8	134.4
80°	88.4	89.7	90.3	90.9	91.5	90.3	94.7	96.5	96.5	100.8	103.9
82.5°	63.5	64.2	65.9	66.5	66.6	67.9	68.2	69.6	71.1	73.0	77.1
85°	31.8	33.6	34.2	33.6	34.2	33.0	34.9	35.5	36.1	36.1	36.1
87.5°	11.5	12.4	12.4	13.3	13.3	14.3	14.4	13.5	13.7	15.3	13.5
90°	7.8	9.8	12.1	14.4	16.7	19.0	19.6	20.4	21.1	21.8	22.3
92.5°	12.8	13.4	15.1	16.8	18.5	20.3	21.4	22.5	23.6	24.7	25.4
95°	19.4	16.8	18.7	20.7	22.6	24.5	25.7	26.9	28.2	29.5	30.0
97.5°	84.0	76.0	63.5	50.8	38.1	25.4	26.9	28.3	29.7	31.1	31.8
100°	147.7	135.7	108.3	80.9	53.5	26.1	27.5	28.9	30.3	31.7	32.5
102.5°	185.5	171.8	141.9	111.9	82.0	52.0	47.7	43.3	39.0	34.6	32.6
105°	243.4	236.4	220.6	204.8	189.0	173.2	142.0	111.0	79.9	48.8	33.4
107.5°	305.4	307.4	309.9	312.4	314.9	317.4	294.6	271.8	249.0	226.2	203.0
110°	347.2	348.9	350.8	352.8	354.7	356.6	350.8	345.0	339.2	333.4	318.0



TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	387.1	388.7	390.7	392.6	394.5	396.5	396.6	396.6	396.8	396.9	394.3
115°	446.2	447.6	449.1	450.7	452.3	453.8	455.7	457.4	459.1	460.9	462.2
117.5°	505.3	506.3	507.1	507.9	508.7	509.5	511.0	512.4	513.7	515.2	515.9
120°	542.4	543.5	544.0	544.5	545.1	545.6	547.0	548.4	549.8	551.2	551.9
122.5°	578.0	579.0	579.6	580.4	581.0	581.6	582.7	583.6	584.6	585.6	586.1
125°	628.7	629.8	630.5	631.1	631.8	632.6	633.0	633.3	633.6	634.0	634.3
127.5°	677.4	678.5	679.4	680.2	681.0	681.9	682.5	683.0	683.6	684.1	684.3
130°	707.8	708.8	709.6	710.3	710.9	711.6	712.3	713.0	713.8	714.5	714.6
132.5°	736.9	737.8	738.4	738.9	739.6	740.1	740.8	741.5	742.2	742.9	743.0
135°	779.9	780.8	781.5	782.2	782.9	783.6	784.1	784.7	785.2	785.7	785.7
137.5°	819.0	819.8	820.2	820.6	821.0	821.4	822.2	823.1	823.9	824.7	825.0
140°	843.2	844.0	844.5	845.0	845.6	846.1	846.8	847.5	848.2	848.9	849.1
142.5°	866.6	867.4	867.9	868.4	868.9	869.5	870.1	870.6	871.2	871.7	871.7
145°	900.0	900.8	901.2	901.5	901.8	902.2	902.5	902.9	903.2	903.6	903.8
147.5°	929.2	929.7	930.1	930.4	930.8	931.1	931.5	931.8	932.2	932.6	932.3
150°	947.0	947.5	947.8	948.2	948.5	948.9	949.2	949.6	949.9	950.3	950.1
152.5°	963.0	963.2	963.4	963.6	963.8	964.0	964.6	965.3	965.9	966.5	966.5
155°	984.6	984.5	984.7	984.8	985.1	985.2	986.1	987.0	987.9	988.7	988.6
157.5°	1004.6	1004.4	1004.2	1004.1	1003.9	1003.7	1004.8	1005.8	1006.9	1008.0	1007.8
160°	1015.3	1015.2	1015.0	1014.9	1014.6	1014.5	1015.6	1016.6	1017.6	1018.7	1018.6
162.5°	1025.0	1024.7	1024.5	1024.3	1024.1	1024.0	1025.2	1026.4	1027.5	1028.7	1028.8
165°	1037.7	1037.4	1037.1	1037.0	1036.8	1036.6	1038.0	1039.4	1040.8	1042.3	1042.4
167.5°	1047.1	1046.7	1046.7	1046.7	1046.7	1046.7	1048.1	1049.6	1051.0	1052.3	1052.3
170°	1052.8	1052.4	1052.4	1052.4	1052.4	1052.4	1053.8	1055.3	1056.7	1058.0	1058.0
172.5°	1056.1	1055.7	1055.8	1056.0	1056.1	1056.2	1057.6	1059.1	1060.4	1061.8	1061.8
175°	1060.8	1060.4	1060.6	1060.8	1061.0	1061.1	1062.4	1063.6	1064.9	1066.0	1066.0
177.5°	1062.8	1062.5	1062.6	1062.8	1062.9	1063.0	1064.1	1065.2	1066.4	1067.5	1067.4
180°	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3



TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0
2.5°	1228.8	1228.3	1231.8	1229.2	1231.8	1228.3	1228.8	1232.2	1233.3	1233.7	1233.7
5°	1143.7	1145.6	1139.3	1139.3	1139.3	1145.6	1143.7	1147.5	1150.6	1153.0	1156.7
7.5°	1068.0	1065.2	1065.5	1062.2	1065.5	1065.2	1068.0	1071.0	1075.0	1080.5	1085.5
10°	1021.7	1018.0	1016.7	1017.3	1016.7	1018.0	1021.7	1029.1	1031.7	1036.6	1042.2
12.5°	983.3	982.5	974.4	974.5	974.4	982.5	983.3	985.3	990.8	1001.2	1007.8
15°	938.3	926.5	925.2	928.9	925.2	926.5	938.3	938.3	940.7	948.8	952.6
17.5°	893.0	886.8	887.2	885.3	887.2	886.8	893.0	894.1	896.0	902.6	907.6
20°	869.1	865.4	864.7	860.4	864.7	865.4	869.1	869.1	871.6	874.7	879.7
22.5°	847.2	846.0	846.4	841.5	846.4	846.0	847.2	848.7	851.2	853.3	856.8
25°	820.0	823.1	820.5	820.5	820.5	823.1	820.0	820.5	821.2	824.3	826.8
27.5°	801.5	801.4	800.2	800.2	800.2	801.4	801.5	800.0	799.3	798.2	797.6
30°	787.6	787.0	788.2	788.2	788.2	787.0	787.6	785.1	783.9	783.2	780.7
32.5°	773.6	774.5	774.8	775.2	774.8	774.5	773.6	770.6	768.4	766.8	764.8
35°	752.1	752.7	754.6	753.4	754.6	752.7	752.1	748.4	745.8	742.1	739.0
37.5°	722.9	725.8	725.2	726.2	725.2	725.8	722.9	721.8	719.4	716.4	712.9
40°	701.0	702.9	702.3	702.3	702.3	702.9	701.0	700.4	697.9	696.1	692.9
42.5°	678.7	680.0	678.3	677.4	678.3	680.0	678.7	677.5	676.0	672.6	669.1
45°	641.9	640.6	642.5	640.0	642.5	640.6	641.9	639.4	638.8	636.3	633.2
47.5°	600.8	602.1	602.5	604.4	602.5	602.1	600.8	601.0	597.5	596.0	595.1
50°	573.4	577.1	577.1	576.6	577.1	577.1	573.4	572.2	569.7	567.2	567.2
52.5°	546.5	548.3	550.7	550.6	550.7	548.3	546.5	544.3	541.8	538.3	537.3
55°	504.9	506.2	507.4	508.0	507.4	506.2	504.9	499.9	498.0	496.2	493.1
57.5°	461.8	461.4	464.3	465.2	464.3	461.4	461.8	457.3	454.5	448.8	448.0
60°	431.4	431.4	436.4	438.3	436.4	431.4	431.4	426.5	422.2	418.4	417.2
62.5°	399.1	401.1	406.1	403.5	406.1	401.1	399.1	393.6	390.2	385.5	382.3
65°	351.7	356.7	356.1	358.6	356.1	356.7	351.7	348.6	341.8	337.5	333.7
67.5°	302.3	305.5	309.9	310.3	309.9	305.5	302.3	297.4	292.9	288.3	283.8
70°	268.9	272.0	274.6	276.4	274.6	272.0	268.9	264.0	259.0	255.9	250.9
72.5°	236.6	238.2	244.2	241.5	244.2	238.2	236.6	230.6	226.6	224.0	218.6
75°	185.5	189.9	193.6	191.8	193.6	189.9	185.5	181.2	178.1	174.4	169.4
77.5°	137.2	141.6	143.3	141.7	143.3	141.6	137.2	134.4	132.8	125.4	124.9
80°	108.4	107.7	111.5	110.8	111.5	107.7	108.4	103.9	100.8	96.5	96.5
82.5°	79.5	78.8	80.6	81.0	80.6	78.8	79.5	77.1	73.0	71.1	69.6
85°	38.6	40.5	37.9	37.4	37.9	40.5	38.6	36.1	36.1	36.1	35.5
87.5°	13.5	13.5	13.2	12.7	13.2	13.5	13.5	13.5	15.3	13.7	13.5
90°	22.7	23.1	23.4	23.7	23.4	23.1	22.7	22.3	21.8	21.1	20.4
92.5°	25.6	25.8	26.1	26.2	26.1	25.8	25.6	25.4	24.7	23.6	22.5
95°	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	29.5	28.2	26.9
97.5°	32.1	32.2	32.4	32.6	32.4	32.2	32.1	31.8	31.1	29.7	28.3
100°	32.7	32.9	33.0	33.2	33.0	32.9	32.7	32.5	31.7	30.3	28.9
102.5°	32.9	33.2	33.5	33.8	33.5	33.2	32.9	32.6	34.6	39.0	43.3
105°	33.7	34.1	34.5	34.8	34.5	34.1	33.7	33.4	48.8	79.9	111.0
107.5°	179.6	156.1	132.7	109.2	132.7	156.1	179.6	203.0	226.2	249.0	271.8
110°	292.8	267.7	242.6	217.5	242.6	267.7	292.8	318.0	333.4	339.2	345.0



TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	389.0	383.7	378.3	373.0	378.3	383.7	389.0	394.3	396.9	396.8	396.6
115°	462.8	463.5	464.2	464.9	464.2	463.5	462.8	462.2	460.9	459.1	457.4
117.5°	516.1	516.2	516.3	516.5	516.3	516.2	516.1	515.9	515.2	513.7	512.4
120°	551.9	551.9	551.9	551.9	551.9	551.9	551.9	551.9	551.2	549.8	548.4
122.5°	586.3	586.5	586.5	586.7	586.5	586.5	586.3	586.1	585.6	584.6	583.6
125°	634.7	635.0	635.4	635.7	635.4	635.0	634.7	634.3	634.0	633.6	633.3
127.5°	683.9	683.6	683.2	682.9	683.2	683.6	683.9	684.3	684.1	683.6	683.0
130°	714.3	713.9	713.6	713.2	713.6	713.9	714.3	714.6	714.5	713.8	713.0
132.5°	742.5	742.0	741.6	741.1	741.6	742.0	742.5	743.0	742.9	742.2	741.5
135°	785.2	784.7	784.1	783.6	784.1	784.7	785.2	785.7	785.7	785.2	784.7
137.5°	824.7	824.3	823.9	823.6	823.9	824.3	824.7	825.0	824.7	823.9	823.1
140°	848.7	848.3	848.0	847.6	848.0	848.3	848.7	849.1	848.9	848.2	847.5
142.5°	871.2	870.8	870.3	869.8	870.3	870.8	871.2	871.7	871.7	871.2	870.6
145°	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.6	903.2	902.9
147.5°	931.5	930.7	929.9	929.1	929.9	930.7	931.5	932.3	932.6	932.2	931.8
150°	949.7	949.1	948.6	948.1	948.6	949.1	949.7	950.1	950.3	949.9	949.6
152.5°	965.7	964.9	964.1	963.2	964.1	964.9	965.7	966.5	966.5	965.9	965.3
155°	987.6	986.6	985.5	984.4	985.5	986.6	987.6	988.6	988.7	987.9	987.0
157.5°	1006.4	1005.0	1003.7	1002.3	1003.7	1005.0	1006.4	1007.8	1008.0	1006.9	1005.8
160°	1017.4	1016.1	1014.9	1013.7	1014.9	1016.1	1017.4	1018.6	1018.7	1017.6	1016.6
162.5°	1027.7	1026.6	1025.6	1024.5	1025.6	1026.6	1027.7	1028.8	1028.7	1027.5	1026.4
165°	1041.1	1039.9	1038.6	1037.4	1038.6	1039.9	1041.1	1042.4	1042.3	1040.8	1039.4
167.5°	1051.0	1049.6	1048.1	1046.7	1048.1	1049.6	1051.0	1052.3	1052.3	1051.0	1049.6
170°	1056.7	1055.3	1053.8	1052.4	1053.8	1055.3	1056.7	1058.0	1058.0	1056.7	1055.3
172.5°	1060.3	1058.7	1057.2	1055.6	1057.2	1058.7	1060.3	1061.8	1061.8	1060.4	1059.1
175°	1064.5	1063.2	1061.8	1060.3	1061.8	1063.2	1064.5	1066.0	1066.0	1064.9	1063.6
177.5°	1066.0	1064.6	1063.2	1061.8	1063.2	1064.6	1066.0	1067.4	1067.5	1066.4	1065.2
180°	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3



TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0
2.5°	1232.2	1232.2	1241.7	1247.7	1255.1	1260.1	1263.6	1267.1	1273.1	1281.0	1290.0
5°	1161.7	1164.3	1178.0	1191.7	1204.8	1215.9	1225.3	1236.4	1250.1	1266.9	1285.6
7.5°	1093.5	1103.1	1116.9	1133.6	1151.9	1168.2	1184.8	1203.2	1222.5	1247.3	1273.4
10°	1049.7	1060.3	1077.1	1098.3	1117.5	1136.9	1157.4	1177.3	1201.6	1230.9	1264.5
12.5°	1011.4	1021.4	1038.7	1061.9	1080.2	1101.5	1125.1	1151.0	1178.2	1213.5	1251.6
15°	958.1	970.0	991.2	1002.3	1030.4	1055.9	1077.7	1115.1	1149.9	1186.1	1230.3
17.5°	914.6	921.1	938.3	959.2	980.1	1008.7	1037.2	1068.3	1103.1	1147.3	1202.6
20°	884.7	890.3	908.9	930.8	953.2	979.4	1004.9	1036.0	1075.2	1121.9	1181.7
22.5°	862.3	868.4	880.6	903.9	924.8	946.5	972.0	1009.1	1050.8	1096.5	1161.3
25°	829.9	833.6	841.8	860.4	879.1	903.4	925.8	960.7	1003.6	1057.2	1121.9
27.5°	799.2	802.8	809.5	822.9	840.3	860.1	884.5	914.1	957.7	1015.8	1084.6
30°	780.7	781.3	787.6	800.0	815.0	831.2	853.6	887.2	928.3	987.5	1059.6
32.5°	764.8	762.4	766.7	776.1	790.6	806.8	825.2	858.3	897.9	956.1	1030.2
35°	737.8	736.5	734.7	742.8	755.2	767.6	783.9	808.7	853.6	907.8	985.6
37.5°	710.3	707.3	703.9	707.7	717.3	730.3	744.3	766.5	805.2	864.7	939.2
40°	689.8	687.4	685.5	684.2	692.9	705.4	716.0	737.1	773.2	829.9	903.4
42.5°	667.4	665.9	663.5	661.8	669.1	678.5	689.6	708.3	744.3	797.6	867.0
45°	631.3	630.1	628.8	627.6	631.9	640.6	649.4	663.1	694.2	745.8	808.7
47.5°	591.1	589.5	589.9	588.0	592.2	598.1	604.2	618.9	648.7	690.5	736.4
50°	562.2	561.6	561.6	561.6	562.8	569.7	575.3	586.5	613.9	655.6	688.6
52.5°	534.8	532.2	532.2	533.2	535.4	539.8	543.4	555.6	579.5	613.8	643.7
55°	491.9	486.9	485.6	486.9	488.7	492.5	496.2	506.2	526.7	552.2	569.7
57.5°	444.3	441.6	439.9	440.1	441.2	444.2	447.0	457.9	474.0	487.4	498.6
60°	410.9	412.2	406.5	407.8	407.8	410.3	414.6	421.5	435.2	444.5	455.7
62.5°	379.5	377.8	376.2	374.5	374.5	375.4	381.3	386.7	398.3	403.2	411.9
65°	330.6	330.6	326.9	328.1	328.8	324.4	327.5	333.7	341.2	343.0	351.2
67.5°	281.1	279.3	277.2	275.3	275.3	275.0	276.6	279.6	285.3	285.9	292.2
70°	247.2	245.9	245.3	243.4	241.0	244.1	242.2	245.3	248.4	249.1	252.8
72.5°	214.3	213.0	211.9	210.1	209.1	208.7	208.8	212.5	214.5	213.7	217.9
75°	167.5	166.2	165.0	161.8	161.8	160.0	160.7	163.1	165.6	163.7	167.5
77.5°	123.0	119.1	118.9	119.8	117.6	118.0	117.3	116.9	118.0	118.2	121.5
80°	94.7	90.3	91.5	90.9	90.3	89.7	88.4	89.0	89.7	90.3	92.1
82.5°	68.2	67.9	66.6	66.5	65.9	64.2	63.5	64.6	65.3	64.9	66.2
85°	34.9	33.0	34.2	33.6	34.2	33.6	31.8	31.8	33.0	32.4	33.6
87.5°	14.4	14.3	13.3	13.3	12.4	12.4	11.5	11.6	11.8	11.5	12.1
90°	19.6	19.0	16.7	14.4	12.1	9.8	7.8	6.1	4.3	2.5	0.8
92.5°	21.4	20.3	18.5	16.8	15.1	13.4	12.8	13.2	13.7	14.2	14.7
95°	25.7	24.5	22.6	20.7	18.7	16.8	19.4	26.6	33.8	41.0	48.2
97.5°	26.9	25.4	38.1	50.8	63.5	76.0	84.0	87.2	90.5	93.7	97.0
100°	27.5	26.1	53.5	80.9	108.3	135.7	147.7	144.2	140.7	137.1	133.6
102.5°	47.7	52.0	82.0	111.9	141.9	171.8	185.5	183.0	180.5	177.9	175.4
105°	142.0	173.2	189.0	204.8	220.6	236.4	243.4	241.5	239.5	237.6	235.6
107.5°	294.6	317.4	314.9	312.4	309.9	307.4	305.4	303.9	302.3	300.8	299.2
110°	350.8	356.6	354.7	352.8	350.8	348.9	347.2	345.8	344.4	343.0	341.6



TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	396.6	396.5	394.5	392.6	390.7	388.7	387.1	385.9	384.6	383.3	382.1
115°	455.7	453.8	452.3	450.7	449.1	447.6	446.2	445.2	444.1	443.1	442.0
117.5°	511.0	509.5	508.7	507.9	507.1	506.3	505.3	504.0	502.6	501.4	500.0
120°	547.0	545.6	545.1	544.5	544.0	543.5	542.4	540.8	539.2	537.7	536.1
122.5°	582.7	581.6	581.0	580.4	579.6	579.0	578.0	576.7	575.4	574.1	572.8
125°	633.0	632.6	631.8	631.1	630.5	629.8	628.7	627.3	625.9	624.5	623.1
127.5°	682.5	681.9	681.0	680.2	679.4	678.5	677.4	676.0	674.6	673.2	671.8
130°	712.3	711.6	710.9	710.3	709.6	708.8	707.8	706.4	705.0	703.5	702.2
132.5°	740.8	740.1	739.6	738.9	738.4	737.8	736.9	735.5	734.0	732.7	731.3
135°	784.1	783.6	782.9	782.2	781.5	780.8	779.9	778.9	777.8	776.7	775.7
137.5°	822.2	821.4	821.0	820.6	820.2	819.8	819.0	817.7	816.3	815.0	813.7
140°	846.8	846.1	845.6	845.0	844.5	844.0	843.2	842.1	841.1	840.0	838.9
142.5°	870.1	869.5	868.9	868.4	867.9	867.4	866.6	865.5	864.4	863.4	862.4
145°	902.5	902.2	901.8	901.5	901.2	900.8	900.0	898.8	897.5	896.4	895.1
147.5°	931.5	931.1	930.8	930.4	930.1	929.7	929.2	928.4	927.6	926.8	925.9
150°	949.2	948.9	948.5	948.2	947.8	947.5	947.0	946.5	945.9	945.5	944.9
152.5°	964.6	964.0	963.8	963.6	963.4	963.2	963.0	962.7	962.5	962.3	961.9
155°	986.1	985.2	985.1	984.8	984.7	984.5	984.6	985.0	985.3	985.6	986.0
157.5°	1004.8	1003.7	1003.9	1004.1	1004.2	1004.4	1004.6	1004.6	1004.6	1004.6	1004.6
160°	1015.6	1014.5	1014.6	1014.9	1015.0	1015.2	1015.3	1015.6	1015.7	1015.9	1016.1
162.5°	1025.2	1024.0	1024.1	1024.3	1024.5	1024.7	1025.0	1025.5	1025.9	1026.4	1026.8
165°	1038.0	1036.6	1036.8	1037.0	1037.1	1037.4	1037.7	1038.2	1038.7	1039.3	1039.8
167.5°	1048.1	1046.7	1046.7	1046.7	1046.7	1046.7	1047.1	1047.8	1048.5	1049.2	1049.9
170°	1053.8	1052.4	1052.4	1052.4	1052.4	1052.4	1052.8	1053.5	1054.2	1054.9	1055.6
172.5°	1057.6	1056.2	1056.1	1056.0	1055.8	1055.7	1056.1	1056.9	1057.7	1058.6	1059.4
175°	1062.4	1061.1	1061.0	1060.8	1060.6	1060.4	1060.8	1061.7	1062.6	1063.4	1064.3
177.5°	1064.1	1063.0	1062.9	1062.8	1062.6	1062.5	1062.8	1063.4	1064.1	1064.9	1065.6
180°	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3



TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0
2.5°	1293.0	1295.5	1303.9	1310.0	1316.9	1320.9	1324.8	1327.9	1331.8	1332.8	1347.3
5°	1298.7	1311.2	1333.0	1349.2	1369.0	1390.8	1405.8	1412.7	1430.7	1445.7	1475.5
7.5°	1297.1	1323.7	1356.5	1390.6	1427.2	1461.1	1490.5	1525.3	1550.1	1587.4	1624.1
10°	1295.6	1331.1	1373.4	1417.1	1468.1	1515.4	1557.7	1605.0	1644.3	1695.9	1740.1
12.5°	1291.1	1334.1	1392.9	1444.4	1506.4	1571.7	1634.4	1695.2	1730.0	1816.0	1856.7
15°	1280.1	1331.1	1404.5	1483.0	1568.3	1645.5	1725.2	1788.7	1891.4	1966.8	2014.7
17.5°	1258.9	1330.4	1417.5	1512.1	1615.9	1717.6	1807.9	1904.2	2013.3	2104.4	2201.5
20°	1249.0	1327.4	1424.5	1529.1	1636.8	1752.0	1854.7	1970.5	2089.5	2179.1	2303.6
22.5°	1230.5	1319.4	1424.0	1540.6	1655.7	1774.9	1895.1	2011.8	2149.2	2272.7	2391.3
25°	1200.4	1300.0	1408.3	1538.4	1673.6	1793.1	1936.9	2091.9	2235.1	2393.9	2512.2
27.5°	1168.7	1275.1	1383.6	1504.7	1650.0	1791.8	1972.8	2147.9	2323.0	2460.1	2547.7
30°	1144.3	1247.7	1359.8	1481.8	1625.6	1794.3	1996.6	2187.8	2358.4	2476.0	2525.2
32.5°	1117.9	1222.7	1321.9	1449.9	1603.1	1792.8	2011.6	2211.2	2360.4	2438.7	2429.1
35°	1076.5	1164.3	1260.8	1384.0	1564.6	1781.9	2020.3	2213.3	2304.9	2288.1	2161.0
37.5°	1016.7	1090.5	1185.6	1320.5	1519.7	1758.8	2002.9	2147.7	2141.7	2004.9	1820.8
40°	979.4	1042.2	1133.8	1275.7	1484.9	1743.9	1975.5	2069.5	1989.8	1798.6	1578.3
42.5°	930.5	988.4	1080.0	1225.9	1446.5	1713.5	1923.2	1950.4	1794.5	1574.5	1372.5
45°	854.8	905.9	1000.5	1151.2	1389.0	1647.3	1795.6	1728.9	1519.1	1291.9	1138.1
47.5°	773.5	826.6	917.6	1072.4	1305.8	1547.9	1618.5	1476.8	1261.4	1077.1	935.9
50°	722.2	773.2	862.3	1018.6	1249.5	1466.2	1495.5	1312.4	1114.4	952.6	836.8
52.5°	670.4	718.5	806.0	962.7	1183.8	1371.6	1353.5	1167.0	984.9	847.0	756.1
55°	593.3	638.8	722.2	869.1	1070.2	1219.0	1153.7	975.6	824.9	717.9	648.7
57.5°	524.3	567.9	639.9	772.6	947.5	1049.7	966.5	816.5	696.6	614.3	562.7
60°	477.5	516.1	584.6	707.9	859.8	937.6	855.5	722.9	621.9	556.0	509.9
62.5°	433.2	466.8	530.3	642.1	774.1	839.5	756.3	644.1	558.3	499.7	460.6
65°	366.1	396.6	452.7	539.8	648.1	691.7	620.1	529.2	462.6	419.0	392.8
67.5°	304.8	330.7	379.1	447.7	527.4	559.2	504.7	434.4	384.1	349.1	328.4
70°	264.0	286.4	324.4	383.5	455.7	480.0	429.0	371.1	334.3	306.3	287.0
72.5°	229.6	246.1	280.5	326.2	386.5	405.8	370.2	319.2	285.0	264.0	248.7
75°	174.9	188.6	211.0	247.8	289.5	300.7	273.9	242.2	219.1	204.2	192.3
77.5°	126.1	136.3	152.4	175.1	204.0	214.0	197.1	175.9	159.1	149.0	142.4
80°	95.2	103.4	117.1	135.7	153.1	158.8	148.8	132.6	120.8	115.2	109.6
82.5°	70.3	74.9	83.2	95.9	107.8	114.5	106.0	96.3	89.9	84.8	82.7
85°	35.5	37.9	41.7	46.7	54.2	56.6	53.6	51.0	47.3	44.2	44.2
87.5°	13.5	13.8	15.7	17.0	19.4	21.4	21.3	20.8	20.8	20.4	20.0
90°	2.5	4.3	6.1	7.8	9.8	12.1	14.4	16.7	19.0	19.6	20.4
92.5°	14.2	13.7	13.2	12.8	13.4	15.1	16.8	18.5	20.3	21.4	22.5
95°	41.0	33.8	26.6	19.4	16.8	18.7	20.7	22.6	24.5	25.7	26.9
97.5°	93.7	90.5	87.2	84.0	76.0	63.5	50.8	38.1	25.4	26.9	28.3
100°	137.1	140.7	144.2	147.7	135.7	108.3	80.9	53.5	26.1	27.5	28.9
102.5°	177.9	180.5	183.0	185.5	171.8	141.9	111.9	82.0	52.0	47.7	43.3
105°	237.6	239.5	241.5	243.4	236.4	220.6	204.8	189.0	173.2	142.0	111.0
107.5°	300.8	302.3	303.9	305.4	307.4	309.9	312.4	314.9	317.4	294.6	271.8
110°	343.0	344.4	345.8	347.2	348.9	350.8	352.8	354.7	356.6	350.8	345.0





TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	383.3	384.6	385.9	387.1	388.7	390.7	392.6	394.5	396.5	396.6	396.6
115°	443.1	444.1	445.2	446.2	447.6	449.1	450.7	452.3	453.8	455.7	457.4
117.5°	501.4	502.6	504.0	505.3	506.3	507.1	507.9	508.7	509.5	511.0	512.4
120°	537.7	539.2	540.8	542.4	543.5	544.0	544.5	545.1	545.6	547.0	548.4
122.5°	574.1	575.4	576.7	578.0	579.0	579.6	580.4	581.0	581.6	582.7	583.6
125°	624.5	625.9	627.3	628.7	629.8	630.5	631.1	631.8	632.6	633.0	633.3
127.5°	673.2	674.6	676.0	677.4	678.5	679.4	680.2	681.0	681.9	682.5	683.0
130°	703.5	705.0	706.4	707.8	708.8	709.6	710.3	710.9	711.6	712.3	713.0
132.5°	732.7	734.0	735.5	736.9	737.8	738.4	738.9	739.6	740.1	740.8	741.5
135°	776.7	777.8	778.9	779.9	780.8	781.5	782.2	782.9	783.6	784.1	784.7
137.5°	815.0	816.3	817.7	819.0	819.8	820.2	820.6	821.0	821.4	822.2	823.1
140°	840.0	841.1	842.1	843.2	844.0	844.5	845.0	845.6	846.1	846.8	847.5
142.5°	863.4	864.4	865.5	866.6	867.4	867.9	868.4	868.9	869.5	870.1	870.6
145°	896.4	897.5	898.8	900.0	900.8	901.2	901.5	901.8	902.2	902.5	902.9
147.5°	926.8	927.6	928.4	929.2	929.7	930.1	930.4	930.8	931.1	931.5	931.8
150°	945.5	945.9	946.5	947.0	947.5	947.8	948.2	948.5	948.9	949.2	949.6
152.5°	962.3	962.5	962.7	963.0	963.2	963.4	963.6	963.8	964.0	964.6	965.3
155°	985.6	985.3	985.0	984.6	984.5	984.7	984.8	985.1	985.2	986.1	987.0
157.5°	1004.6	1004.6	1004.6	1004.6	1004.4	1004.2	1004.1	1003.9	1003.7	1004.8	1005.8
160°	1015.9	1015.7	1015.6	1015.3	1015.2	1015.0	1014.9	1014.6	1014.5	1015.6	1016.6
162.5°	1026.4	1025.9	1025.5	1025.0	1024.7	1024.5	1024.3	1024.1	1024.0	1025.2	1026.4
165°	1039.3	1038.7	1038.2	1037.7	1037.4	1037.1	1037.0	1036.8	1036.6	1038.0	1039.4
167.5°	1049.2	1048.5	1047.8	1047.1	1046.7	1046.7	1046.7	1046.7	1046.7	1048.1	1049.6
170°	1054.9	1054.2	1053.5	1052.8	1052.4	1052.4	1052.4	1052.4	1052.4	1053.8	1055.3
172.5°	1058.6	1057.7	1056.9	1056.1	1055.7	1055.8	1056.0	1056.1	1056.2	1057.6	1059.1
175°	1063.4	1062.6	1061.7	1060.8	1060.4	1060.6	1060.8	1061.0	1061.1	1062.4	1063.6
177.5°	1064.9	1064.1	1063.4	1062.8	1062.5	1062.6	1062.8	1062.9	1063.0	1064.1	1065.2
180°	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3



TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0
2.5°	1352.3	1352.7	1358.3	1362.2	1360.3	1362.7	1363.7
5°	1477.4	1499.8	1511.6	1520.4	1521.0	1521.6	1526.6
7.5°	1654.9	1678.9	1696.5	1723.1	1731.1	1740.1	1737.5
10°	1784.4	1819.8	1850.4	1866.5	1884.0	1909.5	1889.0
12.5°	1905.4	1968.3	2014.7	2039.9	2056.3	2061.4	2051.4
15°	2105.0	2187.1	2231.3	2230.2	2286.2	2310.5	2272.5
17.5°	2288.1	2363.9	2424.6	2455.8	2502.4	2512.8	2508.0
20°	2400.1	2482.9	2530.2	2583.8	2608.0	2629.8	2633.5
22.5°	2496.7	2571.0	2621.9	2666.4	2686.8	2697.1	2703.3
25°	2596.2	2654.8	2685.3	2700.8	2706.4	2705.1	2697.1
27.5°	2589.3	2593.8	2560.3	2527.2	2497.8	2464.5	2453.0
30°	2522.1	2469.8	2376.5	2323.5	2245.7	2184.0	2208.9
32.5°	2345.3	2241.2	2136.4	2020.7	1924.9	1897.7	1870.3
35°	2001.6	1818.6	1711.5	1587.0	1537.2	1487.4	1453.1
37.5°	1619.4	1477.8	1350.8	1269.3	1219.4	1187.9	1171.0
40°	1400.2	1272.6	1168.0	1102.0	1064.0	1028.5	1023.6
42.5°	1225.4	1106.8	1028.0	975.5	939.0	923.9	913.0
45°	1003.6	920.8	867.9	830.5	806.3	796.9	784.5
47.5°	849.5	790.9	751.2	725.8	707.5	700.5	699.6
50°	763.3	714.7	685.5	665.5	651.3	648.7	638.8
52.5°	698.5	656.5	633.7	616.2	605.9	599.0	596.0
55°	606.4	578.4	557.9	547.9	539.8	532.9	532.9
57.5°	530.6	507.2	493.6	485.1	482.6	477.8	474.7
60°	483.8	463.8	453.3	445.8	440.8	441.4	435.8
62.5°	437.9	425.0	414.9	407.4	401.5	401.6	402.0
65°	373.0	363.0	355.5	353.0	349.3	344.9	346.2
67.5°	316.0	306.7	300.9	296.6	295.3	293.0	296.6
70°	275.2	268.3	264.0	260.2	259.0	259.6	262.8
72.5°	237.8	233.0	230.1	228.4	225.6	225.8	227.8
75°	186.8	183.1	180.5	178.7	178.1	178.1	178.1
77.5°	137.2	136.3	135.2	132.5	132.6	133.3	133.5
80°	108.4	106.5	105.8	104.6	102.7	101.5	104.6
82.5°	81.0	79.1	78.4	78.2	75.3	75.1	77.7
85°	43.6	41.7	42.3	41.7	41.7	41.1	41.1
87.5°	19.6	19.3	18.9	19.5	19.0	18.6	19.7
90°	21.1	21.8	22.3	22.7	23.1	23.4	23.7
92.5°	23.6	24.7	25.4	25.6	25.8	26.1	26.2
95°	28.2	29.5	30.0	30.0	30.0	30.0	30.0
97.5°	29.7	31.1	31.8	32.1	32.2	32.4	32.6
100°	30.3	31.7	32.5	32.7	32.9	33.0	33.2
102.5°	39.0	34.6	32.6	32.9	33.2	33.5	33.8
105°	79.9	48.8	33.4	33.7	34.1	34.5	34.8
107.5°	249.0	226.2	203.0	179.6	156.1	132.7	109.2
110°	339.2	333.4	318.0	292.8	267.7	242.6	217.5



TEST NUMBER: P332072-927

CATALOG NUMBER: S123DIP-S1165D1025U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	396.8	396.9	394.3	389.0	383.7	378.3	373.0
115°	459.1	460.9	462.2	462.8	463.5	464.2	464.9
117.5°	513.7	515.2	515.9	516.1	516.2	516.3	516.5
120°	549.8	551.2	551.9	551.9	551.9	551.9	551.9
122.5°	584.6	585.6	586.1	586.3	586.5	586.5	586.7
125°	633.6	634.0	634.3	634.7	635.0	635.4	635.7
127.5°	683.6	684.1	684.3	683.9	683.6	683.2	682.9
130°	713.8	714.5	714.6	714.3	713.9	713.6	713.2
132.5°	742.2	742.9	743.0	742.5	742.0	741.6	741.1
135°	785.2	785.7	785.7	785.2	784.7	784.1	783.6
137.5°	823.9	824.7	825.0	824.7	824.3	823.9	823.6
140°	848.2	848.9	849.1	848.7	848.3	848.0	847.6
142.5°	871.2	871.7	871.7	871.2	870.8	870.3	869.8
145°	903.2	903.6	903.8	903.8	903.8	903.8	903.8
147.5°	932.2	932.6	932.3	931.5	930.7	929.9	929.1
150°	949.9	950.3	950.1	949.7	949.1	948.6	948.1
152.5°	965.9	966.5	966.5	965.7	964.9	964.1	963.2
155°	987.9	988.7	988.6	987.6	986.6	985.5	984.4
157.5°	1006.9	1008.0	1007.8	1006.4	1005.0	1003.7	1002.3
160°	1017.6	1018.7	1018.6	1017.4	1016.1	1014.9	1013.7
162.5°	1027.5	1028.7	1028.8	1027.7	1026.6	1025.6	1024.5
165°	1040.8	1042.3	1042.4	1041.1	1039.9	1038.6	1037.4
167.5°	1051.0	1052.3	1052.3	1051.0	1049.6	1048.1	1046.7
170°	1056.7	1058.0	1058.0	1056.7	1055.3	1053.8	1052.4
172.5°	1060.4	1061.8	1061.8	1060.3	1058.7	1057.2	1055.6
175°	1064.9	1066.0	1066.0	1064.5	1063.2	1061.8	1060.3
177.5°	1066.4	1067.5	1067.4	1066.0	1064.6	1063.2	1061.8
180°	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3

(END OF REPORT)