

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332063-927

Luminaire Tested: **S123DIP-S1165D805U927-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332063-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S1165D805U927-4F0-1E-UDD-A  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 805 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6422.9 lumens  
Efficiency: N/A  
Efficacy: 105.8 lumens/watt  
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 60.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

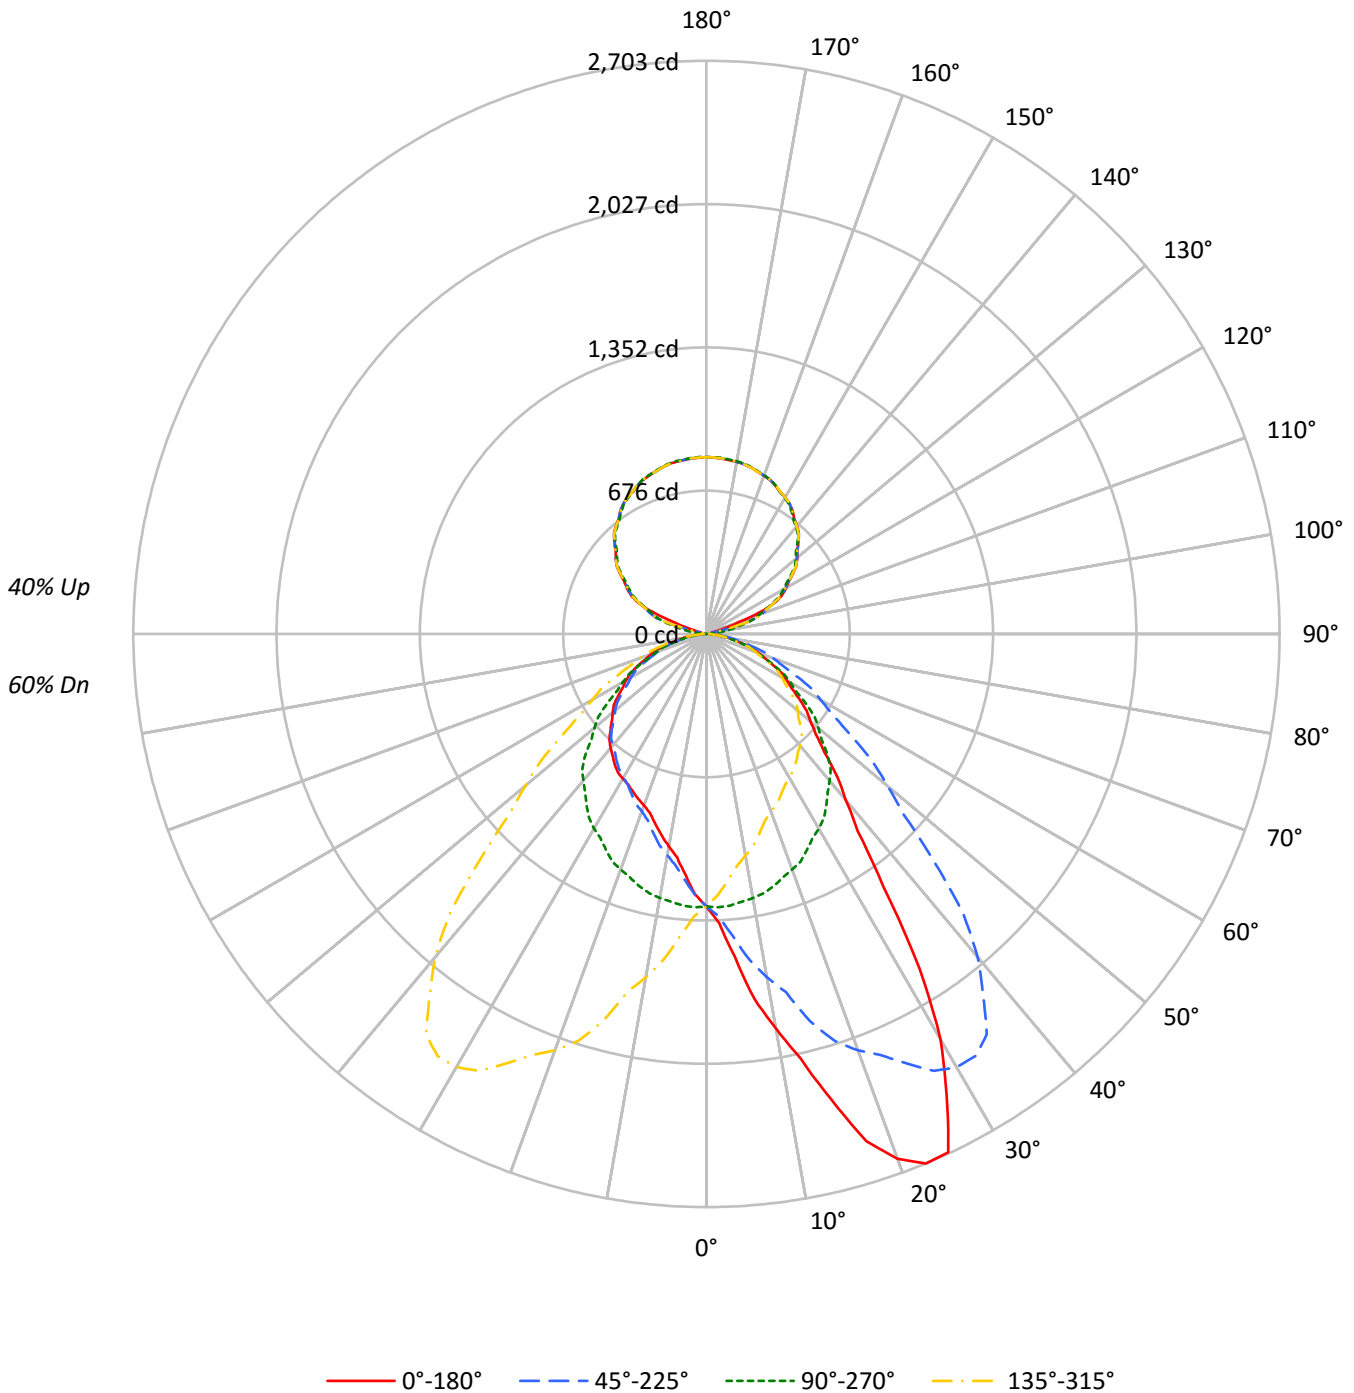



TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	66	66	66	60
1	100	96	92	89	94	90	87	84	79	76	74	68	66	65	59	57	56	52
2	92	84	78	73	86	79	74	69	69	65	62	60	57	55	52	50	48	44
3	84	74	67	61	78	70	63	58	61	56	52	54	50	47	46	43	41	37
4	77	66	58	52	72	62	55	50	55	49	45	48	44	40	42	38	36	32
5	71	59	51	45	66	56	48	43	49	43	39	43	39	35	38	34	31	28
6	65	53	45	39	61	50	43	37	44	38	34	39	34	31	34	30	27	25
7	60	48	40	34	56	45	38	33	40	34	30	36	31	27	31	27	24	22
8	56	44	36	31	52	41	34	29	37	31	27	33	28	24	29	25	22	20
9	52	40	32	27	49	38	31	26	34	28	24	30	25	22	26	23	20	18
10	49	37	29	25	46	35	28	24	31	26	22	28	23	20	25	21	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	13832	13832	13832	13832
5°	16495	13891	12310	13891
10°	20647	13821	11119	13821
15°	25324	13710	10351	13710
20°	30166	13536	9856	13536
25°	32033	13324	9745	13324
30°	27455	13170	9797	13170
35°	19094	12951	9900	12951
40°	14383	12694	9868	12694
45°	11942	12310	9742	12310
50°	10697	11531	9656	11531
55°	10001	10691	9533	10691
60°	9382	9810	9436	9810
65°	8818	8945	9133	8945
70°	8271	7956	8699	7956
75°	7407	6966	7977	6966
80°	6484	5709	6868	5709
85°	5076	4150	4619	4150



TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	126.6	2.0
10°-20°	405.9	6.3
20°-30°	681.2	10.6
30°-40°	771.4	12.0
40°-50°	691.7	10.8
50°-60°	558.2	8.7
60°-70°	389.0	6.1
70°-80°	204.5	3.2
80°-90°	52.3	0.8
90°-100°	30.3	0.5
100°-110°	144.4	2.2
110°-120°	347.0	5.4
120°-130°	441.8	6.9
130°-140°	472.1	7.3
140°-150°	441.4	6.9
150°-160°	356.1	5.5
160°-170°	229.8	3.6
170°-180°	79.2	1.2
0°-30°	1213.7	18.9
0°-40°	1985.1	30.9
0°-60°	3235.0	50.4
0°-90°	3880.8	60.4
90°-120°	521.7	8.1
90°-150°	1877.0	29.2
90°-180°	2542.0	39.6
0°-180°	6422.9	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1285	1285	1285	1285	1285	
5°	1527	1286	1139	1286	1527	158
15°	2272	1230	929	1230	2272	656
25°	2697	1122	820	1122	2697	1183
35°	1453	986	753	986	1453	944
45°	784	809	640	809	784	621
55°	533	570	508	570	533	478
65°	346	351	359	351	346	345
75°	178	168	192	168	178	191
85°	41	34	37	34	41	49
90°	19	1	19	1	19	10
95°	24	38	24	38	24	20
105°	27	185	27	185	27	62
115°	364	346	364	346	364	337
125°	498	488	498	488	498	445
135°	614	608	614	608	614	473
145°	708	701	708	701	708	442
155°	771	772	771	772	771	356
165°	812	814	812	814	812	229
175°	830	834	830	834	830	79
180°	834	834	834	834	834	



TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0
2.5°	1363.7	1362.7	1360.3	1362.2	1358.3	1352.7	1352.3	1347.3	1332.8	1331.8	1327.9
5°	1526.6	1521.6	1521.0	1520.4	1511.6	1499.8	1477.4	1475.5	1445.7	1430.7	1412.7
7.5°	1737.5	1740.1	1731.1	1723.1	1696.5	1678.9	1654.9	1624.1	1587.4	1550.1	1525.3
10°	1889.0	1909.5	1884.0	1866.5	1850.4	1819.8	1784.4	1740.1	1695.9	1644.3	1605.0
12.5°	2051.4	2061.4	2056.3	2039.9	2014.7	1968.3	1905.4	1856.7	1816.0	1730.0	1695.2
15°	2272.5	2310.5	2286.2	2230.2	2231.3	2187.1	2105.0	2014.7	1966.8	1891.4	1788.7
17.5°	2508.0	2512.8	2502.4	2455.8	2424.6	2363.9	2288.1	2201.5	2104.4	2013.3	1904.2
20°	2633.5	2629.8	2608.0	2583.8	2530.2	2482.9	2400.1	2303.6	2179.1	2089.5	1970.5
22.5°	2703.3	2697.1	2686.8	2666.4	2621.9	2571.0	2496.7	2391.3	2272.7	2149.2	2011.8
25°	2697.1	2705.1	2706.4	2700.8	2685.3	2654.8	2596.2	2512.2	2393.9	2235.1	2091.9
27.5°	2453.0	2464.5	2497.8	2527.2	2560.3	2593.8	2589.3	2547.7	2460.1	2323.0	2147.9
30°	2208.9	2184.0	2245.7	2323.5	2376.5	2469.8	2522.1	2525.2	2476.0	2358.4	2187.8
32.5°	1870.3	1897.7	1924.9	2020.7	2136.4	2241.2	2345.3	2429.1	2438.7	2360.4	2211.2
35°	1453.1	1487.4	1537.2	1587.0	1711.5	1818.6	2001.6	2161.0	2288.1	2304.9	2213.3
37.5°	1171.0	1187.9	1219.4	1269.3	1350.8	1477.8	1619.4	1820.8	2004.9	2141.7	2147.7
40°	1023.6	1028.5	1064.0	1102.0	1168.0	1272.6	1400.2	1578.3	1798.6	1989.8	2069.5
42.5°	913.0	923.9	939.0	975.5	1028.0	1106.8	1225.4	1372.5	1574.5	1794.5	1950.4
45°	784.5	796.9	806.3	830.5	867.9	920.8	1003.6	1138.1	1291.9	1519.1	1728.9
47.5°	699.6	700.5	707.5	725.8	751.2	790.9	849.5	935.9	1077.1	1261.4	1476.8
50°	638.8	648.7	651.3	665.5	685.5	714.7	763.3	836.8	952.6	1114.4	1312.4
52.5°	596.0	599.0	605.9	616.2	633.7	656.5	698.5	756.1	847.0	984.9	1167.0
55°	532.9	532.9	539.8	547.9	557.9	578.4	606.4	648.7	717.9	824.9	975.6
57.5°	474.7	477.8	482.6	485.1	493.6	507.2	530.6	562.7	614.3	696.6	816.5
60°	435.8	441.4	440.8	445.8	453.3	463.8	483.8	509.9	556.0	621.9	722.9
62.5°	402.0	401.6	401.5	407.4	414.9	425.0	437.9	460.6	499.7	558.3	644.1
65°	346.2	344.9	349.3	353.0	355.5	363.0	373.0	392.8	419.0	462.6	529.2
67.5°	296.6	293.0	295.3	296.6	300.9	306.7	316.0	328.4	349.1	384.1	434.4
70°	262.8	259.6	259.0	260.2	264.0	268.3	275.2	287.0	306.3	334.3	371.1
72.5°	227.8	225.8	225.6	228.4	230.1	233.0	237.8	248.7	264.0	285.0	319.2
75°	178.1	178.1	178.1	178.7	180.5	183.1	186.8	192.3	204.2	219.1	242.2
77.5°	133.5	133.3	132.6	132.5	135.2	136.3	137.2	142.4	149.0	159.1	175.9
80°	104.6	101.5	102.7	104.6	105.8	106.5	108.4	109.6	115.2	120.8	132.6
82.5°	77.7	75.1	75.3	78.2	78.4	79.1	81.0	82.7	84.8	89.9	96.3
85°	41.1	41.1	41.7	41.7	42.3	41.7	43.6	44.2	44.2	47.3	51.0
87.5°	18.7	17.6	18.1	18.5	17.9	18.4	18.8	19.2	19.5	19.9	20.0
90°	18.6	18.3	18.1	17.7	17.5	17.0	16.5	16.0	15.4	14.9	13.1
92.5°	20.6	20.4	20.2	20.0	19.9	19.4	18.5	17.6	16.7	15.8	14.5
95°	23.5	23.5	23.5	23.5	23.5	23.1	22.1	21.2	20.2	19.2	17.7
97.5°	25.5	25.3	25.3	25.1	25.0	24.3	23.2	22.2	21.1	20.0	29.9
100°	26.0	25.9	25.7	25.6	25.4	24.9	23.8	22.7	21.5	20.4	41.9
102.5°	26.5	26.2	26.0	25.7	25.5	27.1	30.5	33.9	37.3	40.7	64.2
105°	27.3	27.0	26.7	26.5	26.1	38.2	62.6	86.9	111.3	135.6	148.0
107.5°	85.6	103.9	122.3	140.7	159.0	177.1	195.0	212.9	230.8	248.6	246.6
110°	170.3	190.0	209.7	229.3	249.1	261.2	265.7	270.2	274.8	279.3	277.8



TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	292.2	296.4	300.5	304.7	308.8	310.9	310.8	310.7	310.6	310.5	309.0
115°	364.2	363.6	363.1	362.5	361.9	361.0	359.7	358.2	356.9	355.5	354.3
117.5°	404.6	404.4	404.3	404.3	404.1	403.5	402.4	401.3	400.2	399.1	398.5
120°	432.3	432.3	432.3	432.3	432.3	431.7	430.6	429.5	428.4	427.3	426.9
122.5°	459.5	459.5	459.3	459.2	459.1	458.7	457.9	457.1	456.4	455.6	455.0
125°	498.0	497.6	497.4	497.1	496.9	496.5	496.3	496.0	495.7	495.4	494.9
127.5°	534.9	535.1	535.4	535.7	535.9	535.8	535.4	535.0	534.6	534.1	533.5
130°	558.6	558.9	559.2	559.4	559.8	559.6	559.0	558.5	557.9	557.4	556.8
132.5°	580.4	580.8	581.2	581.6	581.9	581.9	581.3	580.7	580.3	579.7	579.2
135°	613.8	614.2	614.6	615.0	615.4	615.4	615.0	614.6	614.2	613.8	613.2
137.5°	645.1	645.4	645.6	645.9	646.2	646.0	645.3	644.7	644.0	643.3	643.0
140°	663.9	664.2	664.5	664.7	665.0	664.9	664.3	663.8	663.2	662.7	662.3
142.5°	681.3	681.7	682.0	682.4	682.8	682.8	682.3	681.9	681.4	681.0	680.6
145°	707.9	707.9	707.9	707.9	707.9	707.7	707.5	707.2	706.9	706.6	706.4
147.5°	727.7	728.3	729.0	729.6	730.2	730.4	730.2	729.8	729.6	729.3	729.0
150°	742.6	743.0	743.4	743.8	744.3	744.3	744.0	743.7	743.5	743.2	742.9
152.5°	754.5	755.1	755.7	756.4	757.0	757.1	756.5	756.1	755.6	755.1	754.9
155°	771.0	771.9	772.7	773.6	774.4	774.4	773.7	773.1	772.4	771.7	771.5
157.5°	785.1	786.2	787.2	788.3	789.3	789.5	788.6	787.8	787.0	786.2	786.3
160°	794.0	795.0	795.9	796.9	797.8	797.9	797.1	796.2	795.4	794.6	794.7
162.5°	802.4	803.3	804.1	804.9	805.8	805.7	804.9	803.9	803.0	802.0	802.2
165°	812.5	813.5	814.4	815.5	816.4	816.3	815.2	814.1	813.0	811.9	812.1
167.5°	819.8	820.9	822.0	823.2	824.3	824.3	823.2	822.0	820.9	819.8	819.8
170°	824.3	825.5	826.5	827.6	828.7	828.7	827.6	826.5	825.5	824.3	824.3
172.5°	826.8	828.0	829.3	830.4	831.6	831.7	830.6	829.5	828.4	827.3	827.2
175°	830.5	831.6	832.7	833.9	834.9	835.0	834.0	833.1	832.1	831.2	831.0
177.5°	831.6	832.7	833.9	835.0	836.1	836.1	835.3	834.4	833.5	832.6	832.5
180°	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6



TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0
2.5°	1324.8	1320.9	1316.9	1310.0	1303.9	1295.5	1293.0	1290.0	1281.0	1273.1	1267.1
5°	1405.8	1390.8	1369.0	1349.2	1333.0	1311.2	1298.7	1285.6	1266.9	1250.1	1236.4
7.5°	1490.5	1461.1	1427.2	1390.6	1356.5	1323.7	1297.1	1273.4	1247.3	1222.5	1203.2
10°	1557.7	1515.4	1468.1	1417.1	1373.4	1331.1	1295.6	1264.5	1230.9	1201.6	1177.3
12.5°	1634.4	1571.7	1506.4	1444.4	1392.9	1334.1	1291.1	1251.6	1213.5	1178.2	1151.0
15°	1725.2	1645.5	1568.3	1483.0	1404.5	1331.1	1280.1	1230.3	1186.1	1149.9	1115.1
17.5°	1807.9	1717.6	1615.9	1512.1	1417.5	1330.4	1258.9	1202.6	1147.3	1103.1	1068.3
20°	1854.7	1752.0	1636.8	1529.1	1424.5	1327.4	1249.0	1181.7	1121.9	1075.2	1036.0
22.5°	1895.1	1774.9	1655.7	1540.6	1424.0	1319.4	1230.5	1161.3	1096.5	1050.8	1009.1
25°	1936.9	1793.1	1673.6	1538.4	1408.3	1300.0	1200.4	1121.9	1057.2	1003.6	960.7
27.5°	1972.8	1791.8	1650.0	1504.7	1383.6	1275.1	1168.7	1084.6	1015.8	957.7	914.1
30°	1996.6	1794.3	1625.6	1481.8	1359.8	1247.7	1144.3	1059.6	987.5	928.3	887.2
32.5°	2011.6	1792.8	1603.1	1449.9	1321.9	1222.7	1117.9	1030.2	956.1	897.9	858.3
35°	2020.3	1781.9	1564.6	1384.0	1260.8	1164.3	1076.5	985.6	907.8	853.6	808.7
37.5°	2002.9	1758.8	1519.7	1320.5	1185.6	1090.5	1016.7	939.2	864.7	805.2	766.5
40°	1975.5	1743.9	1484.9	1275.7	1133.8	1042.2	979.4	903.4	829.9	773.2	737.1
42.5°	1923.2	1713.5	1446.5	1225.9	1080.0	988.4	930.5	867.0	797.6	744.3	708.3
45°	1795.6	1647.3	1389.0	1151.2	1000.5	905.9	854.8	808.7	745.8	694.2	663.1
47.5°	1618.5	1547.9	1305.8	1072.4	917.6	826.6	773.5	736.4	690.5	648.7	618.9
50°	1495.5	1466.2	1249.5	1018.6	862.3	773.2	722.2	688.6	655.6	613.9	586.5
52.5°	1353.5	1371.6	1183.8	962.7	806.0	718.5	670.4	643.7	613.8	579.5	555.6
55°	1153.7	1219.0	1070.2	869.1	722.2	638.8	593.3	569.7	552.2	526.7	506.2
57.5°	966.5	1049.7	947.5	772.6	639.9	567.9	524.3	498.6	487.4	474.0	457.9
60°	855.5	937.6	859.8	707.9	584.6	516.1	477.5	455.7	444.5	435.2	421.5
62.5°	756.3	839.5	774.1	642.1	530.3	466.8	433.2	411.9	403.2	398.3	386.7
65°	620.1	691.7	648.1	539.8	452.7	396.6	366.1	351.2	343.0	341.2	333.7
67.5°	504.7	559.2	527.4	447.7	379.1	330.7	304.8	292.2	285.9	285.3	279.6
70°	429.0	480.0	455.7	383.5	324.4	286.4	264.0	252.8	249.1	248.4	245.3
72.5°	370.2	405.8	386.5	326.2	280.5	246.1	229.6	217.9	213.7	214.5	212.5
75°	273.9	300.7	289.5	247.8	211.0	188.6	174.9	167.5	163.7	165.6	163.1
77.5°	197.1	214.0	204.0	175.1	152.4	136.3	126.1	121.5	118.2	118.0	116.9
80°	148.8	158.8	153.1	135.7	117.1	103.4	95.2	92.1	90.3	89.7	89.0
82.5°	106.0	114.5	107.8	95.9	83.2	74.9	70.3	66.2	64.9	65.3	64.6
85°	53.6	56.6	54.2	46.7	41.7	37.9	35.5	33.6	32.4	33.0	31.8
87.5°	20.7	20.8	19.0	16.6	15.4	13.6	13.4	12.0	11.3	11.6	11.4
90°	11.2	9.5	7.7	6.1	4.8	3.4	2.0	0.6	2.0	3.4	4.8
92.5°	13.2	11.8	10.5	10.0	10.4	10.8	11.2	11.5	11.2	10.8	10.4
95°	16.2	14.7	13.2	15.2	20.8	26.5	32.2	37.8	32.2	26.5	20.8
97.5°	39.8	49.7	59.6	65.8	68.4	70.9	73.4	75.9	73.4	70.9	68.4
100°	63.4	84.8	106.3	115.7	112.9	110.2	107.4	104.6	107.4	110.2	112.9
102.5°	87.6	111.1	134.6	145.3	143.3	141.3	139.3	137.4	139.3	141.3	143.3
105°	160.4	172.8	185.2	190.6	189.1	187.6	186.1	184.6	186.1	187.6	189.1
107.5°	244.7	242.7	240.7	239.2	238.0	236.8	235.6	234.3	235.6	236.8	238.0
110°	276.3	274.8	273.2	272.0	270.8	269.7	268.6	267.5	268.6	269.7	270.8





TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	307.5	306.0	304.4	303.2	302.2	301.3	300.2	299.3	300.2	301.3	302.2
115°	353.0	351.8	350.5	349.5	348.7	347.8	347.1	346.2	347.1	347.8	348.7
117.5°	397.8	397.2	396.6	395.7	394.7	393.7	392.7	391.7	392.7	393.7	394.7
120°	426.5	426.1	425.7	424.8	423.6	422.4	421.1	419.9	421.1	422.4	423.6
122.5°	454.6	454.0	453.4	452.7	451.7	450.7	449.6	448.6	449.6	450.7	451.7
125°	494.3	493.8	493.3	492.4	491.3	490.2	489.1	488.1	489.1	490.2	491.3
127.5°	532.8	532.1	531.5	530.6	529.5	528.4	527.3	526.2	527.3	528.4	529.5
130°	556.3	555.7	555.2	554.4	553.3	552.2	551.0	549.9	551.0	552.2	553.3
132.5°	578.8	578.4	577.9	577.2	576.1	575.0	573.9	572.7	573.9	575.0	576.1
135°	612.7	612.1	611.6	610.9	610.1	609.2	608.4	607.5	608.4	609.2	610.1
137.5°	642.8	642.5	642.1	641.4	640.4	639.4	638.3	637.3	638.3	639.4	640.4
140°	661.9	661.5	661.0	660.4	659.6	658.8	657.9	657.1	657.9	658.8	659.6
142.5°	680.2	679.8	679.4	678.7	677.9	677.1	676.3	675.4	676.3	677.1	677.9
145°	706.1	705.8	705.5	705.0	703.9	703.0	702.0	701.1	702.0	703.0	703.9
147.5°	728.7	728.5	728.3	727.8	727.1	726.5	725.9	725.2	725.9	726.5	727.1
150°	742.7	742.4	742.1	741.7	741.3	740.9	740.5	740.1	740.5	740.9	741.3
152.5°	754.7	754.6	754.4	754.2	754.1	753.8	753.7	753.4	753.7	753.8	754.1
155°	771.4	771.3	771.1	771.2	771.5	771.7	772.1	772.3	772.1	771.7	771.5
157.5°	786.5	786.6	786.7	786.8	786.8	786.9	786.9	786.9	786.9	786.9	786.8
160°	794.9	795.0	795.1	795.3	795.4	795.6	795.7	795.8	795.7	795.6	795.4
162.5°	802.3	802.4	802.6	802.8	803.2	803.5	803.9	804.2	803.9	803.5	803.2
165°	812.2	812.4	812.5	812.8	813.2	813.6	814.0	814.4	814.0	813.6	813.2
167.5°	819.8	819.8	819.8	820.1	820.7	821.3	821.8	822.4	821.8	821.3	820.7
170°	824.3	824.3	824.3	824.6	825.1	825.7	826.2	826.8	826.2	825.7	825.1
172.5°	827.0	827.0	826.9	827.1	827.8	828.5	829.1	829.7	829.1	828.5	827.8
175°	830.8	830.7	830.6	830.8	831.6	832.3	832.9	833.6	832.9	832.3	831.6
177.5°	832.4	832.3	832.2	832.4	833.0	833.5	834.1	834.6	834.1	833.5	833.0
180°	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6



TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0
2.5°	1263.6	1260.1	1255.1	1247.7	1241.7	1232.2	1232.2	1233.7	1233.7	1233.3	1232.2
5°	1225.3	1215.9	1204.8	1191.7	1178.0	1164.3	1161.7	1156.7	1153.0	1150.6	1147.5
7.5°	1184.8	1168.2	1151.9	1133.6	1116.9	1103.1	1093.5	1085.5	1080.5	1075.0	1071.0
10°	1157.4	1136.9	1117.5	1098.3	1077.1	1060.3	1049.7	1042.2	1036.6	1031.7	1029.1
12.5°	1125.1	1101.5	1080.2	1061.9	1038.7	1021.4	1011.4	1007.8	1001.2	990.8	985.3
15°	1077.7	1055.9	1030.4	1002.3	991.2	970.0	958.1	952.6	948.8	940.7	938.3
17.5°	1037.2	1008.7	980.1	959.2	938.3	921.1	914.6	907.6	902.6	896.0	894.1
20°	1004.9	979.4	953.2	930.8	908.9	890.3	884.7	879.7	874.7	871.6	869.1
22.5°	972.0	946.5	924.8	903.9	880.6	868.4	862.3	856.8	853.3	851.2	848.7
25°	925.8	903.4	879.1	860.4	841.8	833.6	829.9	826.8	824.3	821.2	820.5
27.5°	884.5	860.1	840.3	822.9	809.5	802.8	799.2	797.6	798.2	799.3	800.0
30°	853.6	831.2	815.0	800.0	787.6	781.3	780.7	780.7	783.2	783.9	785.1
32.5°	825.2	806.8	790.6	776.1	766.7	762.4	764.8	764.8	766.8	768.4	770.6
35°	783.9	767.6	755.2	742.8	734.7	736.5	737.8	739.0	742.1	745.8	748.4
37.5°	744.3	730.3	717.3	707.7	703.9	707.3	710.3	712.9	716.4	719.4	721.8
40°	716.0	705.4	692.9	684.2	685.5	687.4	689.8	692.9	696.1	697.9	700.4
42.5°	689.6	678.5	669.1	661.8	663.5	665.9	667.4	669.1	672.6	676.0	677.5
45°	649.4	640.6	631.9	627.6	628.8	630.1	631.3	633.2	636.3	638.8	639.4
47.5°	604.2	598.1	592.2	588.0	589.9	589.5	591.1	595.1	596.0	597.5	601.0
50°	575.3	569.7	562.8	561.6	561.6	561.6	562.2	567.2	567.2	569.7	572.2
52.5°	543.4	539.8	535.4	533.2	532.2	532.2	534.8	537.3	538.3	541.8	544.3
55°	496.2	492.5	488.7	486.9	485.6	486.9	491.9	493.1	496.2	498.0	499.9
57.5°	447.0	444.2	441.2	440.1	439.9	441.6	444.3	448.0	448.8	454.5	457.3
60°	414.6	410.3	407.8	407.8	406.5	412.2	410.9	417.2	418.4	422.2	426.5
62.5°	381.3	375.4	374.5	374.5	376.2	377.8	379.5	382.3	385.5	390.2	393.6
65°	327.5	324.4	328.8	328.1	326.9	330.6	330.6	333.7	337.5	341.8	348.6
67.5°	276.6	275.0	275.3	275.3	277.2	279.3	281.1	283.8	288.3	292.9	297.4
70°	242.2	244.1	241.0	243.4	245.3	245.9	247.2	250.9	255.9	259.0	264.0
72.5°	208.8	208.7	209.1	210.1	211.9	213.0	214.3	218.6	224.0	226.6	230.6
75°	160.7	160.0	161.8	161.8	165.0	166.2	167.5	169.4	174.4	178.1	181.2
77.5°	117.3	118.0	117.6	119.8	118.9	119.1	123.0	124.9	125.4	132.8	134.4
80°	88.4	89.7	90.3	90.9	91.5	90.3	94.7	96.5	96.5	100.8	103.9
82.5°	63.5	64.2	65.9	66.5	66.6	67.9	68.2	69.6	71.1	73.0	77.1
85°	31.8	33.6	34.2	33.6	34.2	33.0	34.9	35.5	36.1	36.1	36.1
87.5°	11.2	12.0	11.9	12.8	12.6	13.5	13.5	12.7	12.8	14.3	12.4
90°	6.1	7.7	9.5	11.2	13.1	14.9	15.4	16.0	16.5	17.0	17.5
92.5°	10.0	10.5	11.8	13.2	14.5	15.8	16.7	17.6	18.5	19.4	19.9
95°	15.2	13.2	14.7	16.2	17.7	19.2	20.2	21.2	22.1	23.1	23.5
97.5°	65.8	59.6	49.7	39.8	29.9	20.0	21.1	22.2	23.2	24.3	25.0
100°	115.7	106.3	84.8	63.4	41.9	20.4	21.5	22.7	23.8	24.9	25.4
102.5°	145.3	134.6	111.1	87.6	64.2	40.7	37.3	33.9	30.5	27.1	25.5
105°	190.6	185.2	172.8	160.4	148.0	135.6	111.3	86.9	62.6	38.2	26.1
107.5°	239.2	240.7	242.7	244.7	246.6	248.6	230.8	212.9	195.0	177.1	159.0
110°	272.0	273.2	274.8	276.3	277.8	279.3	274.8	270.2	265.7	261.2	249.1



TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	303.2	304.4	306.0	307.5	309.0	310.5	310.6	310.7	310.8	310.9	308.8
115°	349.5	350.5	351.8	353.0	354.3	355.5	356.9	358.2	359.7	361.0	361.9
117.5°	395.7	396.6	397.2	397.8	398.5	399.1	400.2	401.3	402.4	403.5	404.1
120°	424.8	425.7	426.1	426.5	426.9	427.3	428.4	429.5	430.6	431.7	432.3
122.5°	452.7	453.4	454.0	454.6	455.0	455.6	456.4	457.1	457.9	458.7	459.1
125°	492.4	493.3	493.8	494.3	494.9	495.4	495.7	496.0	496.3	496.5	496.9
127.5°	530.6	531.5	532.1	532.8	533.5	534.1	534.6	535.0	535.4	535.8	535.9
130°	554.4	555.2	555.7	556.3	556.8	557.4	557.9	558.5	559.0	559.6	559.8
132.5°	577.2	577.9	578.4	578.8	579.2	579.7	580.3	580.7	581.3	581.9	581.9
135°	610.9	611.6	612.1	612.7	613.2	613.8	614.2	614.6	615.0	615.4	615.4
137.5°	641.4	642.1	642.5	642.8	643.0	643.3	644.0	644.7	645.3	646.0	646.2
140°	660.4	661.0	661.5	661.9	662.3	662.7	663.2	663.8	664.3	664.9	665.0
142.5°	678.7	679.4	679.8	680.2	680.6	681.0	681.4	681.9	682.3	682.8	682.8
145°	705.0	705.5	705.8	706.1	706.4	706.6	706.9	707.2	707.5	707.7	707.9
147.5°	727.8	728.3	728.5	728.7	729.0	729.3	729.6	729.8	730.2	730.4	730.2
150°	741.7	742.1	742.4	742.7	742.9	743.2	743.5	743.7	744.0	744.3	744.3
152.5°	754.2	754.4	754.6	754.7	754.9	755.1	755.6	756.1	756.5	757.1	757.0
155°	771.2	771.1	771.3	771.4	771.5	771.7	772.4	773.1	773.7	774.4	774.4
157.5°	786.8	786.7	786.6	786.5	786.3	786.2	787.0	787.8	788.6	789.5	789.3
160°	795.3	795.1	795.0	794.9	794.7	794.6	795.4	796.2	797.1	797.9	797.8
162.5°	802.8	802.6	802.4	802.3	802.2	802.0	803.0	803.9	804.9	805.7	805.8
165°	812.8	812.5	812.4	812.2	812.1	811.9	813.0	814.1	815.2	816.3	816.4
167.5°	820.1	819.8	819.8	819.8	819.8	819.8	820.9	822.0	823.2	824.3	824.3
170°	824.6	824.3	824.3	824.3	824.3	824.3	825.5	826.5	827.6	828.7	828.7
172.5°	827.1	826.9	827.0	827.0	827.2	827.3	828.4	829.5	830.6	831.7	831.6
175°	830.8	830.6	830.7	830.8	831.0	831.2	832.1	833.1	834.0	835.0	834.9
177.5°	832.4	832.2	832.3	832.4	832.5	832.6	833.5	834.4	835.3	836.1	836.1
180°	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6



TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0
2.5°	1228.8	1228.3	1231.8	1229.2	1231.8	1228.3	1228.8	1232.2	1233.3	1233.7	1233.7
5°	1143.7	1145.6	1139.3	1139.3	1139.3	1145.6	1143.7	1147.5	1150.6	1153.0	1156.7
7.5°	1068.0	1065.2	1065.5	1062.2	1065.5	1065.2	1068.0	1071.0	1075.0	1080.5	1085.5
10°	1021.7	1018.0	1016.7	1017.3	1016.7	1018.0	1021.7	1029.1	1031.7	1036.6	1042.2
12.5°	983.3	982.5	974.4	974.5	974.4	982.5	983.3	985.3	990.8	1001.2	1007.8
15°	938.3	926.5	925.2	928.9	925.2	926.5	938.3	938.3	940.7	948.8	952.6
17.5°	893.0	886.8	887.2	885.3	887.2	886.8	893.0	894.1	896.0	902.6	907.6
20°	869.1	865.4	864.7	860.4	864.7	865.4	869.1	869.1	871.6	874.7	879.7
22.5°	847.2	846.0	846.4	841.5	846.4	846.0	847.2	848.7	851.2	853.3	856.8
25°	820.0	823.1	820.5	820.5	820.5	823.1	820.0	820.5	821.2	824.3	826.8
27.5°	801.5	801.4	800.2	800.2	800.2	801.4	801.5	800.0	799.3	798.2	797.6
30°	787.6	787.0	788.2	788.2	788.2	787.0	787.6	785.1	783.9	783.2	780.7
32.5°	773.6	774.5	774.8	775.2	774.8	774.5	773.6	770.6	768.4	766.8	764.8
35°	752.1	752.7	754.6	753.4	754.6	752.7	752.1	748.4	745.8	742.1	739.0
37.5°	722.9	725.8	725.2	726.2	725.2	725.8	722.9	721.8	719.4	716.4	712.9
40°	701.0	702.9	702.3	702.3	702.3	702.9	701.0	700.4	697.9	696.1	692.9
42.5°	678.7	680.0	678.3	677.4	678.3	680.0	678.7	677.5	676.0	672.6	669.1
45°	641.9	640.6	642.5	640.0	642.5	640.6	641.9	639.4	638.8	636.3	633.2
47.5°	600.8	602.1	602.5	604.4	602.5	602.1	600.8	601.0	597.5	596.0	595.1
50°	573.4	577.1	577.1	576.6	577.1	577.1	573.4	572.2	569.7	567.2	567.2
52.5°	546.5	548.3	550.7	550.6	550.7	548.3	546.5	544.3	541.8	538.3	537.3
55°	504.9	506.2	507.4	508.0	507.4	506.2	504.9	499.9	498.0	496.2	493.1
57.5°	461.8	461.4	464.3	465.2	464.3	461.4	461.8	457.3	454.5	448.8	448.0
60°	431.4	431.4	436.4	438.3	436.4	431.4	431.4	426.5	422.2	418.4	417.2
62.5°	399.1	401.1	406.1	403.5	406.1	401.1	399.1	393.6	390.2	385.5	382.3
65°	351.7	356.7	356.1	358.6	356.1	356.7	351.7	348.6	341.8	337.5	333.7
67.5°	302.3	305.5	309.9	310.3	309.9	305.5	302.3	297.4	292.9	288.3	283.8
70°	268.9	272.0	274.6	276.4	274.6	272.0	268.9	264.0	259.0	255.9	250.9
72.5°	236.6	238.2	244.2	241.5	244.2	238.2	236.6	230.6	226.6	224.0	218.6
75°	185.5	189.9	193.6	191.8	193.6	189.9	185.5	181.2	178.1	174.4	169.4
77.5°	137.2	141.6	143.3	141.7	143.3	141.6	137.2	134.4	132.8	125.4	124.9
80°	108.4	107.7	111.5	110.8	111.5	107.7	108.4	103.9	100.8	96.5	96.5
82.5°	79.5	78.8	80.6	81.0	80.6	78.8	79.5	77.1	73.0	71.1	69.6
85°	38.6	40.5	37.9	37.4	37.9	40.5	38.6	36.1	36.1	36.1	35.5
87.5°	12.5	12.6	12.1	11.7	12.1	12.6	12.5	12.4	14.3	12.8	12.7
90°	17.7	18.1	18.3	18.6	18.3	18.1	17.7	17.5	17.0	16.5	16.0
92.5°	20.0	20.2	20.4	20.6	20.4	20.2	20.0	19.9	19.4	18.5	17.6
95°	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.1	22.1	21.2
97.5°	25.1	25.3	25.3	25.5	25.3	25.3	25.1	25.0	24.3	23.2	22.2
100°	25.6	25.7	25.9	26.0	25.9	25.7	25.6	25.4	24.9	23.8	22.7
102.5°	25.7	26.0	26.2	26.5	26.2	26.0	25.7	25.5	27.1	30.5	33.9
105°	26.5	26.7	27.0	27.3	27.0	26.7	26.5	26.1	38.2	62.6	86.9
107.5°	140.7	122.3	103.9	85.6	103.9	122.3	140.7	159.0	177.1	195.0	212.9
110°	229.3	209.7	190.0	170.3	190.0	209.7	229.3	249.1	261.2	265.7	270.2



TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	304.7	300.5	296.4	292.2	296.4	300.5	304.7	308.8	310.9	310.8	310.7
115°	362.5	363.1	363.6	364.2	363.6	363.1	362.5	361.9	361.0	359.7	358.2
117.5°	404.3	404.3	404.4	404.6	404.4	404.3	404.3	404.1	403.5	402.4	401.3
120°	432.3	432.3	432.3	432.3	432.3	432.3	432.3	432.3	431.7	430.6	429.5
122.5°	459.2	459.3	459.5	459.5	459.5	459.3	459.2	459.1	458.7	457.9	457.1
125°	497.1	497.4	497.6	498.0	497.6	497.4	497.1	496.9	496.5	496.3	496.0
127.5°	535.7	535.4	535.1	534.9	535.1	535.4	535.7	535.9	535.8	535.4	535.0
130°	559.4	559.2	558.9	558.6	558.9	559.2	559.4	559.8	559.6	559.0	558.5
132.5°	581.6	581.2	580.8	580.4	580.8	581.2	581.6	581.9	581.9	581.3	580.7
135°	615.0	614.6	614.2	613.8	614.2	614.6	615.0	615.4	615.4	615.0	614.6
137.5°	645.9	645.6	645.4	645.1	645.4	645.6	645.9	646.2	646.0	645.3	644.7
140°	664.7	664.5	664.2	663.9	664.2	664.5	664.7	665.0	664.9	664.3	663.8
142.5°	682.4	682.0	681.7	681.3	681.7	682.0	682.4	682.8	682.8	682.3	681.9
145°	707.9	707.9	707.9	707.9	707.9	707.9	707.9	707.9	707.7	707.5	707.2
147.5°	729.6	729.0	728.3	727.7	728.3	729.0	729.6	730.2	730.4	730.2	729.8
150°	743.8	743.4	743.0	742.6	743.0	743.4	743.8	744.3	744.3	744.0	743.7
152.5°	756.4	755.7	755.1	754.5	755.1	755.7	756.4	757.0	757.1	756.5	756.1
155°	773.6	772.7	771.9	771.0	771.9	772.7	773.6	774.4	774.4	773.7	773.1
157.5°	788.3	787.2	786.2	785.1	786.2	787.2	788.3	789.3	789.5	788.6	787.8
160°	796.9	795.9	795.0	794.0	795.0	795.9	796.9	797.8	797.9	797.1	796.2
162.5°	804.9	804.1	803.3	802.4	803.3	804.1	804.9	805.8	805.7	804.9	803.9
165°	815.5	814.4	813.5	812.5	813.5	814.4	815.5	816.4	816.3	815.2	814.1
167.5°	823.2	822.0	820.9	819.8	820.9	822.0	823.2	824.3	824.3	823.2	822.0
170°	827.6	826.5	825.5	824.3	825.5	826.5	827.6	828.7	828.7	827.6	826.5
172.5°	830.4	829.3	828.0	826.8	828.0	829.3	830.4	831.6	831.7	830.6	829.5
175°	833.9	832.7	831.6	830.5	831.6	832.7	833.9	834.9	835.0	834.0	833.1
177.5°	835.0	833.9	832.7	831.6	832.7	833.9	835.0	836.1	836.1	835.3	834.4
180°	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6



TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0
2.5°	1232.2	1232.2	1241.7	1247.7	1255.1	1260.1	1263.6	1267.1	1273.1	1281.0	1290.0
5°	1161.7	1164.3	1178.0	1191.7	1204.8	1215.9	1225.3	1236.4	1250.1	1266.9	1285.6
7.5°	1093.5	1103.1	1116.9	1133.6	1151.9	1168.2	1184.8	1203.2	1222.5	1247.3	1273.4
10°	1049.7	1060.3	1077.1	1098.3	1117.5	1136.9	1157.4	1177.3	1201.6	1230.9	1264.5
12.5°	1011.4	1021.4	1038.7	1061.9	1080.2	1101.5	1125.1	1151.0	1178.2	1213.5	1251.6
15°	958.1	970.0	991.2	1002.3	1030.4	1055.9	1077.7	1115.1	1149.9	1186.1	1230.3
17.5°	914.6	921.1	938.3	959.2	980.1	1008.7	1037.2	1068.3	1103.1	1147.3	1202.6
20°	884.7	890.3	908.9	930.8	953.2	979.4	1004.9	1036.0	1075.2	1121.9	1181.7
22.5°	862.3	868.4	880.6	903.9	924.8	946.5	972.0	1009.1	1050.8	1096.5	1161.3
25°	829.9	833.6	841.8	860.4	879.1	903.4	925.8	960.7	1003.6	1057.2	1121.9
27.5°	799.2	802.8	809.5	822.9	840.3	860.1	884.5	914.1	957.7	1015.8	1084.6
30°	780.7	781.3	787.6	800.0	815.0	831.2	853.6	887.2	928.3	987.5	1059.6
32.5°	764.8	762.4	766.7	776.1	790.6	806.8	825.2	858.3	897.9	956.1	1030.2
35°	737.8	736.5	734.7	742.8	755.2	767.6	783.9	808.7	853.6	907.8	985.6
37.5°	710.3	707.3	703.9	707.7	717.3	730.3	744.3	766.5	805.2	864.7	939.2
40°	689.8	687.4	685.5	684.2	692.9	705.4	716.0	737.1	773.2	829.9	903.4
42.5°	667.4	665.9	663.5	661.8	669.1	678.5	689.6	708.3	744.3	797.6	867.0
45°	631.3	630.1	628.8	627.6	631.9	640.6	649.4	663.1	694.2	745.8	808.7
47.5°	591.1	589.5	589.9	588.0	592.2	598.1	604.2	618.9	648.7	690.5	736.4
50°	562.2	561.6	561.6	561.6	562.8	569.7	575.3	586.5	613.9	655.6	688.6
52.5°	534.8	532.2	532.2	533.2	535.4	539.8	543.4	555.6	579.5	613.8	643.7
55°	491.9	486.9	485.6	486.9	488.7	492.5	496.2	506.2	526.7	552.2	569.7
57.5°	444.3	441.6	439.9	440.1	441.2	444.2	447.0	457.9	474.0	487.4	498.6
60°	410.9	412.2	406.5	407.8	407.8	410.3	414.6	421.5	435.2	444.5	455.7
62.5°	379.5	377.8	376.2	374.5	374.5	375.4	381.3	386.7	398.3	403.2	411.9
65°	330.6	330.6	326.9	328.1	328.8	324.4	327.5	333.7	341.2	343.0	351.2
67.5°	281.1	279.3	277.2	275.3	275.3	275.0	276.6	279.6	285.3	285.9	292.2
70°	247.2	245.9	245.3	243.4	241.0	244.1	242.2	245.3	248.4	249.1	252.8
72.5°	214.3	213.0	211.9	210.1	209.1	208.7	208.8	212.5	214.5	213.7	217.9
75°	167.5	166.2	165.0	161.8	161.8	160.0	160.7	163.1	165.6	163.7	167.5
77.5°	123.0	119.1	118.9	119.8	117.6	118.0	117.3	116.9	118.0	118.2	121.5
80°	94.7	90.3	91.5	90.9	90.3	89.7	88.4	89.0	89.7	90.3	92.1
82.5°	68.2	67.9	66.6	66.5	65.9	64.2	63.5	64.6	65.3	64.9	66.2
85°	34.9	33.0	34.2	33.6	34.2	33.6	31.8	31.8	33.0	32.4	33.6
87.5°	13.5	13.5	12.6	12.8	11.9	12.0	11.2	11.4	11.6	11.3	12.0
90°	15.4	14.9	13.1	11.2	9.5	7.7	6.1	4.8	3.4	2.0	0.6
92.5°	16.7	15.8	14.5	13.2	11.8	10.5	10.0	10.4	10.8	11.2	11.5
95°	20.2	19.2	17.7	16.2	14.7	13.2	15.2	20.8	26.5	32.2	37.8
97.5°	21.1	20.0	29.9	39.8	49.7	59.6	65.8	68.4	70.9	73.4	75.9
100°	21.5	20.4	41.9	63.4	84.8	106.3	115.7	112.9	110.2	107.4	104.6
102.5°	37.3	40.7	64.2	87.6	111.1	134.6	145.3	143.3	141.3	139.3	137.4
105°	111.3	135.6	148.0	160.4	172.8	185.2	190.6	189.1	187.6	186.1	184.6
107.5°	230.8	248.6	246.6	244.7	242.7	240.7	239.2	238.0	236.8	235.6	234.3
110°	274.8	279.3	277.8	276.3	274.8	273.2	272.0	270.8	269.7	268.6	267.5



TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	310.6	310.5	309.0	307.5	306.0	304.4	303.2	302.2	301.3	300.2	299.3
115°	356.9	355.5	354.3	353.0	351.8	350.5	349.5	348.7	347.8	347.1	346.2
117.5°	400.2	399.1	398.5	397.8	397.2	396.6	395.7	394.7	393.7	392.7	391.7
120°	428.4	427.3	426.9	426.5	426.1	425.7	424.8	423.6	422.4	421.1	419.9
122.5°	456.4	455.6	455.0	454.6	454.0	453.4	452.7	451.7	450.7	449.6	448.6
125°	495.7	495.4	494.9	494.3	493.8	493.3	492.4	491.3	490.2	489.1	488.1
127.5°	534.6	534.1	533.5	532.8	532.1	531.5	530.6	529.5	528.4	527.3	526.2
130°	557.9	557.4	556.8	556.3	555.7	555.2	554.4	553.3	552.2	551.0	549.9
132.5°	580.3	579.7	579.2	578.8	578.4	577.9	577.2	576.1	575.0	573.9	572.7
135°	614.2	613.8	613.2	612.7	612.1	611.6	610.9	610.1	609.2	608.4	607.5
137.5°	644.0	643.3	643.0	642.8	642.5	642.1	641.4	640.4	639.4	638.3	637.3
140°	663.2	662.7	662.3	661.9	661.5	661.0	660.4	659.6	658.8	657.9	657.1
142.5°	681.4	681.0	680.6	680.2	679.8	679.4	678.7	677.9	677.1	676.3	675.4
145°	706.9	706.6	706.4	706.1	705.8	705.5	705.0	703.9	703.0	702.0	701.1
147.5°	729.6	729.3	729.0	728.7	728.5	728.3	727.8	727.1	726.5	725.9	725.2
150°	743.5	743.2	742.9	742.7	742.4	742.1	741.7	741.3	740.9	740.5	740.1
152.5°	755.6	755.1	754.9	754.7	754.6	754.4	754.2	754.1	753.8	753.7	753.4
155°	772.4	771.7	771.5	771.4	771.3	771.1	771.2	771.5	771.7	772.1	772.3
157.5°	787.0	786.2	786.3	786.5	786.6	786.7	786.8	786.8	786.9	786.9	786.9
160°	795.4	794.6	794.7	794.9	795.0	795.1	795.3	795.4	795.6	795.7	795.8
162.5°	803.0	802.0	802.2	802.3	802.4	802.6	802.8	803.2	803.5	803.9	804.2
165°	813.0	811.9	812.1	812.2	812.4	812.5	812.8	813.2	813.6	814.0	814.4
167.5°	820.9	819.8	819.8	819.8	819.8	819.8	820.1	820.7	821.3	821.8	822.4
170°	825.5	824.3	824.3	824.3	824.3	824.3	824.6	825.1	825.7	826.2	826.8
172.5°	828.4	827.3	827.2	827.0	827.0	826.9	827.1	827.8	828.5	829.1	829.7
175°	832.1	831.2	831.0	830.8	830.7	830.6	830.8	831.6	832.3	832.9	833.6
177.5°	833.5	832.6	832.5	832.4	832.3	832.2	832.4	833.0	833.5	834.1	834.6
180°	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6



TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0
2.5°	1293.0	1295.5	1303.9	1310.0	1316.9	1320.9	1324.8	1327.9	1331.8	1332.8	1347.3
5°	1298.7	1311.2	1333.0	1349.2	1369.0	1390.8	1405.8	1412.7	1430.7	1445.7	1475.5
7.5°	1297.1	1323.7	1356.5	1390.6	1427.2	1461.1	1490.5	1525.3	1550.1	1587.4	1624.1
10°	1295.6	1331.1	1373.4	1417.1	1468.1	1515.4	1557.7	1605.0	1644.3	1695.9	1740.1
12.5°	1291.1	1334.1	1392.9	1444.4	1506.4	1571.7	1634.4	1695.2	1730.0	1816.0	1856.7
15°	1280.1	1331.1	1404.5	1483.0	1568.3	1645.5	1725.2	1788.7	1891.4	1966.8	2014.7
17.5°	1258.9	1330.4	1417.5	1512.1	1615.9	1717.6	1807.9	1904.2	2013.3	2104.4	2201.5
20°	1249.0	1327.4	1424.5	1529.1	1636.8	1752.0	1854.7	1970.5	2089.5	2179.1	2303.6
22.5°	1230.5	1319.4	1424.0	1540.6	1655.7	1774.9	1895.1	2011.8	2149.2	2272.7	2391.3
25°	1200.4	1300.0	1408.3	1538.4	1673.6	1793.1	1936.9	2091.9	2235.1	2393.9	2512.2
27.5°	1168.7	1275.1	1383.6	1504.7	1650.0	1791.8	1972.8	2147.9	2323.0	2460.1	2547.7
30°	1144.3	1247.7	1359.8	1481.8	1625.6	1794.3	1996.6	2187.8	2358.4	2476.0	2525.2
32.5°	1117.9	1222.7	1321.9	1449.9	1603.1	1792.8	2011.6	2211.2	2360.4	2438.7	2429.1
35°	1076.5	1164.3	1260.8	1384.0	1564.6	1781.9	2020.3	2213.3	2304.9	2288.1	2161.0
37.5°	1016.7	1090.5	1185.6	1320.5	1519.7	1758.8	2002.9	2147.7	2141.7	2004.9	1820.8
40°	979.4	1042.2	1133.8	1275.7	1484.9	1743.9	1975.5	2069.5	1989.8	1798.6	1578.3
42.5°	930.5	988.4	1080.0	1225.9	1446.5	1713.5	1923.2	1950.4	1794.5	1574.5	1372.5
45°	854.8	905.9	1000.5	1151.2	1389.0	1647.3	1795.6	1728.9	1519.1	1291.9	1138.1
47.5°	773.5	826.6	917.6	1072.4	1305.8	1547.9	1618.5	1476.8	1261.4	1077.1	935.9
50°	722.2	773.2	862.3	1018.6	1249.5	1466.2	1495.5	1312.4	1114.4	952.6	836.8
52.5°	670.4	718.5	806.0	962.7	1183.8	1371.6	1353.5	1167.0	984.9	847.0	756.1
55°	593.3	638.8	722.2	869.1	1070.2	1219.0	1153.7	975.6	824.9	717.9	648.7
57.5°	524.3	567.9	639.9	772.6	947.5	1049.7	966.5	816.5	696.6	614.3	562.7
60°	477.5	516.1	584.6	707.9	859.8	937.6	855.5	722.9	621.9	556.0	509.9
62.5°	433.2	466.8	530.3	642.1	774.1	839.5	756.3	644.1	558.3	499.7	460.6
65°	366.1	396.6	452.7	539.8	648.1	691.7	620.1	529.2	462.6	419.0	392.8
67.5°	304.8	330.7	379.1	447.7	527.4	559.2	504.7	434.4	384.1	349.1	328.4
70°	264.0	286.4	324.4	383.5	455.7	480.0	429.0	371.1	334.3	306.3	287.0
72.5°	229.6	246.1	280.5	326.2	386.5	405.8	370.2	319.2	285.0	264.0	248.7
75°	174.9	188.6	211.0	247.8	289.5	300.7	273.9	242.2	219.1	204.2	192.3
77.5°	126.1	136.3	152.4	175.1	204.0	214.0	197.1	175.9	159.1	149.0	142.4
80°	95.2	103.4	117.1	135.7	153.1	158.8	148.8	132.6	120.8	115.2	109.6
82.5°	70.3	74.9	83.2	95.9	107.8	114.5	106.0	96.3	89.9	84.8	82.7
85°	35.5	37.9	41.7	46.7	54.2	56.6	53.6	51.0	47.3	44.2	44.2
87.5°	13.4	13.6	15.4	16.6	19.0	20.8	20.7	20.0	19.9	19.5	19.2
90°	2.0	3.4	4.8	6.1	7.7	9.5	11.2	13.1	14.9	15.4	16.0
92.5°	11.2	10.8	10.4	10.0	10.5	11.8	13.2	14.5	15.8	16.7	17.6
95°	32.2	26.5	20.8	15.2	13.2	14.7	16.2	17.7	19.2	20.2	21.2
97.5°	73.4	70.9	68.4	65.8	59.6	49.7	39.8	29.9	20.0	21.1	22.2
100°	107.4	110.2	112.9	115.7	106.3	84.8	63.4	41.9	20.4	21.5	22.7
102.5°	139.3	141.3	143.3	145.3	134.6	111.1	87.6	64.2	40.7	37.3	33.9
105°	186.1	187.6	189.1	190.6	185.2	172.8	160.4	148.0	135.6	111.3	86.9
107.5°	235.6	236.8	238.0	239.2	240.7	242.7	244.7	246.6	248.6	230.8	212.9
110°	268.6	269.7	270.8	272.0	273.2	274.8	276.3	277.8	279.3	274.8	270.2





TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	300.2	301.3	302.2	303.2	304.4	306.0	307.5	309.0	310.5	310.6	310.7
115°	347.1	347.8	348.7	349.5	350.5	351.8	353.0	354.3	355.5	356.9	358.2
117.5°	392.7	393.7	394.7	395.7	396.6	397.2	397.8	398.5	399.1	400.2	401.3
120°	421.1	422.4	423.6	424.8	425.7	426.1	426.5	426.9	427.3	428.4	429.5
122.5°	449.6	450.7	451.7	452.7	453.4	454.0	454.6	455.0	455.6	456.4	457.1
125°	489.1	490.2	491.3	492.4	493.3	493.8	494.3	494.9	495.4	495.7	496.0
127.5°	527.3	528.4	529.5	530.6	531.5	532.1	532.8	533.5	534.1	534.6	535.0
130°	551.0	552.2	553.3	554.4	555.2	555.7	556.3	556.8	557.4	557.9	558.5
132.5°	573.9	575.0	576.1	577.2	577.9	578.4	578.8	579.2	579.7	580.3	580.7
135°	608.4	609.2	610.1	610.9	611.6	612.1	612.7	613.2	613.8	614.2	614.6
137.5°	638.3	639.4	640.4	641.4	642.1	642.5	642.8	643.0	643.3	644.0	644.7
140°	657.9	658.8	659.6	660.4	661.0	661.5	661.9	662.3	662.7	663.2	663.8
142.5°	676.3	677.1	677.9	678.7	679.4	679.8	680.2	680.6	681.0	681.4	681.9
145°	702.0	703.0	703.9	705.0	705.5	705.8	706.1	706.4	706.6	706.9	707.2
147.5°	725.9	726.5	727.1	727.8	728.3	728.5	728.7	729.0	729.3	729.6	729.8
150°	740.5	740.9	741.3	741.7	742.1	742.4	742.7	742.9	743.2	743.5	743.7
152.5°	753.7	753.8	754.1	754.2	754.4	754.6	754.7	754.9	755.1	755.6	756.1
155°	772.1	771.7	771.5	771.2	771.1	771.3	771.4	771.5	771.7	772.4	773.1
157.5°	786.9	786.9	786.8	786.8	786.7	786.6	786.5	786.3	786.2	787.0	787.8
160°	795.7	795.6	795.4	795.3	795.1	795.0	794.9	794.7	794.6	795.4	796.2
162.5°	803.9	803.5	803.2	802.8	802.6	802.4	802.3	802.2	802.0	803.0	803.9
165°	814.0	813.6	813.2	812.8	812.5	812.4	812.2	812.1	811.9	813.0	814.1
167.5°	821.8	821.3	820.7	820.1	819.8	819.8	819.8	819.8	819.8	820.9	822.0
170°	826.2	825.7	825.1	824.6	824.3	824.3	824.3	824.3	824.3	825.5	826.5
172.5°	829.1	828.5	827.8	827.1	826.9	827.0	827.0	827.2	827.3	828.4	829.5
175°	832.9	832.3	831.6	830.8	830.6	830.7	830.8	831.0	831.2	832.1	833.1
177.5°	834.1	833.5	833.0	832.4	832.2	832.3	832.4	832.5	832.6	833.5	834.4
180°	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6



TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0	1285.0
2.5°	1352.3	1352.7	1358.3	1362.2	1360.3	1362.7	1363.7
5°	1477.4	1499.8	1511.6	1520.4	1521.0	1521.6	1526.6
7.5°	1654.9	1678.9	1696.5	1723.1	1731.1	1740.1	1737.5
10°	1784.4	1819.8	1850.4	1866.5	1884.0	1909.5	1889.0
12.5°	1905.4	1968.3	2014.7	2039.9	2056.3	2061.4	2051.4
15°	2105.0	2187.1	2231.3	2230.2	2286.2	2310.5	2272.5
17.5°	2288.1	2363.9	2424.6	2455.8	2502.4	2512.8	2508.0
20°	2400.1	2482.9	2530.2	2583.8	2608.0	2629.8	2633.5
22.5°	2496.7	2571.0	2621.9	2666.4	2686.8	2697.1	2703.3
25°	2596.2	2654.8	2685.3	2700.8	2706.4	2705.1	2697.1
27.5°	2589.3	2593.8	2560.3	2527.2	2497.8	2464.5	2453.0
30°	2522.1	2469.8	2376.5	2323.5	2245.7	2184.0	2208.9
32.5°	2345.3	2241.2	2136.4	2020.7	1924.9	1897.7	1870.3
35°	2001.6	1818.6	1711.5	1587.0	1537.2	1487.4	1453.1
37.5°	1619.4	1477.8	1350.8	1269.3	1219.4	1187.9	1171.0
40°	1400.2	1272.6	1168.0	1102.0	1064.0	1028.5	1023.6
42.5°	1225.4	1106.8	1028.0	975.5	939.0	923.9	913.0
45°	1003.6	920.8	867.9	830.5	806.3	796.9	784.5
47.5°	849.5	790.9	751.2	725.8	707.5	700.5	699.6
50°	763.3	714.7	685.5	665.5	651.3	648.7	638.8
52.5°	698.5	656.5	633.7	616.2	605.9	599.0	596.0
55°	606.4	578.4	557.9	547.9	539.8	532.9	532.9
57.5°	530.6	507.2	493.6	485.1	482.6	477.8	474.7
60°	483.8	463.8	453.3	445.8	440.8	441.4	435.8
62.5°	437.9	425.0	414.9	407.4	401.5	401.6	402.0
65°	373.0	363.0	355.5	353.0	349.3	344.9	346.2
67.5°	316.0	306.7	300.9	296.6	295.3	293.0	296.6
70°	275.2	268.3	264.0	260.2	259.0	259.6	262.8
72.5°	237.8	233.0	230.1	228.4	225.6	225.8	227.8
75°	186.8	183.1	180.5	178.7	178.1	178.1	178.1
77.5°	137.2	136.3	135.2	132.5	132.6	133.3	133.5
80°	108.4	106.5	105.8	104.6	102.7	101.5	104.6
82.5°	81.0	79.1	78.4	78.2	75.3	75.1	77.7
85°	43.6	41.7	42.3	41.7	41.7	41.1	41.1
87.5°	18.8	18.4	17.9	18.5	18.1	17.6	18.7
90°	16.5	17.0	17.5	17.7	18.1	18.3	18.6
92.5°	18.5	19.4	19.9	20.0	20.2	20.4	20.6
95°	22.1	23.1	23.5	23.5	23.5	23.5	23.5
97.5°	23.2	24.3	25.0	25.1	25.3	25.3	25.5
100°	23.8	24.9	25.4	25.6	25.7	25.9	26.0
102.5°	30.5	27.1	25.5	25.7	26.0	26.2	26.5
105°	62.6	38.2	26.1	26.5	26.7	27.0	27.3
107.5°	195.0	177.1	159.0	140.7	122.3	103.9	85.6
110°	265.7	261.2	249.1	229.3	209.7	190.0	170.3



TEST NUMBER: P332063-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	310.8	310.9	308.8	304.7	300.5	296.4	292.2
115°	359.7	361.0	361.9	362.5	363.1	363.6	364.2
117.5°	402.4	403.5	404.1	404.3	404.3	404.4	404.6
120°	430.6	431.7	432.3	432.3	432.3	432.3	432.3
122.5°	457.9	458.7	459.1	459.2	459.3	459.5	459.5
125°	496.3	496.5	496.9	497.1	497.4	497.6	498.0
127.5°	535.4	535.8	535.9	535.7	535.4	535.1	534.9
130°	559.0	559.6	559.8	559.4	559.2	558.9	558.6
132.5°	581.3	581.9	581.9	581.6	581.2	580.8	580.4
135°	615.0	615.4	615.4	615.0	614.6	614.2	613.8
137.5°	645.3	646.0	646.2	645.9	645.6	645.4	645.1
140°	664.3	664.9	665.0	664.7	664.5	664.2	663.9
142.5°	682.3	682.8	682.8	682.4	682.0	681.7	681.3
145°	707.5	707.7	707.9	707.9	707.9	707.9	707.9
147.5°	730.2	730.4	730.2	729.6	729.0	728.3	727.7
150°	744.0	744.3	744.3	743.8	743.4	743.0	742.6
152.5°	756.5	757.1	757.0	756.4	755.7	755.1	754.5
155°	773.7	774.4	774.4	773.6	772.7	771.9	771.0
157.5°	788.6	789.5	789.3	788.3	787.2	786.2	785.1
160°	797.1	797.9	797.8	796.9	795.9	795.0	794.0
162.5°	804.9	805.7	805.8	804.9	804.1	803.3	802.4
165°	815.2	816.3	816.4	815.5	814.4	813.5	812.5
167.5°	823.2	824.3	824.3	823.2	822.0	820.9	819.8
170°	827.6	828.7	828.7	827.6	826.5	825.5	824.3
172.5°	830.6	831.7	831.6	830.4	829.3	828.0	826.8
175°	834.0	835.0	834.9	833.9	832.7	831.6	830.5
177.5°	835.3	836.1	836.1	835.0	833.9	832.7	831.6
180°	833.6	833.6	833.6	833.6	833.6	833.6	833.6

(END OF REPORT)