

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332069-927

Luminaire Tested: **S123DIP-S1165D805U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332069-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S1165D805U927-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 805 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6312.8 lumens
Efficiency: N/A
Efficacy: 104.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332069-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

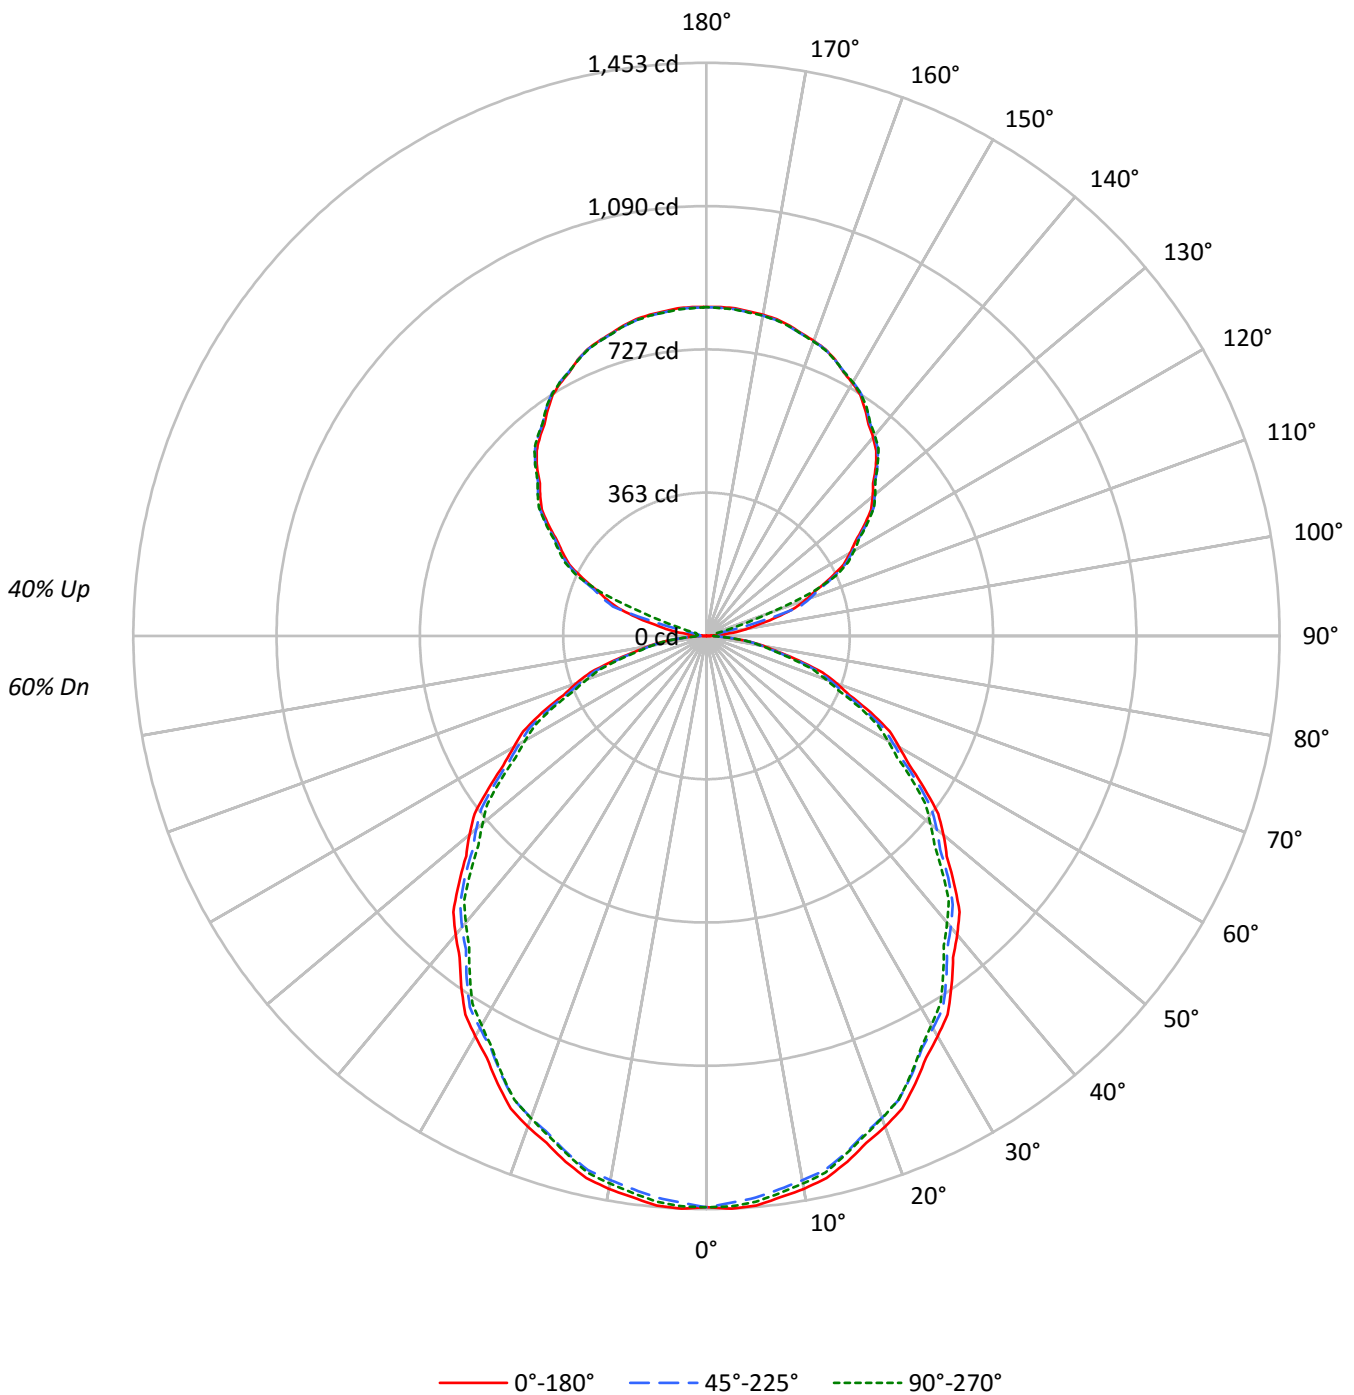



TEST NUMBER: P332069-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	89	89	89	76	76	76	65	65	65	60
1	100	95	91	88	93	89	86	83	78	75	73	67	65	64	57	56	55	50
2	91	83	77	72	85	78	73	68	68	64	60	59	56	53	50	48	46	42
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	45	42	39	35
4	76	65	57	51	71	61	54	48	53	48	43	46	42	38	40	37	34	30
5	70	58	50	43	65	54	47	41	48	42	37	42	37	33	36	32	29	26
6	64	52	44	38	60	49	41	36	43	37	33	38	33	29	33	29	26	23
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	30	26	23	21
8	55	43	35	29	51	40	33	28	36	30	26	31	27	23	27	24	21	18
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	19	17
10	48	36	28	24	45	34	27	23	30	25	21	27	22	19	23	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	15588	15588	15588
5°	15662	15446	15554
10°	15557	15312	15407
15°	15375	15139	15166
20°	15163	14892	14905
25°	14878	14598	14567
30°	14564	14270	14162
35°	14236	13925	13745
40°	13893	13543	13333
45°	13516	13192	12871
50°	13137	12762	12407
55°	12643	12314	11941
60°	12144	11795	11418
65°	11703	11227	10878
70°	11053	10581	10112
75°	10098	9736	9320
80°	9106	8722	8647
85°	7991	7694	7385



TEST NUMBER: P332069-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	136.4	2.2
10°-20°	385.2	6.1
20°-30°	569.0	9.0
30°-40°	664.6	10.5
40°-50°	668.2	10.6
50°-60°	587.0	9.3
60°-70°	437.3	6.9
70°-80°	249.1	3.9
80°-90°	73.9	1.2
90°-100°	30.3	0.5
100°-110°	144.4	2.3
110°-120°	347.0	5.5
120°-130°	441.8	7.0
130°-140°	472.1	7.5
140°-150°	441.4	7.0
150°-160°	356.1	5.6
160°-170°	229.8	3.6
170°-180°	79.2	1.3
0°-30°	1090.6	17.3
0°-40°	1755.3	27.8
0°-60°	3010.4	47.7
0°-90°	3770.7	59.7
90°-120°	521.7	8.3
90°-150°	1877.0	29.7
90°-180°	2542.0	40.3
0°-180°	6312.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1448	1448	1448	1448	1448	
5°	1450	1443	1430	1441	1440	137
15°	1380	1374	1358	1368	1361	389
25°	1253	1245	1229	1230	1226	577
35°	1083	1075	1060	1052	1046	677
45°	888	882	867	852	846	685
55°	674	672	656	643	636	603
65°	460	453	441	431	427	453
75°	243	238	234	228	224	260
85°	65	62	62	60	60	71
90°	1	7	15	17	19	5
95°	38	14	19	23	24	47
105°	185	188	136	32	27	196
115°	346	350	356	361	364	342
125°	488	493	495	497	498	436
135°	608	611	614	615	614	468
145°	701	705	707	708	708	439
155°	772	771	772	774	771	356
165°	814	813	812	816	812	230
175°	834	831	831	835	830	79
180°	834	834	834	834	834	



TEST NUMBER: P332069-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2
2.5°	1453.2	1452.3	1451.4	1450.6	1449.6	1448.0	1445.6	1443.1	1440.7	1438.2	1440.4
5°	1449.5	1448.1	1446.7	1445.3	1443.9	1441.7	1438.7	1435.6	1432.6	1429.5	1432.3
7.5°	1435.3	1433.8	1432.5	1431.1	1429.7	1427.4	1424.3	1421.2	1418.0	1414.8	1417.3
10°	1423.3	1421.9	1420.5	1419.1	1417.8	1415.3	1411.7	1408.1	1404.5	1400.9	1403.4
12.5°	1407.4	1406.2	1405.0	1403.9	1402.7	1400.4	1397.1	1393.7	1390.3	1387.0	1388.8
15°	1379.7	1378.6	1377.5	1376.4	1375.3	1372.9	1369.4	1365.7	1362.2	1358.5	1360.7
17.5°	1347.6	1346.2	1344.7	1343.3	1341.8	1339.3	1335.7	1332.1	1328.5	1324.9	1326.5
20°	1323.7	1322.0	1320.3	1318.7	1317.1	1314.4	1310.8	1307.3	1303.6	1300.1	1301.2
22.5°	1296.8	1295.1	1293.5	1291.8	1290.1	1287.5	1283.9	1280.3	1276.8	1273.1	1274.0
25°	1252.7	1251.0	1249.4	1247.7	1246.1	1243.4	1239.8	1236.3	1232.6	1229.1	1229.3
27.5°	1205.6	1204.0	1202.5	1200.8	1199.2	1196.5	1192.6	1188.7	1184.9	1181.0	1181.2
30°	1171.8	1170.4	1169.0	1167.6	1166.3	1163.6	1159.8	1155.9	1152.0	1148.1	1148.1
32.5°	1137.9	1136.1	1134.2	1132.4	1130.6	1128.1	1125.2	1122.2	1119.2	1116.3	1114.7
35°	1083.4	1081.7	1080.1	1078.4	1076.7	1074.1	1070.5	1066.9	1063.3	1059.7	1058.0
37.5°	1027.5	1025.5	1023.3	1021.3	1019.1	1016.3	1012.6	1009.0	1005.4	1001.6	999.7
40°	988.7	987.1	985.4	983.7	982.1	979.3	975.4	971.5	967.7	963.8	961.6
42.5°	949.8	948.0	946.1	944.2	942.3	939.4	935.6	931.7	927.8	924.0	921.8
45°	887.9	886.8	885.7	884.6	883.4	881.1	877.5	873.9	870.3	866.6	863.4
47.5°	826.3	824.7	823.2	821.5	819.9	817.5	814.0	810.6	807.3	803.9	800.7
50°	784.5	783.2	781.7	780.4	779.0	776.5	772.9	769.3	765.6	762.1	759.1
52.5°	740.7	739.7	738.8	737.8	736.9	734.5	730.7	726.9	723.1	719.2	716.6
55°	673.7	673.4	673.1	672.9	672.6	670.7	667.0	663.5	659.8	656.2	653.2
57.5°	609.9	609.0	608.0	607.1	606.2	604.3	601.3	598.5	595.6	592.7	590.0
60°	564.1	563.8	563.6	563.2	563.0	561.2	557.9	554.5	551.2	547.9	545.4
62.5°	523.2	522.5	521.8	521.1	520.4	518.3	515.0	511.7	508.4	505.1	502.6
65°	459.5	458.1	456.7	455.3	453.9	451.9	449.1	446.3	443.5	440.8	438.6
67.5°	392.0	390.8	389.6	388.3	387.1	385.5	383.3	381.3	379.1	377.1	375.1
70°	351.2	349.5	347.8	346.2	344.5	342.9	341.2	339.5	337.9	336.2	334.3
72.5°	308.3	307.1	305.9	304.7	303.5	301.9	300.0	298.1	296.3	294.4	292.6
75°	242.8	241.7	240.6	239.5	238.4	237.4	236.6	235.8	235.0	234.1	232.7
77.5°	184.8	184.2	183.5	183.0	182.4	181.6	180.5	179.6	178.6	177.6	176.7
80°	146.9	146.1	145.3	144.4	143.6	142.9	142.4	141.8	141.2	140.7	140.5
82.5°	110.1	109.9	109.7	109.6	109.4	109.2	109.2	109.1	108.9	108.8	108.4
85°	64.7	64.2	63.6	63.1	62.5	62.3	62.3	62.3	62.3	62.3	61.7
87.5°	26.1	25.7	25.3	24.9	24.5	24.3	24.5	24.6	24.7	24.9	24.8
90°	0.6	2.0	3.4	4.8	6.1	7.7	9.5	11.2	13.1	14.9	15.4
92.5°	11.5	11.2	10.8	10.4	10.0	10.5	11.8	13.2	14.5	15.8	16.7
95°	37.8	32.2	26.5	20.8	15.2	13.2	14.7	16.2	17.7	19.2	20.2
97.5°	75.9	73.4	70.9	68.4	65.8	59.6	49.7	39.8	29.9	20.0	21.1
100°	104.6	107.4	110.2	112.9	115.7	106.3	84.8	63.4	41.9	20.4	21.5
102.5°	137.4	139.3	141.3	143.3	145.3	134.6	111.1	87.6	64.2	40.7	37.3
105°	184.6	186.1	187.6	189.1	190.6	185.2	172.8	160.4	148.0	135.6	111.3
107.5°	234.3	235.6	236.8	238.0	239.2	240.7	242.7	244.7	246.6	248.6	230.8
110°	267.5	268.6	269.7	270.8	272.0	273.2	274.8	276.3	277.8	279.3	274.8



TEST NUMBER: P332069-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	299.3	300.2	301.3	302.2	303.2	304.4	306.0	307.5	309.0	310.5	310.6
115°	346.2	347.1	347.8	348.7	349.5	350.5	351.8	353.0	354.3	355.5	356.9
117.5°	391.7	392.7	393.7	394.7	395.7	396.6	397.2	397.8	398.5	399.1	400.2
120°	419.9	421.1	422.4	423.6	424.8	425.7	426.1	426.5	426.9	427.3	428.4
122.5°	448.6	449.6	450.7	451.7	452.7	453.4	454.0	454.6	455.0	455.6	456.4
125°	488.1	489.1	490.2	491.3	492.4	493.3	493.8	494.3	494.9	495.4	495.7
127.5°	526.2	527.3	528.4	529.5	530.6	531.5	532.1	532.8	533.5	534.1	534.6
130°	549.9	551.0	552.2	553.3	554.4	555.2	555.7	556.3	556.8	557.4	557.9
132.5°	572.7	573.9	575.0	576.1	577.2	577.9	578.4	578.8	579.2	579.7	580.3
135°	607.5	608.4	609.2	610.1	610.9	611.6	612.1	612.7	613.2	613.8	614.2
137.5°	637.3	638.3	639.4	640.4	641.4	642.1	642.5	642.8	643.0	643.3	644.0
140°	657.1	657.9	658.8	659.6	660.4	661.0	661.5	661.9	662.3	662.7	663.2
142.5°	675.4	676.3	677.1	677.9	678.7	679.4	679.8	680.2	680.6	681.0	681.4
145°	701.1	702.0	703.0	703.9	705.0	705.5	705.8	706.1	706.4	706.6	706.9
147.5°	725.2	725.9	726.5	727.1	727.8	728.3	728.5	728.7	729.0	729.3	729.6
150°	740.1	740.5	740.9	741.3	741.7	742.1	742.4	742.7	742.9	743.2	743.5
152.5°	753.4	753.7	753.8	754.1	754.2	754.4	754.6	754.7	754.9	755.1	755.6
155°	772.3	772.1	771.7	771.5	771.2	771.1	771.3	771.4	771.5	771.7	772.4
157.5°	786.9	786.9	786.9	786.8	786.8	786.7	786.6	786.5	786.3	786.2	787.0
160°	795.8	795.7	795.6	795.4	795.3	795.1	795.0	794.9	794.7	794.6	795.4
162.5°	804.2	803.9	803.5	803.2	802.8	802.6	802.4	802.3	802.2	802.0	803.0
165°	814.4	814.0	813.6	813.2	812.8	812.5	812.4	812.2	812.1	811.9	813.0
167.5°	822.4	821.8	821.3	820.7	820.1	819.8	819.8	819.8	819.8	819.8	820.9
170°	826.8	826.2	825.7	825.1	824.6	824.3	824.3	824.3	824.3	824.3	825.5
172.5°	829.7	829.1	828.5	827.8	827.1	826.9	827.0	827.0	827.2	827.3	828.4
175°	833.6	832.9	832.3	831.6	830.8	830.6	830.7	830.8	831.0	831.2	832.1
177.5°	834.6	834.1	833.5	833.0	832.4	832.2	832.3	832.4	832.5	832.6	833.5
180°	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6



TEST NUMBER: P332069-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2
2.5°	1442.6	1444.9	1447.1	1448.1	1447.9	1447.6	1447.4	1447.2
5°	1435.0	1437.8	1440.6	1441.7	1441.1	1440.6	1440.0	1439.5
7.5°	1419.8	1422.3	1424.8	1425.8	1425.5	1425.2	1424.9	1424.6
10°	1405.9	1408.3	1410.9	1411.8	1411.3	1410.7	1410.2	1409.6
12.5°	1390.6	1392.4	1394.2	1395.0	1394.6	1394.3	1394.0	1393.7
15°	1362.9	1365.2	1367.4	1367.7	1366.0	1364.4	1362.7	1361.0
17.5°	1328.0	1329.6	1331.1	1331.6	1331.0	1330.4	1329.8	1329.2
20°	1302.3	1303.4	1304.5	1304.6	1303.8	1302.9	1302.1	1301.2
22.5°	1274.9	1275.8	1276.7	1276.6	1275.6	1274.5	1273.4	1272.4
25°	1229.6	1229.9	1230.2	1229.9	1229.1	1228.2	1227.4	1226.5
27.5°	1181.5	1181.6	1181.9	1181.5	1180.4	1179.3	1178.3	1177.3
30°	1148.1	1148.1	1148.1	1147.2	1145.2	1143.3	1141.3	1139.4
32.5°	1113.1	1111.6	1110.0	1108.7	1107.7	1106.6	1105.6	1104.5
35°	1056.4	1054.7	1053.0	1051.5	1050.1	1048.8	1047.3	1046.0
37.5°	997.7	995.7	993.7	992.3	991.3	990.5	989.6	988.7
40°	959.4	957.2	955.0	953.3	952.2	951.1	950.0	948.9
42.5°	919.6	917.3	915.1	913.5	912.4	911.2	910.1	909.0
45°	860.1	856.7	853.4	851.0	849.7	848.3	846.9	845.5
47.5°	797.4	794.2	790.8	788.6	787.4	786.2	785.0	783.8
50°	756.0	753.0	749.9	747.6	745.9	744.3	742.6	740.9
52.5°	714.1	711.5	708.8	706.7	705.0	703.4	701.7	700.1
55°	650.1	647.1	644.0	641.8	640.5	639.1	637.7	636.3
57.5°	587.3	584.6	581.9	579.7	578.1	576.6	574.9	573.3
60°	543.0	540.4	538.0	536.0	534.6	533.2	531.9	530.4
62.5°	500.1	497.6	495.1	493.4	492.4	491.5	490.6	489.6
65°	436.4	434.2	432.0	430.5	429.6	428.8	427.9	427.1
67.5°	373.2	371.2	369.3	367.7	366.6	365.4	364.2	363.1
70°	332.3	330.4	328.4	326.8	325.4	324.0	322.7	321.3
72.5°	291.0	289.2	287.5	286.3	285.6	284.9	284.2	283.4
75°	231.3	230.0	228.5	227.4	226.6	225.8	225.0	224.1
77.5°	175.7	174.8	173.8	173.3	173.3	173.3	173.3	173.3
80°	140.1	139.9	139.6	139.5	139.5	139.5	139.5	139.5
82.5°	107.8	107.3	106.9	106.5	106.2	106.1	105.8	105.6
85°	61.2	60.6	60.0	59.8	59.8	59.8	59.8	59.8
87.5°	24.6	24.6	24.5	24.4	24.5	24.6	24.6	24.6
90°	16.0	16.5	17.0	17.5	17.7	18.1	18.3	18.6
92.5°	17.6	18.5	19.4	19.9	20.0	20.2	20.4	20.6
95°	21.2	22.1	23.1	23.5	23.5	23.5	23.5	23.5
97.5°	22.2	23.2	24.3	25.0	25.1	25.3	25.3	25.5
100°	22.7	23.8	24.9	25.4	25.6	25.7	25.9	26.0
102.5°	33.9	30.5	27.1	25.5	25.7	26.0	26.2	26.5
105°	86.9	62.6	38.2	26.1	26.5	26.7	27.0	27.3
107.5°	212.9	195.0	177.1	159.0	140.7	122.3	103.9	85.6
110°	270.2	265.7	261.2	249.1	229.3	209.7	190.0	170.3



TEST NUMBER: P332069-927

CATALOG NUMBER: S123DIP-S1165D805U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	310.7	310.8	310.9	308.8	304.7	300.5	296.4	292.2
115°	358.2	359.7	361.0	361.9	362.5	363.1	363.6	364.2
117.5°	401.3	402.4	403.5	404.1	404.3	404.3	404.4	404.6
120°	429.5	430.6	431.7	432.3	432.3	432.3	432.3	432.3
122.5°	457.1	457.9	458.7	459.1	459.2	459.3	459.5	459.5
125°	496.0	496.3	496.5	496.9	497.1	497.4	497.6	498.0
127.5°	535.0	535.4	535.8	535.9	535.7	535.4	535.1	534.9
130°	558.5	559.0	559.6	559.8	559.4	559.2	558.9	558.6
132.5°	580.7	581.3	581.9	581.9	581.6	581.2	580.8	580.4
135°	614.6	615.0	615.4	615.4	615.0	614.6	614.2	613.8
137.5°	644.7	645.3	646.0	646.2	645.9	645.6	645.4	645.1
140°	663.8	664.3	664.9	665.0	664.7	664.5	664.2	663.9
142.5°	681.9	682.3	682.8	682.8	682.4	682.0	681.7	681.3
145°	707.2	707.5	707.7	707.9	707.9	707.9	707.9	707.9
147.5°	729.8	730.2	730.4	730.2	729.6	729.0	728.3	727.7
150°	743.7	744.0	744.3	744.3	743.8	743.4	743.0	742.6
152.5°	756.1	756.5	757.1	757.0	756.4	755.7	755.1	754.5
155°	773.1	773.7	774.4	774.4	773.6	772.7	771.9	771.0
157.5°	787.8	788.6	789.5	789.3	788.3	787.2	786.2	785.1
160°	796.2	797.1	797.9	797.8	796.9	795.9	795.0	794.0
162.5°	803.9	804.9	805.7	805.8	804.9	804.1	803.3	802.4
165°	814.1	815.2	816.3	816.4	815.5	814.4	813.5	812.5
167.5°	822.0	823.2	824.3	824.3	823.2	822.0	820.9	819.8
170°	826.5	827.6	828.7	828.7	827.6	826.5	825.5	824.3
172.5°	829.5	830.6	831.7	831.6	830.4	829.3	828.0	826.8
175°	833.1	834.0	835.0	834.9	833.9	832.7	831.6	830.5
177.5°	834.4	835.3	836.1	836.1	835.0	833.9	832.7	831.6
180°	833.6	833.6	833.6	833.6	833.6	833.6	833.6	833.6

(END OF REPORT)