

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331871-927

Luminaire Tested: **S123DIP-S340D365U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331871-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S340D365U927-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 365 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2267.1 lumens
Efficiency: N/A
Efficacy: 111.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 20.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331871-927

CATALOG NUMBER: S123DIP-S340D365U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

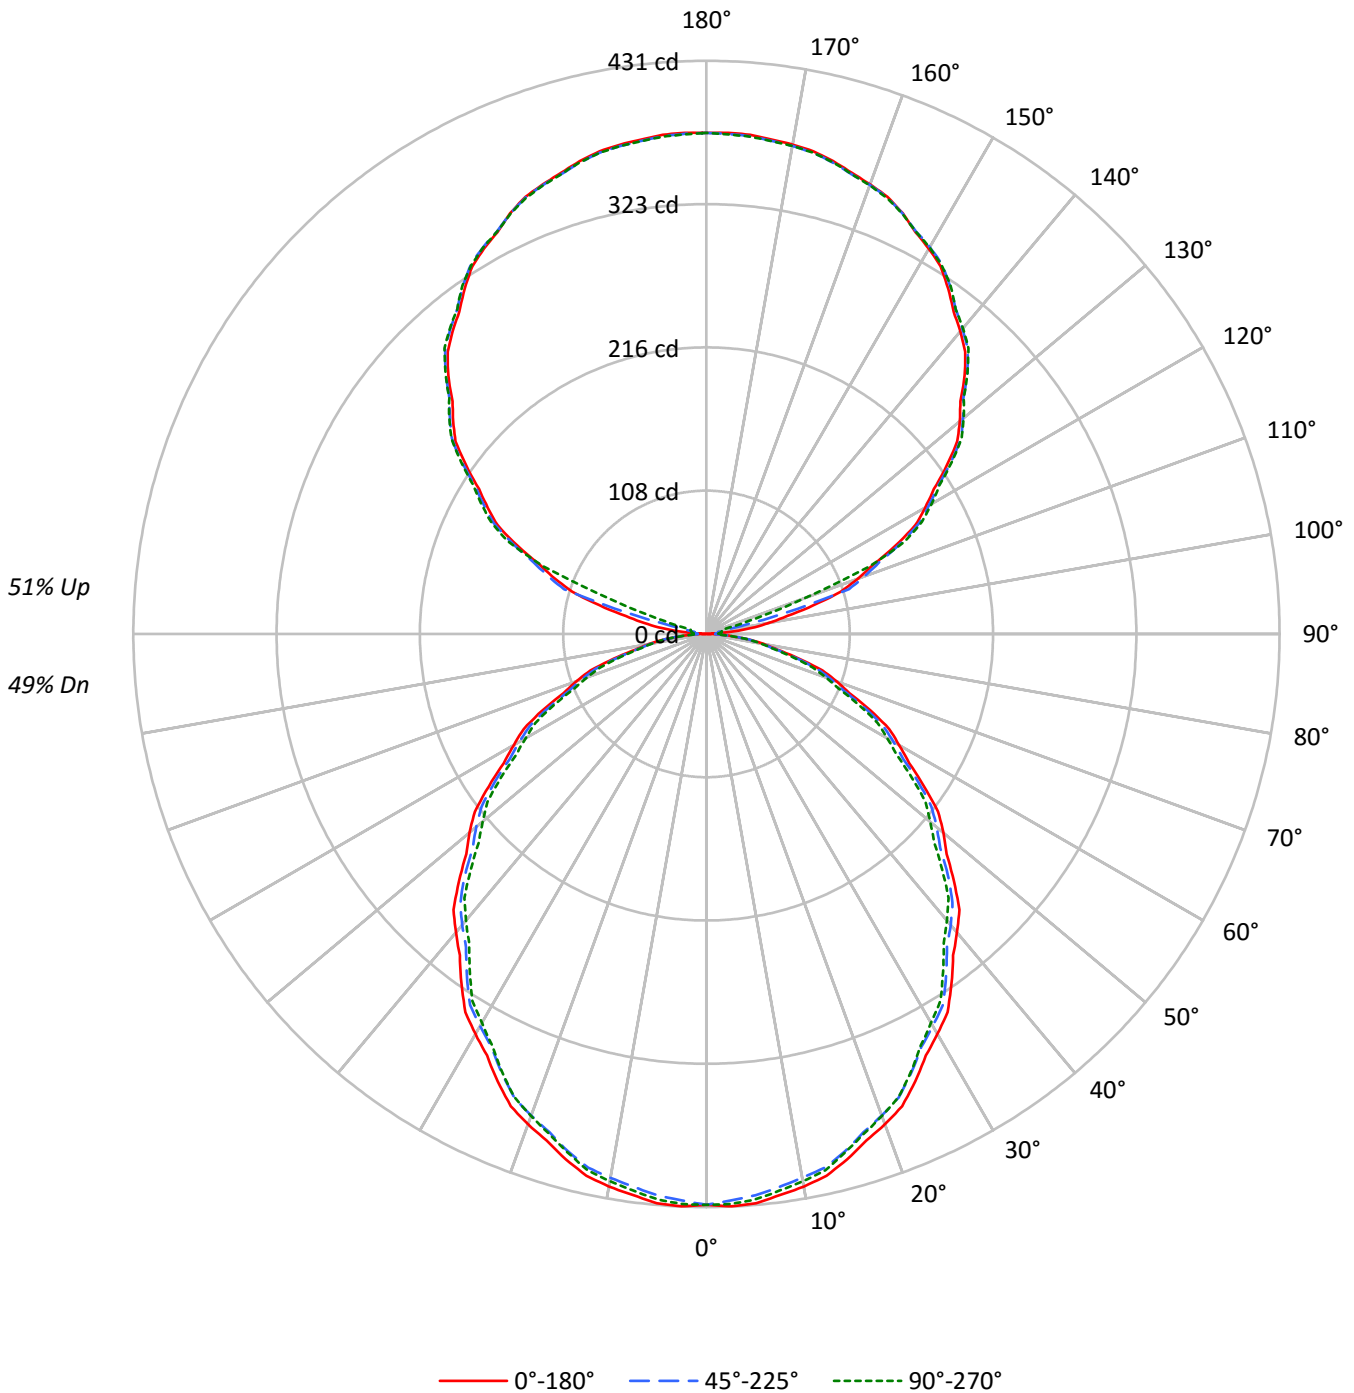



TEST NUMBER: P331871-927

CATALOG NUMBER: S123DIP-S340D365U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	55	55	55	49
1	98	93	89	86	90	86	83	80	73	70	68	60	59	57	49	48	47	41
2	89	81	75	70	82	75	70	65	64	60	56	53	50	48	43	41	39	35
3	81	71	64	58	74	66	60	55	56	51	47	47	43	40	38	36	33	29
4	74	63	55	49	68	59	52	46	50	44	40	42	38	34	34	31	29	25
5	68	56	48	42	62	52	45	40	45	39	35	37	33	30	31	28	25	22
6	63	51	42	37	57	47	40	34	40	34	30	34	29	26	28	25	22	19
7	58	46	38	32	53	42	35	30	36	31	27	31	26	23	25	22	20	17
8	54	41	34	28	49	39	32	27	33	28	24	28	24	21	23	20	18	15
9	50	38	30	25	46	35	28	24	30	25	21	26	22	18	22	18	16	14
10	47	35	27	23	43	32	26	21	28	23	19	24	20	17	20	17	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4621	4621	4621
5°	4643	4578	4611
10°	4611	4539	4568
15°	4558	4488	4496
20°	4495	4415	4418
25°	4410	4327	4318
30°	4318	4230	4197
35°	4221	4127	4075
40°	4118	4014	3953
45°	4007	3911	3815
50°	3893	3783	3677
55°	3748	3652	3539
60°	3599	3496	3384
65°	3469	3326	3224
70°	3276	3138	2996
75°	2994	2886	2766
80°	2703	2585	2566
85°	2371	2285	2186



TEST NUMBER: P331871-927

CATALOG NUMBER: S123DIP-S340D365U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	40.4	1.8
10°-20°	114.2	5.0
20°-30°	168.7	7.4
30°-40°	197.0	8.7
40°-50°	198.1	8.7
50°-60°	174.0	7.7
60°-70°	129.6	5.7
70°-80°	73.8	3.3
80°-90°	22.3	1.0
90°-100°	13.7	0.6
100°-110°	65.3	2.9
110°-120°	156.8	6.9
120°-130°	199.7	8.8
130°-140°	213.4	9.4
140°-150°	199.5	8.8
150°-160°	160.9	7.1
160°-170°	103.9	4.6
170°-180°	35.8	1.6
0°-30°	323.3	14.3
0°-40°	520.3	22.9
0°-60°	892.4	39.4
0°-90°	1118.1	49.3
90°-120°	235.8	10.4
90°-150°	848.4	37.4
90°-180°	1149.0	50.7
0°-180°	2267.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	429	429	429	429	429	
5°	430	428	424	427	427	41
15°	409	407	403	405	404	115
25°	371	369	364	365	364	171
35°	321	319	314	312	310	201
45°	263	262	257	253	251	203
55°	200	199	195	191	189	179
65°	136	134	131	128	127	134
75°	72	70	69	68	66	77
85°	19	18	18	18	18	21
90°	0	3	7	8	8	2
95°	17	6	9	11	11	21
105°	83	85	61	15	12	88
115°	156	158	161	163	165	154
125°	221	223	224	224	225	197
135°	275	276	277	278	277	211
145°	317	319	319	320	320	198
155°	349	349	349	350	348	161
165°	368	367	367	369	367	104
175°	377	376	376	377	375	36
180°	377	377	377	377	377	



TEST NUMBER: P331871-927

CATALOG NUMBER: S123DIP-S340D365U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	429.3	429.3	429.3	429.3	429.3	429.3	429.3	429.3	429.3	429.3	429.3
2.5°	430.8	430.5	430.2	430.0	429.7	429.2	428.5	427.8	427.1	426.4	427.0
5°	429.7	429.2	428.8	428.4	428.0	427.4	426.4	425.6	424.6	423.7	424.5
7.5°	425.5	425.0	424.6	424.2	423.8	423.1	422.2	421.3	420.3	419.4	420.1
10°	421.9	421.5	421.0	420.6	420.3	419.5	418.4	417.4	416.3	415.3	416.0
12.5°	417.2	416.8	416.5	416.1	415.8	415.1	414.2	413.1	412.1	411.1	411.7
15°	409.0	408.7	408.3	408.0	407.7	406.9	405.9	404.8	403.8	402.7	403.4
17.5°	399.4	399.0	398.6	398.2	397.8	397.0	395.9	394.9	393.8	392.8	393.2
20°	392.4	391.9	391.4	390.9	390.4	389.6	388.6	387.5	386.4	385.4	385.7
22.5°	384.4	383.9	383.4	382.9	382.5	381.7	380.6	379.5	378.4	377.4	377.6
25°	371.3	370.8	370.3	369.9	369.4	368.6	367.5	366.5	365.4	364.3	364.4
27.5°	357.4	356.9	356.4	355.9	355.5	354.7	353.6	352.4	351.3	350.1	350.1
30°	347.4	346.9	346.5	346.1	345.7	344.9	343.8	342.6	341.5	340.3	340.3
32.5°	337.3	336.8	336.2	335.6	335.2	334.4	333.5	332.6	331.8	330.9	330.4
35°	321.2	320.7	320.1	319.6	319.2	318.4	317.3	316.2	315.2	314.1	313.6
37.5°	304.6	304.0	303.3	302.7	302.1	301.3	300.2	299.0	298.0	296.9	296.4
40°	293.1	292.6	292.1	291.6	291.1	290.3	289.1	288.0	286.8	285.7	285.0
42.5°	281.5	281.0	280.4	279.9	279.3	278.5	277.3	276.2	275.0	273.9	273.2
45°	263.2	262.8	262.5	262.2	261.9	261.2	260.1	259.0	257.9	256.9	256.0
47.5°	244.9	244.5	244.0	243.5	243.0	242.3	241.3	240.3	239.3	238.3	237.3
50°	232.5	232.1	231.7	231.3	230.9	230.1	229.1	228.1	227.0	225.9	225.0
52.5°	219.5	219.3	219.0	218.7	218.4	217.7	216.6	215.5	214.4	213.2	212.5
55°	199.7	199.6	199.6	199.5	199.4	198.8	197.7	196.6	195.6	194.6	193.6
57.5°	180.8	180.5	180.2	180.0	179.7	179.1	178.2	177.4	176.6	175.7	174.9
60°	167.2	167.2	167.1	167.0	166.9	166.4	165.3	164.4	163.4	162.4	161.7
62.5°	155.1	154.9	154.7	154.5	154.2	153.7	152.7	151.7	150.7	149.7	149.0
65°	136.2	135.8	135.4	135.0	134.6	134.0	133.2	132.3	131.5	130.6	130.0
67.5°	116.2	115.8	115.5	115.1	114.8	114.2	113.7	113.0	112.4	111.8	111.2
70°	104.1	103.6	103.1	102.6	102.1	101.6	101.2	100.6	100.1	99.7	99.1
72.5°	91.4	91.0	90.7	90.3	89.9	89.5	89.0	88.4	87.9	87.3	86.7
75°	72.0	71.6	71.3	71.0	70.7	70.3	70.1	69.9	69.6	69.4	69.0
77.5°	54.7	54.6	54.4	54.3	54.0	53.8	53.6	53.2	52.9	52.6	52.4
80°	43.6	43.3	43.1	42.9	42.5	42.4	42.2	42.1	41.9	41.7	41.6
82.5°	32.6	32.6	32.6	32.5	32.4	32.4	32.3	32.3	32.3	32.2	32.1
85°	19.2	19.0	18.9	18.7	18.5	18.5	18.5	18.5	18.5	18.5	18.3
87.5°	7.8	7.7	7.6	7.5	7.4	7.4	7.5	7.7	7.8	7.8	7.8
90°	0.3	0.9	1.5	2.1	2.8	3.5	4.3	5.1	5.9	6.7	7.0
92.5°	5.2	5.1	4.8	4.7	4.5	4.8	5.3	5.9	6.6	7.1	7.5
95°	17.1	14.5	12.0	9.4	6.9	5.9	6.7	7.3	8.0	8.7	9.1
97.5°	34.3	33.2	32.0	30.9	29.7	26.9	22.4	18.0	13.5	9.0	9.5
100°	47.3	48.6	49.8	51.0	52.3	48.1	38.3	28.7	18.9	9.3	9.7
102.5°	62.1	63.0	63.8	64.8	65.7	60.8	50.2	39.6	29.0	18.5	16.9
105°	83.4	84.1	84.8	85.5	86.2	83.7	78.1	72.5	66.9	61.3	50.3
107.5°	105.9	106.5	107.0	107.6	108.1	108.8	109.7	110.6	111.5	112.3	104.3
110°	121.0	121.4	121.9	122.4	122.9	123.5	124.2	124.8	125.6	126.3	124.2



TEST NUMBER: P331871-927

CATALOG NUMBER: S123DIP-S340D365U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	135.2	135.7	136.2	136.6	137.0	137.6	138.3	139.0	139.7	140.4	140.4
115°	156.5	156.9	157.2	157.6	158.0	158.4	159.0	159.5	160.1	160.7	161.3
117.5°	177.1	177.5	177.9	178.4	178.9	179.3	179.5	179.8	180.1	180.4	180.9
120°	189.8	190.4	190.9	191.5	192.0	192.4	192.6	192.8	193.0	193.1	193.7
122.5°	202.8	203.3	203.7	204.1	204.6	204.9	205.2	205.4	205.7	205.9	206.3
125°	220.6	221.1	221.6	222.0	222.6	222.9	223.2	223.5	223.7	223.9	224.1
127.5°	237.8	238.4	238.8	239.3	239.8	240.2	240.5	240.8	241.1	241.4	241.6
130°	248.6	249.1	249.5	250.1	250.6	251.0	251.2	251.4	251.7	251.9	252.2
132.5°	258.9	259.4	259.9	260.4	260.9	261.2	261.4	261.7	261.8	262.1	262.3
135°	274.6	275.0	275.4	275.8	276.1	276.4	276.6	276.9	277.2	277.4	277.6
137.5°	288.0	288.5	289.0	289.5	289.9	290.3	290.4	290.5	290.7	290.8	291.1
140°	297.0	297.4	297.8	298.1	298.5	298.8	299.0	299.1	299.4	299.5	299.8
142.5°	305.3	305.7	306.0	306.4	306.8	307.0	307.3	307.4	307.6	307.8	308.0
145°	316.9	317.3	317.7	318.2	318.6	318.9	319.0	319.2	319.2	319.4	319.6
147.5°	327.8	328.1	328.4	328.7	328.9	329.2	329.3	329.4	329.5	329.6	329.8
150°	334.5	334.7	334.9	335.1	335.3	335.4	335.6	335.6	335.8	335.9	336.0
152.5°	340.6	340.6	340.7	340.8	340.9	341.0	341.0	341.1	341.2	341.3	341.5
155°	349.1	349.0	348.8	348.7	348.6	348.6	348.6	348.6	348.7	348.8	349.1
157.5°	355.7	355.7	355.7	355.6	355.6	355.6	355.5	355.5	355.4	355.4	355.7
160°	359.7	359.7	359.6	359.5	359.5	359.4	359.3	359.3	359.3	359.2	359.5
162.5°	363.5	363.4	363.2	363.1	362.9	362.7	362.7	362.7	362.6	362.5	362.9
165°	368.1	367.9	367.7	367.6	367.3	367.3	367.2	367.1	367.0	367.0	367.5
167.5°	371.7	371.5	371.2	371.0	370.7	370.6	370.6	370.6	370.6	370.6	371.1
170°	373.7	373.4	373.2	373.0	372.7	372.6	372.6	372.6	372.6	372.6	373.1
172.5°	375.0	374.8	374.5	374.1	373.8	373.8	373.8	373.8	373.9	373.9	374.5
175°	376.8	376.4	376.1	375.9	375.6	375.4	375.5	375.6	375.6	375.7	376.1
177.5°	377.2	377.0	376.8	376.5	376.2	376.1	376.2	376.2	376.3	376.4	376.8
180°	376.8	376.8	376.8	376.8	376.8	376.8	376.8	376.8	376.8	376.8	376.8



TEST NUMBER: P331871-927

CATALOG NUMBER: S123DIP-S340D365U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	429.3	429.3	429.3	429.3	429.3	429.3	429.3	429.3
2.5°	427.6	428.3	429.0	429.3	429.2	429.1	429.0	429.0
5°	425.4	426.2	427.1	427.4	427.2	427.1	426.8	426.7
7.5°	420.9	421.6	422.3	422.6	422.6	422.5	422.4	422.2
10°	416.8	417.5	418.2	418.5	418.4	418.2	418.0	417.9
12.5°	412.2	412.7	413.3	413.5	413.4	413.3	413.2	413.1
15°	404.0	404.6	405.4	405.4	404.9	404.4	403.9	403.5
17.5°	393.6	394.1	394.6	394.7	394.5	394.3	394.2	394.0
20°	386.0	386.3	386.7	386.7	386.4	386.2	386.0	385.7
22.5°	377.9	378.2	378.4	378.4	378.1	377.8	377.5	377.2
25°	364.5	364.6	364.6	364.6	364.3	364.1	363.8	363.6
27.5°	350.2	350.3	350.3	350.2	349.9	349.6	349.3	349.0
30°	340.3	340.3	340.3	340.0	339.5	338.9	338.3	337.7
32.5°	329.9	329.5	329.1	328.7	328.4	328.0	327.7	327.4
35°	313.1	312.7	312.1	311.7	311.3	310.9	310.5	310.1
37.5°	295.7	295.2	294.5	294.1	293.9	293.6	293.3	293.1
40°	284.4	283.8	283.0	282.6	282.3	281.9	281.6	281.3
42.5°	272.6	271.9	271.2	270.8	270.5	270.1	269.8	269.4
45°	254.9	254.0	252.9	252.3	251.8	251.4	251.0	250.6
47.5°	236.4	235.4	234.4	233.8	233.4	233.1	232.7	232.3
50°	224.1	223.2	222.3	221.6	221.1	220.6	220.1	219.6
52.5°	211.7	210.9	210.1	209.5	209.0	208.5	208.0	207.6
55°	192.7	191.8	190.9	190.3	189.9	189.4	189.0	188.6
57.5°	174.1	173.3	172.5	171.8	171.3	170.9	170.4	169.9
60°	161.0	160.2	159.5	158.9	158.4	158.0	157.6	157.2
62.5°	148.2	147.5	146.8	146.2	146.0	145.7	145.4	145.1
65°	129.4	128.7	128.0	127.6	127.4	127.1	126.8	126.6
67.5°	110.6	110.0	109.5	109.0	108.7	108.3	108.0	107.7
70°	98.5	97.9	97.4	96.9	96.5	96.1	95.6	95.2
72.5°	86.3	85.7	85.2	84.8	84.7	84.4	84.2	84.0
75°	68.6	68.1	67.7	67.4	67.2	66.9	66.7	66.5
77.5°	52.0	51.8	51.5	51.4	51.4	51.4	51.4	51.4
80°	41.5	41.4	41.4	41.4	41.4	41.4	41.4	41.4
82.5°	32.0	31.8	31.7	31.5	31.5	31.4	31.4	31.3
85°	18.1	18.0	17.8	17.7	17.7	17.7	17.7	17.7
87.5°	7.8	7.8	7.8	7.8	7.8	7.8	7.8	7.8
90°	7.2	7.4	7.7	7.9	8.0	8.2	8.2	8.4
92.5°	8.0	8.4	8.8	9.0	9.0	9.1	9.2	9.3
95°	9.6	10.0	10.5	10.6	10.6	10.6	10.6	10.6
97.5°	10.0	10.5	11.0	11.2	11.3	11.4	11.5	11.6
100°	10.2	10.7	11.2	11.5	11.6	11.6	11.7	11.7
102.5°	15.4	13.8	12.3	11.6	11.6	11.7	11.9	12.0
105°	39.3	28.3	17.3	11.8	12.0	12.0	12.2	12.3
107.5°	96.3	88.2	80.1	71.9	63.6	55.3	47.0	38.7
110°	122.2	120.1	118.0	112.6	103.7	94.7	85.9	77.0



TEST NUMBER: P331871-927

CATALOG NUMBER: S123DIP-S340D365U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	140.5	140.5	140.5	139.6	137.7	135.9	134.0	132.1
115°	161.9	162.6	163.2	163.6	163.8	164.1	164.4	164.6
117.5°	181.4	181.9	182.4	182.7	182.7	182.8	182.8	182.8
120°	194.2	194.6	195.1	195.4	195.4	195.4	195.4	195.4
122.5°	206.6	207.0	207.3	207.5	207.6	207.6	207.6	207.7
125°	224.2	224.3	224.4	224.6	224.7	224.8	225.0	225.1
127.5°	241.8	242.0	242.2	242.2	242.1	242.0	241.9	241.8
130°	252.5	252.7	252.9	253.0	252.9	252.8	252.6	252.5
132.5°	262.5	262.8	263.0	263.1	262.8	262.7	262.5	262.4
135°	277.8	278.0	278.1	278.1	278.0	277.8	277.6	277.4
137.5°	291.4	291.7	292.0	292.1	291.9	291.8	291.7	291.6
140°	300.0	300.2	300.6	300.6	300.5	300.3	300.2	300.1
142.5°	308.2	308.4	308.6	308.6	308.5	308.2	308.1	307.9
145°	319.6	319.8	319.9	320.0	320.0	320.0	320.0	320.0
147.5°	329.9	330.0	330.2	330.1	329.8	329.5	329.2	328.9
150°	336.2	336.3	336.4	336.4	336.2	336.0	335.8	335.6
152.5°	341.7	342.0	342.2	342.1	341.9	341.6	341.3	341.0
155°	349.4	349.7	350.1	350.0	349.7	349.3	348.9	348.5
157.5°	356.1	356.5	356.9	356.8	356.3	355.8	355.3	354.8
160°	359.9	360.3	360.7	360.6	360.2	359.7	359.3	358.9
162.5°	363.4	363.8	364.2	364.2	363.8	363.5	363.1	362.7
165°	368.0	368.5	369.0	369.0	368.6	368.1	367.7	367.3
167.5°	371.5	372.1	372.6	372.6	372.1	371.5	371.1	370.6
170°	373.6	374.1	374.5	374.5	374.1	373.6	373.1	372.6
172.5°	374.9	375.4	375.9	375.9	375.3	374.8	374.2	373.7
175°	376.5	377.0	377.4	377.4	376.9	376.4	375.9	375.4
177.5°	377.2	377.6	378.0	377.9	377.4	376.9	376.4	375.9
180°	376.8	376.8	376.8	376.8	376.8	376.8	376.8	376.8

(END OF REPORT)