

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331946-927

Luminaire Tested: **S123DIP-S560D1195U927-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331946-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S560D1195U927-4F0-1E-UDD-A
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1195 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5671.3 lumens
Efficiency: N/A
Efficacy: 114.8 lumens/watt
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 49.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

Luminous Intensity Polar Plot

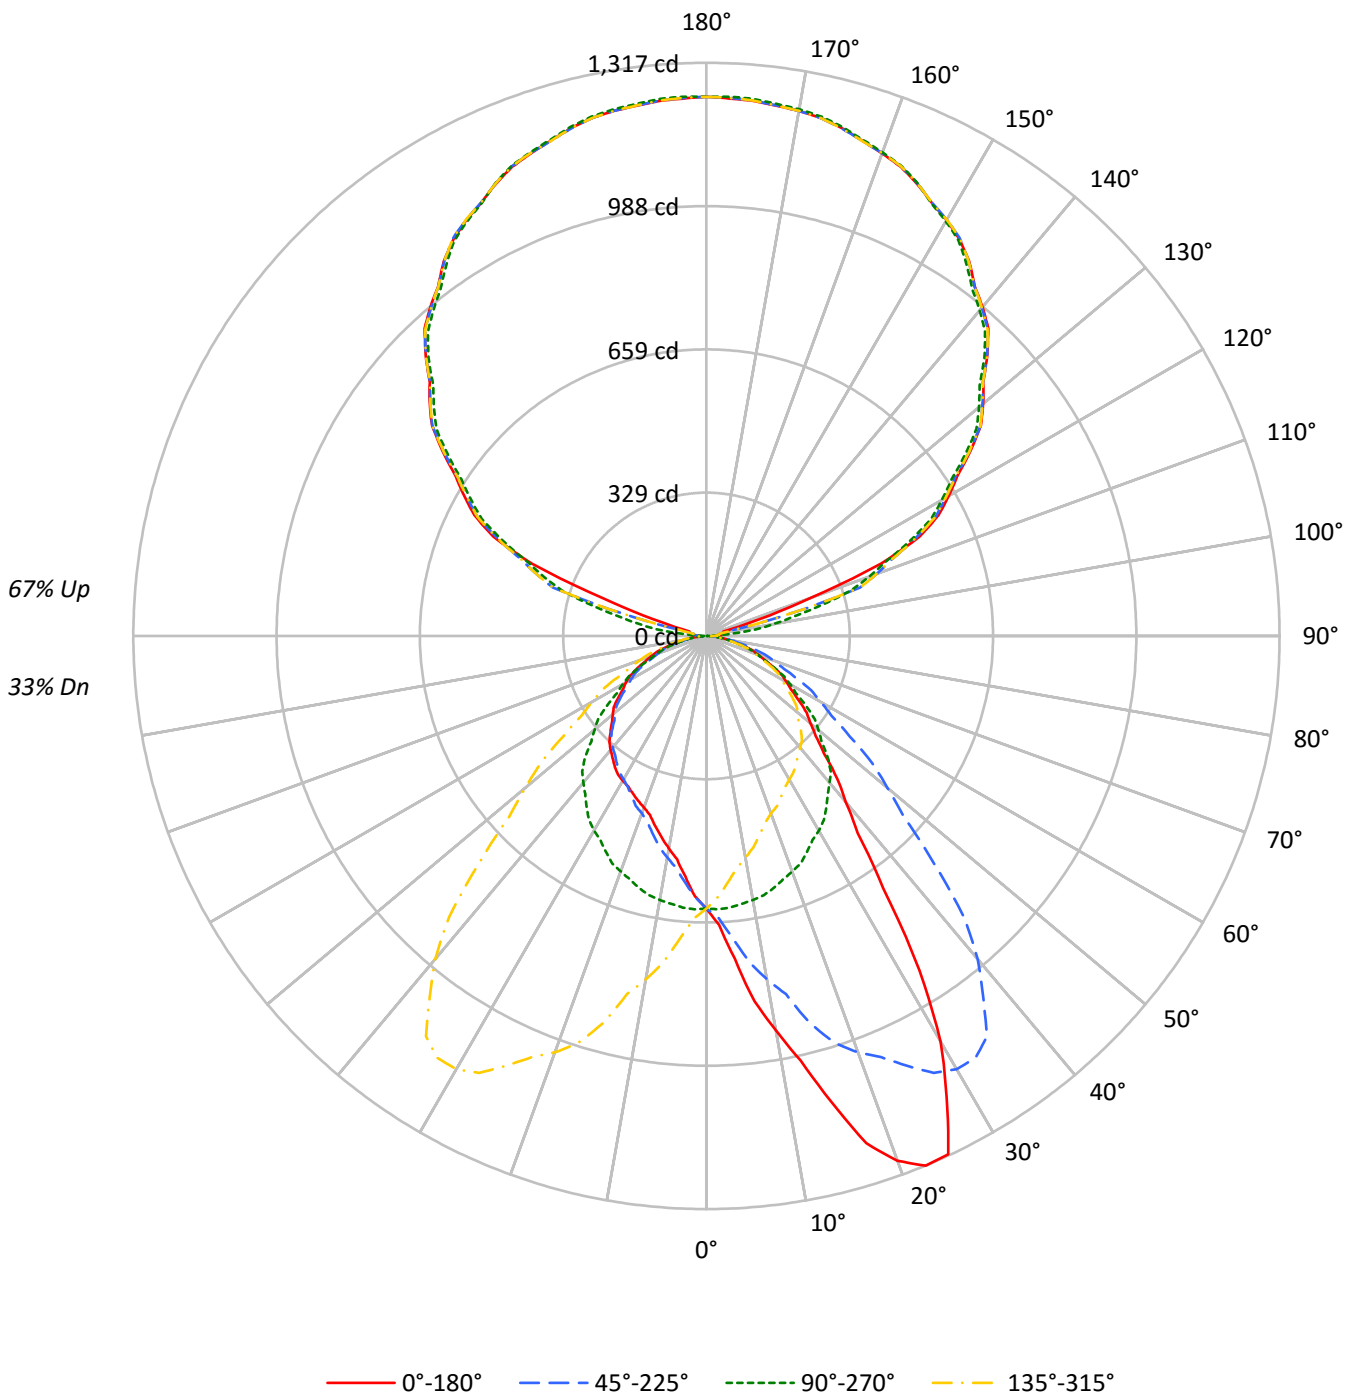



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	33
1	94	90	86	83	85	81	78	75	65	63	61	50	49	48	36	36	35	28
2	86	79	73	68	77	71	66	62	57	54	51	44	42	40	32	31	30	24
3	78	69	62	57	70	63	57	52	51	46	43	39	36	34	29	27	25	21
4	72	61	54	48	64	56	49	44	45	40	37	35	32	29	26	24	22	18
5	66	55	47	41	59	50	43	38	40	35	31	31	28	25	23	21	19	16
6	61	49	41	36	54	45	38	33	36	31	27	28	25	22	21	19	17	14
7	56	44	36	31	50	40	33	29	33	28	24	26	22	19	19	17	15	12
8	52	40	32	27	47	36	30	25	30	25	21	23	20	17	18	15	13	11
9	48	36	29	24	43	33	27	22	27	22	19	22	18	15	16	14	12	10
10	45	33	26	22	41	30	24	20	25	20	17	20	16	14	15	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	6740	6740	6740	6740
5°	8038	6769	5999	6769
10°	10061	6735	5418	6735
15°	12340	6681	5045	6681
20°	14701	6596	4803	6596
25°	15610	6494	4749	6494
30°	13380	6418	4774	6418
35°	9305	6311	4824	6311
40°	7009	6185	4808	6185
45°	5820	5999	4748	5999
50°	5213	5620	4706	5620
55°	4874	5210	4647	5210
60°	4573	4781	4598	4781
65°	4297	4358	4452	4358
70°	4028	3877	4239	3877
75°	3606	3394	3889	3394
80°	3155	2783	3347	2783
85°	2470	2025	2248	2025



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.7	1.1
10°-20°	197.8	3.5
20°-30°	332.0	5.9
30°-40°	375.9	6.6
40°-50°	337.1	5.9
50°-60°	272.0	4.8
60°-70°	189.6	3.3
70°-80°	99.6	1.8
80°-90°	27.8	0.5
90°-100°	45.0	0.8
100°-110°	214.7	3.8
110°-120°	515.6	9.1
120°-130°	656.6	11.6
130°-140°	701.5	12.4
140°-150°	656.0	11.6
150°-160°	529.2	9.3
160°-170°	341.5	6.0
170°-180°	117.7	2.1
0°-30°	591.5	10.4
0°-40°	967.4	17.1
0°-60°	1576.5	27.8
0°-90°	1893.5	33.4
90°-120°	775.3	13.7
90°-150°	2789.4	49.2
90°-180°	3778.0	66.6
0°-180°	5671.3	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	626	626	626	626	626	
5°	744	626	555	626	744	77
15°	1107	600	453	600	1107	320
25°	1314	547	400	547	1314	576
35°	708	480	367	480	708	460
45°	382	394	312	394	382	303
55°	260	278	248	278	260	233
65°	169	171	175	171	169	168
75°	87	82	94	82	87	93
85°	20	16	18	16	20	24
90°	28	1	28	1	28	14
95°	35	56	35	56	35	29
105°	40	274	40	274	40	93
115°	541	514	541	514	541	500
125°	740	725	740	725	740	661
135°	912	903	912	903	912	703
145°	1052	1042	1052	1042	1052	657
155°	1146	1148	1146	1148	1146	528
165°	1208	1210	1208	1210	1208	341
175°	1234	1239	1234	1239	1234	117
180°	1239	1239	1239	1239	1239	



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2
2.5°	664.6	664.1	662.9	663.8	661.9	659.3	659.0	656.6	649.5	649.0	647.1
5°	743.9	741.5	741.2	740.9	736.7	730.9	719.9	719.1	704.5	697.2	688.4
7.5°	846.8	848.0	843.6	839.7	826.7	818.2	806.4	791.5	773.6	755.4	743.3
10°	920.5	930.5	918.1	909.6	901.7	886.8	869.6	848.0	826.5	801.3	782.2
12.5°	999.7	1004.6	1002.1	994.0	981.8	959.2	928.5	904.8	884.9	843.0	826.1
15°	1107.4	1125.9	1114.1	1086.8	1087.4	1065.9	1025.8	981.8	958.5	921.7	871.6
17.5°	1222.3	1224.6	1219.5	1196.7	1181.5	1152.0	1115.0	1072.9	1025.5	981.1	928.0
20°	1283.4	1281.6	1271.0	1259.1	1233.0	1210.0	1169.6	1122.6	1061.9	1018.2	960.3
22.5°	1317.4	1314.3	1309.3	1299.4	1277.7	1252.9	1216.7	1165.3	1107.6	1047.3	980.4
25°	1314.3	1318.3	1318.9	1316.1	1308.6	1293.7	1265.2	1224.2	1166.6	1089.3	1019.5
27.5°	1195.4	1200.9	1217.2	1231.6	1247.7	1264.0	1261.9	1241.5	1198.9	1132.0	1046.7
30°	1076.5	1064.3	1094.4	1132.3	1158.1	1203.6	1229.1	1230.6	1206.7	1149.3	1066.1
32.5°	911.4	924.8	938.0	984.7	1041.1	1092.2	1142.9	1183.8	1188.4	1150.2	1077.5
35°	708.1	724.8	749.1	773.4	834.1	886.2	975.4	1053.1	1115.0	1123.2	1078.6
37.5°	570.6	578.9	594.2	618.5	658.2	720.2	789.2	887.3	977.0	1043.7	1046.6
40°	498.8	501.2	518.5	537.0	569.2	620.1	682.4	769.1	876.5	969.7	1008.5
42.5°	444.9	450.3	457.6	475.4	501.0	539.3	597.1	668.9	767.3	874.5	950.5
45°	382.3	388.3	392.9	404.7	422.9	448.7	489.1	554.6	629.5	740.3	842.6
47.5°	340.9	341.4	344.8	353.7	366.1	385.5	414.0	456.1	524.9	614.7	719.7
50°	311.3	316.2	317.3	324.3	334.1	348.3	372.0	407.7	464.2	543.1	639.6
52.5°	290.4	291.8	295.2	300.3	308.8	319.9	340.4	368.4	412.7	480.0	568.7
55°	259.7	259.7	263.1	267.0	271.9	281.9	295.5	316.2	349.8	402.0	475.5
57.5°	231.3	232.8	235.2	236.4	240.5	247.2	258.6	274.3	299.4	339.5	397.9
60°	212.4	215.1	214.8	217.2	220.9	226.0	235.8	248.5	270.9	303.1	352.3
62.5°	195.9	195.7	195.7	198.5	202.2	207.1	213.4	224.4	243.5	272.0	313.9
65°	168.7	168.1	170.2	172.1	173.3	176.9	181.7	191.5	204.2	225.5	257.9
67.5°	144.6	142.8	143.9	144.6	146.6	149.5	154.0	160.0	170.2	187.2	211.7
70°	128.0	126.5	126.2	126.8	128.7	130.8	134.1	139.9	149.2	163.0	180.9
72.5°	111.1	110.0	110.0	111.3	112.2	113.5	115.9	121.2	128.7	138.9	155.6
75°	86.7	86.7	86.7	87.1	88.0	89.2	91.0	93.7	99.5	106.8	118.0
77.5°	65.0	65.0	64.6	64.6	65.9	66.5	66.9	69.4	72.6	77.6	85.7
80°	50.9	49.4	50.1	50.9	51.6	51.9	52.8	53.4	56.2	58.9	64.6
82.5°	37.9	36.6	36.7	38.1	38.3	38.5	39.5	40.3	41.4	43.8	46.9
85°	20.0	20.0	20.4	20.4	20.6	20.4	21.2	21.5	21.5	23.1	24.9
87.5°	12.8	12.2	12.4	12.6	12.2	12.4	12.4	12.5	12.6	12.7	12.4
90°	27.6	27.2	26.8	26.4	26.0	25.3	24.6	23.7	22.9	22.1	19.4
92.5°	30.6	30.3	30.1	29.8	29.5	28.8	27.5	26.1	24.9	23.5	21.5
95°	34.9	34.9	34.9	34.9	34.9	34.2	32.8	31.4	29.9	28.5	26.3
97.5°	37.9	37.7	37.5	37.3	37.1	36.2	34.5	32.9	31.3	29.6	44.4
100°	38.7	38.4	38.3	38.0	37.9	36.9	35.3	33.7	32.0	30.3	62.3
102.5°	39.4	39.1	38.7	38.3	37.9	40.2	45.3	50.4	55.5	60.5	95.4
105°	40.5	40.1	39.7	39.3	38.9	56.7	92.9	129.1	165.3	201.5	220.0
107.5°	127.2	154.5	181.7	209.1	236.3	263.2	289.8	316.3	342.9	369.5	366.5
110°	253.1	282.3	311.6	340.9	370.1	388.1	394.8	401.6	408.4	415.1	412.8



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	434.2	440.4	446.6	452.7	458.9	462.0	461.8	461.7	461.6	461.4	459.2
115°	541.1	540.3	539.6	538.7	537.9	536.5	534.4	532.3	530.4	528.3	526.5
117.5°	601.2	601.0	600.9	600.7	600.6	599.6	598.0	596.4	594.7	593.1	592.2
120°	642.4	642.4	642.4	642.4	642.4	641.6	639.9	638.3	636.7	635.0	634.5
122.5°	682.9	682.8	682.5	682.4	682.2	681.6	680.5	679.3	678.2	677.0	676.2
125°	740.0	739.6	739.2	738.7	738.3	737.9	737.5	737.1	736.7	736.3	735.5
127.5°	794.8	795.3	795.7	796.1	796.5	796.3	795.7	795.0	794.4	793.7	792.7
130°	830.2	830.6	831.0	831.4	831.8	831.6	830.8	830.0	829.2	828.3	827.5
132.5°	862.5	863.2	863.7	864.3	864.8	864.7	864.0	863.1	862.3	861.5	860.8
135°	912.1	912.7	913.3	913.9	914.6	914.6	913.9	913.3	912.7	912.1	911.2
137.5°	958.6	959.1	959.5	959.9	960.3	960.0	959.0	958.1	957.0	956.1	955.6
140°	986.7	987.1	987.5	987.9	988.2	988.1	987.2	986.4	985.6	984.8	984.2
142.5°	1012.4	1013.0	1013.5	1014.2	1014.7	1014.6	1014.0	1013.4	1012.7	1012.0	1011.5
145°	1051.9	1051.9	1051.9	1051.9	1051.9	1051.8	1051.4	1051.0	1050.5	1050.1	1049.7
147.5°	1081.4	1082.4	1083.3	1084.3	1085.2	1085.4	1085.1	1084.7	1084.3	1083.8	1083.4
150°	1103.5	1104.1	1104.8	1105.3	1106.0	1106.0	1105.6	1105.3	1104.9	1104.5	1104.1
152.5°	1121.2	1122.1	1123.1	1124.0	1125.0	1125.1	1124.3	1123.6	1122.8	1122.1	1121.9
155°	1145.9	1147.1	1148.3	1149.5	1150.7	1150.9	1149.9	1148.8	1147.8	1146.8	1146.6
157.5°	1166.6	1168.2	1169.8	1171.5	1173.1	1173.2	1172.0	1170.8	1169.6	1168.3	1168.5
160°	1179.9	1181.3	1182.8	1184.2	1185.7	1185.7	1184.5	1183.3	1182.1	1180.8	1181.1
162.5°	1192.4	1193.7	1194.9	1196.2	1197.5	1197.5	1196.0	1194.7	1193.3	1191.8	1192.1
165°	1207.5	1208.9	1210.4	1211.8	1213.2	1213.1	1211.5	1209.9	1208.2	1206.6	1206.8
167.5°	1218.4	1220.0	1221.6	1223.3	1225.0	1225.0	1223.3	1221.6	1220.0	1218.4	1218.4
170°	1225.0	1226.6	1228.3	1229.9	1231.5	1231.5	1229.9	1228.3	1226.6	1225.0	1225.0
172.5°	1228.7	1230.5	1232.3	1234.1	1235.9	1236.0	1234.3	1232.7	1231.1	1229.4	1229.2
175°	1234.2	1235.9	1237.5	1239.1	1240.7	1240.9	1239.4	1238.0	1236.6	1235.1	1234.9
177.5°	1235.9	1237.5	1239.1	1240.8	1242.4	1242.5	1241.3	1239.9	1238.7	1237.3	1237.2
180°	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2
2.5°	645.6	643.7	641.7	638.3	635.4	631.3	630.1	628.7	624.3	620.4	617.5
5°	685.1	677.8	667.2	657.4	649.6	639.0	632.9	626.5	617.4	609.3	602.5
7.5°	726.4	712.0	695.5	677.7	661.1	645.0	632.1	620.6	607.8	595.7	586.4
10°	759.1	738.5	715.4	690.5	669.3	648.6	631.4	616.2	599.8	585.6	573.7
12.5°	796.5	765.9	734.1	703.9	678.7	650.1	629.2	609.9	591.4	574.2	560.9
15°	840.7	801.9	764.3	722.7	684.4	648.6	623.8	599.5	578.0	560.4	543.4
17.5°	881.0	837.0	787.4	736.9	690.8	648.3	613.5	586.1	559.1	537.6	520.6
20°	903.8	853.7	797.6	745.1	694.2	646.8	608.6	575.8	546.8	523.9	504.9
22.5°	923.5	864.9	806.8	750.8	694.0	642.9	599.7	565.9	534.3	512.1	491.8
25°	943.9	873.8	815.6	749.7	686.3	633.5	584.9	546.8	515.2	489.1	468.2
27.5°	961.4	873.2	804.1	733.2	674.3	621.4	569.6	528.5	495.0	466.7	445.4
30°	973.0	874.4	792.2	722.1	662.7	608.0	557.6	516.4	481.2	452.3	432.4
32.5°	980.3	873.7	781.3	706.5	644.2	595.9	544.8	502.1	465.9	437.6	418.3
35°	984.5	868.3	762.5	674.5	614.4	567.4	524.6	480.3	442.4	416.0	394.1
37.5°	976.0	857.1	740.6	643.5	577.7	531.5	495.4	457.7	421.4	392.4	373.5
40°	962.7	849.9	723.6	621.7	552.5	507.9	477.3	440.2	404.4	376.8	359.3
42.5°	937.2	835.0	705.0	597.4	526.2	481.6	453.4	422.6	388.6	362.7	345.2
45°	875.0	802.8	676.9	561.0	487.6	441.5	416.6	394.1	363.5	338.3	323.1
47.5°	788.7	754.3	636.4	522.6	447.2	402.8	376.9	358.9	336.4	316.2	301.6
50°	728.8	714.5	609.0	496.4	420.2	376.8	352.0	335.6	319.5	299.1	285.8
52.5°	659.6	668.4	576.9	469.2	392.8	350.1	326.7	313.7	299.1	282.4	270.8
55°	562.2	594.1	521.6	423.6	352.0	311.3	289.1	277.6	269.1	256.7	246.7
57.5°	471.0	511.5	461.7	376.5	311.8	276.8	255.6	243.0	237.5	231.0	223.2
60°	416.8	456.9	419.0	345.0	284.9	251.5	232.7	222.1	216.7	212.1	205.4
62.5°	368.6	409.1	377.2	312.9	258.4	227.5	211.1	200.7	196.5	194.1	188.4
65°	302.2	337.1	315.8	263.1	220.5	193.3	178.4	171.1	167.2	166.3	162.6
67.5°	246.0	272.5	257.1	218.2	184.7	161.1	148.5	142.4	139.3	139.0	136.3
70°	209.1	233.9	222.1	186.9	158.0	139.6	128.7	123.2	121.4	121.0	119.5
72.5°	180.4	197.7	188.4	159.0	136.7	119.9	111.9	106.2	104.1	104.6	103.5
75°	133.5	146.6	141.1	120.7	102.8	91.9	85.2	81.6	79.8	80.7	79.5
77.5°	96.1	104.3	99.4	85.3	74.3	66.4	61.5	59.3	57.6	57.5	57.0
80°	72.5	77.4	74.6	66.1	57.0	50.4	46.4	44.9	44.0	43.7	43.4
82.5°	51.7	55.8	52.5	46.7	40.6	36.5	34.3	32.3	31.6	31.8	31.5
85°	26.1	27.6	26.4	22.7	20.4	18.5	17.3	16.4	15.8	16.1	15.4
87.5°	12.4	12.0	10.8	9.3	8.5	7.3	6.9	6.0	5.9	6.3	6.5
90°	16.8	14.1	11.5	9.1	7.1	5.0	2.9	1.0	2.9	5.0	7.1
92.5°	19.6	17.6	15.5	14.8	15.4	16.0	16.6	17.1	16.6	16.0	15.4
95°	24.0	21.8	19.6	22.6	31.0	39.4	47.8	56.2	47.8	39.4	31.0
97.5°	59.1	73.8	88.6	97.8	101.6	105.3	109.1	112.8	109.1	105.3	101.6
100°	94.2	126.1	158.0	171.9	167.8	163.7	159.6	155.5	159.6	163.7	167.8
102.5°	130.2	165.1	199.9	215.9	212.9	210.0	207.1	204.1	207.1	210.0	212.9
105°	238.4	256.7	275.2	283.3	281.0	278.8	276.6	274.3	276.6	278.8	281.0
107.5°	363.6	360.8	357.8	355.5	353.6	351.9	350.1	348.2	350.1	351.9	353.6
110°	410.6	408.4	406.1	404.2	402.5	400.8	399.3	397.6	399.3	400.8	402.5



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	457.0	454.7	452.5	450.6	449.2	447.7	446.2	444.7	446.2	447.7	449.2
115°	524.6	522.8	520.9	519.4	518.2	516.9	515.7	514.5	515.7	516.9	518.2
117.5°	591.2	590.3	589.3	588.1	586.6	585.0	583.5	582.0	583.5	585.0	586.6
120°	633.8	633.2	632.6	631.4	629.5	627.7	625.8	624.0	625.8	627.7	629.5
122.5°	675.5	674.7	673.9	672.8	671.2	669.7	668.2	666.7	668.2	669.7	671.2
125°	734.7	733.8	733.0	731.8	730.2	728.5	726.9	725.2	726.9	728.5	730.2
127.5°	791.8	790.8	789.8	788.5	786.9	785.2	783.5	782.0	783.5	785.2	786.9
130°	826.7	825.9	825.1	823.8	822.2	820.5	819.0	817.3	819.0	820.5	822.2
132.5°	860.2	859.5	858.8	857.7	856.0	854.4	852.8	851.1	852.8	854.4	856.0
135°	910.5	909.7	908.8	907.8	906.6	905.3	904.1	902.9	904.1	905.3	906.6
137.5°	955.2	954.7	954.3	953.3	951.7	950.1	948.6	947.1	948.6	950.1	951.7
140°	983.6	982.9	982.3	981.4	980.2	979.0	977.7	976.5	977.7	979.0	980.2
142.5°	1010.8	1010.2	1009.6	1008.7	1007.4	1006.2	1005.0	1003.8	1005.0	1006.2	1007.4
145°	1049.3	1048.9	1048.5	1047.6	1046.2	1044.7	1043.3	1041.9	1043.3	1044.7	1046.2
147.5°	1083.0	1082.6	1082.2	1081.5	1080.5	1079.7	1078.7	1077.8	1078.7	1079.7	1080.5
150°	1103.6	1103.2	1102.8	1102.3	1101.7	1101.1	1100.4	1099.9	1100.4	1101.1	1101.7
152.5°	1121.7	1121.3	1121.1	1120.9	1120.5	1120.3	1120.0	1119.7	1120.0	1120.3	1120.5
155°	1146.4	1146.1	1146.0	1146.1	1146.4	1146.8	1147.3	1147.7	1147.3	1146.8	1146.4
157.5°	1168.7	1168.9	1169.1	1169.3	1169.3	1169.3	1169.3	1169.4	1169.3	1169.3	1169.3
160°	1181.2	1181.5	1181.6	1181.9	1182.1	1182.3	1182.5	1182.6	1182.5	1182.3	1182.1
162.5°	1192.3	1192.5	1192.7	1193.0	1193.6	1194.1	1194.7	1195.2	1194.7	1194.1	1193.6
165°	1207.0	1207.2	1207.4	1207.8	1208.5	1209.0	1209.7	1210.3	1209.7	1209.0	1208.5
167.5°	1218.4	1218.4	1218.4	1218.8	1219.6	1220.4	1221.2	1222.1	1221.2	1220.4	1219.6
170°	1225.0	1225.0	1225.0	1225.4	1226.2	1227.1	1227.9	1228.7	1227.9	1227.1	1226.2
172.5°	1229.1	1228.9	1228.8	1229.2	1230.2	1231.1	1232.2	1233.1	1232.2	1231.1	1230.2
175°	1234.7	1234.5	1234.3	1234.7	1235.7	1236.8	1237.8	1238.8	1237.8	1236.8	1235.7
177.5°	1237.0	1236.8	1236.7	1237.0	1237.9	1238.7	1239.4	1240.3	1239.4	1238.7	1237.9
180°	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2
2.5°	615.8	614.1	611.6	608.0	605.1	600.5	600.5	601.2	601.2	600.9	600.5
5°	597.1	592.6	587.1	580.7	574.0	567.4	566.2	563.7	561.9	560.7	559.2
7.5°	577.3	569.3	561.3	552.5	544.3	537.6	532.9	529.0	526.5	523.9	521.9
10°	564.0	554.0	544.6	535.2	524.9	516.7	511.5	507.9	505.2	502.7	501.5
12.5°	548.3	536.8	526.4	517.5	506.2	497.7	492.8	491.2	487.9	482.8	480.1
15°	525.2	514.6	502.2	488.5	483.0	472.7	466.9	464.2	462.4	458.4	457.2
17.5°	505.5	491.5	477.6	467.4	457.2	448.9	445.7	442.3	439.9	436.7	435.7
20°	489.7	477.3	464.5	453.6	443.0	433.9	431.1	428.7	426.3	424.8	423.6
22.5°	473.6	461.2	450.7	440.5	429.1	423.2	420.2	417.6	415.8	414.8	413.6
25°	451.1	440.2	428.4	419.3	410.2	406.2	404.4	402.9	401.7	400.2	399.9
27.5°	431.0	419.1	409.6	401.0	394.5	391.2	389.4	388.7	389.0	389.5	389.8
30°	416.0	405.0	397.1	389.8	383.8	380.8	380.5	380.5	381.7	382.0	382.6
32.5°	402.1	393.2	385.2	378.2	373.6	371.5	372.7	372.7	373.7	374.5	375.6
35°	382.0	374.1	368.0	361.9	358.0	358.9	359.5	360.1	361.6	363.5	364.7
37.5°	362.7	355.9	349.6	344.8	343.0	344.7	346.1	347.4	349.2	350.5	351.7
40°	348.9	343.7	337.7	333.4	334.1	334.9	336.2	337.7	339.2	340.1	341.4
42.5°	336.0	330.7	326.1	322.5	323.4	324.6	325.3	326.1	327.8	329.5	330.2
45°	316.5	312.2	307.9	305.9	306.4	307.0	307.7	308.6	310.1	311.3	311.6
47.5°	294.5	291.4	288.6	286.5	287.5	287.2	288.0	290.0	290.5	291.2	292.9
50°	280.4	277.6	274.3	273.7	273.7	273.7	273.9	276.4	276.4	277.6	278.8
52.5°	264.8	263.1	260.9	259.8	259.4	259.4	260.6	261.8	262.3	264.0	265.2
55°	241.8	240.0	238.2	237.3	236.6	237.3	239.7	240.3	241.8	242.7	243.6
57.5°	217.9	216.4	215.0	214.5	214.4	215.2	216.5	218.3	218.7	221.5	222.8
60°	202.1	199.9	198.8	198.8	198.1	200.8	200.3	203.3	203.9	205.7	207.9
62.5°	185.8	182.9	182.4	182.4	183.3	184.1	185.0	186.3	187.9	190.2	191.8
65°	159.6	158.0	160.2	159.9	159.3	161.1	161.1	162.6	164.5	166.6	169.9
67.5°	134.8	134.0	134.2	134.2	135.1	136.1	137.0	138.3	140.5	142.8	144.9
70°	118.0	118.9	117.4	118.7	119.5	119.9	120.4	122.2	124.7	126.2	128.7
72.5°	101.8	101.7	101.9	102.3	103.3	103.9	104.4	106.5	109.2	110.4	112.4
75°	78.3	78.0	78.9	78.9	80.4	81.0	81.6	82.5	84.9	86.7	88.3
77.5°	57.2	57.5	57.4	58.4	58.0	58.1	60.0	60.8	61.1	64.7	65.5
80°	43.1	43.7	44.0	44.3	44.6	44.0	46.1	47.1	47.1	49.1	50.7
82.5°	31.0	31.3	32.1	32.4	32.5	33.0	33.3	33.9	34.6	35.6	37.5
85°	15.4	16.4	16.7	16.4	16.7	16.1	17.0	17.3	17.6	17.6	17.6
87.5°	6.7	7.4	7.7	8.5	8.7	9.5	9.7	9.3	9.5	10.4	9.6
90°	9.1	11.5	14.1	16.8	19.4	22.1	22.9	23.7	24.6	25.3	26.0
92.5°	14.8	15.5	17.6	19.6	21.5	23.5	24.9	26.1	27.5	28.8	29.5
95°	22.6	19.6	21.8	24.0	26.3	28.5	29.9	31.4	32.8	34.2	34.9
97.5°	97.8	88.6	73.8	59.1	44.4	29.6	31.3	32.9	34.5	36.2	37.1
100°	171.9	158.0	126.1	94.2	62.3	30.3	32.0	33.7	35.3	36.9	37.9
102.5°	215.9	199.9	165.1	130.2	95.4	60.5	55.5	50.4	45.3	40.2	37.9
105°	283.3	275.2	256.7	238.4	220.0	201.5	165.3	129.1	92.9	56.7	38.9
107.5°	355.5	357.8	360.8	363.6	366.5	369.5	342.9	316.3	289.8	263.2	236.3
110°	404.2	406.1	408.4	410.6	412.8	415.1	408.4	401.6	394.8	388.1	370.1



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	450.6	452.5	454.7	457.0	459.2	461.4	461.6	461.7	461.8	462.0	458.9
115°	519.4	520.9	522.8	524.6	526.5	528.3	530.4	532.3	534.4	536.5	537.9
117.5°	588.1	589.3	590.3	591.2	592.2	593.1	594.7	596.4	598.0	599.6	600.6
120°	631.4	632.6	633.2	633.8	634.5	635.0	636.7	638.3	639.9	641.6	642.4
122.5°	672.8	673.9	674.7	675.5	676.2	677.0	678.2	679.3	680.5	681.6	682.2
125°	731.8	733.0	733.8	734.7	735.5	736.3	736.7	737.1	737.5	737.9	738.3
127.5°	788.5	789.8	790.8	791.8	792.7	793.7	794.4	795.0	795.7	796.3	796.5
130°	823.8	825.1	825.9	826.7	827.5	828.3	829.2	830.0	830.8	831.6	831.8
132.5°	857.7	858.8	859.5	860.2	860.8	861.5	862.3	863.1	864.0	864.7	864.8
135°	907.8	908.8	909.7	910.5	911.2	912.1	912.7	913.3	913.9	914.6	914.6
137.5°	953.3	954.3	954.7	955.2	955.6	956.1	957.0	958.1	959.0	960.0	960.3
140°	981.4	982.3	982.9	983.6	984.2	984.8	985.6	986.4	987.2	988.1	988.2
142.5°	1008.7	1009.6	1010.2	1010.8	1011.5	1012.0	1012.7	1013.4	1014.0	1014.6	1014.7
145°	1047.6	1048.5	1048.9	1049.3	1049.7	1050.1	1050.5	1051.0	1051.4	1051.8	1051.9
147.5°	1081.5	1082.2	1082.6	1083.0	1083.4	1083.8	1084.3	1084.7	1085.1	1085.4	1085.2
150°	1102.3	1102.8	1103.2	1103.6	1104.1	1104.5	1104.9	1105.3	1105.6	1106.0	1106.0
152.5°	1120.9	1121.1	1121.3	1121.7	1121.9	1122.1	1122.8	1123.6	1124.3	1125.1	1125.0
155°	1146.1	1146.0	1146.1	1146.4	1146.6	1146.8	1147.8	1148.8	1149.9	1150.9	1150.7
157.5°	1169.3	1169.1	1168.9	1168.7	1168.5	1168.3	1169.6	1170.8	1172.0	1173.2	1173.1
160°	1181.9	1181.6	1181.5	1181.2	1181.1	1180.8	1182.1	1183.3	1184.5	1185.7	1185.7
162.5°	1193.0	1192.7	1192.5	1192.3	1192.1	1191.8	1193.3	1194.7	1196.0	1197.5	1197.5
165°	1207.8	1207.4	1207.2	1207.0	1206.8	1206.6	1208.2	1209.9	1211.5	1213.1	1213.2
167.5°	1218.8	1218.4	1218.4	1218.4	1218.4	1218.4	1220.0	1221.6	1223.3	1225.0	1225.0
170°	1225.4	1225.0	1225.0	1225.0	1225.0	1225.0	1226.6	1228.3	1229.9	1231.5	1231.5
172.5°	1229.2	1228.8	1228.9	1229.1	1229.2	1229.4	1231.1	1232.7	1234.3	1236.0	1235.9
175°	1234.7	1234.3	1234.5	1234.7	1234.9	1235.1	1236.6	1238.0	1239.4	1240.9	1240.7
177.5°	1237.0	1236.7	1236.8	1237.0	1237.2	1237.3	1238.7	1239.9	1241.3	1242.5	1242.4
180°	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2
2.5°	598.8	598.6	600.2	599.0	600.2	598.6	598.8	600.5	600.9	601.2	601.2
5°	557.4	558.3	555.2	555.2	555.2	558.3	557.4	559.2	560.7	561.9	563.7
7.5°	520.5	519.1	519.3	517.6	519.3	519.1	520.5	521.9	523.9	526.5	529.0
10°	497.9	496.1	495.4	495.7	495.4	496.1	497.9	501.5	502.7	505.2	507.9
12.5°	479.2	478.8	474.8	474.9	474.8	478.8	479.2	480.1	482.8	487.9	491.2
15°	457.2	451.5	450.8	452.7	450.8	451.5	457.2	457.2	458.4	462.4	464.2
17.5°	435.2	432.1	432.4	431.4	432.4	432.1	435.2	435.7	436.7	439.9	442.3
20°	423.6	421.8	421.4	419.3	421.4	421.8	423.6	423.6	424.8	426.3	428.7
22.5°	412.9	412.3	412.4	410.1	412.4	412.3	412.9	413.6	414.8	415.8	417.6
25°	399.6	401.1	399.9	399.9	399.9	401.1	399.6	399.9	400.2	401.7	402.9
27.5°	390.6	390.5	389.9	389.9	389.9	390.5	390.6	389.8	389.5	389.0	388.7
30°	383.8	383.5	384.1	384.1	384.1	383.5	383.8	382.6	382.0	381.7	380.5
32.5°	377.0	377.4	377.6	377.8	377.6	377.4	377.0	375.6	374.5	373.7	372.7
35°	366.5	366.8	367.7	367.1	367.7	366.8	366.5	364.7	363.5	361.6	360.1
37.5°	352.3	353.7	353.4	353.9	353.4	353.7	352.3	351.7	350.5	349.2	347.4
40°	341.7	342.5	342.2	342.2	342.2	342.5	341.7	341.4	340.1	339.2	337.7
42.5°	330.7	331.4	330.6	330.1	330.6	331.4	330.7	330.2	329.5	327.8	326.1
45°	312.8	312.2	313.1	311.9	313.1	312.2	312.8	311.6	311.3	310.1	308.6
47.5°	292.8	293.4	293.7	294.5	293.7	293.4	292.8	292.9	291.2	290.5	290.0
50°	279.4	281.2	281.2	281.0	281.2	281.2	279.4	278.8	277.6	276.4	276.4
52.5°	266.3	267.2	268.4	268.3	268.4	267.2	266.3	265.2	264.0	262.3	261.8
55°	246.1	246.7	247.2	247.6	247.2	246.7	246.1	243.6	242.7	241.8	240.3
57.5°	225.1	224.8	226.2	226.7	226.2	224.8	225.1	222.8	221.5	218.7	218.3
60°	210.2	210.2	212.7	213.6	212.7	210.2	210.2	207.9	205.7	203.9	203.3
62.5°	194.5	195.4	197.9	196.6	197.9	195.4	194.5	191.8	190.2	187.9	186.3
65°	171.4	173.9	173.6	174.8	173.6	173.9	171.4	169.9	166.6	164.5	162.6
67.5°	147.3	148.9	151.1	151.2	151.1	148.9	147.3	144.9	142.8	140.5	138.3
70°	131.1	132.6	133.8	134.7	133.8	132.6	131.1	128.7	126.2	124.7	122.2
72.5°	115.3	116.1	119.0	117.7	119.0	116.1	115.3	112.4	110.4	109.2	106.5
75°	90.4	92.5	94.3	93.5	94.3	92.5	90.4	88.3	86.7	84.9	82.5
77.5°	66.9	69.0	69.9	69.1	69.9	69.0	66.9	65.5	64.7	61.1	60.8
80°	52.8	52.5	54.3	54.0	54.3	52.5	52.8	50.7	49.1	47.1	47.1
82.5°	38.7	38.4	39.3	39.5	39.3	38.4	38.7	37.5	35.6	34.6	33.9
85°	18.8	19.7	18.5	18.2	18.5	19.7	18.8	17.6	17.6	17.6	17.3
87.5°	9.7	9.7	9.6	9.4	9.6	9.7	9.7	9.6	10.4	9.5	9.3
90°	26.4	26.8	27.2	27.6	27.2	26.8	26.4	26.0	25.3	24.6	23.7
92.5°	29.8	30.1	30.3	30.6	30.3	30.1	29.8	29.5	28.8	27.5	26.1
95°	34.9	34.9	34.9	34.9	34.9	34.9	34.9	34.9	34.2	32.8	31.4
97.5°	37.3	37.5	37.7	37.9	37.7	37.5	37.3	37.1	36.2	34.5	32.9
100°	38.0	38.3	38.4	38.7	38.4	38.3	38.0	37.9	36.9	35.3	33.7
102.5°	38.3	38.7	39.1	39.4	39.1	38.7	38.3	37.9	40.2	45.3	50.4
105°	39.3	39.7	40.1	40.5	40.1	39.7	39.3	38.9	56.7	92.9	129.1
107.5°	209.1	181.7	154.5	127.2	154.5	181.7	209.1	236.3	263.2	289.8	316.3
110°	340.9	311.6	282.3	253.1	282.3	311.6	340.9	370.1	388.1	394.8	401.6



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	452.7	446.6	440.4	434.2	440.4	446.6	452.7	458.9	462.0	461.8	461.7
115°	538.7	539.6	540.3	541.1	540.3	539.6	538.7	537.9	536.5	534.4	532.3
117.5°	600.7	600.9	601.0	601.2	601.0	600.9	600.7	600.6	599.6	598.0	596.4
120°	642.4	642.4	642.4	642.4	642.4	642.4	642.4	642.4	641.6	639.9	638.3
122.5°	682.4	682.5	682.8	682.9	682.8	682.5	682.4	682.2	681.6	680.5	679.3
125°	738.7	739.2	739.6	740.0	739.6	739.2	738.7	738.3	737.9	737.5	737.1
127.5°	796.1	795.7	795.3	794.8	795.3	795.7	796.1	796.5	796.3	795.7	795.0
130°	831.4	831.0	830.6	830.2	830.6	831.0	831.4	831.8	831.6	830.8	830.0
132.5°	864.3	863.7	863.2	862.5	863.2	863.7	864.3	864.8	864.7	864.0	863.1
135°	913.9	913.3	912.7	912.1	912.7	913.3	913.9	914.6	914.6	913.9	913.3
137.5°	959.9	959.5	959.1	958.6	959.1	959.5	959.9	960.3	960.0	959.0	958.1
140°	987.9	987.5	987.1	986.7	987.1	987.5	987.9	988.2	988.1	987.2	986.4
142.5°	1014.2	1013.5	1013.0	1012.4	1013.0	1013.5	1014.2	1014.7	1014.6	1014.0	1013.4
145°	1051.9	1051.9	1051.9	1051.9	1051.9	1051.9	1051.9	1051.9	1051.8	1051.4	1051.0
147.5°	1084.3	1083.3	1082.4	1081.4	1082.4	1083.3	1084.3	1085.2	1085.4	1085.1	1084.7
150°	1105.3	1104.8	1104.1	1103.5	1104.1	1104.8	1105.3	1106.0	1106.0	1105.6	1105.3
152.5°	1124.0	1123.1	1122.1	1121.2	1122.1	1123.1	1124.0	1125.0	1125.1	1124.3	1123.6
155°	1149.5	1148.3	1147.1	1145.9	1147.1	1148.3	1149.5	1150.7	1150.9	1149.9	1148.8
157.5°	1171.5	1169.8	1168.2	1166.6	1168.2	1169.8	1171.5	1173.1	1173.2	1172.0	1170.8
160°	1184.2	1182.8	1181.3	1179.9	1181.3	1182.8	1184.2	1185.7	1185.7	1184.5	1183.3
162.5°	1196.2	1194.9	1193.7	1192.4	1193.7	1194.9	1196.2	1197.5	1197.5	1196.0	1194.7
165°	1211.8	1210.4	1208.9	1207.5	1208.9	1210.4	1211.8	1213.2	1213.1	1211.5	1209.9
167.5°	1223.3	1221.6	1220.0	1218.4	1220.0	1221.6	1223.3	1225.0	1225.0	1223.3	1221.6
170°	1229.9	1228.3	1226.6	1225.0	1226.6	1228.3	1229.9	1231.5	1231.5	1229.9	1228.3
172.5°	1234.1	1232.3	1230.5	1228.7	1230.5	1232.3	1234.1	1235.9	1236.0	1234.3	1232.7
175°	1239.1	1237.5	1235.9	1234.2	1235.9	1237.5	1239.1	1240.7	1240.9	1239.4	1238.0
177.5°	1240.8	1239.1	1237.5	1235.9	1237.5	1239.1	1240.8	1242.4	1242.5	1241.3	1239.9
180°	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2
2.5°	600.5	600.5	605.1	608.0	611.6	614.1	615.8	617.5	620.4	624.3	628.7
5°	566.2	567.4	574.0	580.7	587.1	592.6	597.1	602.5	609.3	617.4	626.5
7.5°	532.9	537.6	544.3	552.5	561.3	569.3	577.3	586.4	595.7	607.8	620.6
10°	511.5	516.7	524.9	535.2	544.6	554.0	564.0	573.7	585.6	599.8	616.2
12.5°	492.8	497.7	506.2	517.5	526.4	536.8	548.3	560.9	574.2	591.4	609.9
15°	466.9	472.7	483.0	488.5	502.2	514.6	525.2	543.4	560.4	578.0	599.5
17.5°	445.7	448.9	457.2	467.4	477.6	491.5	505.5	520.6	537.6	559.1	586.1
20°	431.1	433.9	443.0	453.6	464.5	477.3	489.7	504.9	523.9	546.8	575.8
22.5°	420.2	423.2	429.1	440.5	450.7	461.2	473.6	491.8	512.1	534.3	565.9
25°	404.4	406.2	410.2	419.3	428.4	440.2	451.1	468.2	489.1	515.2	546.8
27.5°	389.4	391.2	394.5	401.0	409.6	419.1	431.0	445.4	466.7	495.0	528.5
30°	380.5	380.8	383.8	389.8	397.1	405.0	416.0	432.4	452.3	481.2	516.4
32.5°	372.7	371.5	373.6	378.2	385.2	393.2	402.1	418.3	437.6	465.9	502.1
35°	359.5	358.9	358.0	361.9	368.0	374.1	382.0	394.1	416.0	442.4	480.3
37.5°	346.1	344.7	343.0	344.8	349.6	355.9	362.7	373.5	392.4	421.4	457.7
40°	336.2	334.9	334.1	333.4	337.7	343.7	348.9	359.3	376.8	404.4	440.2
42.5°	325.3	324.6	323.4	322.5	326.1	330.7	336.0	345.2	362.7	388.6	422.6
45°	307.7	307.0	306.4	305.9	307.9	312.2	316.5	323.1	338.3	363.5	394.1
47.5°	288.0	287.2	287.5	286.5	288.6	291.4	294.5	301.6	316.2	336.4	358.9
50°	273.9	273.7	273.7	273.7	274.3	277.6	280.4	285.8	299.1	319.5	335.6
52.5°	260.6	259.4	259.4	259.8	260.9	263.1	264.8	270.8	282.4	299.1	313.7
55°	239.7	237.3	236.6	237.3	238.2	240.0	241.8	246.7	256.7	269.1	277.6
57.5°	216.5	215.2	214.4	214.5	215.0	216.4	217.9	223.2	231.0	237.5	243.0
60°	200.3	200.8	198.1	198.8	198.8	199.9	202.1	205.4	212.1	216.7	222.1
62.5°	185.0	184.1	183.3	182.4	182.4	182.9	185.8	188.4	194.1	196.5	200.7
65°	161.1	161.1	159.3	159.9	160.2	158.0	159.6	162.6	166.3	167.2	171.1
67.5°	137.0	136.1	135.1	134.2	134.2	134.0	134.8	136.3	139.0	139.3	142.4
70°	120.4	119.9	119.5	118.7	117.4	118.9	118.0	119.5	121.0	121.4	123.2
72.5°	104.4	103.9	103.3	102.3	101.9	101.7	101.8	103.5	104.6	104.1	106.2
75°	81.6	81.0	80.4	78.9	78.9	78.0	78.3	79.5	80.7	79.8	81.6
77.5°	60.0	58.1	58.0	58.4	57.4	57.5	57.2	57.0	57.5	57.6	59.3
80°	46.1	44.0	44.6	44.3	44.0	43.7	43.1	43.4	43.7	44.0	44.9
82.5°	33.3	33.0	32.5	32.4	32.1	31.3	31.0	31.5	31.8	31.6	32.3
85°	17.0	16.1	16.7	16.4	16.7	16.4	15.4	15.4	16.1	15.8	16.4
87.5°	9.7	9.5	8.7	8.5	7.7	7.4	6.7	6.5	6.3	5.9	6.0
90°	22.9	22.1	19.4	16.8	14.1	11.5	9.1	7.1	5.0	2.9	1.0
92.5°	24.9	23.5	21.5	19.6	17.6	15.5	14.8	15.4	16.0	16.6	17.1
95°	29.9	28.5	26.3	24.0	21.8	19.6	22.6	31.0	39.4	47.8	56.2
97.5°	31.3	29.6	44.4	59.1	73.8	88.6	97.8	101.6	105.3	109.1	112.8
100°	32.0	30.3	62.3	94.2	126.1	158.0	171.9	167.8	163.7	159.6	155.5
102.5°	55.5	60.5	95.4	130.2	165.1	199.9	215.9	212.9	210.0	207.1	204.1
105°	165.3	201.5	220.0	238.4	256.7	275.2	283.3	281.0	278.8	276.6	274.3
107.5°	342.9	369.5	366.5	363.6	360.8	357.8	355.5	353.6	351.9	350.1	348.2
110°	408.4	415.1	412.8	410.6	408.4	406.1	404.2	402.5	400.8	399.3	397.6



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	461.6	461.4	459.2	457.0	454.7	452.5	450.6	449.2	447.7	446.2	444.7
115°	530.4	528.3	526.5	524.6	522.8	520.9	519.4	518.2	516.9	515.7	514.5
117.5°	594.7	593.1	592.2	591.2	590.3	589.3	588.1	586.6	585.0	583.5	582.0
120°	636.7	635.0	634.5	633.8	633.2	632.6	631.4	629.5	627.7	625.8	624.0
122.5°	678.2	677.0	676.2	675.5	674.7	673.9	672.8	671.2	669.7	668.2	666.7
125°	736.7	736.3	735.5	734.7	733.8	733.0	731.8	730.2	728.5	726.9	725.2
127.5°	794.4	793.7	792.7	791.8	790.8	789.8	788.5	786.9	785.2	783.5	782.0
130°	829.2	828.3	827.5	826.7	825.9	825.1	823.8	822.2	820.5	819.0	817.3
132.5°	862.3	861.5	860.8	860.2	859.5	858.8	857.7	856.0	854.4	852.8	851.1
135°	912.7	912.1	911.2	910.5	909.7	908.8	907.8	906.6	905.3	904.1	902.9
137.5°	957.0	956.1	955.6	955.2	954.7	954.3	953.3	951.7	950.1	948.6	947.1
140°	985.6	984.8	984.2	983.6	982.9	982.3	981.4	980.2	979.0	977.7	976.5
142.5°	1012.7	1012.0	1011.5	1010.8	1010.2	1009.6	1008.7	1007.4	1006.2	1005.0	1003.8
145°	1050.5	1050.1	1049.7	1049.3	1048.9	1048.5	1047.6	1046.2	1044.7	1043.3	1041.9
147.5°	1084.3	1083.8	1083.4	1083.0	1082.6	1082.2	1081.5	1080.5	1079.7	1078.7	1077.8
150°	1104.9	1104.5	1104.1	1103.6	1103.2	1102.8	1102.3	1101.7	1101.1	1100.4	1099.9
152.5°	1122.8	1122.1	1121.9	1121.7	1121.3	1121.1	1120.9	1120.5	1120.3	1120.0	1119.7
155°	1147.8	1146.8	1146.6	1146.4	1146.1	1146.0	1146.1	1146.4	1146.8	1147.3	1147.7
157.5°	1169.6	1168.3	1168.5	1168.7	1168.9	1169.1	1169.3	1169.3	1169.3	1169.3	1169.4
160°	1182.1	1180.8	1181.1	1181.2	1181.5	1181.6	1181.9	1182.1	1182.3	1182.5	1182.6
162.5°	1193.3	1191.8	1192.1	1192.3	1192.5	1192.7	1193.0	1193.6	1194.1	1194.7	1195.2
165°	1208.2	1206.6	1206.8	1207.0	1207.2	1207.4	1207.8	1208.5	1209.0	1209.7	1210.3
167.5°	1220.0	1218.4	1218.4	1218.4	1218.4	1218.4	1218.8	1219.6	1220.4	1221.2	1222.1
170°	1226.6	1225.0	1225.0	1225.0	1225.0	1225.0	1225.4	1226.2	1227.1	1227.9	1228.7
172.5°	1231.1	1229.4	1229.2	1229.1	1228.9	1228.8	1229.2	1230.2	1231.1	1232.2	1233.1
175°	1236.6	1235.1	1234.9	1234.7	1234.5	1234.3	1234.7	1235.7	1236.8	1237.8	1238.8
177.5°	1238.7	1237.3	1237.2	1237.0	1236.8	1236.7	1237.0	1237.9	1238.7	1239.4	1240.3
180°	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2
2.5°	630.1	631.3	635.4	638.3	641.7	643.7	645.6	647.1	649.0	649.5	656.6
5°	632.9	639.0	649.6	657.4	667.2	677.8	685.1	688.4	697.2	704.5	719.1
7.5°	632.1	645.0	661.1	677.7	695.5	712.0	726.4	743.3	755.4	773.6	791.5
10°	631.4	648.6	669.3	690.5	715.4	738.5	759.1	782.2	801.3	826.5	848.0
12.5°	629.2	650.1	678.7	703.9	734.1	765.9	796.5	826.1	843.0	884.9	904.8
15°	623.8	648.6	684.4	722.7	764.3	801.9	840.7	871.6	921.7	958.5	981.8
17.5°	613.5	648.3	690.8	736.9	787.4	837.0	881.0	928.0	981.1	1025.5	1072.9
20°	608.6	646.8	694.2	745.1	797.6	853.7	903.8	960.3	1018.2	1061.9	1122.6
22.5°	599.7	642.9	694.0	750.8	806.8	864.9	923.5	980.4	1047.3	1107.6	1165.3
25°	584.9	633.5	686.3	749.7	815.6	873.8	943.9	1019.5	1089.3	1166.6	1224.2
27.5°	569.6	621.4	674.3	733.2	804.1	873.2	961.4	1046.7	1132.0	1198.9	1241.5
30°	557.6	608.0	662.7	722.1	792.2	874.4	973.0	1066.1	1149.3	1206.7	1230.6
32.5°	544.8	595.9	644.2	706.5	781.3	873.7	980.3	1077.5	1150.2	1188.4	1183.8
35°	524.6	567.4	614.4	674.5	762.5	868.3	984.5	1078.6	1123.2	1115.0	1053.1
37.5°	495.4	531.5	577.7	643.5	740.6	857.1	976.0	1046.6	1043.7	977.0	887.3
40°	477.3	507.9	552.5	621.7	723.6	849.9	962.7	1008.5	969.7	876.5	769.1
42.5°	453.4	481.6	526.2	597.4	705.0	835.0	937.2	950.5	874.5	767.3	668.9
45°	416.6	441.5	487.6	561.0	676.9	802.8	875.0	842.6	740.3	629.5	554.6
47.5°	376.9	402.8	447.2	522.6	636.4	754.3	788.7	719.7	614.7	524.9	456.1
50°	352.0	376.8	420.2	496.4	609.0	714.5	728.8	639.6	543.1	464.2	407.7
52.5°	326.7	350.1	392.8	469.2	576.9	668.4	659.6	568.7	480.0	412.7	368.4
55°	289.1	311.3	352.0	423.6	521.6	594.1	562.2	475.5	402.0	349.8	316.2
57.5°	255.6	276.8	311.8	376.5	461.7	511.5	471.0	397.9	339.5	299.4	274.3
60°	232.7	251.5	284.9	345.0	419.0	456.9	416.8	352.3	303.1	270.9	248.5
62.5°	211.1	227.5	258.4	312.9	377.2	409.1	368.6	313.9	272.0	243.5	224.4
65°	178.4	193.3	220.5	263.1	315.8	337.1	302.2	257.9	225.5	204.2	191.5
67.5°	148.5	161.1	184.7	218.2	257.1	272.5	246.0	211.7	187.2	170.2	160.0
70°	128.7	139.6	158.0	186.9	222.1	233.9	209.1	180.9	163.0	149.2	139.9
72.5°	111.9	119.9	136.7	159.0	188.4	197.7	180.4	155.6	138.9	128.7	121.2
75°	85.2	91.9	102.8	120.7	141.1	146.6	133.5	118.0	106.8	99.5	93.7
77.5°	61.5	66.4	74.3	85.3	99.4	104.3	96.1	85.7	77.6	72.6	69.4
80°	46.4	50.4	57.0	66.1	74.6	77.4	72.5	64.6	58.9	56.2	53.4
82.5°	34.3	36.5	40.6	46.7	52.5	55.8	51.7	46.9	43.8	41.4	40.3
85°	17.3	18.5	20.4	22.7	26.4	27.6	26.1	24.9	23.1	21.5	21.5
87.5°	6.9	7.3	8.5	9.3	10.8	12.0	12.4	12.4	12.7	12.6	12.5
90°	2.9	5.0	7.1	9.1	11.5	14.1	16.8	19.4	22.1	22.9	23.7
92.5°	16.6	16.0	15.4	14.8	15.5	17.6	19.6	21.5	23.5	24.9	26.1
95°	47.8	39.4	31.0	22.6	19.6	21.8	24.0	26.3	28.5	29.9	31.4
97.5°	109.1	105.3	101.6	97.8	88.6	73.8	59.1	44.4	29.6	31.3	32.9
100°	159.6	163.7	167.8	171.9	158.0	126.1	94.2	62.3	30.3	32.0	33.7
102.5°	207.1	210.0	212.9	215.9	199.9	165.1	130.2	95.4	60.5	55.5	50.4
105°	276.6	278.8	281.0	283.3	275.2	256.7	238.4	220.0	201.5	165.3	129.1
107.5°	350.1	351.9	353.6	355.5	357.8	360.8	363.6	366.5	369.5	342.9	316.3
110°	399.3	400.8	402.5	404.2	406.1	408.4	410.6	412.8	415.1	408.4	401.6



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	446.2	447.7	449.2	450.6	452.5	454.7	457.0	459.2	461.4	461.6	461.7
115°	515.7	516.9	518.2	519.4	520.9	522.8	524.6	526.5	528.3	530.4	532.3
117.5°	583.5	585.0	586.6	588.1	589.3	590.3	591.2	592.2	593.1	594.7	596.4
120°	625.8	627.7	629.5	631.4	632.6	633.2	633.8	634.5	635.0	636.7	638.3
122.5°	668.2	669.7	671.2	672.8	673.9	674.7	675.5	676.2	677.0	678.2	679.3
125°	726.9	728.5	730.2	731.8	733.0	733.8	734.7	735.5	736.3	736.7	737.1
127.5°	783.5	785.2	786.9	788.5	789.8	790.8	791.8	792.7	793.7	794.4	795.0
130°	819.0	820.5	822.2	823.8	825.1	825.9	826.7	827.5	828.3	829.2	830.0
132.5°	852.8	854.4	856.0	857.7	858.8	859.5	860.2	860.8	861.5	862.3	863.1
135°	904.1	905.3	906.6	907.8	908.8	909.7	910.5	911.2	912.1	912.7	913.3
137.5°	948.6	950.1	951.7	953.3	954.3	954.7	955.2	955.6	956.1	957.0	958.1
140°	977.7	979.0	980.2	981.4	982.3	982.9	983.6	984.2	984.8	985.6	986.4
142.5°	1005.0	1006.2	1007.4	1008.7	1009.6	1010.2	1010.8	1011.5	1012.0	1012.7	1013.4
145°	1043.3	1044.7	1046.2	1047.6	1048.5	1048.9	1049.3	1049.7	1050.1	1050.5	1051.0
147.5°	1078.7	1079.7	1080.5	1081.5	1082.2	1082.6	1083.0	1083.4	1083.8	1084.3	1084.7
150°	1100.4	1101.1	1101.7	1102.3	1102.8	1103.2	1103.6	1104.1	1104.5	1104.9	1105.3
152.5°	1120.0	1120.3	1120.5	1120.9	1121.1	1121.3	1121.7	1121.9	1122.1	1122.8	1123.6
155°	1147.3	1146.8	1146.4	1146.1	1146.0	1146.1	1146.4	1146.6	1146.8	1147.8	1148.8
157.5°	1169.3	1169.3	1169.3	1169.3	1169.1	1168.9	1168.7	1168.5	1168.3	1169.6	1170.8
160°	1182.5	1182.3	1182.1	1181.9	1181.6	1181.5	1181.2	1181.1	1180.8	1182.1	1183.3
162.5°	1194.7	1194.1	1193.6	1193.0	1192.7	1192.5	1192.3	1192.1	1191.8	1193.3	1194.7
165°	1209.7	1209.0	1208.5	1207.8	1207.4	1207.2	1207.0	1206.8	1206.6	1208.2	1209.9
167.5°	1221.2	1220.4	1219.6	1218.8	1218.4	1218.4	1218.4	1218.4	1218.4	1220.0	1221.6
170°	1227.9	1227.1	1226.2	1225.4	1225.0	1225.0	1225.0	1225.0	1225.0	1226.6	1228.3
172.5°	1232.2	1231.1	1230.2	1229.2	1228.8	1228.9	1229.1	1229.2	1229.4	1231.1	1232.7
175°	1237.8	1236.8	1235.7	1234.7	1234.3	1234.5	1234.7	1234.9	1235.1	1236.6	1238.0
177.5°	1239.4	1238.7	1237.9	1237.0	1236.7	1236.8	1237.0	1237.2	1237.3	1238.7	1239.9
180°	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	626.2	626.2	626.2	626.2	626.2	626.2	626.2
2.5°	659.0	659.3	661.9	663.8	662.9	664.1	664.6
5°	719.9	730.9	736.7	740.9	741.2	741.5	743.9
7.5°	806.4	818.2	826.7	839.7	843.6	848.0	846.8
10°	869.6	886.8	901.7	909.6	918.1	930.5	920.5
12.5°	928.5	959.2	981.8	994.0	1002.1	1004.6	999.7
15°	1025.8	1065.9	1087.4	1086.8	1114.1	1125.9	1107.4
17.5°	1115.0	1152.0	1181.5	1196.7	1219.5	1224.6	1222.3
20°	1169.6	1210.0	1233.0	1259.1	1271.0	1281.6	1283.4
22.5°	1216.7	1252.9	1277.7	1299.4	1309.3	1314.3	1317.4
25°	1265.2	1293.7	1308.6	1316.1	1318.9	1318.3	1314.3
27.5°	1261.9	1264.0	1247.7	1231.6	1217.2	1200.9	1195.4
30°	1229.1	1203.6	1158.1	1132.3	1094.4	1064.3	1076.5
32.5°	1142.9	1092.2	1041.1	984.7	938.0	924.8	911.4
35°	975.4	886.2	834.1	773.4	749.1	724.8	708.1
37.5°	789.2	720.2	658.2	618.5	594.2	578.9	570.6
40°	682.4	620.1	569.2	537.0	518.5	501.2	498.8
42.5°	597.1	539.3	501.0	475.4	457.6	450.3	444.9
45°	489.1	448.7	422.9	404.7	392.9	388.3	382.3
47.5°	414.0	385.5	366.1	353.7	344.8	341.4	340.9
50°	372.0	348.3	334.1	324.3	317.3	316.2	311.3
52.5°	340.4	319.9	308.8	300.3	295.2	291.8	290.4
55°	295.5	281.9	271.9	267.0	263.1	259.7	259.7
57.5°	258.6	247.2	240.5	236.4	235.2	232.8	231.3
60°	235.8	226.0	220.9	217.2	214.8	215.1	212.4
62.5°	213.4	207.1	202.2	198.5	195.7	195.7	195.9
65°	181.7	176.9	173.3	172.1	170.2	168.1	168.7
67.5°	154.0	149.5	146.6	144.6	143.9	142.8	144.6
70°	134.1	130.8	128.7	126.8	126.2	126.5	128.0
72.5°	115.9	113.5	112.2	111.3	110.0	110.0	111.1
75°	91.0	89.2	88.0	87.1	86.7	86.7	86.7
77.5°	66.9	66.5	65.9	64.6	64.6	65.0	65.0
80°	52.8	51.9	51.6	50.9	50.1	49.4	50.9
82.5°	39.5	38.5	38.3	38.1	36.7	36.6	37.9
85°	21.2	20.4	20.6	20.4	20.4	20.0	20.0
87.5°	12.4	12.4	12.2	12.6	12.4	12.2	12.8
90°	24.6	25.3	26.0	26.4	26.8	27.2	27.6
92.5°	27.5	28.8	29.5	29.8	30.1	30.3	30.6
95°	32.8	34.2	34.9	34.9	34.9	34.9	34.9
97.5°	34.5	36.2	37.1	37.3	37.5	37.7	37.9
100°	35.3	36.9	37.9	38.0	38.3	38.4	38.7
102.5°	45.3	40.2	37.9	38.3	38.7	39.1	39.4
105°	92.9	56.7	38.9	39.3	39.7	40.1	40.5
107.5°	289.8	263.2	236.3	209.1	181.7	154.5	127.2
110°	394.8	388.1	370.1	340.9	311.6	282.3	253.1



TEST NUMBER: P331946-927

CATALOG NUMBER: S123DIP-S560D1195U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	461.8	462.0	458.9	452.7	446.6	440.4	434.2
115°	534.4	536.5	537.9	538.7	539.6	540.3	541.1
117.5°	598.0	599.6	600.6	600.7	600.9	601.0	601.2
120°	639.9	641.6	642.4	642.4	642.4	642.4	642.4
122.5°	680.5	681.6	682.2	682.4	682.5	682.8	682.9
125°	737.5	737.9	738.3	738.7	739.2	739.6	740.0
127.5°	795.7	796.3	796.5	796.1	795.7	795.3	794.8
130°	830.8	831.6	831.8	831.4	831.0	830.6	830.2
132.5°	864.0	864.7	864.8	864.3	863.7	863.2	862.5
135°	913.9	914.6	914.6	913.9	913.3	912.7	912.1
137.5°	959.0	960.0	960.3	959.9	959.5	959.1	958.6
140°	987.2	988.1	988.2	987.9	987.5	987.1	986.7
142.5°	1014.0	1014.6	1014.7	1014.2	1013.5	1013.0	1012.4
145°	1051.4	1051.8	1051.9	1051.9	1051.9	1051.9	1051.9
147.5°	1085.1	1085.4	1085.2	1084.3	1083.3	1082.4	1081.4
150°	1105.6	1106.0	1106.0	1105.3	1104.8	1104.1	1103.5
152.5°	1124.3	1125.1	1125.0	1124.0	1123.1	1122.1	1121.2
155°	1149.9	1150.9	1150.7	1149.5	1148.3	1147.1	1145.9
157.5°	1172.0	1173.2	1173.1	1171.5	1169.8	1168.2	1166.6
160°	1184.5	1185.7	1185.7	1184.2	1182.8	1181.3	1179.9
162.5°	1196.0	1197.5	1197.5	1196.2	1194.9	1193.7	1192.4
165°	1211.5	1213.1	1213.2	1211.8	1210.4	1208.9	1207.5
167.5°	1223.3	1225.0	1225.0	1223.3	1221.6	1220.0	1218.4
170°	1229.9	1231.5	1231.5	1229.9	1228.3	1226.6	1225.0
172.5°	1234.3	1236.0	1235.9	1234.1	1232.3	1230.5	1228.7
175°	1239.4	1240.9	1240.7	1239.1	1237.5	1235.9	1234.2
177.5°	1241.3	1242.5	1242.4	1240.8	1239.1	1237.5	1235.9
180°	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8

(END OF REPORT)