

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331984-927

Luminaire Tested: **S123DIP-S775D1025U927-4F0-1E-UDD-A4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331984-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S775D1025U927-4F0-1E-UDD-A4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1025 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5525.4 lumens
Efficiency: N/A
Efficacy: 106.3 lumens/watt
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

Luminous Intensity Polar Plot

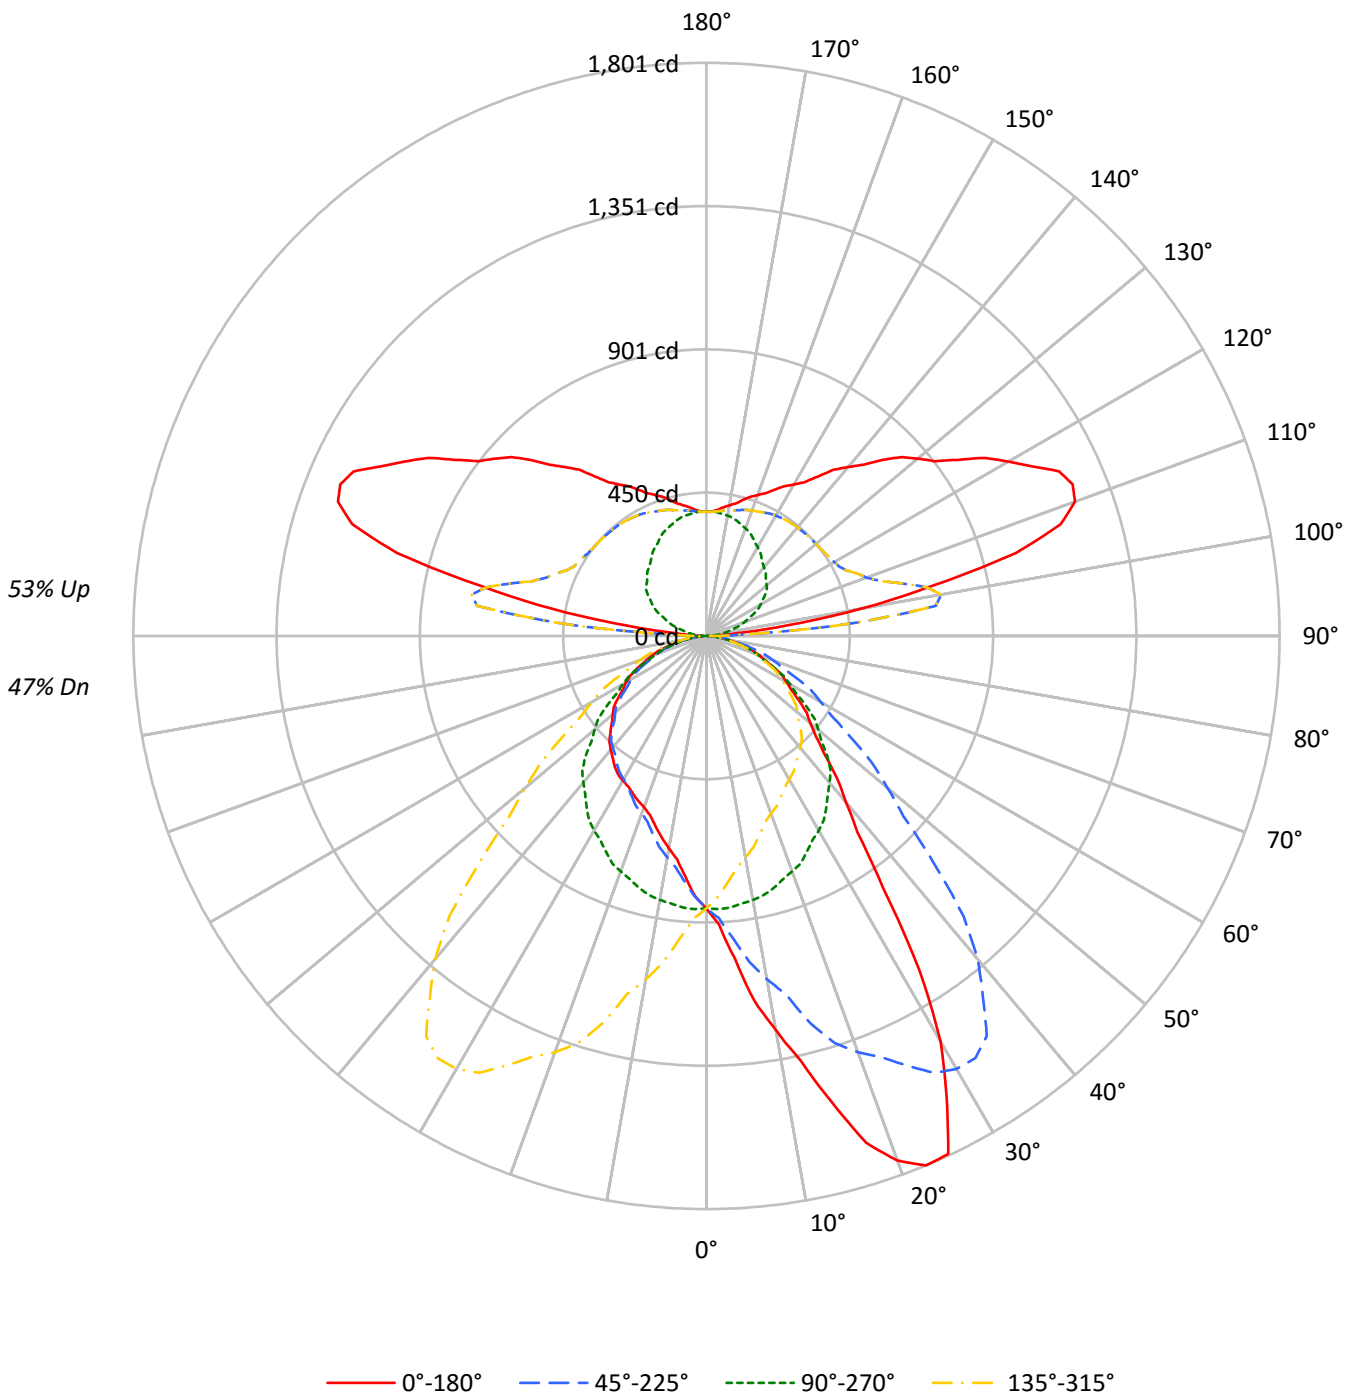



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	53	53	53	47																												
1	97	93	89	86	89	86	82	80	72	70	67	59	58	56	47	46	45	40																												
2	89	82	76	71	81	75	70	66	63	59	56	52	50	47	42	40	39	34																												
3	81	72	65	59	74	66	60	55	56	51	48	46	43	40	37	35	33	29																												
4	74	64	56	50	68	59	52	47	50	45	41	41	38	35	34	31	29	25																												
5	68	57	49	43	62	53	46	40	45	39	35	37	33	30	30	27	25	22																												
6	63	51	43	37	58	47	40	35	40	35	31	34	30	26	28	24	22	19																												
7	58	46	38	33	53	43	36	31	36	31	27	31	26	23	25	22	20	17																												
8	54	42	34	29	50	39	32	27	33	28	24	28	24	21	23	20	18	15																												
9	50	38	31	26	46	35	29	24	30	25	21	26	22	19	21	18	16	14																												
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	20	17	14	12																												

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	9214	9214	9214	9214
5°	10988	9253	8200	9253
10°	13753	9206	7406	9206
15°	16868	9132	6896	9132
20°	20095	9016	6565	9016
25°	21338	8875	6492	8875
30°	18288	8772	6527	8772
35°	12720	8627	6594	8627
40°	9580	8455	6573	8455
45°	7954	8202	6491	8202
50°	7125	7681	6430	7681
55°	6662	7122	6351	7122
60°	6250	6536	6286	6536
65°	5873	5957	6082	5957
70°	5508	5297	5794	5297
75°	4932	4637	5311	4637
80°	4320	3806	4575	3806
85°	3384	2766	3075	2766



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	84.3	1.5
10°-20°	270.4	4.9
20°-30°	453.8	8.2
30°-40°	513.8	9.3
40°-50°	460.8	8.3
50°-60°	371.8	6.7
60°-70°	259.1	4.7
70°-80°	136.2	2.5
80°-90°	36.3	0.7
90°-100°	217.4	3.9
100°-110°	615.6	11.1
110°-120°	605.5	11.0
120°-130°	483.0	8.7
130°-140°	380.8	6.9
140°-150°	284.2	5.1
150°-160°	198.1	3.6
160°-170°	116.4	2.1
170°-180°	37.9	0.7
0°-30°	808.5	14.6
0°-40°	1322.3	23.9
0°-60°	2154.9	39.0
0°-90°	2586.6	46.8
90°-120°	1438.5	26.0
90°-150°	2586.5	46.8
90°-180°	2939.0	53.2
0°-180°	5525.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	856	856	856	856	856	
5°	1017	856	759	856	1017	105
15°	1514	820	619	820	1514	437
25°	1797	747	547	747	1797	788
35°	968	656	502	656	968	629
45°	522	539	426	539	522	413
55°	355	380	338	380	355	319
65°	231	234	239	234	231	230
75°	119	112	128	112	119	127
85°	27	22	25	22	27	33
90°	23	2	23	2	23	13
95°	92	27	92	27	92	165
105°	1006	92	1006	92	1006	992
115°	1223	162	1223	162	1223	1189
125°	965	225	965	225	965	874
135°	782	264	782	264	782	607
145°	611	301	611	301	611	389
155°	507	342	507	342	507	236
165°	442	374	442	374	442	126
175°	398	390	398	390	398	39
180°	391	391	391	391	391	



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0
2.5°	908.4	907.8	906.1	907.4	904.8	901.1	900.8	897.5	887.8	887.2	884.6
5°	1016.9	1013.6	1013.2	1012.7	1006.9	999.1	984.1	982.9	963.0	953.0	941.0
7.5°	1157.4	1159.1	1153.1	1147.8	1130.0	1118.3	1102.3	1081.8	1057.4	1032.6	1016.1
10°	1258.3	1271.9	1255.0	1243.3	1232.6	1212.2	1188.6	1159.1	1129.7	1095.3	1069.1
12.5°	1366.4	1373.2	1369.8	1358.8	1342.0	1311.1	1269.2	1236.8	1209.7	1152.3	1129.2
15°	1513.7	1539.1	1522.9	1485.5	1486.4	1456.9	1402.2	1342.0	1310.1	1259.9	1191.5
17.5°	1670.6	1673.8	1666.9	1635.9	1615.1	1574.6	1524.1	1466.5	1401.8	1341.0	1268.4
20°	1754.3	1751.8	1737.3	1721.1	1685.4	1653.9	1598.8	1534.5	1451.5	1391.8	1312.6
22.5°	1800.7	1796.6	1789.7	1776.2	1746.4	1712.6	1663.1	1592.8	1513.9	1431.6	1340.1
25°	1796.6	1802.0	1802.8	1799.0	1788.7	1768.4	1729.4	1673.4	1594.6	1488.8	1393.4
27.5°	1634.0	1641.6	1663.8	1683.5	1705.4	1727.8	1724.8	1697.0	1638.7	1547.4	1430.8
30°	1471.4	1454.8	1495.9	1547.8	1583.0	1645.2	1680.1	1682.1	1649.3	1571.0	1457.3
32.5°	1245.8	1264.1	1282.2	1346.0	1423.1	1492.9	1562.3	1618.1	1624.4	1572.3	1472.9
35°	968.0	990.8	1024.0	1057.1	1140.1	1211.4	1333.3	1439.5	1524.1	1535.3	1474.3
37.5°	780.0	791.3	812.3	845.5	899.8	984.4	1078.7	1212.9	1335.5	1426.6	1430.6
40°	681.8	685.2	708.8	734.0	778.0	847.7	932.7	1051.3	1198.1	1325.5	1378.6
42.5°	608.2	615.4	625.5	649.7	684.8	737.2	816.3	914.3	1048.8	1195.4	1299.3
45°	522.5	530.8	537.1	553.3	578.1	613.4	668.5	758.1	860.5	1011.9	1151.7
47.5°	466.0	466.7	471.3	483.5	500.4	526.9	565.9	623.4	717.5	840.2	983.7
50°	425.5	432.1	433.8	443.3	456.6	476.1	508.4	557.4	634.5	742.4	874.3
52.5°	397.0	398.9	403.6	410.5	422.1	437.3	465.3	503.7	564.2	656.1	777.4
55°	355.0	355.0	359.6	365.0	371.6	385.2	403.9	432.1	478.2	549.5	649.9
57.5°	316.2	318.2	321.5	323.1	328.8	337.9	353.4	374.9	409.2	464.1	543.8
60°	290.3	294.1	293.7	296.9	301.9	309.0	322.3	339.7	370.3	414.3	481.5
62.5°	267.8	267.5	267.4	271.4	276.4	283.1	291.7	306.8	332.9	371.9	429.0
65°	230.6	229.7	232.7	235.1	236.8	241.8	248.4	261.7	279.1	308.2	352.5
67.5°	197.6	195.2	196.8	197.6	200.4	204.3	210.5	218.7	232.6	255.9	289.3
70°	175.0	172.9	172.5	173.3	175.9	178.7	183.3	191.2	204.1	222.7	247.2
72.5°	151.8	150.4	150.3	152.1	153.3	155.2	158.4	165.6	175.9	189.9	212.7
75°	118.6	118.6	118.6	119.0	120.3	121.9	124.5	128.2	136.0	146.0	161.3
77.5°	88.9	88.8	88.3	88.2	90.1	90.9	91.4	94.9	99.3	106.0	117.2
80°	69.7	67.6	68.4	69.7	70.5	70.9	72.2	73.0	76.8	80.5	88.3
82.5°	51.7	50.0	50.1	52.1	52.3	52.7	53.9	55.1	56.5	59.9	64.1
85°	27.4	27.4	27.8	27.8	28.2	27.8	29.0	29.5	29.5	31.5	34.0
87.5°	14.6	14.0	14.2	14.4	14.2	14.3	14.4	14.6	14.7	15.2	15.1
90°	22.9	23.7	22.9	22.1	22.9	21.4	20.6	19.8	19.0	19.8	17.4
92.5°	38.1	39.5	38.7	41.1	42.5	46.7	52.8	66.5	91.7	121.6	133.8
95°	91.7	94.9	100.4	107.6	122.6	151.1	193.0	284.6	380.3	468.9	417.5
97.5°	249.7	256.5	277.9	313.5	371.8	466.4	568.4	709.6	777.4	726.7	532.0
100°	495.8	495.0	525.9	583.6	663.5	775.7	868.2	932.3	904.6	748.8	506.0
102.5°	727.3	745.5	771.3	817.0	879.2	950.3	1004.2	1006.3	910.9	707.7	468.1
105°	1005.8	1009.8	1035.1	1065.1	1101.5	1122.0	1107.1	1027.9	862.7	635.7	421.4
107.5°	1166.2	1173.5	1182.0	1192.2	1191.5	1163.3	1094.1	965.7	778.2	572.2	391.7
110°	1232.0	1233.6	1235.2	1228.8	1206.7	1151.3	1051.7	906.2	725.1	536.1	380.3



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	1245.2	1244.9	1238.9	1219.3	1178.8	1107.6	996.0	847.3	678.9	512.1	374.0
115°	1223.3	1219.3	1203.5	1168.7	1109.4	1023.2	907.0	769.4	623.1	486.3	371.6
117.5°	1153.3	1148.0	1125.2	1085.4	1023.5	936.0	831.7	713.0	589.4	471.1	373.0
120°	1095.2	1090.4	1071.4	1027.1	964.7	884.9	790.0	683.2	571.7	464.1	375.6
122.5°	1040.8	1034.7	1013.9	974.1	918.5	844.4	756.5	659.8	557.1	459.7	380.0
125°	964.7	959.2	939.4	904.6	854.0	790.8	714.9	628.7	538.5	453.9	386.7
127.5°	902.1	897.0	879.2	849.4	804.3	746.8	678.3	601.4	522.0	451.1	394.3
130°	866.6	860.3	843.8	815.2	773.3	719.5	655.5	584.4	513.2	449.2	399.3
132.5°	831.9	827.4	812.7	784.3	744.9	693.6	634.0	568.5	504.9	448.5	403.1
135°	782.0	776.5	762.2	738.6	699.8	654.7	603.3	547.2	494.2	447.6	408.8
137.5°	729.4	725.7	713.8	689.7	657.1	618.1	573.8	527.8	484.9	445.8	412.6
140°	692.7	693.5	680.8	658.7	628.7	594.6	556.7	516.3	479.2	445.2	415.1
142.5°	658.5	659.3	647.9	628.4	602.7	573.1	540.3	505.6	474.1	443.9	417.0
145°	611.2	609.7	603.3	586.7	567.0	544.0	518.7	492.7	467.3	442.0	418.3
147.5°	572.4	571.7	565.7	554.4	539.5	523.2	502.7	482.0	460.7	439.0	418.3
150°	549.5	549.5	544.8	536.1	524.3	509.2	492.7	474.4	456.2	436.5	418.3
152.5°	530.6	530.6	527.8	519.7	510.3	497.9	483.2	467.5	451.2	433.3	416.4
155°	506.8	506.0	504.5	498.2	491.1	481.6	469.7	457.0	443.6	427.8	414.3
157.5°	485.2	485.4	484.1	479.3	473.2	465.7	456.5	446.0	435.1	422.9	411.7
160°	471.3	472.1	472.1	467.3	461.8	456.2	448.4	439.7	429.4	419.1	410.4
162.5°	458.6	459.4	459.4	455.3	451.7	446.8	439.5	432.1	423.7	415.3	407.9
165°	442.0	442.0	442.8	439.7	436.5	432.5	427.0	422.2	415.9	409.6	404.1
167.5°	426.2	426.2	427.0	424.8	423.3	420.5	417.3	413.7	408.5	403.9	400.3
170°	416.7	416.7	417.5	415.9	415.1	413.5	410.4	408.1	404.1	400.1	397.8
172.5°	407.9	408.5	410.0	408.4	408.2	407.3	404.7	403.0	399.7	397.0	395.9
175°	397.8	398.5	399.3	398.5	398.5	398.5	397.0	396.2	394.6	393.0	393.0
177.5°	391.9	391.9	393.2	392.5	393.2	393.2	392.5	391.9	391.3	390.6	391.3
180°	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0
2.5°	882.5	879.9	877.2	872.6	868.6	862.9	861.3	859.3	853.3	848.0	844.1
5°	936.4	926.5	912.0	898.7	888.0	873.4	865.1	856.4	844.0	832.7	823.6
7.5°	992.8	973.3	950.7	926.3	903.6	881.7	864.0	848.3	830.8	814.4	801.5
10°	1037.6	1009.4	977.9	943.9	914.9	886.7	863.0	842.3	819.9	800.4	784.3
12.5°	1088.7	1046.9	1003.5	962.2	927.8	888.7	860.1	833.7	808.3	784.8	766.7
15°	1149.2	1096.1	1044.7	987.9	935.6	886.7	852.7	819.5	790.0	766.0	742.8
17.5°	1204.3	1144.1	1076.3	1007.3	944.2	886.2	838.6	801.1	764.2	734.8	711.7
20°	1235.5	1167.0	1090.3	1018.6	948.9	884.2	831.9	787.1	747.3	716.2	690.1
22.5°	1262.3	1182.3	1102.9	1026.2	948.6	878.8	819.7	773.6	730.4	700.0	672.2
25°	1290.2	1194.4	1114.8	1024.8	938.1	865.9	799.5	747.3	704.2	668.5	639.9
27.5°	1314.1	1193.6	1099.1	1002.3	921.7	849.4	778.5	722.5	676.7	637.9	608.9
30°	1330.0	1195.2	1082.8	987.1	905.8	831.1	762.2	705.8	657.7	618.4	591.0
32.5°	1340.0	1194.2	1067.9	965.8	880.5	814.5	744.7	686.3	636.8	598.1	571.7
35°	1345.8	1186.9	1042.2	921.9	839.8	775.5	717.1	656.5	604.7	568.5	538.8
37.5°	1334.2	1171.6	1012.3	879.6	789.7	726.4	677.2	625.7	576.1	536.3	510.6
40°	1315.9	1161.7	989.1	849.8	755.2	694.3	652.4	601.7	552.8	515.1	491.0
42.5°	1281.0	1141.4	963.5	816.6	719.4	658.4	619.9	577.6	531.2	495.8	471.8
45°	1196.0	1097.3	925.3	766.8	666.5	603.4	569.4	538.8	496.9	462.4	441.6
47.5°	1078.1	1031.1	869.8	714.3	611.2	550.6	515.2	490.5	459.9	432.1	412.3
50°	996.2	976.7	832.3	678.5	574.4	515.1	481.1	458.7	436.7	408.9	390.7
52.5°	901.6	913.6	788.5	641.4	536.9	478.6	446.6	428.8	408.8	386.0	370.1
55°	768.5	812.0	712.9	578.9	481.1	425.5	395.2	379.5	367.9	350.9	337.2
57.5°	643.8	699.3	631.1	514.7	426.3	378.3	349.3	332.1	324.6	315.8	305.0
60°	569.8	624.6	572.7	471.5	389.4	343.8	318.1	303.6	296.1	289.9	280.7
62.5°	503.8	559.2	515.6	427.8	353.2	310.9	288.6	274.4	268.5	265.3	257.5
65°	413.0	460.7	431.7	359.6	301.5	264.2	243.8	233.9	228.5	227.3	222.3
67.5°	336.2	372.5	351.3	298.3	252.5	220.3	203.0	194.6	190.4	190.0	186.3
70°	285.7	319.7	303.6	255.5	216.1	190.8	175.9	168.3	165.9	165.5	163.4
72.5°	246.6	270.3	257.5	217.3	186.9	163.9	153.0	145.1	142.4	142.9	141.5
75°	182.4	200.3	192.8	165.1	140.6	125.6	116.5	111.5	109.1	110.4	108.7
77.5°	131.3	142.6	135.9	116.6	101.6	90.7	84.1	81.0	78.7	78.7	77.9
80°	99.1	105.8	102.0	90.4	78.0	68.8	63.5	61.4	60.1	59.7	59.3
82.5°	70.6	76.2	71.9	63.8	55.4	49.9	46.9	44.1	43.3	43.5	43.0
85°	35.6	37.7	36.0	31.1	27.8	25.3	23.6	22.4	21.5	21.9	21.2
87.5°	15.3	15.1	13.7	12.0	11.0	9.6	9.3	8.3	7.9	8.2	8.4
90°	15.1	12.7	10.3	8.7	7.1	4.8	3.2	1.6	3.2	4.8	7.1
92.5°	100.4	66.4	45.7	34.0	27.3	21.2	14.6	9.8	14.6	21.2	27.3
95°	287.8	170.0	102.8	71.9	51.4	37.9	29.2	26.9	29.2	37.9	51.4
97.5°	315.8	183.0	118.7	85.4	65.1	53.5	46.7	45.9	46.7	53.5	65.1
100°	298.1	181.1	125.7	94.9	75.9	64.9	59.3	58.5	59.3	64.9	75.9
102.5°	282.9	183.6	134.0	105.7	88.6	78.1	73.2	71.8	73.2	78.1	88.6
105°	272.0	190.6	147.9	123.3	108.4	98.9	94.1	91.7	94.1	98.9	108.4
107.5°	271.2	203.5	166.0	143.3	129.2	119.9	115.3	112.9	115.3	119.9	129.2
110°	274.4	214.3	178.7	156.5	143.1	134.4	130.5	128.1	130.5	134.4	143.1



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	280.7	225.1	192.0	170.5	157.0	148.4	144.4	142.0	144.4	148.4	157.0
115°	291.0	242.7	212.7	191.4	177.9	170.0	165.2	162.1	165.2	170.0	177.9
117.5°	304.6	261.6	231.9	212.1	197.0	189.8	185.8	182.2	185.8	189.8	197.0
120°	314.7	273.6	245.1	225.4	210.3	202.4	198.4	196.1	198.4	202.4	210.3
122.5°	324.2	286.2	258.4	237.4	223.0	214.4	210.5	208.1	210.5	214.4	223.0
125°	339.2	304.4	276.8	255.4	240.3	231.7	227.0	225.4	227.0	231.7	240.3
127.5°	351.6	320.3	293.5	272.2	255.6	246.7	240.8	238.5	240.8	246.7	255.6
130°	359.8	329.7	303.6	282.3	265.7	256.2	249.1	246.7	249.1	256.2	265.7
132.5°	367.4	337.9	312.5	291.8	275.2	263.8	256.0	253.0	256.0	263.8	275.2
135°	377.2	350.3	325.7	304.4	287.8	276.0	267.3	264.1	267.3	276.0	287.8
137.5°	384.4	358.9	335.3	315.5	299.0	286.4	277.9	274.6	277.9	286.4	299.0
140°	388.2	364.6	341.6	321.9	306.0	293.3	285.4	281.5	285.4	293.3	306.0
142.5°	392.1	369.0	346.7	328.1	312.4	301.0	292.4	289.1	292.4	301.0	312.4
145°	396.2	374.8	354.3	336.0	322.7	310.8	303.6	301.3	303.6	310.8	322.7
147.5°	398.7	379.5	360.8	345.2	332.2	322.0	315.1	313.6	315.1	322.0	332.2
150°	399.3	382.7	364.6	350.3	339.2	328.9	322.7	321.9	322.7	328.9	339.2
152.5°	400.6	384.6	369.0	355.4	345.5	336.5	330.2	330.0	330.2	336.5	345.5
155°	400.9	388.2	374.8	363.8	355.1	347.1	342.4	342.4	342.4	347.1	355.1
157.5°	401.7	390.3	379.5	371.0	363.6	356.6	352.8	352.2	352.8	356.6	363.6
160°	401.7	392.2	382.7	374.8	369.2	363.0	359.8	359.8	359.8	363.0	369.2
162.5°	401.1	392.8	384.6	378.0	373.0	368.0	365.5	365.5	365.5	368.0	373.0
165°	399.3	393.8	387.5	381.9	378.7	374.8	373.2	374.0	373.2	374.8	378.7
167.5°	398.1	393.6	389.0	385.6	383.3	380.3	379.5	380.5	379.5	380.3	383.3
170°	396.2	393.0	389.0	387.5	385.9	383.5	382.7	384.3	382.7	383.5	385.9
172.5°	395.5	393.0	389.7	388.7	387.8	386.0	385.9	386.8	385.9	386.0	387.8
175°	393.8	392.2	390.6	389.8	389.8	388.2	389.0	389.8	389.0	388.2	389.8
177.5°	392.5	391.3	390.6	390.6	390.6	390.0	390.6	391.3	390.6	390.0	390.6
180°	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0
2.5°	841.7	839.4	836.1	831.1	827.1	820.8	820.8	821.8	821.8	821.5	820.8
5°	816.2	809.9	802.5	793.8	784.7	775.5	773.9	770.6	768.1	766.4	764.3
7.5°	789.3	778.2	767.3	755.1	744.0	734.8	728.4	723.1	719.7	716.1	713.4
10°	771.0	757.2	744.4	731.6	717.5	706.3	699.3	694.3	690.5	687.2	685.6
12.5°	749.4	733.7	719.5	707.3	691.9	680.4	673.7	671.4	666.9	660.0	656.3
15°	717.9	703.4	686.3	667.7	660.2	646.1	638.3	634.5	632.0	626.6	625.0
17.5°	690.9	671.9	652.8	638.9	625.0	613.6	609.2	604.6	601.3	596.8	595.6
20°	669.4	652.4	634.9	620.0	605.5	593.0	589.3	586.0	582.7	580.6	578.9
22.5°	647.5	630.5	616.0	602.1	586.6	578.5	574.4	570.8	568.4	567.0	565.4
25°	616.7	601.7	585.6	573.1	560.7	555.3	552.8	550.7	549.1	547.0	546.6
27.5°	589.1	572.9	559.8	548.2	539.2	534.7	532.3	531.3	531.7	532.4	532.9
30°	568.5	553.7	542.9	532.9	524.7	520.5	520.1	520.1	521.7	522.1	523.0
32.5°	549.7	537.4	526.6	517.0	510.7	507.9	509.5	509.5	510.8	511.8	513.3
35°	522.1	511.4	503.0	494.8	489.4	490.6	491.5	492.3	494.3	496.9	498.5
37.5°	495.8	486.5	477.8	471.3	468.9	471.1	473.1	474.8	477.3	479.2	480.9
40°	476.9	469.8	461.6	455.7	456.6	457.9	459.5	461.6	463.7	464.9	466.6
42.5°	459.3	451.9	445.7	440.8	442.0	443.6	444.6	445.7	448.1	450.3	451.3
45°	432.5	426.7	421.0	418.0	418.9	419.7	420.5	421.8	423.8	425.5	426.0
47.5°	402.4	398.4	394.5	391.7	393.0	392.7	393.7	396.4	397.0	398.1	400.4
50°	383.2	379.5	374.9	374.1	374.1	374.1	374.5	377.8	377.8	379.5	381.1
52.5°	361.9	359.6	356.6	355.1	354.5	354.5	356.2	357.9	358.5	360.9	362.6
55°	330.5	328.0	325.6	324.3	323.4	324.3	327.6	328.4	330.5	331.8	333.0
57.5°	297.8	295.9	293.9	293.2	293.0	294.1	296.0	298.4	299.0	302.8	304.7
60°	276.2	273.3	271.6	271.6	270.8	274.6	273.7	277.9	278.7	281.1	284.1
62.5°	254.0	250.1	249.4	249.4	250.6	251.7	252.8	254.6	256.8	259.9	262.2
65°	218.2	216.1	219.0	218.6	217.7	220.2	220.2	222.3	224.7	227.7	232.3
67.5°	184.2	183.2	183.4	183.4	184.7	186.1	187.2	189.0	192.0	195.1	198.0
70°	161.3	162.6	160.5	162.2	163.4	163.8	164.6	167.2	170.5	172.5	175.9
72.5°	139.1	139.0	139.3	139.9	141.2	141.9	142.8	145.6	149.2	151.0	153.6
75°	107.0	106.5	107.8	107.8	109.9	110.7	111.5	112.8	116.1	118.6	120.6
77.5°	78.1	78.7	78.3	79.8	79.2	79.4	81.9	83.2	83.5	88.4	89.5
80°	58.9	59.7	60.1	60.5	61.0	60.1	63.1	64.2	64.2	67.2	69.2
82.5°	42.3	42.8	43.9	44.3	44.4	45.2	45.5	46.3	47.4	48.6	51.3
85°	21.2	22.4	22.8	22.4	22.8	21.9	23.2	23.6	24.1	24.1	24.1
87.5°	8.4	9.0	9.2	10.0	10.1	10.9	10.8	10.2	10.4	11.6	10.5
90°	8.7	10.3	12.7	15.1	17.4	19.8	19.0	19.8	20.6	21.4	22.9
92.5°	34.0	45.7	66.4	100.4	133.8	121.6	91.7	66.5	52.8	46.7	42.5
95°	71.9	102.8	170.0	287.8	417.5	468.9	380.3	284.6	193.0	151.1	122.6
97.5°	85.4	118.7	183.0	315.8	532.0	726.7	777.4	709.6	568.4	466.4	371.8
100°	94.9	125.7	181.1	298.1	506.0	748.8	904.6	932.3	868.2	775.7	663.5
102.5°	105.7	134.0	183.6	282.9	468.1	707.7	910.9	1006.3	1004.2	950.3	879.2
105°	123.3	147.9	190.6	272.0	421.4	635.7	862.7	1027.9	1107.1	1122.0	1101.5
107.5°	143.3	166.0	203.5	271.2	391.7	572.2	778.2	965.7	1094.1	1163.3	1191.5
110°	156.5	178.7	214.3	274.4	380.3	536.1	725.1	906.2	1051.7	1151.3	1206.7



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	170.5	192.0	225.1	280.7	374.0	512.1	678.9	847.3	996.0	1107.6	1178.8
115°	191.4	212.7	242.7	291.0	371.6	486.3	623.1	769.4	907.0	1023.2	1109.4
117.5°	212.1	231.9	261.6	304.6	373.0	471.1	589.4	713.0	831.7	936.0	1023.5
120°	225.4	245.1	273.6	314.7	375.6	464.1	571.7	683.2	790.0	884.9	964.7
122.5°	237.4	258.4	286.2	324.2	380.0	459.7	557.1	659.8	756.5	844.4	918.5
125°	255.4	276.8	304.4	339.2	386.7	453.9	538.5	628.7	714.9	790.8	854.0
127.5°	272.2	293.5	320.3	351.6	394.3	451.1	522.0	601.4	678.3	746.8	804.3
130°	282.3	303.6	329.7	359.8	399.3	449.2	513.2	584.4	655.5	719.5	773.3
132.5°	291.8	312.5	337.9	367.4	403.1	448.5	504.9	568.5	634.0	693.6	744.9
135°	304.4	325.7	350.3	377.2	408.8	447.6	494.2	547.2	603.3	654.7	699.8
137.5°	315.5	335.3	358.9	384.4	412.6	445.8	484.9	527.8	573.8	618.1	657.1
140°	321.9	341.6	364.6	388.2	415.1	445.2	479.2	516.3	556.7	594.6	628.7
142.5°	328.1	346.7	369.0	392.1	417.0	443.9	474.1	505.6	540.3	573.1	602.7
145°	336.0	354.3	374.8	396.2	418.3	442.0	467.3	492.7	518.7	544.0	567.0
147.5°	345.2	360.8	379.5	398.7	418.3	439.0	460.7	482.0	502.7	523.2	539.5
150°	350.3	364.6	382.7	399.3	418.3	436.5	456.2	474.4	492.7	509.2	524.3
152.5°	355.4	369.0	384.6	400.6	416.4	433.3	451.2	467.5	483.2	497.9	510.3
155°	363.8	374.8	388.2	400.9	414.3	427.8	443.6	457.0	469.7	481.6	491.1
157.5°	371.0	379.5	390.3	401.7	411.7	422.9	435.1	446.0	456.5	465.7	473.2
160°	374.8	382.7	392.2	401.7	410.4	419.1	429.4	439.7	448.4	456.2	461.8
162.5°	378.0	384.6	392.8	401.1	407.9	415.3	423.7	432.1	439.5	446.8	451.7
165°	381.9	387.5	393.8	399.3	404.1	409.6	415.9	422.2	427.0	432.5	436.5
167.5°	385.6	389.0	393.6	398.1	400.3	403.9	408.5	413.7	417.3	420.5	423.3
170°	387.5	389.0	393.0	396.2	397.8	400.1	404.1	408.1	410.4	413.5	415.1
172.5°	388.7	389.7	393.0	395.5	395.9	397.0	399.7	403.0	404.7	407.3	408.2
175°	389.8	390.6	392.2	393.8	393.0	393.0	394.6	396.2	397.0	398.5	398.5
177.5°	390.6	390.6	391.3	392.5	391.3	390.6	391.3	391.9	392.5	393.2	393.2
180°	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0
2.5°	818.5	818.2	820.5	818.8	820.5	818.2	818.5	820.8	821.5	821.8	821.8
5°	761.8	763.1	758.9	758.9	758.9	763.1	761.8	764.3	766.4	768.1	770.6
7.5°	711.4	709.6	709.7	707.5	709.7	709.6	711.4	713.4	716.1	719.7	723.1
10°	680.6	678.1	677.2	677.6	677.2	678.1	680.6	685.6	687.2	690.5	694.3
12.5°	655.0	654.5	649.0	649.1	649.0	654.5	655.0	656.3	660.0	666.9	671.4
15°	625.0	617.1	616.2	618.8	616.2	617.1	625.0	625.0	626.6	632.0	634.5
17.5°	594.8	590.7	591.0	589.7	591.0	590.7	594.8	595.6	596.8	601.3	604.6
20°	578.9	576.5	576.1	573.1	576.1	576.5	578.9	578.9	580.6	582.7	586.0
22.5°	564.4	563.6	563.8	560.5	563.8	563.6	564.4	565.4	567.0	568.4	570.8
25°	546.2	548.3	546.6	546.6	546.6	548.3	546.2	546.6	547.0	549.1	550.7
27.5°	533.9	533.9	533.0	533.0	533.0	533.9	533.9	532.9	532.4	531.7	531.3
30°	524.7	524.2	525.1	525.1	525.1	524.2	524.7	523.0	522.1	521.7	520.1
32.5°	515.3	515.9	516.1	516.4	516.1	515.9	515.3	513.3	511.8	510.8	509.5
35°	501.0	501.4	502.6	501.8	502.6	501.4	501.0	498.5	496.9	494.3	492.3
37.5°	481.6	483.5	483.1	483.7	483.1	483.5	481.6	480.9	479.2	477.3	474.8
40°	467.0	468.3	467.8	467.8	467.8	468.3	467.0	466.6	464.9	463.7	461.6
42.5°	452.0	453.0	451.9	451.2	451.9	453.0	452.0	451.3	450.3	448.1	445.7
45°	427.5	426.7	428.0	426.4	428.0	426.7	427.5	426.0	425.5	423.8	421.8
47.5°	400.2	401.0	401.4	402.6	401.4	401.0	400.2	400.4	398.1	397.0	396.4
50°	382.0	384.4	384.4	384.0	384.4	384.4	382.0	381.1	379.5	377.8	377.8
52.5°	364.0	365.2	366.9	366.8	366.9	365.2	364.0	362.6	360.9	358.5	357.9
55°	336.4	337.2	338.0	338.4	338.0	337.2	336.4	333.0	331.8	330.5	328.4
57.5°	307.6	307.3	309.3	309.9	309.3	307.3	307.6	304.7	302.8	299.0	298.4
60°	287.4	287.4	290.7	292.0	290.7	287.4	287.4	284.1	281.1	278.7	277.9
62.5°	265.9	267.2	270.5	268.7	270.5	267.2	265.9	262.2	259.9	256.8	254.6
65°	234.3	237.7	237.3	238.8	237.3	237.7	234.3	232.3	227.7	224.7	222.3
67.5°	201.4	203.4	206.4	206.7	206.4	203.4	201.4	198.0	195.1	192.0	189.0
70°	179.2	181.3	182.9	184.1	182.9	181.3	179.2	175.9	172.5	170.5	167.2
72.5°	157.6	158.7	162.6	160.9	162.6	158.7	157.6	153.6	151.0	149.2	145.6
75°	123.6	126.5	129.0	127.7	129.0	126.5	123.6	120.6	118.6	116.1	112.8
77.5°	91.4	94.3	95.5	94.4	95.5	94.3	91.4	89.5	88.4	83.5	83.2
80°	72.2	71.8	74.2	73.8	74.2	71.8	72.2	69.2	67.2	64.2	64.2
82.5°	52.9	52.5	53.6	53.9	53.6	52.5	52.9	51.3	48.6	47.4	46.3
85°	25.7	26.9	25.3	24.9	25.3	26.9	25.7	24.1	24.1	24.1	23.6
87.5°	10.4	10.5	10.4	9.9	10.4	10.5	10.4	10.5	11.6	10.4	10.2
90°	22.1	22.9	23.7	22.9	23.7	22.9	22.1	22.9	21.4	20.6	19.8
92.5°	41.1	38.7	39.5	38.1	39.5	38.7	41.1	42.5	46.7	52.8	66.5
95°	107.6	100.4	94.9	91.7	94.9	100.4	107.6	122.6	151.1	193.0	284.6
97.5°	313.5	277.9	256.5	249.7	256.5	277.9	313.5	371.8	466.4	568.4	709.6
100°	583.6	525.9	495.0	495.8	495.0	525.9	583.6	663.5	775.7	868.2	932.3
102.5°	817.0	771.3	745.5	727.3	745.5	771.3	817.0	879.2	950.3	1004.2	1006.3
105°	1065.1	1035.1	1009.8	1005.8	1009.8	1035.1	1065.1	1101.5	1122.0	1107.1	1027.9
107.5°	1192.2	1182.0	1173.5	1166.2	1173.5	1182.0	1192.2	1191.5	1163.3	1094.1	965.7
110°	1228.8	1235.2	1233.6	1232.0	1233.6	1235.2	1228.8	1206.7	1151.3	1051.7	906.2



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	1219.3	1238.9	1244.9	1245.2	1244.9	1238.9	1219.3	1178.8	1107.6	996.0	847.3
115°	1168.7	1203.5	1219.3	1223.3	1219.3	1203.5	1168.7	1109.4	1023.2	907.0	769.4
117.5°	1085.4	1125.2	1148.0	1153.3	1148.0	1125.2	1085.4	1023.5	936.0	831.7	713.0
120°	1027.1	1071.4	1090.4	1095.2	1090.4	1071.4	1027.1	964.7	884.9	790.0	683.2
122.5°	974.1	1013.9	1034.7	1040.8	1034.7	1013.9	974.1	918.5	844.4	756.5	659.8
125°	904.6	939.4	959.2	964.7	959.2	939.4	904.6	854.0	790.8	714.9	628.7
127.5°	849.4	879.2	897.0	902.1	897.0	879.2	849.4	804.3	746.8	678.3	601.4
130°	815.2	843.8	860.3	866.6	860.3	843.8	815.2	773.3	719.5	655.5	584.4
132.5°	784.3	812.7	827.4	831.9	827.4	812.7	784.3	744.9	693.6	634.0	568.5
135°	738.6	762.2	776.5	782.0	776.5	762.2	738.6	699.8	654.7	603.3	547.2
137.5°	689.7	713.8	725.7	729.4	725.7	713.8	689.7	657.1	618.1	573.8	527.8
140°	658.7	680.8	693.5	692.7	693.5	680.8	658.7	628.7	594.6	556.7	516.3
142.5°	628.4	647.9	659.3	658.5	659.3	647.9	628.4	602.7	573.1	540.3	505.6
145°	586.7	603.3	609.7	611.2	609.7	603.3	586.7	567.0	544.0	518.7	492.7
147.5°	554.4	565.7	571.7	572.4	571.7	565.7	554.4	539.5	523.2	502.7	482.0
150°	536.1	544.8	549.5	549.5	549.5	544.8	536.1	524.3	509.2	492.7	474.4
152.5°	519.7	527.8	530.6	530.6	530.6	527.8	519.7	510.3	497.9	483.2	467.5
155°	498.2	504.5	506.0	506.8	506.0	504.5	498.2	491.1	481.6	469.7	457.0
157.5°	479.3	484.1	485.4	485.2	485.4	484.1	479.3	473.2	465.7	456.5	446.0
160°	467.3	472.1	472.1	471.3	472.1	472.1	467.3	461.8	456.2	448.4	439.7
162.5°	455.3	459.4	459.4	458.6	459.4	459.4	455.3	451.7	446.8	439.5	432.1
165°	439.7	442.8	442.0	442.0	442.0	442.8	439.7	436.5	432.5	427.0	422.2
167.5°	424.8	427.0	426.2	426.2	426.2	427.0	424.8	423.3	420.5	417.3	413.7
170°	415.9	417.5	416.7	416.7	416.7	417.5	415.9	415.1	413.5	410.4	408.1
172.5°	408.4	410.0	408.5	407.9	408.5	410.0	408.4	408.2	407.3	404.7	403.0
175°	398.5	399.3	398.5	397.8	398.5	399.3	398.5	398.5	398.5	397.0	396.2
177.5°	392.5	393.2	391.9	391.9	391.9	393.2	392.5	393.2	393.2	392.5	391.9
180°	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0
2.5°	820.8	820.8	827.1	831.1	836.1	839.4	841.7	844.1	848.0	853.3	859.3
5°	773.9	775.5	784.7	793.8	802.5	809.9	816.2	823.6	832.7	844.0	856.4
7.5°	728.4	734.8	744.0	755.1	767.3	778.2	789.3	801.5	814.4	830.8	848.3
10°	699.3	706.3	717.5	731.6	744.4	757.2	771.0	784.3	800.4	819.9	842.3
12.5°	673.7	680.4	691.9	707.3	719.5	733.7	749.4	766.7	784.8	808.3	833.7
15°	638.3	646.1	660.2	667.7	686.3	703.4	717.9	742.8	766.0	790.0	819.5
17.5°	609.2	613.6	625.0	638.9	652.8	671.9	690.9	711.7	734.8	764.2	801.1
20°	589.3	593.0	605.5	620.0	634.9	652.4	669.4	690.1	716.2	747.3	787.1
22.5°	574.4	578.5	586.6	602.1	616.0	630.5	647.5	672.2	700.0	730.4	773.6
25°	552.8	555.3	560.7	573.1	585.6	601.7	616.7	639.9	668.5	704.2	747.3
27.5°	532.3	534.7	539.2	548.2	559.8	572.9	589.1	608.9	637.9	676.7	722.5
30°	520.1	520.5	524.7	532.9	542.9	553.7	568.5	591.0	618.4	657.7	705.8
32.5°	509.5	507.9	510.7	517.0	526.6	537.4	549.7	571.7	598.1	636.8	686.3
35°	491.5	490.6	489.4	494.8	503.0	511.4	522.1	538.8	568.5	604.7	656.5
37.5°	473.1	471.1	468.9	471.3	477.8	486.5	495.8	510.6	536.3	576.1	625.7
40°	459.5	457.9	456.6	455.7	461.6	469.8	476.9	491.0	515.1	552.8	601.7
42.5°	444.6	443.6	442.0	440.8	445.7	451.9	459.3	471.8	495.8	531.2	577.6
45°	420.5	419.7	418.9	418.0	421.0	426.7	432.5	441.6	462.4	496.9	538.8
47.5°	393.7	392.7	393.0	391.7	394.5	398.4	402.4	412.3	432.1	459.9	490.5
50°	374.5	374.1	374.1	374.1	374.9	379.5	383.2	390.7	408.9	436.7	458.7
52.5°	356.2	354.5	354.5	355.1	356.6	359.6	361.9	370.1	386.0	408.8	428.8
55°	327.6	324.3	323.4	324.3	325.6	328.0	330.5	337.2	350.9	367.9	379.5
57.5°	296.0	294.1	293.0	293.2	293.9	295.9	297.8	305.0	315.8	324.6	332.1
60°	273.7	274.6	270.8	271.6	271.6	273.3	276.2	280.7	289.9	296.1	303.6
62.5°	252.8	251.7	250.6	249.4	249.4	250.1	254.0	257.5	265.3	268.5	274.4
65°	220.2	220.2	217.7	218.6	219.0	216.1	218.2	222.3	227.3	228.5	233.9
67.5°	187.2	186.1	184.7	183.4	183.4	183.2	184.2	186.3	190.0	190.4	194.6
70°	164.6	163.8	163.4	162.2	160.5	162.6	161.3	163.4	165.5	165.9	168.3
72.5°	142.8	141.9	141.2	139.9	139.3	139.0	139.1	141.5	142.9	142.4	145.1
75°	111.5	110.7	109.9	107.8	107.8	106.5	107.0	108.7	110.4	109.1	111.5
77.5°	81.9	79.4	79.2	79.8	78.3	78.7	78.1	77.9	78.7	78.7	81.0
80°	63.1	60.1	61.0	60.5	60.1	59.7	58.9	59.3	59.7	60.1	61.4
82.5°	45.5	45.2	44.4	44.3	43.9	42.8	42.3	43.0	43.5	43.3	44.1
85°	23.2	21.9	22.8	22.4	22.8	22.4	21.2	21.2	21.9	21.5	22.4
87.5°	10.8	10.9	10.1	10.0	9.2	9.0	8.4	8.4	8.2	7.9	8.3
90°	19.0	19.8	17.4	15.1	12.7	10.3	8.7	7.1	4.8	3.2	1.6
92.5°	91.7	121.6	133.8	100.4	66.4	45.7	34.0	27.3	21.2	14.6	9.8
95°	380.3	468.9	417.5	287.8	170.0	102.8	71.9	51.4	37.9	29.2	26.9
97.5°	777.4	726.7	532.0	315.8	183.0	118.7	85.4	65.1	53.5	46.7	45.9
100°	904.6	748.8	506.0	298.1	181.1	125.7	94.9	75.9	64.9	59.3	58.5
102.5°	910.9	707.7	468.1	282.9	183.6	134.0	105.7	88.6	78.1	73.2	71.8
105°	862.7	635.7	421.4	272.0	190.6	147.9	123.3	108.4	98.9	94.1	91.7
107.5°	778.2	572.2	391.7	271.2	203.5	166.0	143.3	129.2	119.9	115.3	112.9
110°	725.1	536.1	380.3	274.4	214.3	178.7	156.5	143.1	134.4	130.5	128.1



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	678.9	512.1	374.0	280.7	225.1	192.0	170.5	157.0	148.4	144.4	142.0
115°	623.1	486.3	371.6	291.0	242.7	212.7	191.4	177.9	170.0	165.2	162.1
117.5°	589.4	471.1	373.0	304.6	261.6	231.9	212.1	197.0	189.8	185.8	182.2
120°	571.7	464.1	375.6	314.7	273.6	245.1	225.4	210.3	202.4	198.4	196.1
122.5°	557.1	459.7	380.0	324.2	286.2	258.4	237.4	223.0	214.4	210.5	208.1
125°	538.5	453.9	386.7	339.2	304.4	276.8	255.4	240.3	231.7	227.0	225.4
127.5°	522.0	451.1	394.3	351.6	320.3	293.5	272.2	255.6	246.7	240.8	238.5
130°	513.2	449.2	399.3	359.8	329.7	303.6	282.3	265.7	256.2	249.1	246.7
132.5°	504.9	448.5	403.1	367.4	337.9	312.5	291.8	275.2	263.8	256.0	253.0
135°	494.2	447.6	408.8	377.2	350.3	325.7	304.4	287.8	276.0	267.3	264.1
137.5°	484.9	445.8	412.6	384.4	358.9	335.3	315.5	299.0	286.4	277.9	274.6
140°	479.2	445.2	415.1	388.2	364.6	341.6	321.9	306.0	293.3	285.4	281.5
142.5°	474.1	443.9	417.0	392.1	369.0	346.7	328.1	312.4	301.0	292.4	289.1
145°	467.3	442.0	418.3	396.2	374.8	354.3	336.0	322.7	310.8	303.6	301.3
147.5°	460.7	439.0	418.3	398.7	379.5	360.8	345.2	332.2	322.0	315.1	313.6
150°	456.2	436.5	418.3	399.3	382.7	364.6	350.3	339.2	328.9	322.7	321.9
152.5°	451.2	433.3	416.4	400.6	384.6	369.0	355.4	345.5	336.5	330.2	330.0
155°	443.6	427.8	414.3	400.9	388.2	374.8	363.8	355.1	347.1	342.4	342.4
157.5°	435.1	422.9	411.7	401.7	390.3	379.5	371.0	363.6	356.6	352.8	352.2
160°	429.4	419.1	410.4	401.7	392.2	382.7	374.8	369.2	363.0	359.8	359.8
162.5°	423.7	415.3	407.9	401.1	392.8	384.6	378.0	373.0	368.0	365.5	365.5
165°	415.9	409.6	404.1	399.3	393.8	387.5	381.9	378.7	374.8	373.2	374.0
167.5°	408.5	403.9	400.3	398.1	393.6	389.0	385.6	383.3	380.3	379.5	380.5
170°	404.1	400.1	397.8	396.2	393.0	389.0	387.5	385.9	383.5	382.7	384.3
172.5°	399.7	397.0	395.9	395.5	393.0	389.7	388.7	387.8	386.0	385.9	386.8
175°	394.6	393.0	393.0	393.8	392.2	390.6	389.8	389.8	388.2	389.0	389.8
177.5°	391.3	390.6	391.3	392.5	391.3	390.6	390.6	390.6	390.0	390.6	391.3
180°	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0	856.0
2.5°	861.3	862.9	868.6	872.6	877.2	879.9	882.5	884.6	887.2	887.8	897.5
5°	865.1	873.4	888.0	898.7	912.0	926.5	936.4	941.0	953.0	963.0	982.9
7.5°	864.0	881.7	903.6	926.3	950.7	973.3	992.8	1016.1	1032.6	1057.4	1081.8
10°	863.0	886.7	914.9	943.9	977.9	1009.4	1037.6	1069.1	1095.3	1129.7	1159.1
12.5°	860.1	888.7	927.8	962.2	1003.5	1046.9	1088.7	1129.2	1152.3	1209.7	1236.8
15°	852.7	886.7	935.6	987.9	1044.7	1096.1	1149.2	1191.5	1259.9	1310.1	1342.0
17.5°	838.6	886.2	944.2	1007.3	1076.3	1144.1	1204.3	1268.4	1341.0	1401.8	1466.5
20°	831.9	884.2	948.9	1018.6	1090.3	1167.0	1235.5	1312.6	1391.8	1451.5	1534.5
22.5°	819.7	878.8	948.6	1026.2	1102.9	1182.3	1262.3	1340.1	1431.6	1513.9	1592.8
25°	799.5	865.9	938.1	1024.8	1114.8	1194.4	1290.2	1393.4	1488.8	1594.6	1673.4
27.5°	778.5	849.4	921.7	1002.3	1099.1	1193.6	1314.1	1430.8	1547.4	1638.7	1697.0
30°	762.2	831.1	905.8	987.1	1082.8	1195.2	1330.0	1457.3	1571.0	1649.3	1682.1
32.5°	744.7	814.5	880.5	965.8	1067.9	1194.2	1340.0	1472.9	1572.3	1624.4	1618.1
35°	717.1	775.5	839.8	921.9	1042.2	1186.9	1345.8	1474.3	1535.3	1524.1	1439.5
37.5°	677.2	726.4	789.7	879.6	1012.3	1171.6	1334.2	1430.6	1426.6	1335.5	1212.9
40°	652.4	694.3	755.2	849.8	989.1	1161.7	1315.9	1378.6	1325.5	1198.1	1051.3
42.5°	619.9	658.4	719.4	816.6	963.5	1141.4	1281.0	1299.3	1195.4	1048.8	914.3
45°	569.4	603.4	666.5	766.8	925.3	1097.3	1196.0	1151.7	1011.9	860.5	758.1
47.5°	515.2	550.6	611.2	714.3	869.8	1031.1	1078.1	983.7	840.2	717.5	623.4
50°	481.1	515.1	574.4	678.5	832.3	976.7	996.2	874.3	742.4	634.5	557.4
52.5°	446.6	478.6	536.9	641.4	788.5	913.6	901.6	777.4	656.1	564.2	503.7
55°	395.2	425.5	481.1	578.9	712.9	812.0	768.5	649.9	549.5	478.2	432.1
57.5°	349.3	378.3	426.3	514.7	631.1	699.3	643.8	543.8	464.1	409.2	374.9
60°	318.1	343.8	389.4	471.5	572.7	624.6	569.8	481.5	414.3	370.3	339.7
62.5°	288.6	310.9	353.2	427.8	515.6	559.2	503.8	429.0	371.9	332.9	306.8
65°	243.8	264.2	301.5	359.6	431.7	460.7	413.0	352.5	308.2	279.1	261.7
67.5°	203.0	220.3	252.5	298.3	351.3	372.5	336.2	289.3	255.9	232.6	218.7
70°	175.9	190.8	216.1	255.5	303.6	319.7	285.7	247.2	222.7	204.1	191.2
72.5°	153.0	163.9	186.9	217.3	257.5	270.3	246.6	212.7	189.9	175.9	165.6
75°	116.5	125.6	140.6	165.1	192.8	200.3	182.4	161.3	146.0	136.0	128.2
77.5°	84.1	90.7	101.6	116.6	135.9	142.6	131.3	117.2	106.0	99.3	94.9
80°	63.5	68.8	78.0	90.4	102.0	105.8	99.1	88.3	80.5	76.8	73.0
82.5°	46.9	49.9	55.4	63.8	71.9	76.2	70.6	64.1	59.9	56.5	55.1
85°	23.6	25.3	27.8	31.1	36.0	37.7	35.6	34.0	31.5	29.5	29.5
87.5°	9.3	9.6	11.0	12.0	13.7	15.1	15.3	15.1	15.2	14.7	14.6
90°	3.2	4.8	7.1	8.7	10.3	12.7	15.1	17.4	19.8	19.0	19.8
92.5°	14.6	21.2	27.3	34.0	45.7	66.4	100.4	133.8	121.6	91.7	66.5
95°	29.2	37.9	51.4	71.9	102.8	170.0	287.8	417.5	468.9	380.3	284.6
97.5°	46.7	53.5	65.1	85.4	118.7	183.0	315.8	532.0	726.7	777.4	709.6
100°	59.3	64.9	75.9	94.9	125.7	181.1	298.1	506.0	748.8	904.6	932.3
102.5°	73.2	78.1	88.6	105.7	134.0	183.6	282.9	468.1	707.7	910.9	1006.3
105°	94.1	98.9	108.4	123.3	147.9	190.6	272.0	421.4	635.7	862.7	1027.9
107.5°	115.3	119.9	129.2	143.3	166.0	203.5	271.2	391.7	572.2	778.2	965.7
110°	130.5	134.4	143.1	156.5	178.7	214.3	274.4	380.3	536.1	725.1	906.2



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	144.4	148.4	157.0	170.5	192.0	225.1	280.7	374.0	512.1	678.9	847.3
115°	165.2	170.0	177.9	191.4	212.7	242.7	291.0	371.6	486.3	623.1	769.4
117.5°	185.8	189.8	197.0	212.1	231.9	261.6	304.6	373.0	471.1	589.4	713.0
120°	198.4	202.4	210.3	225.4	245.1	273.6	314.7	375.6	464.1	571.7	683.2
122.5°	210.5	214.4	223.0	237.4	258.4	286.2	324.2	380.0	459.7	557.1	659.8
125°	227.0	231.7	240.3	255.4	276.8	304.4	339.2	386.7	453.9	538.5	628.7
127.5°	240.8	246.7	255.6	272.2	293.5	320.3	351.6	394.3	451.1	522.0	601.4
130°	249.1	256.2	265.7	282.3	303.6	329.7	359.8	399.3	449.2	513.2	584.4
132.5°	256.0	263.8	275.2	291.8	312.5	337.9	367.4	403.1	448.5	504.9	568.5
135°	267.3	276.0	287.8	304.4	325.7	350.3	377.2	408.8	447.6	494.2	547.2
137.5°	277.9	286.4	299.0	315.5	335.3	358.9	384.4	412.6	445.8	484.9	527.8
140°	285.4	293.3	306.0	321.9	341.6	364.6	388.2	415.1	445.2	479.2	516.3
142.5°	292.4	301.0	312.4	328.1	346.7	369.0	392.1	417.0	443.9	474.1	505.6
145°	303.6	310.8	322.7	336.0	354.3	374.8	396.2	418.3	442.0	467.3	492.7
147.5°	315.1	322.0	332.2	345.2	360.8	379.5	398.7	418.3	439.0	460.7	482.0
150°	322.7	328.9	339.2	350.3	364.6	382.7	399.3	418.3	436.5	456.2	474.4
152.5°	330.2	336.5	345.5	355.4	369.0	384.6	400.6	416.4	433.3	451.2	467.5
155°	342.4	347.1	355.1	363.8	374.8	388.2	400.9	414.3	427.8	443.6	457.0
157.5°	352.8	356.6	363.6	371.0	379.5	390.3	401.7	411.7	422.9	435.1	446.0
160°	359.8	363.0	369.2	374.8	382.7	392.2	401.7	410.4	419.1	429.4	439.7
162.5°	365.5	368.0	373.0	378.0	384.6	392.8	401.1	407.9	415.3	423.7	432.1
165°	373.2	374.8	378.7	381.9	387.5	393.8	399.3	404.1	409.6	415.9	422.2
167.5°	379.5	380.3	383.3	385.6	389.0	393.6	398.1	400.3	403.9	408.5	413.7
170°	382.7	383.5	385.9	387.5	389.0	393.0	396.2	397.8	400.1	404.1	408.1
172.5°	385.9	386.0	387.8	388.7	389.7	393.0	395.5	395.9	397.0	399.7	403.0
175°	389.0	388.2	389.8	389.8	390.6	392.2	393.8	393.0	393.0	394.6	396.2
177.5°	390.6	390.0	390.6	390.6	390.6	391.3	392.5	391.3	390.6	391.3	391.9
180°	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6	390.6



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	856.0	856.0	856.0	856.0	856.0	856.0	856.0
2.5°	900.8	901.1	904.8	907.4	906.1	907.8	908.4
5°	984.1	999.1	1006.9	1012.7	1013.2	1013.6	1016.9
7.5°	1102.3	1118.3	1130.0	1147.8	1153.1	1159.1	1157.4
10°	1188.6	1212.2	1232.6	1243.3	1255.0	1271.9	1258.3
12.5°	1269.2	1311.1	1342.0	1358.8	1369.8	1373.2	1366.4
15°	1402.2	1456.9	1486.4	1485.5	1522.9	1539.1	1513.7
17.5°	1524.1	1574.6	1615.1	1635.9	1666.9	1673.8	1670.6
20°	1598.8	1653.9	1685.4	1721.1	1737.3	1751.8	1754.3
22.5°	1663.1	1712.6	1746.4	1776.2	1789.7	1796.6	1800.7
25°	1729.4	1768.4	1788.7	1799.0	1802.8	1802.0	1796.6
27.5°	1724.8	1727.8	1705.4	1683.5	1663.8	1641.6	1634.0
30°	1680.1	1645.2	1583.0	1547.8	1495.9	1454.8	1471.4
32.5°	1562.3	1492.9	1423.1	1346.0	1282.2	1264.1	1245.8
35°	1333.3	1211.4	1140.1	1057.1	1024.0	990.8	968.0
37.5°	1078.7	984.4	899.8	845.5	812.3	791.3	780.0
40°	932.7	847.7	778.0	734.0	708.8	685.2	681.8
42.5°	816.3	737.2	684.8	649.7	625.5	615.4	608.2
45°	668.5	613.4	578.1	553.3	537.1	530.8	522.5
47.5°	565.9	526.9	500.4	483.5	471.3	466.7	466.0
50°	508.4	476.1	456.6	443.3	433.8	432.1	425.5
52.5°	465.3	437.3	422.1	410.5	403.6	398.9	397.0
55°	403.9	385.2	371.6	365.0	359.6	355.0	355.0
57.5°	353.4	337.9	328.8	323.1	321.5	318.2	316.2
60°	322.3	309.0	301.9	296.9	293.7	294.1	290.3
62.5°	291.7	283.1	276.4	271.4	267.4	267.5	267.8
65°	248.4	241.8	236.8	235.1	232.7	229.7	230.6
67.5°	210.5	204.3	200.4	197.6	196.8	195.2	197.6
70°	183.3	178.7	175.9	173.3	172.5	172.9	175.0
72.5°	158.4	155.2	153.3	152.1	150.3	150.4	151.8
75°	124.5	121.9	120.3	119.0	118.6	118.6	118.6
77.5°	91.4	90.9	90.1	88.2	88.3	88.8	88.9
80°	72.2	70.9	70.5	69.7	68.4	67.6	69.7
82.5°	53.9	52.7	52.3	52.1	50.1	50.0	51.7
85°	29.0	27.8	28.2	27.8	27.8	27.4	27.4
87.5°	14.4	14.3	14.2	14.4	14.2	14.0	14.6
90°	20.6	21.4	22.9	22.1	22.9	23.7	22.9
92.5°	52.8	46.7	42.5	41.1	38.7	39.5	38.1
95°	193.0	151.1	122.6	107.6	100.4	94.9	91.7
97.5°	568.4	466.4	371.8	313.5	277.9	256.5	249.7
100°	868.2	775.7	663.5	583.6	525.9	495.0	495.8
102.5°	1004.2	950.3	879.2	817.0	771.3	745.5	727.3
105°	1107.1	1122.0	1101.5	1065.1	1035.1	1009.8	1005.8
107.5°	1094.1	1163.3	1191.5	1192.2	1182.0	1173.5	1166.2
110°	1051.7	1151.3	1206.7	1228.8	1235.2	1233.6	1232.0



TEST NUMBER: P331984-927

CATALOG NUMBER: S123DIP-S775D1025U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	996.0	1107.6	1178.8	1219.3	1238.9	1244.9	1245.2
115°	907.0	1023.2	1109.4	1168.7	1203.5	1219.3	1223.3
117.5°	831.7	936.0	1023.5	1085.4	1125.2	1148.0	1153.3
120°	790.0	884.9	964.7	1027.1	1071.4	1090.4	1095.2
122.5°	756.5	844.4	918.5	974.1	1013.9	1034.7	1040.8
125°	714.9	790.8	854.0	904.6	939.4	959.2	964.7
127.5°	678.3	746.8	804.3	849.4	879.2	897.0	902.1
130°	655.5	719.5	773.3	815.2	843.8	860.3	866.6
132.5°	634.0	693.6	744.9	784.3	812.7	827.4	831.9
135°	603.3	654.7	699.8	738.6	762.2	776.5	782.0
137.5°	573.8	618.1	657.1	689.7	713.8	725.7	729.4
140°	556.7	594.6	628.7	658.7	680.8	693.5	692.7
142.5°	540.3	573.1	602.7	628.4	647.9	659.3	658.5
145°	518.7	544.0	567.0	586.7	603.3	609.7	611.2
147.5°	502.7	523.2	539.5	554.4	565.7	571.7	572.4
150°	492.7	509.2	524.3	536.1	544.8	549.5	549.5
152.5°	483.2	497.9	510.3	519.7	527.8	530.6	530.6
155°	469.7	481.6	491.1	498.2	504.5	506.0	506.8
157.5°	456.5	465.7	473.2	479.3	484.1	485.4	485.2
160°	448.4	456.2	461.8	467.3	472.1	472.1	471.3
162.5°	439.5	446.8	451.7	455.3	459.4	459.4	458.6
165°	427.0	432.5	436.5	439.7	442.8	442.0	442.0
167.5°	417.3	420.5	423.3	424.8	427.0	426.2	426.2
170°	410.4	413.5	415.1	415.9	417.5	416.7	416.7
172.5°	404.7	407.3	408.2	408.4	410.0	408.5	407.9
175°	397.0	398.5	398.5	398.5	399.3	398.5	397.8
177.5°	392.5	393.2	393.2	392.5	393.2	391.9	391.9
180°	390.6	390.6	390.6	390.6	390.6	390.6	390.6

(END OF REPORT)