

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331961-927

Luminaire Tested: **S123DIP-S775D365U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331961-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S775D365U927-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 365 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3660.3 lumens
Efficiency: N/A
Efficacy: 104.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 35
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331961-927

CATALOG NUMBER: S123DIP-S775D365U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

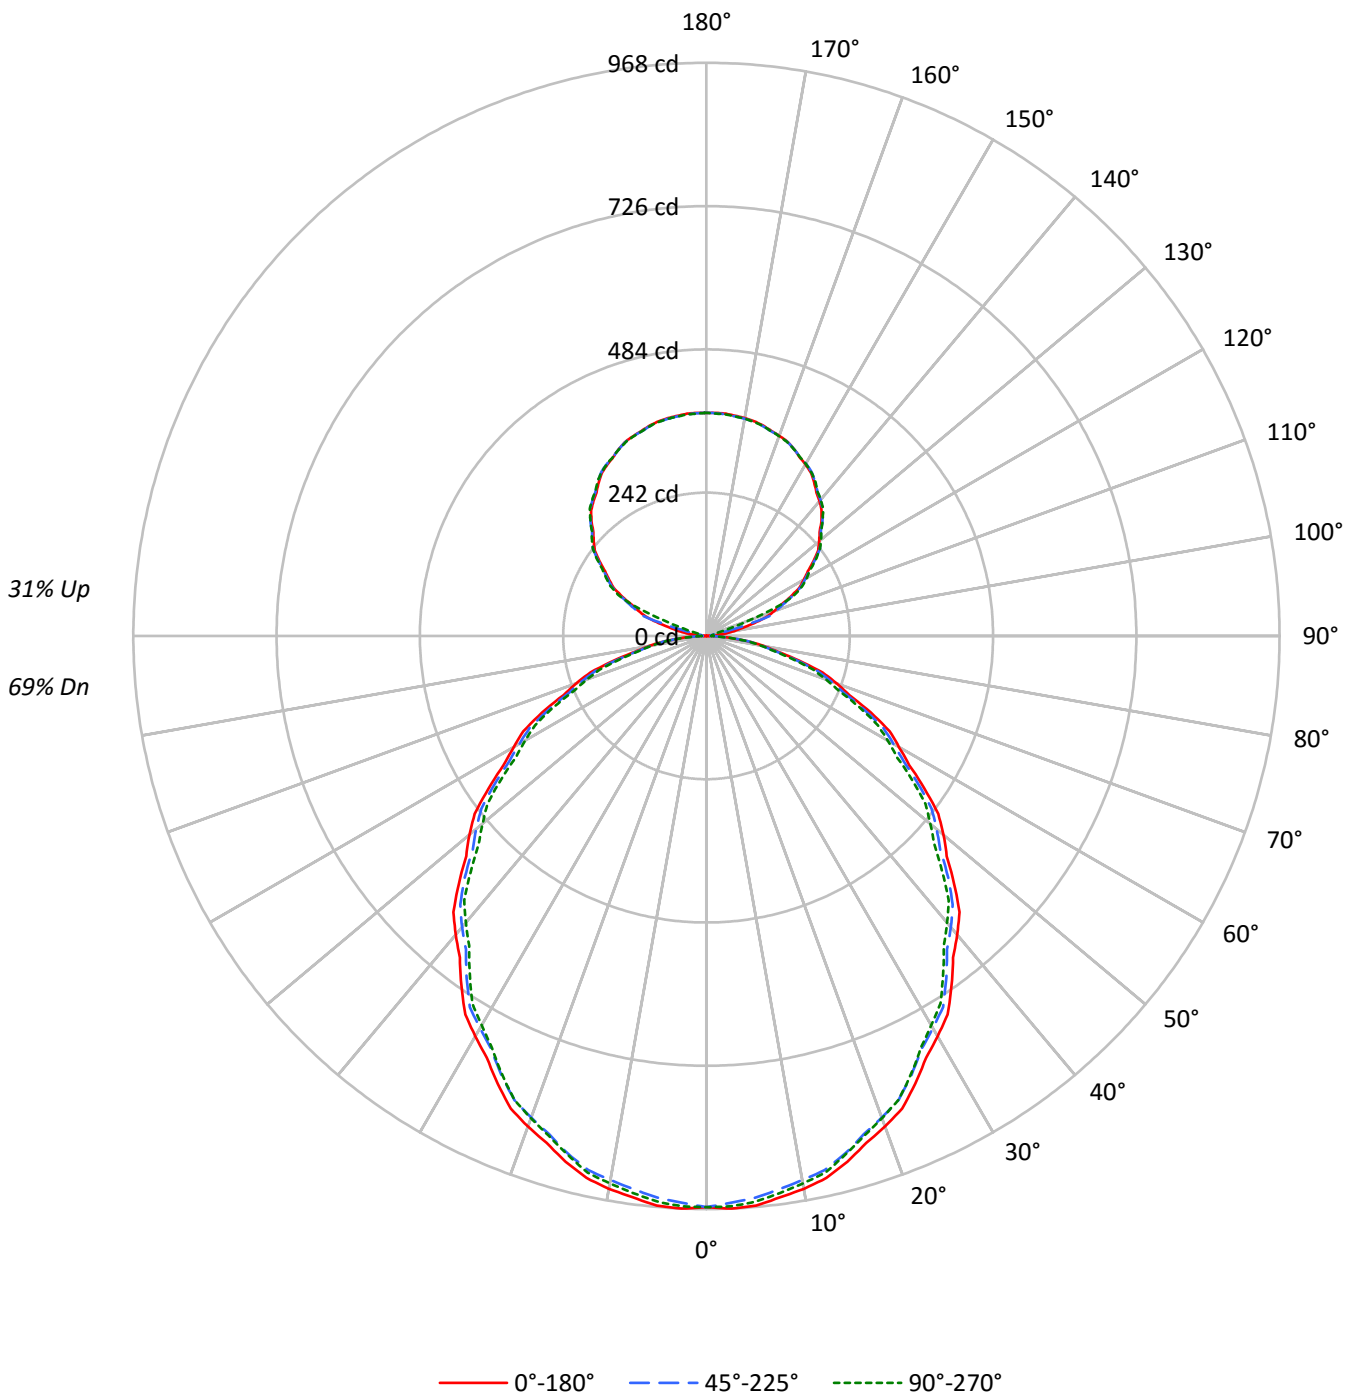



TEST NUMBER: P331961-927

CATALOG NUMBER: S123DIP-S775D365U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	105	105	105	105	94	94	94	83	83	83	73	73	73	69
1	102	97	93	90	96	92	89	85	82	79	77	73	71	69	65	63	62	58
2	93	85	79	73	87	80	75	70	72	68	64	64	61	58	57	54	52	48
3	85	75	67	61	80	71	64	58	63	58	54	57	52	49	50	47	44	41
4	77	66	58	52	73	63	55	50	56	50	46	51	46	42	45	41	38	35
5	71	59	51	44	67	56	49	43	51	44	39	45	40	36	41	36	33	30
6	66	53	45	39	62	51	43	37	46	39	35	41	36	32	37	33	29	27
7	61	48	40	34	57	46	38	33	41	35	31	37	32	28	34	29	26	24
8	57	44	36	30	53	42	34	29	38	32	27	34	29	25	31	27	23	21
9	53	40	32	27	50	38	31	26	35	29	24	32	26	23	29	24	21	19
10	49	37	29	24	47	35	28	24	32	26	22	29	24	21	26	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10384	10384	10384
5°	10432	10289	10361
10°	10363	10200	10263
15°	10242	10085	10104
20°	10100	9919	9929
25°	9911	9723	9704
30°	9701	9506	9434
35°	9483	9276	9155
40°	9254	9021	8882
45°	9003	8788	8573
50°	8751	8500	8264
55°	8422	8203	7955
60°	8088	7858	7608
65°	7796	7480	7246
70°	7361	7046	6735
75°	6729	6488	6209
80°	6069	5808	5759
85°	5323	5125	4915



TEST NUMBER: P331961-927

CATALOG NUMBER: S123DIP-S775D365U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	90.9	2.5
10°-20°	256.6	7.0
20°-30°	379.0	10.4
30°-40°	442.7	12.1
40°-50°	445.1	12.2
50°-60°	391.0	10.7
60°-70°	291.3	8.0
70°-80°	166.0	4.5
80°-90°	48.7	1.3
90°-100°	13.7	0.4
100°-110°	65.3	1.8
110°-120°	156.8	4.3
120°-130°	199.7	5.5
130°-140°	213.4	5.8
140°-150°	199.5	5.5
150°-160°	160.9	4.4
160°-170°	103.9	2.8
170°-180°	35.8	1.0
0°-30°	726.5	19.8
0°-40°	1169.2	31.9
0°-60°	2005.3	54.8
0°-90°	2511.2	68.6
90°-120°	235.8	6.4
90°-150°	848.4	23.2
90°-180°	1149.0	31.4
0°-180°	3660.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	965	965	965	965	965	
5°	966	961	952	960	959	91
15°	919	915	905	911	907	259
25°	834	829	819	819	817	384
35°	722	716	706	701	697	451
45°	591	588	577	568	563	456
55°	449	447	437	428	424	402
65°	306	302	294	287	284	302
75°	162	158	156	152	149	173
85°	43	42	42	40	40	47
90°	0	3	7	8	8	3
95°	17	6	9	11	11	21
105°	83	85	61	15	12	88
115°	156	158	161	163	165	154
125°	221	223	224	224	225	197
135°	275	276	277	278	277	211
145°	317	319	319	320	320	198
155°	349	349	349	350	348	161
165°	368	367	367	369	367	104
175°	377	376	376	377	375	36
180°	377	377	377	377	377	



TEST NUMBER: P331961-927

CATALOG NUMBER: S123DIP-S775D365U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	964.7	964.7	964.7	964.7	964.7	964.7	964.7	964.7	964.7	964.7	964.7
2.5°	968.0	967.4	966.9	966.2	965.7	964.6	962.9	961.3	959.6	958.1	959.5
5°	965.5	964.6	963.7	962.7	961.8	960.4	958.3	956.3	954.3	952.2	954.1
7.5°	956.1	955.1	954.2	953.3	952.4	950.9	948.7	946.7	944.5	942.5	944.1
10°	948.1	947.1	946.3	945.3	944.4	942.8	940.3	937.9	935.6	933.2	934.9
12.5°	937.5	936.7	936.0	935.2	934.4	932.9	930.7	928.4	926.1	923.8	925.1
15°	919.1	918.3	917.6	916.9	916.1	914.6	912.1	909.7	907.4	905.0	906.4
17.5°	897.6	896.7	895.7	894.8	893.8	892.2	889.8	887.3	884.9	882.6	883.6
20°	881.7	880.6	879.6	878.5	877.3	875.5	873.1	870.8	868.4	865.9	866.7
22.5°	863.8	862.7	861.6	860.5	859.4	857.6	855.2	852.9	850.5	848.0	848.7
25°	834.5	833.4	832.3	831.2	830.0	828.3	825.9	823.5	821.1	818.7	818.9
27.5°	803.1	802.0	801.0	799.9	798.8	797.0	794.4	791.9	789.3	786.6	786.8
30°	780.5	779.6	778.7	777.8	776.8	775.1	772.5	769.9	767.4	764.8	764.8
32.5°	758.0	756.8	755.5	754.3	753.1	751.5	749.5	747.5	745.5	743.5	742.5
35°	721.7	720.6	719.5	718.4	717.2	715.5	713.0	710.7	708.3	705.9	704.8
37.5°	684.4	683.1	681.7	680.2	678.9	677.0	674.5	672.1	669.6	667.3	665.9
40°	658.6	657.5	656.4	655.3	654.2	652.4	649.7	647.2	644.6	642.0	640.6
42.5°	632.7	631.4	630.2	629.0	627.7	625.8	623.2	620.6	618.1	615.4	614.0
45°	591.4	590.7	589.9	589.2	588.4	586.9	584.5	582.1	579.7	577.3	575.1
47.5°	550.4	549.4	548.3	547.2	546.1	544.5	542.2	540.0	537.7	535.5	533.3
50°	522.6	521.7	520.7	519.8	518.9	517.2	514.8	512.5	510.0	507.6	505.6
52.5°	493.4	492.7	492.1	491.5	490.8	489.3	486.7	484.2	481.6	479.1	477.4
55°	448.8	448.5	448.4	448.2	448.0	446.7	444.3	442.0	439.5	437.1	435.1
57.5°	406.3	405.7	405.0	404.4	403.8	402.5	400.6	398.6	396.7	394.8	393.0
60°	375.7	375.6	375.4	375.2	375.0	373.8	371.6	369.4	367.2	365.0	363.3
62.5°	348.6	348.1	347.6	347.1	346.7	345.3	343.1	340.9	338.7	336.4	334.8
65°	306.1	305.1	304.2	303.3	302.4	301.0	299.1	297.3	295.5	293.7	292.2
67.5°	261.1	260.3	259.5	258.6	257.9	256.7	255.4	254.0	252.5	251.2	249.9
70°	233.9	232.8	231.7	230.6	229.5	228.4	227.3	226.2	225.1	223.9	222.7
72.5°	205.4	204.5	203.7	203.0	202.2	201.1	199.9	198.6	197.3	196.1	195.0
75°	161.8	161.0	160.3	159.5	158.8	158.1	157.6	157.0	156.5	156.0	155.0
77.5°	123.1	122.7	122.3	121.9	121.4	121.0	120.3	119.6	119.0	118.3	117.6
80°	97.9	97.4	96.8	96.3	95.7	95.2	94.8	94.5	94.1	93.7	93.6
82.5°	73.4	73.2	73.1	73.0	72.9	72.8	72.7	72.6	72.6	72.5	72.2
85°	43.1	42.8	42.4	42.1	41.7	41.5	41.5	41.5	41.5	41.5	41.1
87.5°	17.3	17.0	16.6	16.3	16.0	15.9	15.9	15.9	15.9	15.9	15.8
90°	0.3	0.9	1.5	2.1	2.8	3.5	4.3	5.1	5.9	6.7	7.0
92.5°	5.2	5.1	4.8	4.7	4.5	4.8	5.3	5.9	6.6	7.1	7.5
95°	17.1	14.5	12.0	9.4	6.9	5.9	6.7	7.3	8.0	8.7	9.1
97.5°	34.3	33.2	32.0	30.9	29.7	26.9	22.4	18.0	13.5	9.0	9.5
100°	47.3	48.6	49.8	51.0	52.3	48.1	38.3	28.7	18.9	9.3	9.7
102.5°	62.1	63.0	63.8	64.8	65.7	60.8	50.2	39.6	29.0	18.5	16.9
105°	83.4	84.1	84.8	85.5	86.2	83.7	78.1	72.5	66.9	61.3	50.3
107.5°	105.9	106.5	107.0	107.6	108.1	108.8	109.7	110.6	111.5	112.3	104.3
110°	121.0	121.4	121.9	122.4	122.9	123.5	124.2	124.8	125.6	126.3	124.2



TEST NUMBER: P331961-927

CATALOG NUMBER: S123DIP-S775D365U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	135.2	135.7	136.2	136.6	137.0	137.6	138.3	139.0	139.7	140.4	140.4
115°	156.5	156.9	157.2	157.6	158.0	158.4	159.0	159.5	160.1	160.7	161.3
117.5°	177.1	177.5	177.9	178.4	178.9	179.3	179.5	179.8	180.1	180.4	180.9
120°	189.8	190.4	190.9	191.5	192.0	192.4	192.6	192.8	193.0	193.1	193.7
122.5°	202.8	203.3	203.7	204.1	204.6	204.9	205.2	205.4	205.7	205.9	206.3
125°	220.6	221.1	221.6	222.0	222.6	222.9	223.2	223.5	223.7	223.9	224.1
127.5°	237.8	238.4	238.8	239.3	239.8	240.2	240.5	240.8	241.1	241.4	241.6
130°	248.6	249.1	249.5	250.1	250.6	251.0	251.2	251.4	251.7	251.9	252.2
132.5°	258.9	259.4	259.9	260.4	260.9	261.2	261.4	261.7	261.8	262.1	262.3
135°	274.6	275.0	275.4	275.8	276.1	276.4	276.6	276.9	277.2	277.4	277.6
137.5°	288.0	288.5	289.0	289.5	289.9	290.3	290.4	290.5	290.7	290.8	291.1
140°	297.0	297.4	297.8	298.1	298.5	298.8	299.0	299.1	299.4	299.5	299.8
142.5°	305.3	305.7	306.0	306.4	306.8	307.0	307.3	307.4	307.6	307.8	308.0
145°	316.9	317.3	317.7	318.2	318.6	318.9	319.0	319.2	319.2	319.4	319.6
147.5°	327.8	328.1	328.4	328.7	328.9	329.2	329.3	329.4	329.5	329.6	329.8
150°	334.5	334.7	334.9	335.1	335.3	335.4	335.6	335.6	335.8	335.9	336.0
152.5°	340.6	340.6	340.7	340.8	340.9	341.0	341.0	341.1	341.2	341.3	341.5
155°	349.1	349.0	348.8	348.7	348.6	348.6	348.6	348.6	348.7	348.8	349.1
157.5°	355.7	355.7	355.7	355.6	355.6	355.6	355.5	355.5	355.4	355.4	355.7
160°	359.7	359.7	359.6	359.5	359.5	359.4	359.3	359.3	359.3	359.2	359.5
162.5°	363.5	363.4	363.2	363.1	362.9	362.7	362.7	362.7	362.6	362.5	362.9
165°	368.1	367.9	367.7	367.6	367.3	367.3	367.2	367.1	367.0	367.0	367.5
167.5°	371.7	371.5	371.2	371.0	370.7	370.6	370.6	370.6	370.6	370.6	371.1
170°	373.7	373.4	373.2	373.0	372.7	372.6	372.6	372.6	372.6	372.6	373.1
172.5°	375.0	374.8	374.5	374.1	373.8	373.8	373.8	373.8	373.9	373.9	374.5
175°	376.8	376.4	376.1	375.9	375.6	375.4	375.5	375.6	375.6	375.7	376.1
177.5°	377.2	377.0	376.8	376.5	376.2	376.1	376.2	376.2	376.3	376.4	376.8
180°	376.8	376.8	376.8	376.8	376.8	376.8	376.8	376.8	376.8	376.8	376.8



TEST NUMBER: P331961-927

CATALOG NUMBER: S123DIP-S775D365U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	964.7	964.7	964.7	964.7	964.7	964.7	964.7	964.7
2.5°	961.0	962.5	963.9	964.6	964.5	964.3	964.2	964.0
5°	955.9	957.7	959.6	960.4	960.0	959.6	959.3	958.9
7.5°	945.8	947.5	949.1	949.8	949.6	949.4	949.1	949.0
10°	936.5	938.1	939.8	940.5	940.1	939.7	939.4	939.0
12.5°	926.3	927.5	928.8	929.2	929.0	928.8	928.6	928.4
15°	907.9	909.3	910.9	911.0	909.9	908.8	907.8	906.7
17.5°	884.6	885.7	886.7	887.0	886.6	886.2	885.8	885.4
20°	867.4	868.2	868.9	869.0	868.5	867.9	867.4	866.8
22.5°	849.2	849.9	850.4	850.3	849.7	849.0	848.3	847.6
25°	819.0	819.3	819.4	819.3	818.7	818.2	817.6	817.1
27.5°	787.0	787.1	787.3	787.0	786.3	785.6	784.9	784.2
30°	764.8	764.8	764.8	764.1	762.9	761.5	760.3	759.0
32.5°	741.5	740.5	739.4	738.6	737.8	737.1	736.4	735.8
35°	703.7	702.6	701.5	700.4	699.5	698.6	697.7	696.7
37.5°	664.6	663.2	661.9	661.0	660.4	659.8	659.2	658.6
40°	639.1	637.6	636.1	635.0	634.3	633.5	632.8	632.1
42.5°	612.5	611.0	609.6	608.5	607.8	607.0	606.3	605.5
45°	572.9	570.7	568.5	566.9	566.0	565.1	564.1	563.2
47.5°	531.2	529.0	526.8	525.3	524.5	523.7	522.9	522.0
50°	503.6	501.5	499.6	498.0	496.9	495.7	494.6	493.5
52.5°	475.6	473.9	472.1	470.8	469.7	468.6	467.5	466.4
55°	433.1	431.0	429.0	427.5	426.6	425.7	424.8	423.9
57.5°	391.2	389.4	387.6	386.2	385.1	384.0	382.9	381.9
60°	361.6	360.0	358.3	357.0	356.1	355.2	354.3	353.4
62.5°	333.1	331.4	329.8	328.7	328.0	327.4	326.8	326.1
65°	290.7	289.2	287.7	286.7	286.1	285.6	285.0	284.5
67.5°	248.6	247.3	246.0	244.9	244.2	243.4	242.6	241.9
70°	221.4	220.1	218.8	217.7	216.7	215.9	214.9	214.0
72.5°	193.8	192.7	191.5	190.7	190.2	189.7	189.3	188.8
75°	154.1	153.2	152.3	151.5	151.0	150.4	149.9	149.3
77.5°	117.0	116.4	115.7	115.5	115.5	115.5	115.5	115.5
80°	93.4	93.2	93.0	92.9	92.9	92.9	92.9	92.9
82.5°	71.9	71.5	71.1	70.9	70.8	70.7	70.5	70.3
85°	40.7	40.4	40.0	39.8	39.8	39.8	39.8	39.8
87.5°	15.8	15.7	15.5	15.5	15.5	15.5	15.6	15.6
90°	7.2	7.4	7.7	7.9	8.0	8.2	8.2	8.4
92.5°	8.0	8.4	8.8	9.0	9.0	9.1	9.2	9.3
95°	9.6	10.0	10.5	10.6	10.6	10.6	10.6	10.6
97.5°	10.0	10.5	11.0	11.2	11.3	11.4	11.5	11.6
100°	10.2	10.7	11.2	11.5	11.6	11.6	11.7	11.7
102.5°	15.4	13.8	12.3	11.6	11.6	11.7	11.9	12.0
105°	39.3	28.3	17.3	11.8	12.0	12.0	12.2	12.3
107.5°	96.3	88.2	80.1	71.9	63.6	55.3	47.0	38.7
110°	122.2	120.1	118.0	112.6	103.7	94.7	85.9	77.0



TEST NUMBER: P331961-927

CATALOG NUMBER: S123DIP-S775D365U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	140.5	140.5	140.5	139.6	137.7	135.9	134.0	132.1
115°	161.9	162.6	163.2	163.6	163.8	164.1	164.4	164.6
117.5°	181.4	181.9	182.4	182.7	182.7	182.8	182.8	182.8
120°	194.2	194.6	195.1	195.4	195.4	195.4	195.4	195.4
122.5°	206.6	207.0	207.3	207.5	207.6	207.6	207.6	207.7
125°	224.2	224.3	224.4	224.6	224.7	224.8	225.0	225.1
127.5°	241.8	242.0	242.2	242.2	242.1	242.0	241.9	241.8
130°	252.5	252.7	252.9	253.0	252.9	252.8	252.6	252.5
132.5°	262.5	262.8	263.0	263.1	262.8	262.7	262.5	262.4
135°	277.8	278.0	278.1	278.1	278.0	277.8	277.6	277.4
137.5°	291.4	291.7	292.0	292.1	291.9	291.8	291.7	291.6
140°	300.0	300.2	300.6	300.6	300.5	300.3	300.2	300.1
142.5°	308.2	308.4	308.6	308.6	308.5	308.2	308.1	307.9
145°	319.6	319.8	319.9	320.0	320.0	320.0	320.0	320.0
147.5°	329.9	330.0	330.2	330.1	329.8	329.5	329.2	328.9
150°	336.2	336.3	336.4	336.4	336.2	336.0	335.8	335.6
152.5°	341.7	342.0	342.2	342.1	341.9	341.6	341.3	341.0
155°	349.4	349.7	350.1	350.0	349.7	349.3	348.9	348.5
157.5°	356.1	356.5	356.9	356.8	356.3	355.8	355.3	354.8
160°	359.9	360.3	360.7	360.6	360.2	359.7	359.3	358.9
162.5°	363.4	363.8	364.2	364.2	363.8	363.5	363.1	362.7
165°	368.0	368.5	369.0	369.0	368.6	368.1	367.7	367.3
167.5°	371.5	372.1	372.6	372.6	372.1	371.5	371.1	370.6
170°	373.6	374.1	374.5	374.5	374.1	373.6	373.1	372.6
172.5°	374.9	375.4	375.9	375.9	375.3	374.8	374.2	373.7
175°	376.5	377.0	377.4	377.4	376.9	376.4	375.9	375.4
177.5°	377.2	377.6	378.0	377.9	377.4	376.9	376.4	375.9
180°	376.8	376.8	376.8	376.8	376.8	376.8	376.8	376.8

(END OF REPORT)