

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332371-927

Luminaire Tested: **S123RDIP-S1165D585U927-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332371-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1165D585U927-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 585 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5149.6 lumens
Efficiency: N/A
Efficacy: 93.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 55.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332371-927

CATALOG NUMBER: S123RDIP-S1165D585U927-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

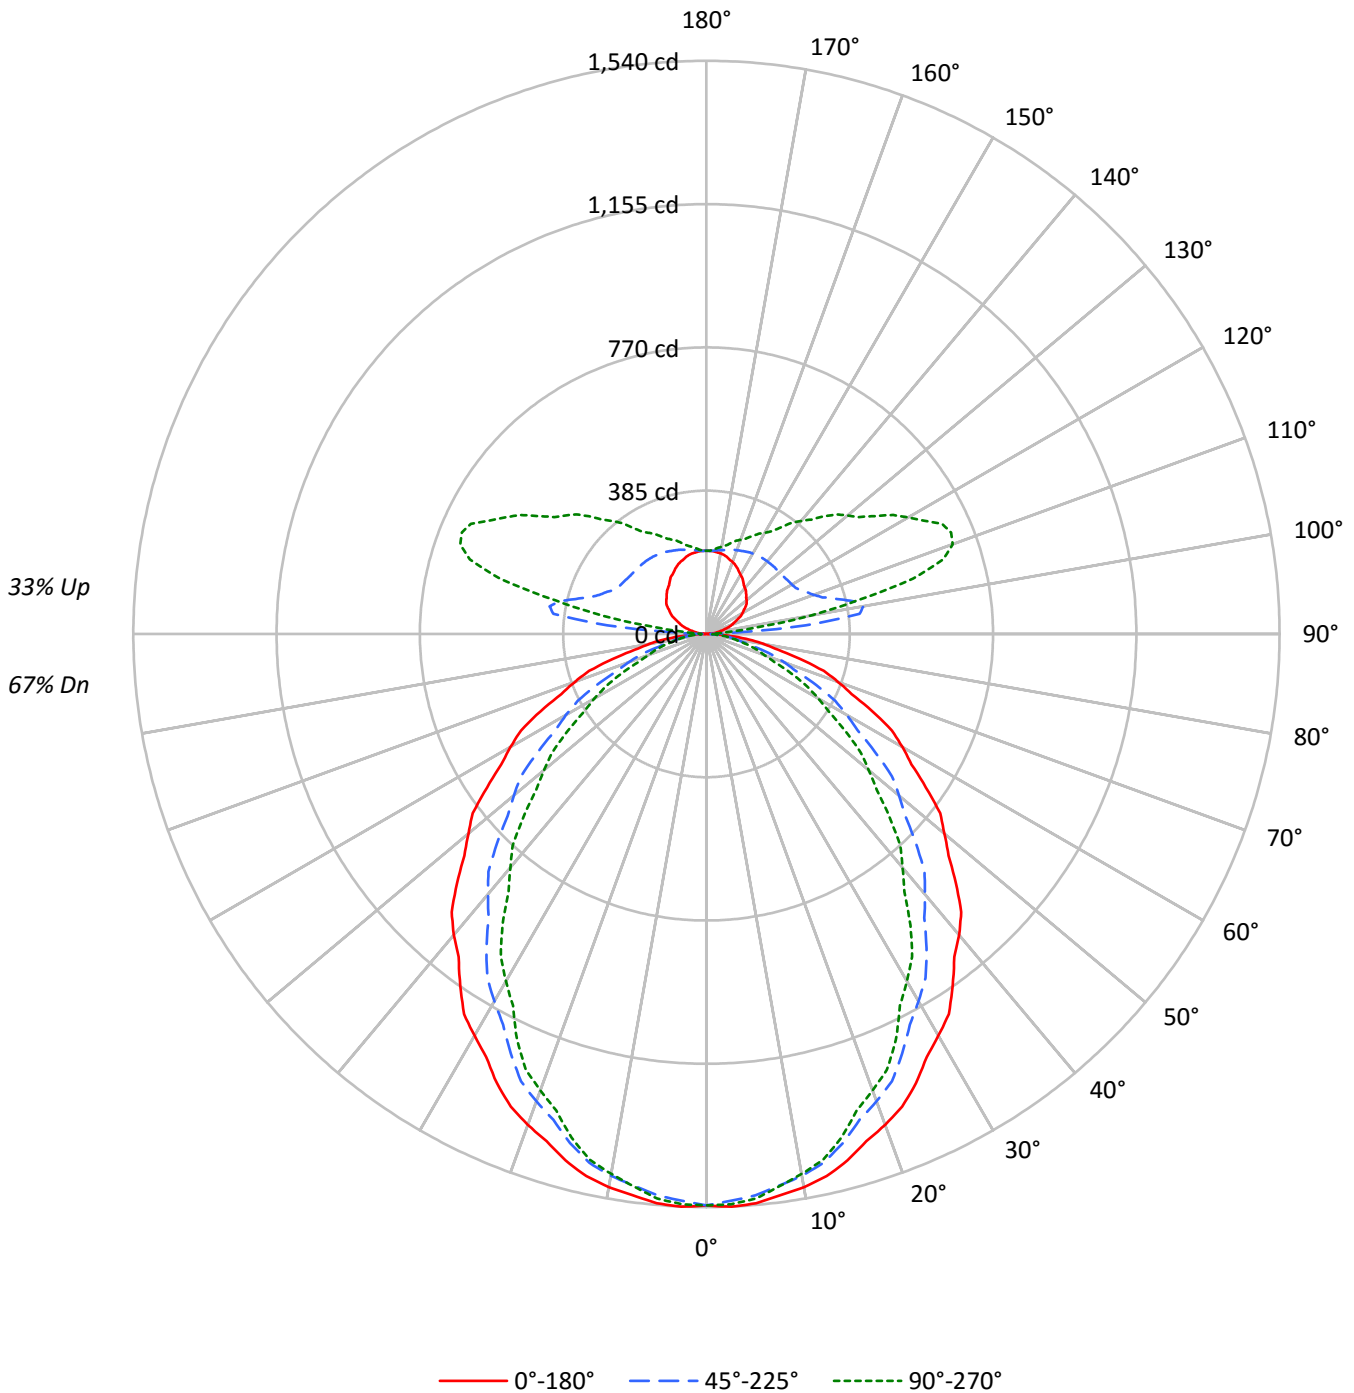



TEST NUMBER: P332371-927

CATALOG NUMBER: S123RDIP-S1165D585U927-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72	67
1	102	98	94	91	96	92	89	86	82	80	77	73	71	69	64	63	62	58
2	93	86	80	75	88	81	76	71	73	68	65	65	61	59	57	55	53	49
3	85	76	69	63	80	72	65	60	64	59	55	58	54	50	51	48	45	42
4	78	68	60	54	74	64	57	51	58	52	47	52	47	43	46	42	39	36
5	72	61	52	46	68	58	50	45	52	46	41	47	42	38	42	38	35	32
6	67	55	46	41	63	52	44	39	47	41	36	42	37	33	38	34	31	28
7	62	49	41	36	58	47	40	35	43	37	32	39	34	30	35	31	27	25
8	58	45	37	32	54	43	36	31	39	33	29	35	30	27	32	28	25	23
9	54	41	34	29	51	40	33	28	36	30	26	33	28	24	30	25	22	20
10	50	38	31	26	48	36	30	25	33	28	24	30	25	22	28	23	20	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16527	16527	16527
5°	16590	16361	16455
10°	16497	16156	16101
15°	16319	15778	15611
20°	16076	15306	14948
25°	15824	14775	14301
30°	15493	14162	13387
35°	15152	13548	12550
40°	14838	12826	11514
45°	14425	12113	10577
50°	13971	11302	9530
55°	13508	10376	8552
60°	13082	9384	7481
65°	12528	8308	6406
70°	11833	6977	5174
75°	10821	5490	4870
80°	9651	4860	4475
85°	8151	4310	4001



TEST NUMBER: P332371-927

CATALOG NUMBER: S123RDIP-S1165D585U927-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	144.2	2.8
10°-20°	401.2	7.8
20°-30°	577.6	11.2
30°-40°	650.7	12.6
40°-50°	622.5	12.1
50°-60°	509.7	9.9
60°-70°	343.9	6.7
70°-80°	173.0	3.4
80°-90°	47.5	0.9
90°-100°	124.2	2.4
100°-110°	351.7	6.8
110°-120°	346.0	6.7
120°-130°	276.0	5.4
130°-140°	217.6	4.2
140°-150°	162.4	3.2
150°-160°	113.2	2.2
160°-170°	66.5	1.3
170°-180°	21.6	0.4
0°-30°	1123.0	21.8
0°-40°	1773.6	34.4
0°-60°	2905.8	56.4
0°-90°	3470.3	67.4
90°-120°	822.0	16.0
90°-150°	1478.0	28.7
90°-180°	1679.0	32.6
0°-180°	5149.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1535	1535	1535	1535	1535	
5°	1535	1529	1514	1525	1523	146
15°	1464	1450	1416	1410	1401	412
25°	1332	1300	1244	1219	1204	613
35°	1153	1106	1031	979	955	721
45°	948	889	796	727	695	731
55°	720	656	553	483	456	645
65°	492	422	326	268	252	487
75°	260	200	132	120	117	278
85°	66	40	35	32	32	74
90°	1	5	11	13	13	4
95°	15	50	268	78	52	17
105°	52	78	363	635	575	56
115°	93	115	278	609	699	92
125°	129	152	259	470	551	114
135°	151	180	256	387	447	117
145°	172	197	252	317	349	108
155°	196	211	244	278	290	90
165°	214	220	234	248	252	60
175°	223	223	225	228	227	21
180°	223	223	223	223	223	



TEST NUMBER: P332371-927

CATALOG NUMBER: S123RDIP-S1165D585U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4
2.5°	1540.4	1539.4	1538.6	1537.7	1536.8	1535.0	1532.4	1529.7	1527.1	1524.4	1526.9
5°	1535.4	1534.0	1532.6	1531.2	1529.9	1527.5	1524.2	1520.8	1517.5	1514.2	1516.7
7.5°	1521.1	1519.7	1518.2	1516.7	1515.2	1512.3	1508.0	1503.6	1499.4	1495.0	1496.4
10°	1509.3	1507.3	1505.4	1503.4	1501.5	1498.0	1493.0	1488.0	1483.0	1478.1	1478.4
12.5°	1492.3	1490.2	1488.0	1485.8	1483.7	1479.6	1473.5	1467.4	1461.3	1455.2	1455.0
15°	1464.4	1461.3	1458.3	1455.2	1452.2	1446.8	1439.1	1431.3	1423.6	1415.9	1414.4
17.5°	1429.3	1425.8	1422.2	1418.6	1415.2	1408.4	1398.6	1388.7	1378.9	1369.0	1366.1
20°	1403.4	1399.0	1394.6	1390.1	1385.7	1378.2	1367.7	1357.2	1346.6	1336.2	1332.5
22.5°	1374.5	1369.4	1364.3	1359.2	1354.2	1346.0	1334.8	1323.7	1312.5	1301.2	1296.8
25°	1332.4	1325.5	1318.6	1311.6	1304.7	1294.9	1282.1	1269.5	1256.7	1244.0	1238.2
27.5°	1281.4	1273.7	1266.1	1258.5	1250.8	1239.9	1225.7	1211.6	1197.4	1183.2	1175.1
30°	1246.5	1238.2	1229.9	1221.5	1213.3	1201.3	1185.9	1170.4	1154.9	1139.4	1130.0
32.5°	1211.6	1202.2	1192.8	1183.4	1174.0	1161.1	1144.7	1128.3	1111.9	1095.6	1085.3
35°	1153.1	1143.1	1133.1	1123.2	1113.3	1099.7	1082.5	1065.4	1048.2	1031.0	1019.1
37.5°	1093.8	1082.8	1071.7	1060.6	1049.6	1034.8	1016.5	998.2	979.9	961.6	948.1
40°	1056.0	1043.8	1031.6	1019.5	1007.3	991.3	971.7	952.0	932.4	912.8	898.3
42.5°	1013.1	1000.9	988.8	976.6	964.4	948.2	927.9	907.5	887.2	867.0	851.2
45°	947.6	935.2	922.7	910.3	897.8	880.9	859.6	838.3	817.0	795.7	779.9
47.5°	882.1	868.5	854.8	841.1	827.4	809.9	788.6	767.3	746.0	724.8	707.6
50°	834.3	821.3	808.3	795.3	782.3	764.6	742.2	719.8	697.4	674.9	657.7
52.5°	791.5	777.4	763.3	749.2	735.0	716.8	694.7	672.5	650.3	628.1	610.3
55°	719.8	706.2	692.6	679.1	665.5	647.0	623.4	599.9	576.4	552.9	536.9
57.5°	653.5	638.7	623.9	609.2	594.4	575.2	551.6	527.9	504.3	480.7	465.5
60°	607.7	592.5	577.3	562.1	546.8	527.7	504.7	481.8	458.8	435.9	420.9
62.5°	561.8	546.6	531.4	516.2	501.0	481.9	458.9	435.9	413.0	390.0	376.0
65°	491.9	476.7	461.4	446.2	431.0	412.6	391.0	369.4	347.8	326.2	312.7
67.5°	421.9	406.5	391.1	375.7	360.4	342.3	321.6	300.9	280.2	259.5	249.4
70°	376.0	361.2	346.2	331.2	316.3	299.1	279.8	260.4	241.1	221.7	212.0
72.5°	330.3	315.5	300.8	286.1	271.3	255.2	237.6	220.0	202.4	184.8	176.9
75°	260.2	247.0	233.7	220.4	207.2	192.9	177.7	162.4	147.2	132.0	129.2
77.5°	196.5	184.5	172.5	160.5	148.5	137.5	127.8	118.0	108.1	98.4	96.9
80°	155.7	144.3	132.9	121.6	110.3	101.7	95.9	90.1	84.3	78.4	77.6
82.5°	116.8	107.0	97.2	87.4	77.6	71.4	68.7	65.9	63.2	60.5	59.7
85°	66.0	59.9	53.8	47.8	41.7	38.2	37.4	36.5	35.7	34.9	34.3
87.5°	24.1	21.9	19.6	17.4	15.1	14.1	14.4	14.7	15.0	15.2	14.9
90°	0.9	1.8	2.7	4.0	5.0	5.9	7.2	8.6	9.9	11.3	10.9
92.5°	5.6	8.3	12.1	15.6	19.4	26.1	37.9	57.4	76.4	69.5	52.4
95°	15.4	16.7	21.7	29.4	41.1	58.7	97.1	164.5	238.6	267.9	217.3
97.5°	26.2	26.7	30.6	37.2	48.8	67.9	104.6	180.5	304.0	415.3	444.3
100°	33.4	33.9	37.1	43.4	54.2	71.9	103.5	170.3	289.1	427.9	516.9
102.5°	41.0	41.8	44.7	50.6	60.4	76.5	104.9	161.7	267.5	404.4	520.5
105°	52.4	53.8	56.5	61.9	70.5	84.5	108.9	155.4	240.8	363.3	493.0
107.5°	64.5	65.9	68.5	73.8	81.9	94.9	116.3	155.0	223.9	326.9	444.7
110°	73.2	74.5	76.8	81.8	89.4	102.1	122.5	156.8	217.3	306.3	414.3



TEST NUMBER: P332371-927

CATALOG NUMBER: S123RDIP-S1165D585U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	81.1	82.5	84.8	89.8	97.4	109.7	128.6	160.4	213.7	292.6	387.9
115°	92.6	94.4	97.1	101.6	109.3	121.5	138.7	166.3	212.4	277.9	356.1
117.5°	104.1	106.2	108.4	112.6	121.2	132.5	149.5	174.0	213.2	269.2	336.8
120°	112.1	113.4	115.7	120.2	128.8	140.1	156.3	179.8	214.6	265.2	326.7
122.5°	118.9	120.3	122.6	127.4	135.6	147.7	163.6	185.3	217.1	262.7	318.4
125°	128.8	129.7	132.4	137.4	145.9	158.1	174.0	193.8	220.9	259.4	307.7
127.5°	136.3	137.6	141.0	146.0	155.5	167.7	183.0	200.9	225.3	257.7	298.3
130°	141.0	142.4	146.4	151.8	161.3	173.5	188.4	205.6	228.1	256.7	293.3
132.5°	144.6	146.3	150.8	157.2	166.8	178.6	193.1	209.9	230.4	256.3	288.5
135°	150.9	152.7	157.7	164.5	174.0	186.2	200.2	215.6	233.6	255.7	282.4
137.5°	156.9	158.8	163.7	170.9	180.3	191.5	205.0	219.7	235.8	254.8	277.1
140°	160.9	163.1	167.6	174.8	183.9	195.2	208.3	221.9	237.2	254.4	273.8
142.5°	165.2	167.1	172.0	178.5	187.5	198.1	210.8	224.0	238.3	253.7	270.9
145°	172.1	173.5	177.6	184.3	192.0	202.4	214.2	226.4	239.0	252.5	267.0
147.5°	179.2	180.0	184.0	189.9	197.3	206.1	216.9	227.8	239.0	250.9	263.2
150°	183.9	184.3	188.0	193.8	200.2	208.3	218.7	228.1	239.0	249.4	260.7
152.5°	188.6	188.7	192.3	197.5	203.0	210.8	219.8	228.9	238.0	247.6	257.9
155°	195.7	195.7	198.4	202.9	207.9	214.2	221.9	229.1	236.8	244.5	253.5
157.5°	201.2	201.6	203.7	207.8	212.0	216.9	223.0	229.6	235.2	241.6	248.6
160°	205.6	205.6	207.4	211.0	214.2	218.7	224.1	229.6	234.5	239.5	245.3
162.5°	208.8	208.8	210.3	213.2	215.9	219.8	224.5	229.2	233.1	237.3	242.1
165°	213.7	213.3	214.2	216.4	218.2	221.4	225.0	228.1	230.9	234.1	237.7
167.5°	217.5	216.9	217.3	219.0	220.3	222.3	224.9	227.4	228.7	230.8	233.5
170°	219.6	218.7	219.1	220.5	221.4	222.3	224.6	226.4	227.3	228.6	230.9
172.5°	221.0	220.5	220.6	221.6	222.1	222.7	224.6	226.0	226.2	226.8	228.4
175°	222.8	222.3	221.9	222.8	222.8	223.2	224.1	225.0	224.6	224.6	225.5
177.5°	223.6	223.2	222.8	223.2	223.2	223.2	223.6	224.3	223.6	223.2	223.6
180°	223.2	223.2	223.2	223.2	223.2	223.2	223.2	223.2	223.2	223.2	223.2



TEST NUMBER: P332371-927

CATALOG NUMBER: S123RDIP-S1165D585U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4
2.5°	1529.3	1531.8	1534.1	1535.2	1534.7	1534.3	1533.8	1533.3
5°	1519.2	1521.7	1524.2	1525.1	1524.6	1524.0	1523.4	1522.9
7.5°	1497.8	1499.2	1500.6	1500.8	1499.8	1498.9	1497.9	1497.0
10°	1478.7	1478.9	1479.2	1478.7	1477.3	1475.9	1474.5	1473.1
12.5°	1454.8	1454.7	1454.5	1453.7	1452.1	1450.4	1448.8	1447.2
15°	1413.1	1411.7	1410.3	1408.7	1406.7	1404.8	1402.8	1400.9
17.5°	1363.2	1360.2	1357.2	1354.4	1351.5	1348.6	1345.8	1342.8
20°	1329.0	1325.3	1321.8	1318.3	1314.9	1311.6	1308.4	1305.0
22.5°	1292.3	1287.9	1283.3	1279.5	1276.4	1273.4	1270.3	1267.2
25°	1232.4	1226.5	1220.8	1216.3	1213.3	1210.2	1207.2	1204.1
27.5°	1167.0	1159.0	1150.9	1144.5	1139.9	1135.3	1130.6	1125.9
30°	1120.5	1111.2	1101.8	1094.9	1090.4	1086.0	1081.6	1077.1
32.5°	1075.0	1064.7	1054.4	1046.9	1042.3	1037.6	1033.0	1028.3
35°	1007.3	995.4	983.5	975.0	970.0	965.0	960.0	955.1
37.5°	934.5	921.1	907.5	897.7	891.6	885.4	879.3	873.1
40°	884.0	869.6	855.2	844.9	838.4	832.1	825.8	819.4
42.5°	835.5	819.8	804.1	793.4	787.7	782.0	776.3	770.6
45°	764.1	748.4	732.6	721.4	714.8	708.1	701.5	694.8
47.5°	690.4	673.3	656.1	644.6	638.7	632.7	626.8	620.9
50°	640.6	623.4	606.3	594.5	588.2	581.8	575.4	569.1
52.5°	592.5	574.6	556.8	545.0	539.3	533.7	528.0	522.3
55°	520.8	504.7	488.7	477.9	472.4	466.8	461.3	455.7
57.5°	450.4	435.1	420.0	410.0	405.4	400.7	395.9	391.3
60°	405.9	391.0	376.0	366.2	361.6	356.8	352.1	347.5
62.5°	361.9	347.8	333.7	324.3	319.3	314.4	309.5	304.6
65°	299.1	285.6	272.0	263.7	260.7	257.6	254.6	251.5
67.5°	239.2	229.1	219.0	212.3	209.1	205.7	202.5	199.2
70°	202.2	192.6	182.9	176.6	173.5	170.5	167.4	164.4
72.5°	169.0	161.1	153.1	148.5	147.3	146.0	144.7	143.5
75°	126.4	123.7	120.9	119.3	118.7	118.2	117.6	117.1
77.5°	95.4	93.9	92.4	91.3	90.8	90.2	89.7	89.1
80°	76.8	76.0	75.1	74.5	73.9	73.4	72.8	72.2
82.5°	58.9	58.1	57.2	56.7	56.6	56.5	56.4	56.3
85°	33.7	33.2	32.6	32.4	32.4	32.4	32.4	32.4
87.5°	14.7	14.7	14.5	14.5	14.2	14.0	13.9	13.5
90°	11.3	11.7	12.2	13.1	12.7	13.1	13.5	13.1
92.5°	38.0	30.2	26.7	24.3	23.5	22.1	22.6	21.8
95°	162.6	110.3	86.3	70.0	61.5	57.4	54.2	52.4
97.5°	405.5	324.8	266.5	212.5	179.1	158.8	146.6	142.7
100°	532.7	496.1	443.2	379.1	333.4	300.5	282.9	283.3
102.5°	575.0	573.9	543.0	502.3	466.8	440.7	426.0	415.6
105°	587.4	632.6	641.2	629.4	608.6	591.4	577.0	574.7
107.5°	551.8	625.2	664.7	680.8	681.2	675.4	670.5	666.4
110°	517.8	600.9	657.9	689.5	702.2	705.8	704.9	703.9



TEST NUMBER: P332371-927

CATALOG NUMBER: S123RDIP-S1165D585U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	484.2	569.1	633.0	673.6	696.7	708.0	711.4	711.5
115°	439.7	518.2	584.7	633.9	667.8	687.7	696.7	699.0
117.5°	407.3	475.2	534.9	584.9	620.2	642.9	656.0	659.0
120°	390.4	451.4	505.6	551.3	586.9	612.3	623.1	625.8
122.5°	377.0	432.2	482.4	524.8	556.6	579.3	591.3	594.7
125°	359.2	408.4	451.9	488.0	516.9	536.8	548.1	551.3
127.5°	343.6	387.6	426.7	459.6	485.4	502.3	512.5	515.5
130°	333.9	374.5	411.1	441.9	465.9	482.1	491.6	495.2
132.5°	324.9	362.3	396.3	425.6	448.1	464.4	472.8	475.3
135°	312.7	344.8	374.1	399.9	422.0	435.5	443.7	446.9
137.5°	301.6	327.9	353.2	375.5	394.1	407.8	414.7	416.8
140°	295.1	318.1	339.8	359.2	376.4	389.0	396.2	395.8
142.5°	288.9	308.7	327.5	344.4	359.0	370.3	376.8	376.3
145°	281.5	296.4	310.9	324.0	335.3	344.8	348.4	349.3
147.5°	275.4	287.2	299.0	308.2	316.8	323.2	326.7	327.0
150°	271.1	281.5	291.0	299.6	306.3	311.3	314.0	314.0
152.5°	267.1	276.1	284.5	291.6	296.9	301.6	303.2	303.2
155°	261.2	268.4	275.2	280.6	284.6	288.3	289.1	289.6
157.5°	254.8	260.9	266.2	270.4	273.9	276.6	277.3	277.3
160°	251.2	256.2	260.7	263.9	267.0	269.7	269.7	269.3
162.5°	246.9	251.1	255.3	258.1	260.2	262.5	262.5	262.1
165°	241.3	244.0	247.2	249.4	251.2	253.0	252.5	252.5
167.5°	236.4	238.4	240.3	241.9	242.7	244.0	243.5	243.5
170°	233.1	234.5	236.3	237.2	237.7	238.6	238.1	238.1
172.5°	230.3	231.2	232.7	233.2	233.3	234.2	233.5	233.1
175°	226.4	226.8	227.8	227.8	227.8	228.1	227.8	227.3
177.5°	223.9	224.3	224.7	224.7	224.3	224.7	223.9	223.9
180°	223.2	223.2	223.2	223.2	223.2	223.2	223.2	223.2

(END OF REPORT)