

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332261-927

Luminaire Tested: **S123RDIP-S340D1025U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332261-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S340D1025U927-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1025 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4276.8 lumens
Efficiency: N/A
Efficacy: 114.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 37.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332261-927

CATALOG NUMBER: S123RDIP-S340D1025U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

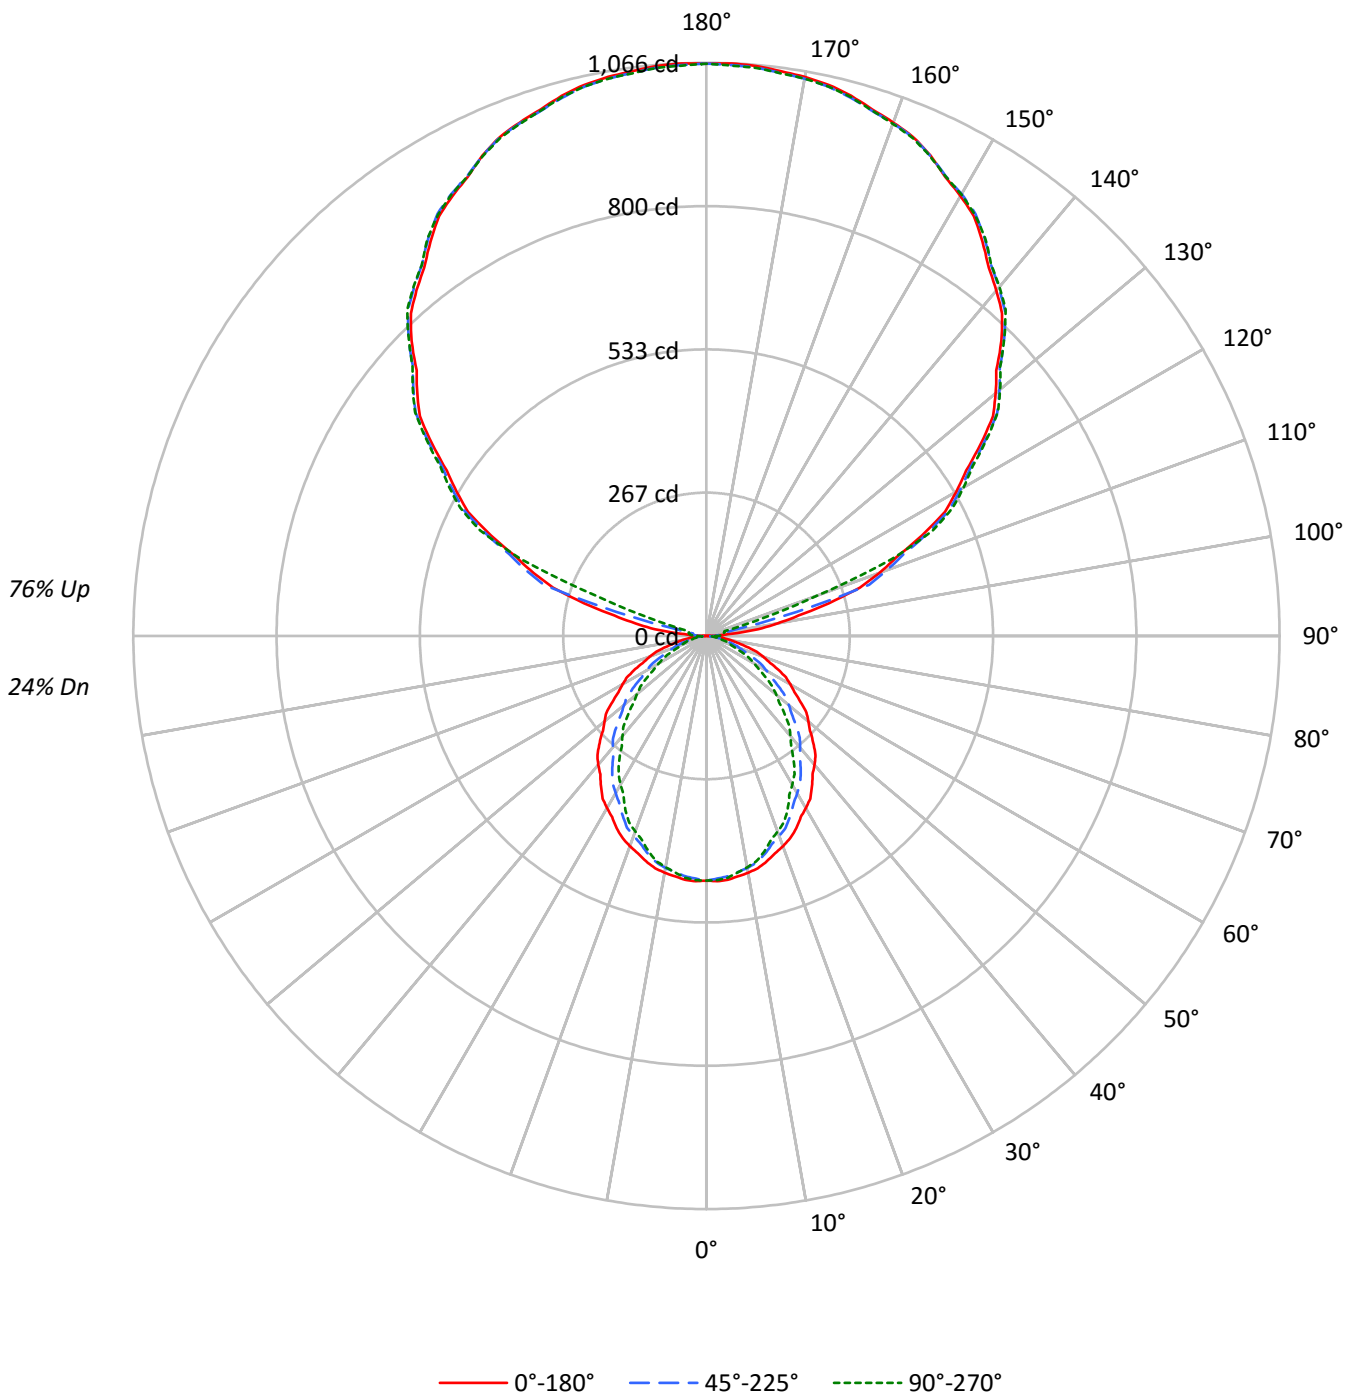



TEST NUMBER: P332261-927

CATALOG NUMBER: S123RDIP-S340D1025U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	32	32	32	24
1	92	88	84	81	82	78	75	73	60	58	57	44	43	42	29	28	28	21
2	84	77	71	66	74	69	64	60	53	50	47	39	37	35	25	24	23	17
3	77	68	61	55	68	61	55	50	47	43	40	34	32	30	23	21	20	15
4	70	60	52	47	62	54	47	42	42	37	34	31	28	25	20	19	17	13
5	64	53	46	40	57	48	41	36	37	33	29	27	24	22	18	17	15	11
6	59	48	40	34	52	43	36	31	33	29	25	25	22	19	17	15	13	10
7	55	43	35	30	48	39	32	27	30	26	22	22	19	17	15	13	12	9
8	50	39	31	26	45	35	29	24	27	23	20	21	17	15	14	12	11	8
9	47	35	28	23	42	32	26	21	25	21	17	19	16	13	13	11	10	7
10	44	32	25	21	39	29	23	19	23	19	16	17	14	12	12	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4899	4899	4899
5°	4917	4850	4878
10°	4889	4790	4773
15°	4837	4677	4628
20°	4765	4537	4431
25°	4691	4380	4240
30°	4593	4197	3967
35°	4491	4016	3720
40°	4398	3801	3413
45°	4276	3589	3136
50°	4141	3349	2825
55°	4003	3076	2535
60°	3877	2781	2217
65°	3713	2463	1897
70°	3509	2068	1533
75°	3211	1626	1443
80°	2858	1444	1327
85°	2421	1272	1186



TEST NUMBER: P332261-927

CATALOG NUMBER: S123RDIP-S340D1025U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	42.7	1.0
10°-20°	118.9	2.8
20°-30°	171.2	4.0
30°-40°	192.9	4.5
40°-50°	184.5	4.3
50°-60°	151.1	3.5
60°-70°	101.9	2.4
70°-80°	51.3	1.2
80°-90°	16.5	0.4
90°-100°	38.7	0.9
100°-110°	184.4	4.3
110°-120°	443.0	10.4
120°-130°	564.1	13.2
130°-140°	602.7	14.1
140°-150°	563.6	13.2
150°-160°	454.6	10.6
160°-170°	293.4	6.9
170°-180°	101.1	2.4
0°-30°	332.9	7.8
0°-40°	525.7	12.3
0°-60°	861.4	20.1
0°-90°	1031.1	24.1
90°-120°	666.1	15.6
90°-150°	2396.5	56.0
90°-180°	3246.0	75.9
0°-180°	4276.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	455	455	455	455	455	
5°	455	453	449	452	452	43
15°	434	430	420	418	415	122
25°	395	385	369	361	357	182
35°	342	328	306	290	283	214
45°	281	264	236	215	206	217
55°	213	195	164	143	135	191
65°	146	125	97	79	74	144
75°	77	59	39	36	35	82
85°	20	12	10	10	10	22
90°	1	9	19	22	24	3
95°	48	18	24	30	30	60
105°	236	240	173	41	35	250
115°	442	447	454	462	465	436
125°	623	629	633	634	636	556
135°	776	780	784	786	784	597
145°	895	900	902	904	904	560
155°	986	985	985	989	984	454
165°	1040	1038	1037	1042	1037	294
175°	1064	1061	1061	1066	1060	101
180°	1064	1064	1064	1064	1064	



TEST NUMBER: P332261-927

CATALOG NUMBER: S123RDIP-S340D1025U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	455.1	455.1	455.1	455.1	455.1	455.1	455.1	455.1	455.1	455.1	455.1
2.5°	456.6	456.3	456.1	455.8	455.6	455.0	454.2	453.4	452.7	451.9	452.6
5°	455.1	454.7	454.3	453.9	453.4	452.8	451.8	450.8	449.8	448.9	449.6
7.5°	450.9	450.4	450.0	449.6	449.2	448.3	447.0	445.8	444.4	443.1	443.5
10°	447.3	446.8	446.2	445.7	445.0	444.0	442.6	441.1	439.6	438.2	438.2
12.5°	442.4	441.7	441.1	440.5	439.8	438.6	436.7	435.0	433.2	431.3	431.3
15°	434.1	433.2	432.3	431.3	430.5	428.9	426.6	424.3	422.0	419.7	419.3
17.5°	423.7	422.6	421.6	420.5	419.5	417.5	414.5	411.6	408.8	405.8	405.0
20°	416.0	414.7	413.4	412.1	410.7	408.5	405.4	402.3	399.2	396.1	395.0
22.5°	407.4	405.9	404.4	402.9	401.4	399.0	395.7	392.4	389.0	385.7	384.4
25°	395.0	392.9	390.9	388.8	386.7	383.8	380.1	376.3	372.5	368.8	367.0
27.5°	379.9	377.6	375.3	373.0	370.7	367.6	363.4	359.1	354.9	350.7	348.3
30°	369.5	367.0	364.6	362.1	359.7	356.1	351.5	346.9	342.3	337.7	334.9
32.5°	359.2	356.3	353.6	350.8	348.0	344.2	339.3	334.5	329.6	324.7	321.7
35°	341.8	338.8	335.9	333.0	330.0	326.0	320.9	315.8	310.7	305.6	302.1
37.5°	324.2	320.9	317.7	314.4	311.1	306.7	301.3	295.9	290.5	285.0	281.1
40°	313.0	309.4	305.8	302.2	298.6	293.8	288.0	282.2	276.4	270.5	266.3
42.5°	300.3	296.7	293.1	289.5	285.9	281.1	275.0	269.0	263.0	257.0	252.3
45°	280.9	277.2	273.5	269.8	266.1	261.1	254.8	248.5	242.2	235.8	231.2
47.5°	261.5	257.5	253.3	249.3	245.3	240.1	233.8	227.4	221.2	214.8	209.8
50°	247.3	243.4	239.6	235.8	231.9	226.6	220.0	213.3	206.7	200.0	195.0
52.5°	234.6	230.4	226.2	222.0	217.9	212.5	205.9	199.3	192.7	186.2	180.9
55°	213.3	209.3	205.3	201.3	197.3	191.8	184.8	177.8	170.9	163.9	159.1
57.5°	193.7	189.3	185.0	180.5	176.2	170.5	163.5	156.5	149.5	142.5	138.0
60°	180.1	175.6	171.1	166.6	162.1	156.5	149.6	142.8	136.0	129.2	124.8
62.5°	166.5	162.0	157.5	153.0	148.5	142.8	136.0	129.2	122.4	115.6	111.5
65°	145.8	141.3	136.8	132.3	127.8	122.3	115.9	109.5	103.1	96.7	92.7
67.5°	125.1	120.5	115.9	111.4	106.8	101.5	95.3	89.2	83.0	76.9	73.9
70°	111.5	107.0	102.6	98.2	93.8	88.6	82.9	77.2	71.5	65.7	62.8
72.5°	97.9	93.6	89.2	84.8	80.4	75.7	70.4	65.2	60.0	54.7	52.4
75°	77.2	73.2	69.2	65.4	61.4	57.2	52.7	48.2	43.6	39.1	38.3
77.5°	58.2	54.7	51.1	47.5	44.0	40.8	37.9	34.9	32.1	29.2	28.8
80°	46.1	42.8	39.5	36.0	32.7	30.2	28.4	26.7	25.0	23.3	23.0
82.5°	34.6	31.7	28.8	25.9	23.0	21.2	20.4	19.6	18.8	17.9	17.7
85°	19.6	17.7	15.9	14.2	12.4	11.3	11.1	10.9	10.6	10.3	10.1
87.5°	7.2	6.9	6.5	6.1	5.8	5.8	6.3	6.7	7.2	7.6	7.7
90°	0.8	2.5	4.3	6.1	7.8	9.8	12.1	14.4	16.7	19.0	19.6
92.5°	14.7	14.2	13.7	13.2	12.8	13.4	15.1	16.8	18.5	20.3	21.4
95°	48.2	41.0	33.8	26.6	19.4	16.8	18.7	20.7	22.6	24.5	25.7
97.5°	97.0	93.7	90.5	87.2	84.0	76.0	63.5	50.8	38.1	25.4	26.9
100°	133.6	137.1	140.7	144.2	147.7	135.7	108.3	80.9	53.5	26.1	27.5
102.5°	175.4	177.9	180.5	183.0	185.5	171.8	141.9	111.9	82.0	52.0	47.7
105°	235.6	237.6	239.5	241.5	243.4	236.4	220.6	204.8	189.0	173.2	142.0
107.5°	299.2	300.8	302.3	303.9	305.4	307.4	309.9	312.4	314.9	317.4	294.6
110°	341.6	343.0	344.4	345.8	347.2	348.9	350.8	352.8	354.7	356.6	350.8



TEST NUMBER: P332261-927

CATALOG NUMBER: S123RDIP-S340D1025U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	382.1	383.3	384.6	385.9	387.1	388.7	390.7	392.6	394.5	396.5	396.6
115°	442.0	443.1	444.1	445.2	446.2	447.6	449.1	450.7	452.3	453.8	455.7
117.5°	500.0	501.4	502.6	504.0	505.3	506.3	507.1	507.9	508.7	509.5	511.0
120°	536.1	537.7	539.2	540.8	542.4	543.5	544.0	544.5	545.1	545.6	547.0
122.5°	572.8	574.1	575.4	576.7	578.0	579.0	579.6	580.4	581.0	581.6	582.7
125°	623.1	624.5	625.9	627.3	628.7	629.8	630.5	631.1	631.8	632.6	633.0
127.5°	671.8	673.2	674.6	676.0	677.4	678.5	679.4	680.2	681.0	681.9	682.5
130°	702.2	703.5	705.0	706.4	707.8	708.8	709.6	710.3	710.9	711.6	712.3
132.5°	731.3	732.7	734.0	735.5	736.9	737.8	738.4	738.9	739.6	740.1	740.8
135°	775.7	776.7	777.8	778.9	779.9	780.8	781.5	782.2	782.9	783.6	784.1
137.5°	813.7	815.0	816.3	817.7	819.0	819.8	820.2	820.6	821.0	821.4	822.2
140°	838.9	840.0	841.1	842.1	843.2	844.0	844.5	845.0	845.6	846.1	846.8
142.5°	862.4	863.4	864.4	865.5	866.6	867.4	867.9	868.4	868.9	869.5	870.1
145°	895.1	896.4	897.5	898.8	900.0	900.8	901.2	901.5	901.8	902.2	902.5
147.5°	925.9	926.8	927.6	928.4	929.2	929.7	930.1	930.4	930.8	931.1	931.5
150°	944.9	945.5	945.9	946.5	947.0	947.5	947.8	948.2	948.5	948.9	949.2
152.5°	961.9	962.3	962.5	962.7	963.0	963.2	963.4	963.6	963.8	964.0	964.6
155°	986.0	985.6	985.3	985.0	984.6	984.5	984.7	984.8	985.1	985.2	986.1
157.5°	1004.6	1004.6	1004.6	1004.6	1004.6	1004.4	1004.2	1004.1	1003.9	1003.7	1004.8
160°	1016.1	1015.9	1015.7	1015.6	1015.3	1015.2	1015.0	1014.9	1014.6	1014.5	1015.6
162.5°	1026.8	1026.4	1025.9	1025.5	1025.0	1024.7	1024.5	1024.3	1024.1	1024.0	1025.2
165°	1039.8	1039.3	1038.7	1038.2	1037.7	1037.4	1037.1	1037.0	1036.8	1036.6	1038.0
167.5°	1049.9	1049.2	1048.5	1047.8	1047.1	1046.7	1046.7	1046.7	1046.7	1046.7	1048.1
170°	1055.6	1054.9	1054.2	1053.5	1052.8	1052.4	1052.4	1052.4	1052.4	1052.4	1053.8
172.5°	1059.4	1058.6	1057.7	1056.9	1056.1	1055.7	1055.8	1056.0	1056.1	1056.2	1057.6
175°	1064.3	1063.4	1062.6	1061.7	1060.8	1060.4	1060.6	1060.8	1061.0	1061.1	1062.4
177.5°	1065.6	1064.9	1064.1	1063.4	1062.8	1062.5	1062.6	1062.8	1062.9	1063.0	1064.1
180°	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3



TEST NUMBER: P332261-927

CATALOG NUMBER: S123RDIP-S340D1025U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	455.1	455.1	455.1	455.1	455.1	455.1	455.1	455.1
2.5°	453.3	454.0	454.8	455.0	455.0	454.8	454.6	454.6
5°	450.4	451.1	451.8	452.1	451.9	451.8	451.6	451.5
7.5°	444.0	444.4	444.8	444.9	444.6	444.3	444.0	443.8
10°	438.3	438.4	438.5	438.3	437.9	437.5	437.0	436.7
12.5°	431.3	431.2	431.2	430.9	430.4	429.9	429.4	429.0
15°	418.8	418.4	418.0	417.6	417.0	416.4	415.8	415.3
17.5°	404.1	403.2	402.3	401.5	400.6	399.7	398.9	398.1
20°	394.0	392.8	391.8	390.8	389.8	388.8	387.9	386.8
22.5°	383.1	381.8	380.4	379.3	378.3	377.5	376.5	375.7
25°	365.3	363.6	361.9	360.5	359.7	358.8	357.8	357.0
27.5°	345.9	343.6	341.2	339.3	337.9	336.5	335.2	333.7
30°	332.2	329.4	326.6	324.6	323.2	321.9	320.6	319.2
32.5°	318.6	315.6	312.5	310.3	309.0	307.6	306.2	304.8
35°	298.6	295.0	291.5	289.0	287.6	286.1	284.6	283.1
37.5°	277.0	273.0	269.0	266.1	264.3	262.4	260.6	258.8
40°	262.1	257.8	253.5	250.4	248.5	246.7	244.8	242.9
42.5°	247.6	243.0	238.4	235.2	233.5	231.8	230.1	228.4
45°	226.5	221.8	217.1	213.8	211.9	209.9	207.9	206.0
47.5°	204.6	199.6	194.5	191.1	189.3	187.6	185.8	184.0
50°	189.9	184.8	179.7	176.3	174.4	172.5	170.6	168.7
52.5°	175.6	170.3	165.1	161.6	159.9	158.2	156.5	154.8
55°	154.4	149.6	144.9	141.6	140.1	138.4	136.7	135.1
57.5°	133.5	129.0	124.5	121.5	120.2	118.7	117.4	116.0
60°	120.3	115.9	111.5	108.5	107.2	105.8	104.4	103.0
62.5°	107.3	103.1	98.9	96.1	94.7	93.2	91.7	90.3
65°	88.6	84.7	80.6	78.2	77.2	76.4	75.5	74.5
67.5°	70.9	67.9	64.9	62.9	61.9	61.0	60.0	59.1
70°	60.0	57.1	54.2	52.4	51.4	50.5	49.6	48.7
72.5°	50.1	47.8	45.4	44.0	43.6	43.3	42.9	42.5
75°	37.5	36.7	35.8	35.3	35.2	35.0	34.9	34.7
77.5°	28.3	27.8	27.4	27.1	26.9	26.8	26.6	26.5
80°	22.7	22.5	22.3	22.1	21.9	21.7	21.5	21.4
82.5°	17.4	17.2	17.0	16.8	16.8	16.7	16.7	16.7
85°	10.0	9.8	9.7	9.6	9.6	9.6	9.6	9.6
87.5°	7.8	7.8	7.9	8.0	8.0	8.0	8.0	8.0
90°	20.4	21.1	21.8	22.3	22.7	23.1	23.4	23.7
92.5°	22.5	23.6	24.7	25.4	25.6	25.8	26.1	26.2
95°	26.9	28.2	29.5	30.0	30.0	30.0	30.0	30.0
97.5°	28.3	29.7	31.1	31.8	32.1	32.2	32.4	32.6
100°	28.9	30.3	31.7	32.5	32.7	32.9	33.0	33.2
102.5°	43.3	39.0	34.6	32.6	32.9	33.2	33.5	33.8
105°	111.0	79.9	48.8	33.4	33.7	34.1	34.5	34.8
107.5°	271.8	249.0	226.2	203.0	179.6	156.1	132.7	109.2
110°	345.0	339.2	333.4	318.0	292.8	267.7	242.6	217.5



TEST NUMBER: P332261-927

CATALOG NUMBER: S123RDIP-S340D1025U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	396.6	396.8	396.9	394.3	389.0	383.7	378.3	373.0
115°	457.4	459.1	460.9	462.2	462.8	463.5	464.2	464.9
117.5°	512.4	513.7	515.2	515.9	516.1	516.2	516.3	516.5
120°	548.4	549.8	551.2	551.9	551.9	551.9	551.9	551.9
122.5°	583.6	584.6	585.6	586.1	586.3	586.5	586.5	586.7
125°	633.3	633.6	634.0	634.3	634.7	635.0	635.4	635.7
127.5°	683.0	683.6	684.1	684.3	683.9	683.6	683.2	682.9
130°	713.0	713.8	714.5	714.6	714.3	713.9	713.6	713.2
132.5°	741.5	742.2	742.9	743.0	742.5	742.0	741.6	741.1
135°	784.7	785.2	785.7	785.7	785.2	784.7	784.1	783.6
137.5°	823.1	823.9	824.7	825.0	824.7	824.3	823.9	823.6
140°	847.5	848.2	848.9	849.1	848.7	848.3	848.0	847.6
142.5°	870.6	871.2	871.7	871.7	871.2	870.8	870.3	869.8
145°	902.9	903.2	903.6	903.8	903.8	903.8	903.8	903.8
147.5°	931.8	932.2	932.6	932.3	931.5	930.7	929.9	929.1
150°	949.6	949.9	950.3	950.1	949.7	949.1	948.6	948.1
152.5°	965.3	965.9	966.5	966.5	965.7	964.9	964.1	963.2
155°	987.0	987.9	988.7	988.6	987.6	986.6	985.5	984.4
157.5°	1005.8	1006.9	1008.0	1007.8	1006.4	1005.0	1003.7	1002.3
160°	1016.6	1017.6	1018.7	1018.6	1017.4	1016.1	1014.9	1013.7
162.5°	1026.4	1027.5	1028.7	1028.8	1027.7	1026.6	1025.6	1024.5
165°	1039.4	1040.8	1042.3	1042.4	1041.1	1039.9	1038.6	1037.4
167.5°	1049.6	1051.0	1052.3	1052.3	1051.0	1049.6	1048.1	1046.7
170°	1055.3	1056.7	1058.0	1058.0	1056.7	1055.3	1053.8	1052.4
172.5°	1059.1	1060.4	1061.8	1061.8	1060.3	1058.7	1057.2	1055.6
175°	1063.6	1064.9	1066.0	1066.0	1064.5	1063.2	1061.8	1060.3
177.5°	1065.2	1066.4	1067.5	1067.4	1066.0	1064.6	1063.2	1061.8
180°	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3	1064.3

(END OF REPORT)