

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332267-927

Luminaire Tested: **S123RDIP-S340D1195U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332267-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S340D1195U927-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1195 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4809.4 lumens
Efficiency: N/A
Efficacy: 114.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 42.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332267-927

CATALOG NUMBER: S123RDIP-S340D1195U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

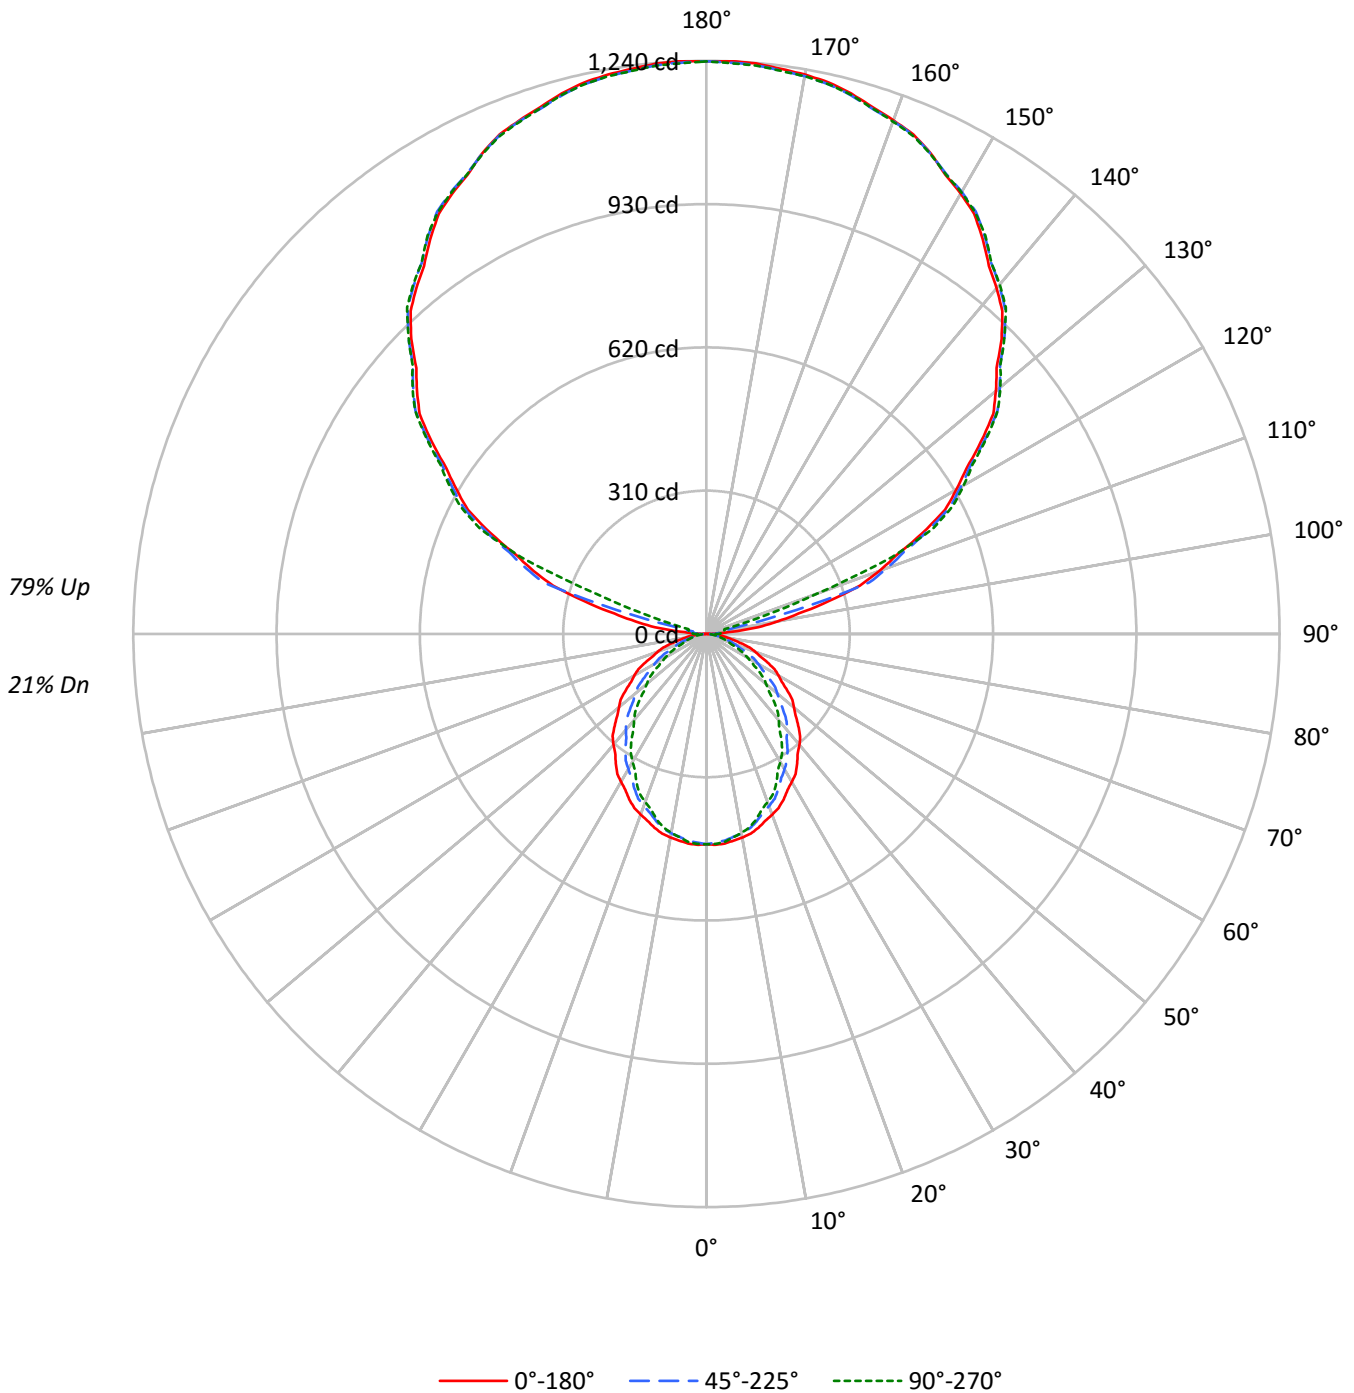



TEST NUMBER: P332267-927

CATALOG NUMBER: S123RDIP-S340D1195U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	100	100	100	100	89	89	89	89	67	67	67	48	48	48	30	30	30	21
1	92	87	84	80	81	78	75	72	59	57	55	42	41	40	27	26	25	18
2	83	76	71	66	74	68	63	59	52	49	46	37	35	33	24	22	22	16
3	76	67	60	55	67	60	54	49	46	42	39	33	30	28	21	20	18	13
4	70	59	52	46	61	53	47	42	41	36	33	29	27	24	19	17	16	12
5	64	53	45	40	56	47	41	36	36	32	28	26	23	21	17	15	14	10
6	59	47	40	34	52	42	36	31	33	28	25	24	21	18	15	14	12	9
7	54	42	35	30	48	38	32	27	29	25	22	21	18	16	14	12	11	8
8	50	38	31	26	44	34	28	24	27	22	19	20	17	14	13	11	10	7
9	46	35	28	23	41	31	25	21	24	20	17	18	15	13	12	10	9	6
10	43	32	25	20	38	29	23	19	22	18	15	17	14	12	11	9	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4899	4899	4899
5°	4917	4850	4878
10°	4889	4790	4773
15°	4837	4677	4628
20°	4765	4537	4431
25°	4691	4380	4240
30°	4593	4197	3967
35°	4491	4016	3720
40°	4398	3801	3413
45°	4276	3589	3136
50°	4141	3349	2825
55°	4003	3076	2535
60°	3877	2781	2217
65°	3713	2463	1897
70°	3509	2068	1533
75°	3211	1626	1443
80°	2858	1444	1327
85°	2421	1272	1186



TEST NUMBER: P332267-927

CATALOG NUMBER: S123RDIP-S340D1195U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	42.7	0.9
10°-20°	118.9	2.5
20°-30°	171.2	3.6
30°-40°	192.9	4.0
40°-50°	184.5	3.8
50°-60°	151.1	3.1
60°-70°	101.9	2.1
70°-80°	51.3	1.1
80°-90°	17.0	0.4
90°-100°	45.0	0.9
100°-110°	214.7	4.5
110°-120°	515.6	10.7
120°-130°	656.6	13.7
130°-140°	701.5	14.6
140°-150°	656.0	13.6
150°-160°	529.2	11.0
160°-170°	341.5	7.1
170°-180°	117.7	2.4
0°-30°	332.9	6.9
0°-40°	525.7	10.9
0°-60°	861.4	17.9
0°-90°	1031.6	21.5
90°-120°	775.3	16.1
90°-150°	2789.4	58.0
90°-180°	3778.0	78.6
0°-180°	4809.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	455	455	455	455	455	
5°	455	453	449	452	452	43
15°	434	430	420	418	415	122
25°	395	385	369	361	357	182
35°	342	328	306	290	283	214
45°	281	264	236	215	206	217
55°	213	195	164	143	135	191
65°	146	125	97	79	74	144
75°	77	59	39	36	35	82
85°	20	12	10	10	10	22
90°	1	10	22	26	28	4
95°	56	21	28	35	35	69
105°	274	279	202	48	40	291
115°	514	520	528	537	541	508
125°	725	732	736	738	740	647
135°	903	908	912	915	912	695
145°	1042	1048	1050	1052	1052	652
155°	1148	1146	1147	1151	1146	529
165°	1210	1208	1207	1213	1208	342
175°	1239	1234	1235	1241	1234	118
180°	1239	1239	1239	1239	1239	



TEST NUMBER: P332267-927

CATALOG NUMBER: S123RDIP-S340D1195U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	455.1	455.1	455.1	455.1	455.1	455.1	455.1	455.1	455.1	455.1	455.1
2.5°	456.6	456.3	456.1	455.8	455.6	455.0	454.2	453.4	452.7	451.9	452.6
5°	455.1	454.7	454.3	453.9	453.4	452.8	451.8	450.8	449.8	448.9	449.6
7.5°	450.9	450.4	450.0	449.6	449.2	448.3	447.0	445.8	444.4	443.1	443.5
10°	447.3	446.8	446.2	445.7	445.0	444.0	442.6	441.1	439.6	438.2	438.2
12.5°	442.4	441.7	441.1	440.5	439.8	438.6	436.7	435.0	433.2	431.3	431.3
15°	434.1	433.2	432.3	431.3	430.5	428.9	426.6	424.3	422.0	419.7	419.3
17.5°	423.7	422.6	421.6	420.5	419.5	417.5	414.5	411.6	408.8	405.8	405.0
20°	416.0	414.7	413.4	412.1	410.7	408.5	405.4	402.3	399.2	396.1	395.0
22.5°	407.4	405.9	404.4	402.9	401.4	399.0	395.7	392.4	389.0	385.7	384.4
25°	395.0	392.9	390.9	388.8	386.7	383.8	380.1	376.3	372.5	368.8	367.0
27.5°	379.9	377.6	375.3	373.0	370.7	367.6	363.4	359.1	354.9	350.7	348.3
30°	369.5	367.0	364.6	362.1	359.7	356.1	351.5	346.9	342.3	337.7	334.9
32.5°	359.2	356.3	353.6	350.8	348.0	344.2	339.3	334.5	329.6	324.7	321.7
35°	341.8	338.8	335.9	333.0	330.0	326.0	320.9	315.8	310.7	305.6	302.1
37.5°	324.2	320.9	317.7	314.4	311.1	306.7	301.3	295.9	290.5	285.0	281.1
40°	313.0	309.4	305.8	302.2	298.6	293.8	288.0	282.2	276.4	270.5	266.3
42.5°	300.3	296.7	293.1	289.5	285.9	281.1	275.0	269.0	263.0	257.0	252.3
45°	280.9	277.2	273.5	269.8	266.1	261.1	254.8	248.5	242.2	235.8	231.2
47.5°	261.5	257.5	253.3	249.3	245.3	240.1	233.8	227.4	221.2	214.8	209.8
50°	247.3	243.4	239.6	235.8	231.9	226.6	220.0	213.3	206.7	200.0	195.0
52.5°	234.6	230.4	226.2	222.0	217.9	212.5	205.9	199.3	192.7	186.2	180.9
55°	213.3	209.3	205.3	201.3	197.3	191.8	184.8	177.8	170.9	163.9	159.1
57.5°	193.7	189.3	185.0	180.5	176.2	170.5	163.5	156.5	149.5	142.5	138.0
60°	180.1	175.6	171.1	166.6	162.1	156.5	149.6	142.8	136.0	129.2	124.8
62.5°	166.5	162.0	157.5	153.0	148.5	142.8	136.0	129.2	122.4	115.6	111.5
65°	145.8	141.3	136.8	132.3	127.8	122.3	115.9	109.5	103.1	96.7	92.7
67.5°	125.1	120.5	115.9	111.4	106.8	101.5	95.3	89.2	83.0	76.9	73.9
70°	111.5	107.0	102.6	98.2	93.8	88.6	82.9	77.2	71.5	65.7	62.8
72.5°	97.9	93.6	89.2	84.8	80.4	75.7	70.4	65.2	60.0	54.7	52.4
75°	77.2	73.2	69.2	65.4	61.4	57.2	52.7	48.2	43.6	39.1	38.3
77.5°	58.2	54.7	51.1	47.5	44.0	40.8	37.9	34.9	32.1	29.2	28.8
80°	46.1	42.8	39.5	36.0	32.7	30.2	28.4	26.7	25.0	23.3	23.0
82.5°	34.6	31.7	28.8	25.9	23.0	21.2	20.4	19.6	18.8	17.9	17.7
85°	19.6	17.7	15.9	14.2	12.4	11.3	11.1	10.9	10.6	10.3	10.1
87.5°	7.3	7.0	6.7	6.3	6.0	6.1	6.7	7.2	7.8	8.2	8.3
90°	1.0	2.9	5.0	7.1	9.1	11.5	14.1	16.8	19.4	22.1	22.9
92.5°	17.1	16.6	16.0	15.4	14.8	15.5	17.6	19.6	21.5	23.5	24.9
95°	56.2	47.8	39.4	31.0	22.6	19.6	21.8	24.0	26.3	28.5	29.9
97.5°	112.8	109.1	105.3	101.6	97.8	88.6	73.8	59.1	44.4	29.6	31.3
100°	155.5	159.6	163.7	167.8	171.9	158.0	126.1	94.2	62.3	30.3	32.0
102.5°	204.1	207.1	210.0	212.9	215.9	199.9	165.1	130.2	95.4	60.5	55.5
105°	274.3	276.6	278.8	281.0	283.3	275.2	256.7	238.4	220.0	201.5	165.3
107.5°	348.2	350.1	351.9	353.6	355.5	357.8	360.8	363.6	366.5	369.5	342.9
110°	397.6	399.3	400.8	402.5	404.2	406.1	408.4	410.6	412.8	415.1	408.4



TEST NUMBER: P332267-927

CATALOG NUMBER: S123RDIP-S340D1195U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	444.7	446.2	447.7	449.2	450.6	452.5	454.7	457.0	459.2	461.4	461.6
115°	514.5	515.7	516.9	518.2	519.4	520.9	522.8	524.6	526.5	528.3	530.4
117.5°	582.0	583.5	585.0	586.6	588.1	589.3	590.3	591.2	592.2	593.1	594.7
120°	624.0	625.8	627.7	629.5	631.4	632.6	633.2	633.8	634.5	635.0	636.7
122.5°	666.7	668.2	669.7	671.2	672.8	673.9	674.7	675.5	676.2	677.0	678.2
125°	725.2	726.9	728.5	730.2	731.8	733.0	733.8	734.7	735.5	736.3	736.7
127.5°	782.0	783.5	785.2	786.9	788.5	789.8	790.8	791.8	792.7	793.7	794.4
130°	817.3	819.0	820.5	822.2	823.8	825.1	825.9	826.7	827.5	828.3	829.2
132.5°	851.1	852.8	854.4	856.0	857.7	858.8	859.5	860.2	860.8	861.5	862.3
135°	902.9	904.1	905.3	906.6	907.8	908.8	909.7	910.5	911.2	912.1	912.7
137.5°	947.1	948.6	950.1	951.7	953.3	954.3	954.7	955.2	955.6	956.1	957.0
140°	976.5	977.7	979.0	980.2	981.4	982.3	982.9	983.6	984.2	984.8	985.6
142.5°	1003.8	1005.0	1006.2	1007.4	1008.7	1009.6	1010.2	1010.8	1011.5	1012.0	1012.7
145°	1041.9	1043.3	1044.7	1046.2	1047.6	1048.5	1048.9	1049.3	1049.7	1050.1	1050.5
147.5°	1077.8	1078.7	1079.7	1080.5	1081.5	1082.2	1082.6	1083.0	1083.4	1083.8	1084.3
150°	1099.9	1100.4	1101.1	1101.7	1102.3	1102.8	1103.2	1103.6	1104.1	1104.5	1104.9
152.5°	1119.7	1120.0	1120.3	1120.5	1120.9	1121.1	1121.3	1121.7	1121.9	1122.1	1122.8
155°	1147.7	1147.3	1146.8	1146.4	1146.1	1146.0	1146.1	1146.4	1146.6	1146.8	1147.8
157.5°	1169.4	1169.3	1169.3	1169.3	1169.3	1169.1	1168.9	1168.7	1168.5	1168.3	1169.6
160°	1182.6	1182.5	1182.3	1182.1	1181.9	1181.6	1181.5	1181.2	1181.1	1180.8	1182.1
162.5°	1195.2	1194.7	1194.1	1193.6	1193.0	1192.7	1192.5	1192.3	1192.1	1191.8	1193.3
165°	1210.3	1209.7	1209.0	1208.5	1207.8	1207.4	1207.2	1207.0	1206.8	1206.6	1208.2
167.5°	1222.1	1221.2	1220.4	1219.6	1218.8	1218.4	1218.4	1218.4	1218.4	1218.4	1220.0
170°	1228.7	1227.9	1227.1	1226.2	1225.4	1225.0	1225.0	1225.0	1225.0	1225.0	1226.6
172.5°	1233.1	1232.2	1231.1	1230.2	1229.2	1228.8	1228.9	1229.1	1229.2	1229.4	1231.1
175°	1238.8	1237.8	1236.8	1235.7	1234.7	1234.3	1234.5	1234.7	1234.9	1235.1	1236.6
177.5°	1240.3	1239.4	1238.7	1237.9	1237.0	1236.7	1236.8	1237.0	1237.2	1237.3	1238.7
180°	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8



TEST NUMBER: P332267-927

CATALOG NUMBER: S123RDIP-S340D1195U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	455.1	455.1	455.1	455.1	455.1	455.1	455.1	455.1
2.5°	453.3	454.0	454.8	455.0	455.0	454.8	454.6	454.6
5°	450.4	451.1	451.8	452.1	451.9	451.8	451.6	451.5
7.5°	444.0	444.4	444.8	444.9	444.6	444.3	444.0	443.8
10°	438.3	438.4	438.5	438.3	437.9	437.5	437.0	436.7
12.5°	431.3	431.2	431.2	430.9	430.4	429.9	429.4	429.0
15°	418.8	418.4	418.0	417.6	417.0	416.4	415.8	415.3
17.5°	404.1	403.2	402.3	401.5	400.6	399.7	398.9	398.1
20°	394.0	392.8	391.8	390.8	389.8	388.8	387.9	386.8
22.5°	383.1	381.8	380.4	379.3	378.3	377.5	376.5	375.7
25°	365.3	363.6	361.9	360.5	359.7	358.8	357.8	357.0
27.5°	345.9	343.6	341.2	339.3	337.9	336.5	335.2	333.7
30°	332.2	329.4	326.6	324.6	323.2	321.9	320.6	319.2
32.5°	318.6	315.6	312.5	310.3	309.0	307.6	306.2	304.8
35°	298.6	295.0	291.5	289.0	287.6	286.1	284.6	283.1
37.5°	277.0	273.0	269.0	266.1	264.3	262.4	260.6	258.8
40°	262.1	257.8	253.5	250.4	248.5	246.7	244.8	242.9
42.5°	247.6	243.0	238.4	235.2	233.5	231.8	230.1	228.4
45°	226.5	221.8	217.1	213.8	211.9	209.9	207.9	206.0
47.5°	204.6	199.6	194.5	191.1	189.3	187.6	185.8	184.0
50°	189.9	184.8	179.7	176.3	174.4	172.5	170.6	168.7
52.5°	175.6	170.3	165.1	161.6	159.9	158.2	156.5	154.8
55°	154.4	149.6	144.9	141.6	140.1	138.4	136.7	135.1
57.5°	133.5	129.0	124.5	121.5	120.2	118.7	117.4	116.0
60°	120.3	115.9	111.5	108.5	107.2	105.8	104.4	103.0
62.5°	107.3	103.1	98.9	96.1	94.7	93.2	91.7	90.3
65°	88.6	84.7	80.6	78.2	77.2	76.4	75.5	74.5
67.5°	70.9	67.9	64.9	62.9	61.9	61.0	60.0	59.1
70°	60.0	57.1	54.2	52.4	51.4	50.5	49.6	48.7
72.5°	50.1	47.8	45.4	44.0	43.6	43.3	42.9	42.5
75°	37.5	36.7	35.8	35.3	35.2	35.0	34.9	34.7
77.5°	28.3	27.8	27.4	27.1	26.9	26.8	26.6	26.5
80°	22.7	22.5	22.3	22.1	21.9	21.7	21.5	21.4
82.5°	17.4	17.2	17.0	16.8	16.8	16.7	16.7	16.7
85°	10.0	9.8	9.7	9.6	9.6	9.6	9.6	9.6
87.5°	8.5	8.6	8.6	8.7	8.7	8.7	8.8	8.8
90°	23.7	24.6	25.3	26.0	26.4	26.8	27.2	27.6
92.5°	26.1	27.5	28.8	29.5	29.8	30.1	30.3	30.6
95°	31.4	32.8	34.2	34.9	34.9	34.9	34.9	34.9
97.5°	32.9	34.5	36.2	37.1	37.3	37.5	37.7	37.9
100°	33.7	35.3	36.9	37.9	38.0	38.3	38.4	38.7
102.5°	50.4	45.3	40.2	37.9	38.3	38.7	39.1	39.4
105°	129.1	92.9	56.7	38.9	39.3	39.7	40.1	40.5
107.5°	316.3	289.8	263.2	236.3	209.1	181.7	154.5	127.2
110°	401.6	394.8	388.1	370.1	340.9	311.6	282.3	253.1



TEST NUMBER: P332267-927

CATALOG NUMBER: S123RDIP-S340D1195U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	461.7	461.8	462.0	458.9	452.7	446.6	440.4	434.2
115°	532.3	534.4	536.5	537.9	538.7	539.6	540.3	541.1
117.5°	596.4	598.0	599.6	600.6	600.7	600.9	601.0	601.2
120°	638.3	639.9	641.6	642.4	642.4	642.4	642.4	642.4
122.5°	679.3	680.5	681.6	682.2	682.4	682.5	682.8	682.9
125°	737.1	737.5	737.9	738.3	738.7	739.2	739.6	740.0
127.5°	795.0	795.7	796.3	796.5	796.1	795.7	795.3	794.8
130°	830.0	830.8	831.6	831.8	831.4	831.0	830.6	830.2
132.5°	863.1	864.0	864.7	864.8	864.3	863.7	863.2	862.5
135°	913.3	913.9	914.6	914.6	913.9	913.3	912.7	912.1
137.5°	958.1	959.0	960.0	960.3	959.9	959.5	959.1	958.6
140°	986.4	987.2	988.1	988.2	987.9	987.5	987.1	986.7
142.5°	1013.4	1014.0	1014.6	1014.7	1014.2	1013.5	1013.0	1012.4
145°	1051.0	1051.4	1051.8	1051.9	1051.9	1051.9	1051.9	1051.9
147.5°	1084.7	1085.1	1085.4	1085.2	1084.3	1083.3	1082.4	1081.4
150°	1105.3	1105.6	1106.0	1106.0	1105.3	1104.8	1104.1	1103.5
152.5°	1123.6	1124.3	1125.1	1125.0	1124.0	1123.1	1122.1	1121.2
155°	1148.8	1149.9	1150.9	1150.7	1149.5	1148.3	1147.1	1145.9
157.5°	1170.8	1172.0	1173.2	1173.1	1171.5	1169.8	1168.2	1166.6
160°	1183.3	1184.5	1185.7	1185.7	1184.2	1182.8	1181.3	1179.9
162.5°	1194.7	1196.0	1197.5	1197.5	1196.2	1194.9	1193.7	1192.4
165°	1209.9	1211.5	1213.1	1213.2	1211.8	1210.4	1208.9	1207.5
167.5°	1221.6	1223.3	1225.0	1225.0	1223.3	1221.6	1220.0	1218.4
170°	1228.3	1229.9	1231.5	1231.5	1229.9	1228.3	1226.6	1225.0
172.5°	1232.7	1234.3	1236.0	1235.9	1234.1	1232.3	1230.5	1228.7
175°	1238.0	1239.4	1240.9	1240.7	1239.1	1237.5	1235.9	1234.2
177.5°	1239.9	1241.3	1242.5	1242.4	1240.8	1239.1	1237.5	1235.9
180°	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8

(END OF REPORT)