

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332286-927

Luminaire Tested: **S123RDIP-S560D805U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332286-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S560D805U927-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 805 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3877.1 lumens  
Efficiency: N/A  
Efficacy: 101.0 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 38.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332286-927

CATALOG NUMBER: S123RDIP-S560D805U927-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

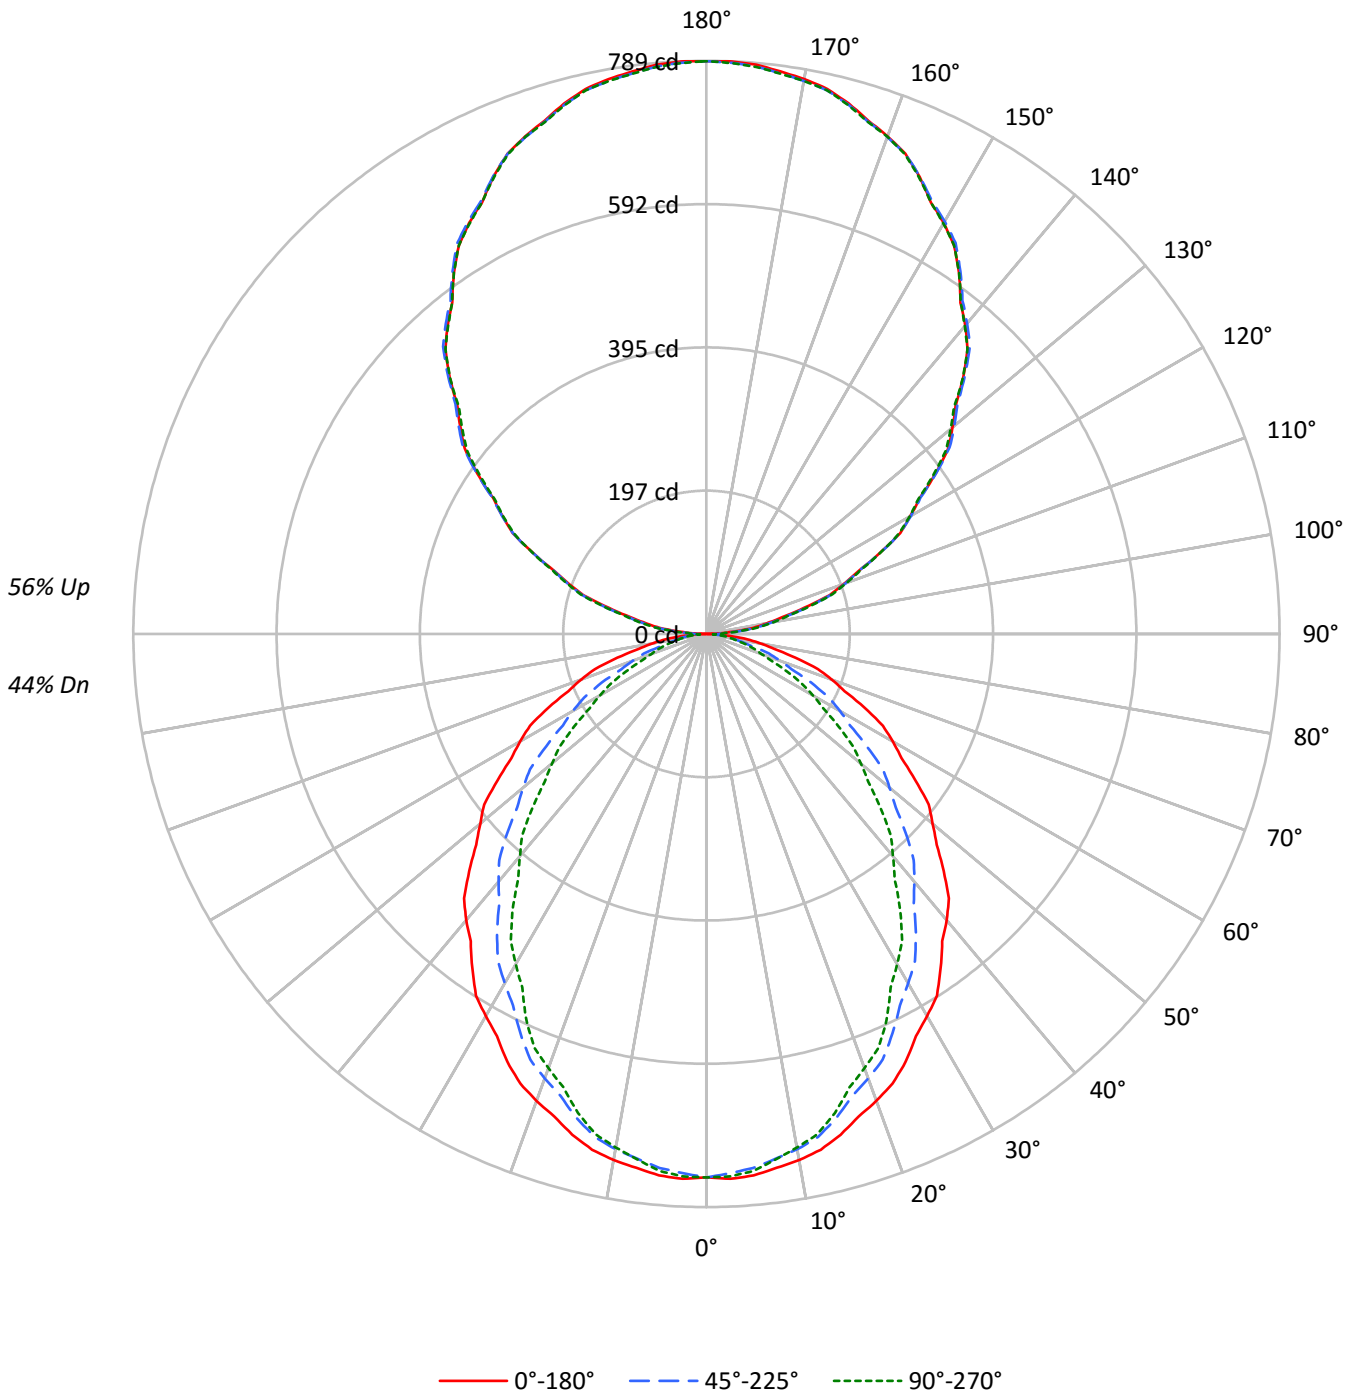



TEST NUMBER: P332286-927

CATALOG NUMBER: S123RDIP-S560D805U927-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	106	106	106	106	97	97	97	97	80	80	80		64	64	64		50	50	50	44
1	97	92	89	85	88	85	82	79	70	68	66		57	56	54		45	44	43	37
2	88	81	75	70	80	74	69	65	62	58	55		50	48	46		40	38	37	32
3	81	71	64	59	74	66	60	55	55	50	47		45	42	39		36	33	31	27
4	74	63	56	50	67	58	52	46	49	44	40		40	36	34		32	29	27	24
5	68	57	49	43	62	52	45	40	44	39	35		36	32	29		29	26	24	21
6	63	51	43	37	57	47	40	35	40	34	30		33	29	26		26	23	21	18
7	58	46	38	33	53	42	36	31	36	31	27		30	26	23		24	21	19	16
8	54	42	34	29	49	39	32	27	33	27	24		27	23	20		22	19	17	15
9	50	38	31	26	46	35	29	24	30	25	21		25	21	18		20	18	15	13
10	47	35	28	23	43	32	26	22	28	23	19		23	19	17		19	16	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8054	8054	8054
5°	8084	7973	8018
10°	8039	7873	7847
15°	7952	7689	7608
20°	7834	7458	7285
25°	7712	7201	6969
30°	7549	6901	6524
35°	7384	6603	6116
40°	7231	6250	5611
45°	7030	5903	5154
50°	6807	5508	4644
55°	6583	5056	4168
60°	6374	4573	3645
65°	6105	4050	3123
70°	5766	3402	2521
75°	5273	2674	2371
80°	4705	2374	2182
85°	3977	2100	1951



TEST NUMBER: P332286-927

CATALOG NUMBER: S123RDIP-S560D805U927-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	70.3	1.8
10°-20°	195.5	5.0
20°-30°	281.5	7.3
30°-40°	317.1	8.2
40°-50°	303.3	7.8
50°-60°	248.4	6.4
60°-70°	167.6	4.3
70°-80°	84.3	2.2
80°-90°	24.6	0.6
90°-100°	51.4	1.3
100°-110°	153.7	4.0
110°-120°	261.5	6.7
120°-130°	343.9	8.9
130°-140°	386.6	10.0
140°-150°	380.0	9.8
150°-160°	319.9	8.3
160°-170°	212.9	5.5
170°-180°	74.6	1.9
0°-30°	547.2	14.1
0°-40°	864.3	22.3
0°-60°	1416.1	36.5
0°-90°	1692.6	43.7
90°-120°	466.6	12.0
90°-150°	1577.1	40.7
90°-180°	2185.0	56.4
0°-180°	3877.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	748	748	748	748	748	
5°	748	745	738	743	742	71
15°	714	706	690	687	683	201
25°	649	633	606	594	587	298
35°	562	539	502	477	465	352
45°	462	433	388	354	339	356
55°	351	320	269	236	222	314
65°	240	206	159	130	123	237
75°	127	97	64	58	57	135
85°	32	19	17	16	16	36
90°	1	7	15	17	19	4
95°	36	41	46	48	48	41
105°	139	141	146	146	147	149
115°	263	265	264	264	264	260
125°	385	387	386	383	381	343
135°	500	503	503	500	499	385
145°	606	608	609	609	606	379
155°	694	694	695	697	693	319
165°	756	754	754	758	754	213
175°	787	784	784	787	784	75
180°	788	788	788	788	788	



TEST NUMBER: P332286-927

CATALOG NUMBER: S123RDIP-S560D805U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2
2.5°	750.7	750.2	749.8	749.3	748.9	748.1	746.8	745.4	744.2	742.9	744.1
5°	748.2	747.6	746.9	746.2	745.5	744.4	742.8	741.2	739.5	737.9	739.1
7.5°	741.3	740.6	739.8	739.1	738.4	737.0	734.9	732.8	730.6	728.6	729.2
10°	735.5	734.5	733.6	732.6	731.7	730.0	727.6	725.2	722.7	720.3	720.4
12.5°	727.2	726.2	725.1	724.1	723.0	721.0	718.0	715.1	712.1	709.2	709.1
15°	713.6	712.2	710.7	709.2	707.7	705.0	701.3	697.5	693.7	690.0	689.3
17.5°	696.5	694.8	693.1	691.3	689.6	686.3	681.5	676.8	671.9	667.2	665.7
20°	683.9	681.8	679.6	677.4	675.3	671.6	666.5	661.4	656.2	651.1	649.4
22.5°	669.8	667.3	664.9	662.3	659.9	655.9	650.5	645.0	639.6	634.1	631.9
25°	649.3	645.9	642.5	639.2	635.8	631.1	624.8	618.6	612.4	606.3	603.4
27.5°	624.4	620.7	617.0	613.2	609.5	604.2	597.3	590.4	583.5	576.6	572.7
30°	607.4	603.4	599.4	595.3	591.3	585.4	577.9	570.4	562.8	555.2	550.6
32.5°	590.4	585.9	581.3	576.7	572.1	565.9	557.9	549.9	541.9	533.9	528.9
35°	561.9	557.1	552.2	547.4	542.5	535.9	527.5	519.2	510.8	502.5	496.6
37.5°	533.1	527.7	522.3	516.8	511.4	504.3	495.4	486.5	477.5	468.6	462.0
40°	514.6	508.7	502.7	496.8	490.8	483.1	473.6	464.0	454.4	444.8	437.8
42.5°	493.7	487.7	481.9	475.9	470.0	462.1	452.2	442.3	432.4	422.5	414.8
45°	461.8	455.7	449.6	443.6	437.5	429.3	418.9	408.5	398.2	387.8	380.1
47.5°	429.8	423.2	416.5	409.9	403.2	394.7	384.3	373.9	363.5	353.2	344.8
50°	406.5	400.2	393.9	387.5	381.2	372.6	361.6	350.8	339.8	328.9	320.5
52.5°	385.7	378.8	371.9	365.0	358.2	349.4	338.5	327.7	316.9	306.1	297.4
55°	350.8	344.1	337.5	330.9	324.3	315.3	303.8	292.4	280.9	269.4	261.6
57.5°	318.5	311.2	304.0	296.8	289.6	280.3	268.8	257.3	245.7	234.2	226.9
60°	296.1	288.8	281.3	273.9	266.5	257.1	246.0	234.8	223.6	212.4	205.1
62.5°	273.8	266.4	259.0	251.5	244.2	234.8	223.6	212.5	201.2	190.0	183.2
65°	239.7	232.3	224.9	217.5	210.0	201.1	190.5	180.1	169.5	159.0	152.4
67.5°	205.6	198.1	190.6	183.1	175.6	166.8	156.7	146.6	136.6	126.4	121.5
70°	183.2	175.9	168.7	161.4	154.2	145.8	136.3	126.9	117.5	108.1	103.3
72.5°	160.9	153.8	146.6	139.4	132.2	124.4	115.8	107.2	98.6	90.1	86.2
75°	126.8	120.3	113.9	107.4	100.9	94.0	86.6	79.1	71.8	64.3	63.0
77.5°	95.8	89.9	84.1	78.2	72.3	67.0	62.3	57.5	52.7	47.9	47.2
80°	75.9	70.3	64.8	59.3	53.7	49.6	46.7	43.9	41.0	38.3	37.8
82.5°	57.0	52.1	47.4	42.6	37.8	34.8	33.4	32.2	30.8	29.5	29.1
85°	32.2	29.2	26.2	23.3	20.3	18.6	18.2	17.8	17.4	17.0	16.7
87.5°	11.8	10.9	10.0	9.0	8.2	7.8	8.2	8.6	9.0	9.3	9.3
90°	0.6	2.0	3.4	4.8	6.1	7.7	9.5	11.2	13.1	14.9	15.4
92.5°	15.0	15.9	16.9	17.8	18.7	19.7	20.8	21.8	22.7	23.8	24.2
95°	36.5	37.5	38.5	39.5	40.4	41.4	42.5	43.6	44.8	45.9	46.4
97.5°	64.9	65.6	66.3	67.0	67.8	68.5	69.3	70.1	70.9	71.7	72.3
100°	84.2	85.1	85.9	86.7	87.5	88.3	89.0	89.7	90.4	91.0	91.5
102.5°	106.5	107.0	107.5	108.1	108.5	109.2	110.1	111.1	111.9	112.9	113.3
105°	139.3	139.7	139.9	140.2	140.5	141.2	142.4	143.7	145.0	146.2	146.2
107.5°	177.5	177.7	177.8	178.0	178.2	178.5	179.0	179.5	180.0	180.5	180.9
110°	201.3	201.5	201.8	202.1	202.4	202.6	203.0	203.2	203.5	203.7	204.3



TEST NUMBER: P332286-927

CATALOG NUMBER: S123RDIP-S560D805U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	226.1	226.2	226.4	226.6	226.7	226.8	226.9	227.0	227.0	227.0	227.8
115°	263.2	263.6	264.0	264.4	264.9	265.0	264.7	264.4	264.1	263.9	264.0
117.5°	300.6	301.0	301.2	301.4	301.7	301.7	301.3	301.0	300.6	300.2	300.2
120°	323.9	324.7	325.6	326.4	327.3	327.3	326.6	325.9	325.3	324.6	324.4
122.5°	348.2	348.8	349.4	350.0	350.6	350.8	350.4	350.1	349.7	349.4	349.0
125°	385.2	385.6	386.0	386.5	386.9	387.0	386.7	386.4	386.1	385.9	385.3
127.5°	419.5	420.3	421.2	422.1	422.9	423.3	422.9	422.6	422.3	422.0	421.3
130°	442.2	443.3	444.4	445.5	446.6	446.9	446.6	446.2	445.8	445.3	444.7
132.5°	465.0	466.1	467.2	468.3	469.4	469.8	469.5	469.2	468.9	468.6	467.9
135°	499.8	500.7	501.5	502.3	503.1	503.5	503.4	503.2	503.0	503.0	502.4
137.5°	532.0	532.7	533.4	534.1	534.8	535.3	535.7	536.0	536.4	536.7	536.1
140°	554.3	555.0	555.7	556.4	557.1	557.5	557.6	557.8	557.9	558.0	557.9
142.5°	574.6	575.4	576.0	576.7	577.4	577.9	578.1	578.4	578.6	578.8	578.7
145°	606.3	606.7	606.9	607.2	607.4	607.8	608.2	608.6	609.0	609.4	609.3
147.5°	634.1	634.6	635.1	635.6	636.1	636.5	636.9	637.3	637.7	638.1	638.1
150°	653.4	653.7	653.9	654.3	654.5	654.8	655.1	655.4	655.6	655.9	655.9
152.5°	669.3	669.6	670.0	670.4	670.8	671.1	671.3	671.5	671.6	671.8	672.0
155°	694.3	694.3	694.3	694.3	694.3	694.3	694.5	694.7	694.8	694.9	695.5
157.5°	715.6	715.4	715.3	715.1	714.9	714.9	715.0	715.2	715.3	715.3	716.0
160°	729.0	728.7	728.4	728.2	727.9	727.8	727.8	727.8	727.8	727.8	728.4
162.5°	740.8	740.5	740.1	739.7	739.3	739.2	739.3	739.4	739.5	739.7	740.3
165°	756.2	755.8	755.4	755.0	754.6	754.4	754.4	754.4	754.4	754.4	755.2
167.5°	768.5	767.9	767.4	766.8	766.3	766.1	766.2	766.3	766.4	766.5	767.4
170°	775.5	774.9	774.4	773.8	773.2	772.9	772.9	772.9	772.9	772.9	774.0
172.5°	780.9	780.4	779.8	779.3	778.7	778.4	778.4	778.4	778.4	778.4	779.3
175°	786.6	786.0	785.5	785.0	784.4	784.1	784.1	784.1	784.1	784.1	785.0
177.5°	788.9	788.5	788.1	787.6	787.2	787.0	787.0	787.0	787.0	787.0	787.6
180°	788.5	788.5	788.5	788.5	788.5	788.5	788.5	788.5	788.5	788.5	788.5



TEST NUMBER: P332286-927

CATALOG NUMBER: S123RDIP-S560D805U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2
2.5°	745.3	746.5	747.7	748.1	747.9	747.7	747.5	747.3
5°	740.3	741.6	742.8	743.2	743.0	742.7	742.4	742.1
7.5°	729.9	730.6	731.3	731.3	730.9	730.5	730.0	729.5
10°	720.6	720.7	720.8	720.6	719.9	719.2	718.6	717.9
12.5°	709.0	708.9	708.8	708.4	707.6	706.8	706.1	705.3
15°	688.6	687.9	687.3	686.4	685.5	684.6	683.7	682.7
17.5°	664.3	662.9	661.4	660.0	658.6	657.2	655.8	654.4
20°	647.6	645.9	644.1	642.5	640.8	639.2	637.5	636.0
22.5°	629.8	627.6	625.4	623.5	622.0	620.5	619.0	617.5
25°	600.6	597.7	594.9	592.7	591.3	589.8	588.3	586.8
27.5°	568.7	564.8	560.9	557.8	555.5	553.3	551.0	548.7
30°	546.1	541.5	536.9	533.5	531.4	529.3	527.0	524.9
32.5°	523.9	518.8	513.8	510.2	507.9	505.6	503.4	501.1
35°	490.8	485.1	479.3	475.2	472.7	470.3	467.9	465.4
37.5°	455.4	448.9	442.3	437.5	434.5	431.5	428.5	425.5
40°	430.8	423.7	416.8	411.7	408.6	405.5	402.4	399.3
42.5°	407.2	399.5	391.8	386.6	383.8	381.0	378.3	375.5
45°	372.4	364.7	357.0	351.6	348.3	345.1	341.8	338.6
47.5°	336.4	328.1	319.7	314.1	311.2	308.3	305.5	302.5
50°	312.2	303.8	295.5	289.7	286.6	283.5	280.4	277.3
52.5°	288.8	280.0	271.3	265.6	262.8	260.1	257.3	254.5
55°	253.8	246.0	238.1	232.9	230.2	227.5	224.8	222.1
57.5°	219.4	212.1	204.7	199.9	197.6	195.3	193.0	190.7
60°	197.8	190.5	183.2	178.5	176.2	173.9	171.6	169.3
62.5°	176.3	169.5	162.6	158.0	155.7	153.2	150.8	148.5
65°	145.8	139.2	132.5	128.5	127.1	125.6	124.1	122.6
67.5°	116.6	111.6	106.7	103.5	101.9	100.3	98.7	97.1
70°	98.5	93.9	89.1	86.0	84.5	83.1	81.6	80.1
72.5°	82.3	78.5	74.6	72.4	71.8	71.1	70.5	69.9
75°	61.6	60.3	58.9	58.1	57.8	57.6	57.3	57.0
77.5°	46.5	45.8	45.0	44.5	44.3	44.0	43.7	43.4
80°	37.4	37.0	36.6	36.3	36.0	35.7	35.5	35.2
82.5°	28.7	28.3	27.9	27.6	27.6	27.6	27.5	27.4
85°	16.5	16.2	15.9	15.8	15.8	15.8	15.8	15.8
87.5°	9.3	9.3	9.3	9.3	9.2	9.2	9.1	9.0
90°	16.0	16.5	17.0	17.5	17.7	18.1	18.3	18.6
92.5°	24.6	25.1	25.5	25.7	25.5	25.3	25.2	25.0
95°	46.9	47.5	48.0	48.3	48.3	48.3	48.3	48.3
97.5°	73.0	73.6	74.2	74.5	74.5	74.5	74.4	74.3
100°	91.9	92.3	92.7	93.1	93.3	93.6	93.9	94.1
102.5°	113.7	114.1	114.5	114.7	114.6	114.5	114.5	114.5
105°	146.2	146.2	146.2	146.3	146.6	146.9	147.1	147.4
107.5°	181.3	181.8	182.3	182.4	182.2	182.0	181.9	181.7
110°	204.9	205.4	206.0	206.1	205.8	205.6	205.3	205.0





TEST NUMBER: P332286-927

CATALOG NUMBER: S123RDIP-S560D805U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	228.4	229.0	229.7	230.0	230.0	229.9	229.8	229.8
115°	264.1	264.3	264.4	264.4	264.3	264.1	264.0	263.9
117.5°	300.2	300.2	300.2	299.9	299.6	299.2	298.8	298.4
120°	324.2	324.2	324.0	323.8	323.5	323.2	323.0	322.7
122.5°	348.6	348.2	347.9	347.5	347.1	346.7	346.3	345.9
125°	384.8	384.2	383.7	383.1	382.5	382.0	381.4	380.9
127.5°	420.5	419.7	419.0	418.3	417.6	417.0	416.4	415.7
130°	444.3	443.7	443.1	442.4	441.4	440.5	439.5	438.5
132.5°	467.3	466.6	466.0	465.2	464.5	463.7	463.0	462.3
135°	501.8	501.3	500.7	500.3	500.0	499.8	499.5	499.2
137.5°	535.6	535.0	534.4	533.9	533.4	532.8	532.3	531.8
140°	557.8	557.6	557.5	557.0	556.0	555.0	554.1	553.1
142.5°	578.6	578.5	578.3	577.9	577.1	576.4	575.6	574.9
145°	609.2	609.0	608.9	608.6	608.0	607.4	606.9	606.3
147.5°	638.1	638.1	638.1	637.6	636.8	636.0	635.2	634.4
150°	655.9	655.9	655.9	655.5	654.7	653.9	653.0	652.2
152.5°	672.2	672.4	672.6	672.4	671.7	671.0	670.3	669.6
155°	696.0	696.6	697.1	696.9	695.9	695.0	694.0	693.1
157.5°	716.5	717.1	717.6	717.6	716.8	716.1	715.3	714.5
160°	729.1	729.8	730.5	730.6	730.0	729.4	728.9	728.3
162.5°	741.0	741.7	742.4	742.3	741.4	740.5	739.7	738.8
165°	756.1	756.9	757.7	757.6	756.7	755.7	754.7	753.8
167.5°	768.3	769.1	769.9	769.9	769.1	768.3	767.4	766.5
170°	774.9	775.9	776.8	776.8	775.9	774.9	774.0	772.9
172.5°	780.1	781.0	781.8	781.8	780.8	779.8	778.9	777.9
175°	785.8	786.6	787.4	787.3	786.4	785.4	784.4	783.5
177.5°	788.3	788.9	789.6	789.6	788.8	788.0	787.3	786.5
180°	788.5	788.5	788.5	788.5	788.5	788.5	788.5	788.5

(END OF REPORT)