

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332287-927

Luminaire Tested: **S123RDIP-S560D805U927-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332287-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S560D805U927-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 805 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3994.5 lumens
Efficiency: N/A
Efficacy: 104.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 38.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332287-927

CATALOG NUMBER: S123RDIP-S560D805U927-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

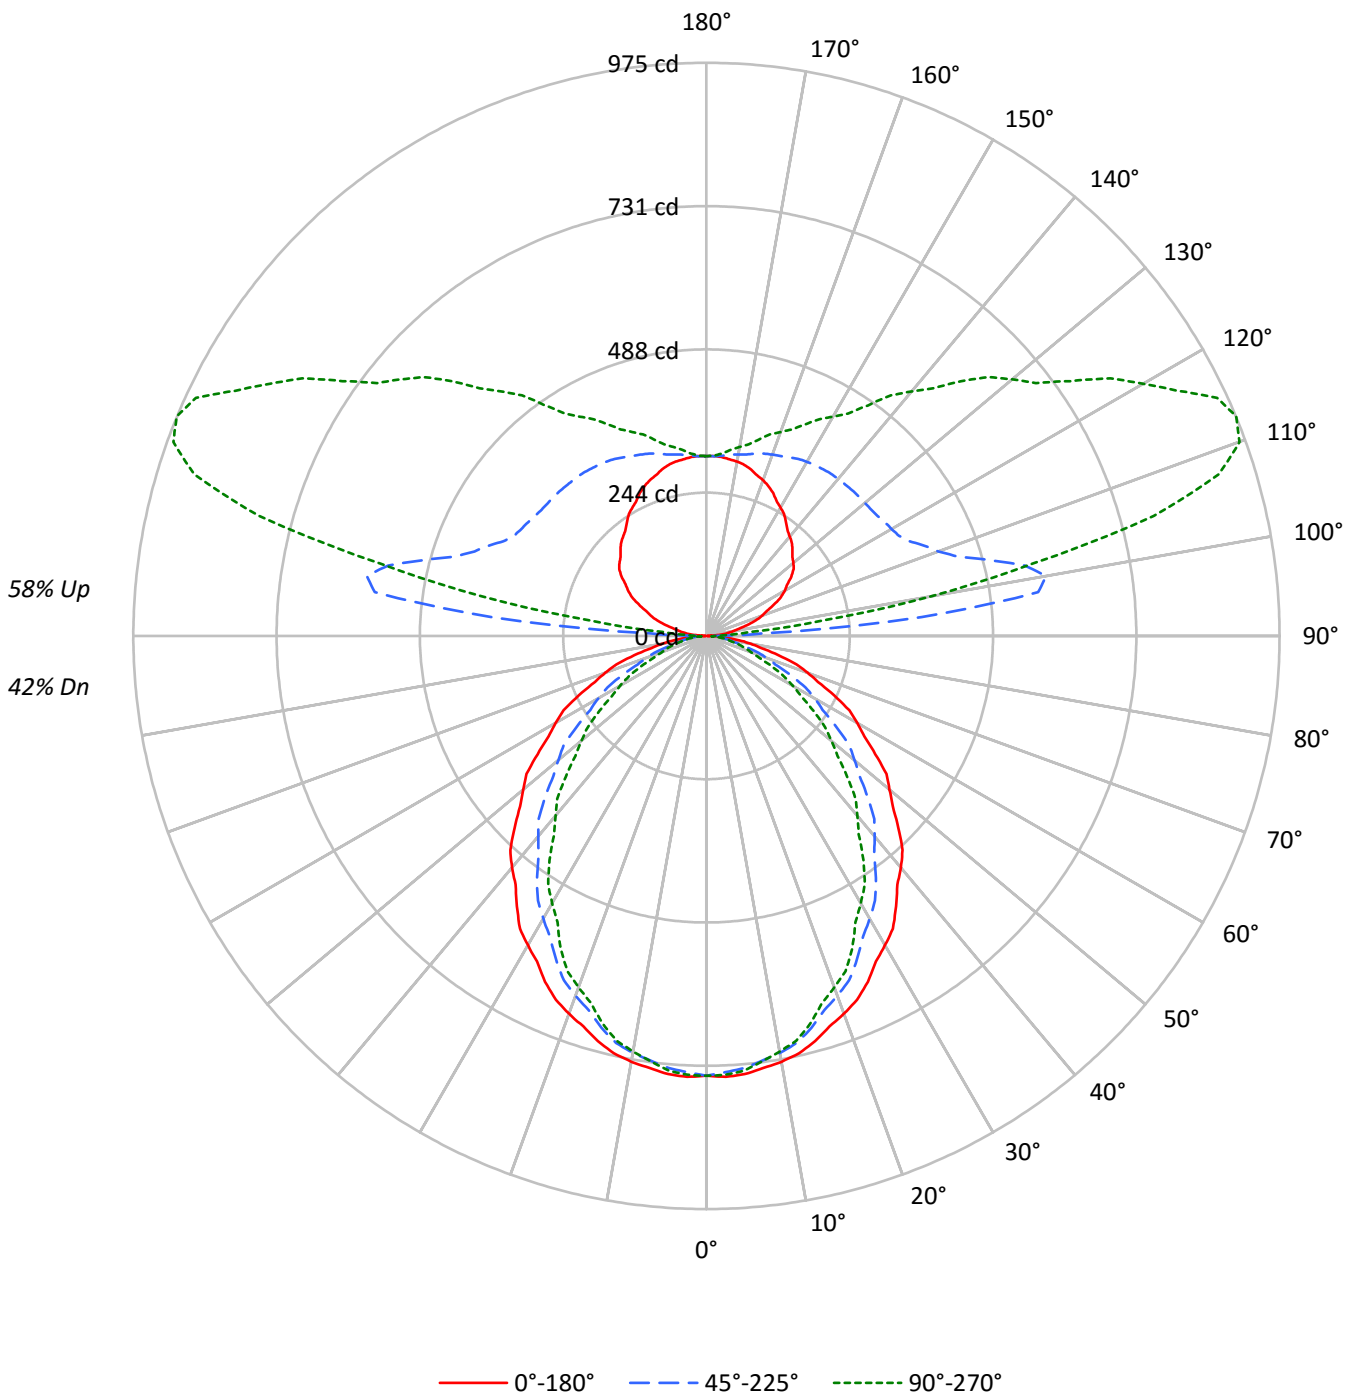



TEST NUMBER: P332287-927

CATALOG NUMBER: S123RDIP-S560D805U927-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	42																				
1	96	92	88	85	88	84	81	78	70	67	65	56	55	53	44	43	42	36																				
2	88	81	75	70	80	74	69	65	61	58	55	50	47	45	39	37	36	31																				
3	80	71	64	58	73	65	59	54	54	50	46	44	41	38	35	33	31	26																				
4	74	63	55	50	67	58	51	46	48	43	40	39	36	33	31	29	27	23																				
5	68	56	48	43	62	52	45	40	43	38	34	36	32	29	28	26	23	20																				
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	26	23	21	18																				
7	58	46	38	32	53	42	35	30	36	30	26	29	25	22	23	21	18	16																				
8	53	41	34	29	49	38	32	27	32	27	23	27	23	20	22	19	17	14																				
9	50	38	31	26	45	35	29	24	30	25	21	25	21	18	20	17	15	13																				
10	46	35	28	23	43	32	26	22	27	22	19	23	19	16	19	16	14	12																				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8054	8054	8054
5°	8084	7973	8018
10°	8039	7873	7847
15°	7952	7689	7608
20°	7834	7458	7285
25°	7712	7201	6969
30°	7549	6901	6524
35°	7384	6603	6116
40°	7231	6250	5611
45°	7030	5903	5154
50°	6807	5508	4644
55°	6583	5056	4168
60°	6374	4573	3645
65°	6105	4050	3123
70°	5766	3402	2521
75°	5273	2674	2371
80°	4705	2374	2182
85°	3977	2100	1951



TEST NUMBER: P332287-927

CATALOG NUMBER: S123RDIP-S560D805U927-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.3	1.8
10°-20°	195.5	4.9
20°-30°	281.5	7.0
30°-40°	317.1	7.9
40°-50°	303.3	7.6
50°-60°	248.4	6.2
60°-70°	167.6	4.2
70°-80°	84.3	2.1
80°-90°	24.7	0.6
90°-100°	170.3	4.3
100°-110°	482.1	12.1
110°-120°	474.3	11.9
120°-130°	378.3	9.5
130°-140°	298.3	7.5
140°-150°	222.6	5.6
150°-160°	155.2	3.9
160°-170°	91.2	2.3
170°-180°	29.7	0.7
0°-30°	547.2	13.7
0°-40°	864.3	21.6
0°-60°	1416.1	35.5
0°-90°	1692.7	42.4
90°-120°	1126.7	28.2
90°-150°	2025.9	50.7
90°-180°	2302.0	57.6
0°-180°	3994.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	748	748	748	748	748	
5°	748	745	738	743	742	71
15°	714	706	690	687	683	201
25°	649	633	606	594	587	298
35°	562	539	502	477	465	352
45°	462	433	388	354	339	356
55°	351	320	269	236	222	314
65°	240	206	159	130	123	237
75°	127	97	64	58	57	135
85°	32	19	17	16	16	36
90°	1	7	15	17	18	3
95°	21	68	367	107	72	23
105°	72	106	498	871	788	76
115°	127	158	381	835	958	126
125°	176	208	356	644	756	157
135°	207	247	350	530	612	160
145°	236	270	346	435	479	148
155°	268	289	335	381	397	123
165°	293	301	321	340	346	83
175°	305	306	308	312	312	29
180°	306	306	306	306	306	



TEST NUMBER: P332287-927

CATALOG NUMBER: S123RDIP-S560D805U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2
2.5°	750.7	750.2	749.8	749.3	748.9	748.1	746.8	745.4	744.2	742.9	744.1
5°	748.2	747.6	746.9	746.2	745.5	744.4	742.8	741.2	739.5	737.9	739.1
7.5°	741.3	740.6	739.8	739.1	738.4	737.0	734.9	732.8	730.6	728.6	729.2
10°	735.5	734.5	733.6	732.6	731.7	730.0	727.6	725.2	722.7	720.3	720.4
12.5°	727.2	726.2	725.1	724.1	723.0	721.0	718.0	715.1	712.1	709.2	709.1
15°	713.6	712.2	710.7	709.2	707.7	705.0	701.3	697.5	693.7	690.0	689.3
17.5°	696.5	694.8	693.1	691.3	689.6	686.3	681.5	676.8	671.9	667.2	665.7
20°	683.9	681.8	679.6	677.4	675.3	671.6	666.5	661.4	656.2	651.1	649.4
22.5°	669.8	667.3	664.9	662.3	659.9	655.9	650.5	645.0	639.6	634.1	631.9
25°	649.3	645.9	642.5	639.2	635.8	631.1	624.8	618.6	612.4	606.3	603.4
27.5°	624.4	620.7	617.0	613.2	609.5	604.2	597.3	590.4	583.5	576.6	572.7
30°	607.4	603.4	599.4	595.3	591.3	585.4	577.9	570.4	562.8	555.2	550.6
32.5°	590.4	585.9	581.3	576.7	572.1	565.9	557.9	549.9	541.9	533.9	528.9
35°	561.9	557.1	552.2	547.4	542.5	535.9	527.5	519.2	510.8	502.5	496.6
37.5°	533.1	527.7	522.3	516.8	511.4	504.3	495.4	486.5	477.5	468.6	462.0
40°	514.6	508.7	502.7	496.8	490.8	483.1	473.6	464.0	454.4	444.8	437.8
42.5°	493.7	487.7	481.9	475.9	470.0	462.1	452.2	442.3	432.4	422.5	414.8
45°	461.8	455.7	449.6	443.6	437.5	429.3	418.9	408.5	398.2	387.8	380.1
47.5°	429.8	423.2	416.5	409.9	403.2	394.7	384.3	373.9	363.5	353.2	344.8
50°	406.5	400.2	393.9	387.5	381.2	372.6	361.6	350.8	339.8	328.9	320.5
52.5°	385.7	378.8	371.9	365.0	358.2	349.4	338.5	327.7	316.9	306.1	297.4
55°	350.8	344.1	337.5	330.9	324.3	315.3	303.8	292.4	280.9	269.4	261.6
57.5°	318.5	311.2	304.0	296.8	289.6	280.3	268.8	257.3	245.7	234.2	226.9
60°	296.1	288.8	281.3	273.9	266.5	257.1	246.0	234.8	223.6	212.4	205.1
62.5°	273.8	266.4	259.0	251.5	244.2	234.8	223.6	212.5	201.2	190.0	183.2
65°	239.7	232.3	224.9	217.5	210.0	201.1	190.5	180.1	169.5	159.0	152.4
67.5°	205.6	198.1	190.6	183.1	175.6	166.8	156.7	146.6	136.6	126.4	121.5
70°	183.2	175.9	168.7	161.4	154.2	145.8	136.3	126.9	117.5	108.1	103.3
72.5°	160.9	153.8	146.6	139.4	132.2	124.4	115.8	107.2	98.6	90.1	86.2
75°	126.8	120.3	113.9	107.4	100.9	94.0	86.6	79.1	71.8	64.3	63.0
77.5°	95.8	89.9	84.1	78.2	72.3	67.0	62.3	57.5	52.7	47.9	47.2
80°	75.9	70.3	64.8	59.3	53.7	49.6	46.7	43.9	41.0	38.3	37.8
82.5°	57.0	52.1	47.4	42.6	37.8	34.8	33.4	32.2	30.8	29.5	29.1
85°	32.2	29.2	26.2	23.3	20.3	18.6	18.2	17.8	17.4	17.0	16.7
87.5°	11.9	10.9	10.0	9.2	8.2	7.9	8.3	8.6	9.0	9.4	9.2
90°	1.3	2.5	3.7	5.5	6.8	8.1	9.9	11.8	13.6	15.4	14.9
92.5°	7.7	11.4	16.6	21.5	26.6	35.8	52.0	78.7	104.8	95.2	71.9
95°	21.1	22.9	29.7	40.2	56.3	80.5	133.2	225.5	327.0	367.3	297.9
97.5°	35.9	36.5	41.9	51.0	66.9	93.0	143.3	247.4	416.7	569.2	609.0
100°	45.9	46.4	50.8	59.5	74.3	98.5	141.8	233.5	396.4	586.5	708.5
102.5°	56.2	57.4	61.2	69.4	82.8	104.9	143.8	221.6	366.6	554.3	713.5
105°	71.9	73.7	77.4	84.8	96.6	115.8	149.2	213.0	330.1	498.0	675.7
107.5°	88.4	90.3	93.9	101.2	112.3	130.1	159.4	212.5	306.8	448.1	609.6
110°	100.4	102.2	105.3	112.1	122.6	140.0	167.9	214.9	297.9	419.9	567.9



TEST NUMBER: P332287-927

CATALOG NUMBER: S123RDIP-S560D805U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	111.2	113.1	116.2	123.0	133.6	150.4	176.3	219.8	292.9	401.1	531.8
115°	127.0	129.4	133.2	139.3	149.9	166.6	190.1	227.9	291.1	380.9	488.1
117.5°	142.7	145.5	148.6	154.3	166.1	181.6	204.9	238.6	292.2	369.0	461.7
120°	153.6	155.4	158.5	164.8	176.5	192.0	214.3	246.5	294.2	363.5	447.8
122.5°	163.0	164.9	167.9	174.7	185.9	202.4	224.2	253.9	297.6	360.1	436.4
125°	176.5	177.8	181.5	188.3	200.0	216.7	238.4	265.7	302.9	355.5	421.8
127.5°	186.8	188.6	193.2	200.2	213.2	229.9	250.8	275.4	308.8	353.3	408.9
130°	193.2	195.1	200.7	208.1	221.1	237.8	258.3	281.8	312.8	351.8	402.0
132.5°	198.2	200.6	206.6	215.6	228.5	244.8	264.7	287.7	315.8	351.3	395.5
135°	206.8	209.4	216.2	225.5	238.4	255.2	274.3	295.4	320.2	350.5	387.1
137.5°	215.0	217.6	224.3	234.2	247.1	262.6	281.1	301.1	323.2	349.2	379.8
140°	220.5	223.6	229.8	239.7	252.1	267.5	285.5	304.1	325.2	348.7	375.3
142.5°	226.4	229.0	235.8	244.6	257.1	271.5	289.0	307.0	326.6	347.7	371.4
145°	236.0	237.8	243.4	252.7	263.2	277.5	293.6	310.3	327.6	346.2	366.1
147.5°	245.7	246.8	252.2	260.2	270.4	282.6	297.3	312.3	327.6	343.9	360.8
150°	252.1	252.7	257.6	265.7	274.3	285.5	299.8	312.8	327.6	341.9	357.4
152.5°	258.5	258.6	263.6	270.7	278.3	289.0	301.3	313.8	326.1	339.4	353.4
155°	268.2	268.2	271.9	278.1	284.9	293.6	304.1	314.0	324.6	335.1	347.5
157.5°	275.8	276.3	279.3	284.8	290.6	297.3	305.7	314.7	322.4	331.2	340.8
160°	281.8	281.8	284.3	289.2	293.6	299.8	307.2	314.7	321.5	328.3	336.3
162.5°	286.3	286.3	288.3	292.2	296.0	301.3	307.7	314.1	319.5	325.3	331.8
165°	292.9	292.3	293.6	296.7	299.1	303.5	308.4	312.8	316.5	320.8	325.7
167.5°	298.0	297.3	297.9	300.2	302.0	304.8	308.3	311.8	313.5	316.4	320.0
170°	301.0	299.8	300.4	302.2	303.5	304.8	307.8	310.3	311.6	313.4	316.5
172.5°	303.0	302.2	302.4	303.7	304.4	305.2	307.8	309.8	310.1	310.9	313.0
175°	305.3	304.8	304.1	305.3	305.3	305.9	307.2	308.4	307.8	307.8	309.0
177.5°	306.4	305.9	305.5	305.9	305.9	305.9	306.4	307.4	306.4	305.9	306.4
180°	305.9	305.9	305.9	305.9	305.9	305.9	305.9	305.9	305.9	305.9	305.9



TEST NUMBER: P332287-927

CATALOG NUMBER: S123RDIP-S560D805U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2
2.5°	745.3	746.5	747.7	748.1	747.9	747.7	747.5	747.3
5°	740.3	741.6	742.8	743.2	743.0	742.7	742.4	742.1
7.5°	729.9	730.6	731.3	731.3	730.9	730.5	730.0	729.5
10°	720.6	720.7	720.8	720.6	719.9	719.2	718.6	717.9
12.5°	709.0	708.9	708.8	708.4	707.6	706.8	706.1	705.3
15°	688.6	687.9	687.3	686.4	685.5	684.6	683.7	682.7
17.5°	664.3	662.9	661.4	660.0	658.6	657.2	655.8	654.4
20°	647.6	645.9	644.1	642.5	640.8	639.2	637.5	636.0
22.5°	629.8	627.6	625.4	623.5	622.0	620.5	619.0	617.5
25°	600.6	597.7	594.9	592.7	591.3	589.8	588.3	586.8
27.5°	568.7	564.8	560.9	557.8	555.5	553.3	551.0	548.7
30°	546.1	541.5	536.9	533.5	531.4	529.3	527.0	524.9
32.5°	523.9	518.8	513.8	510.2	507.9	505.6	503.4	501.1
35°	490.8	485.1	479.3	475.2	472.7	470.3	467.9	465.4
37.5°	455.4	448.9	442.3	437.5	434.5	431.5	428.5	425.5
40°	430.8	423.7	416.8	411.7	408.6	405.5	402.4	399.3
42.5°	407.2	399.5	391.8	386.6	383.8	381.0	378.3	375.5
45°	372.4	364.7	357.0	351.6	348.3	345.1	341.8	338.6
47.5°	336.4	328.1	319.7	314.1	311.2	308.3	305.5	302.5
50°	312.2	303.8	295.5	289.7	286.6	283.5	280.4	277.3
52.5°	288.8	280.0	271.3	265.6	262.8	260.1	257.3	254.5
55°	253.8	246.0	238.1	232.9	230.2	227.5	224.8	222.1
57.5°	219.4	212.1	204.7	199.9	197.6	195.3	193.0	190.7
60°	197.8	190.5	183.2	178.5	176.2	173.9	171.6	169.3
62.5°	176.3	169.5	162.6	158.0	155.7	153.2	150.8	148.5
65°	145.8	139.2	132.5	128.5	127.1	125.6	124.1	122.6
67.5°	116.6	111.6	106.7	103.5	101.9	100.3	98.7	97.1
70°	98.5	93.9	89.1	86.0	84.5	83.1	81.6	80.1
72.5°	82.3	78.5	74.6	72.4	71.8	71.1	70.5	69.9
75°	61.6	60.3	58.9	58.1	57.8	57.6	57.3	57.0
77.5°	46.5	45.8	45.0	44.5	44.3	44.0	43.7	43.4
80°	37.4	37.0	36.6	36.3	36.0	35.7	35.5	35.2
82.5°	28.7	28.3	27.9	27.6	27.6	27.6	27.5	27.4
85°	16.5	16.2	15.9	15.8	15.8	15.8	15.8	15.8
87.5°	9.2	9.2	9.2	9.3	9.1	9.1	9.2	9.0
90°	15.4	16.1	16.7	18.0	17.3	18.0	18.6	18.0
92.5°	52.1	41.4	36.5	33.4	32.2	30.3	31.0	29.9
95°	223.0	151.1	118.3	96.0	84.2	78.7	74.3	71.9
97.5°	555.8	445.2	365.3	291.2	245.5	217.6	200.9	195.6
100°	730.2	680.0	607.6	519.6	457.1	411.9	387.7	388.3
102.5°	788.1	786.6	744.3	688.6	639.9	604.1	583.9	569.7
105°	805.2	867.0	878.8	862.8	834.2	810.7	790.9	787.8
107.5°	756.4	856.9	911.2	933.2	933.7	925.8	919.1	913.4
110°	709.8	823.7	901.7	945.2	962.4	967.4	966.1	965.0



TEST NUMBER: P332287-927

CATALOG NUMBER: S123RDIP-S560D805U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	663.7	780.1	867.6	923.3	955.1	970.4	975.1	975.3
115°	602.6	710.3	801.5	868.9	915.4	942.6	955.1	958.1
117.5°	558.4	651.4	733.2	801.7	850.1	881.3	899.1	903.4
120°	535.1	618.7	693.1	755.6	804.5	839.2	854.1	857.8
122.5°	516.8	592.5	661.3	719.5	762.9	794.1	810.5	815.2
125°	492.3	559.9	619.3	668.9	708.5	735.8	751.2	755.6
127.5°	471.1	531.2	584.9	630.0	665.3	688.6	702.6	706.5
130°	457.7	513.4	563.6	605.7	638.6	660.8	673.8	678.8
132.5°	445.3	496.6	543.3	583.4	614.3	636.6	648.1	651.6
135°	428.6	472.5	512.8	548.1	578.5	597.1	608.2	612.5
137.5°	413.4	449.4	484.1	514.7	540.2	559.0	568.5	571.3
140°	404.4	436.0	465.7	492.3	515.9	533.2	543.2	542.6
142.5°	396.0	423.1	448.9	472.1	492.1	507.5	516.4	515.8
145°	385.9	406.3	426.1	444.1	459.5	472.5	477.5	478.7
147.5°	377.6	393.8	409.8	422.6	434.3	443.1	447.8	448.3
150°	371.6	385.9	398.9	410.6	419.9	426.7	430.5	430.5
152.5°	366.1	378.4	389.9	399.7	407.0	413.4	415.6	415.6
155°	358.0	367.9	377.2	384.6	390.1	395.1	396.4	397.0
157.5°	349.3	357.6	364.8	370.6	375.4	379.1	380.2	380.0
160°	344.4	351.2	357.4	361.7	366.1	369.7	369.7	369.2
162.5°	338.4	344.2	349.9	353.8	356.6	359.8	359.8	359.3
165°	330.7	334.5	338.8	341.9	344.4	346.8	346.2	346.2
167.5°	324.0	326.9	329.4	331.6	332.7	334.5	333.8	333.8
170°	319.6	321.5	323.9	325.2	325.7	327.0	326.4	326.4
172.5°	315.6	317.0	318.9	319.7	319.8	321.1	320.0	319.5
175°	310.3	310.9	312.1	312.1	312.1	312.8	312.1	311.6
177.5°	307.0	307.4	307.9	307.9	307.4	307.9	307.0	307.0
180°	305.9	305.9	305.9	305.9	305.9	305.9	305.9	305.9

(END OF REPORT)