

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332044-830

Luminaire Tested: **S123DIP-S1000D1195U830-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332044-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S1000D1195U830-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1195 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7956.4 lumens
Efficiency: N/A
Efficacy: 121.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332044-830

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

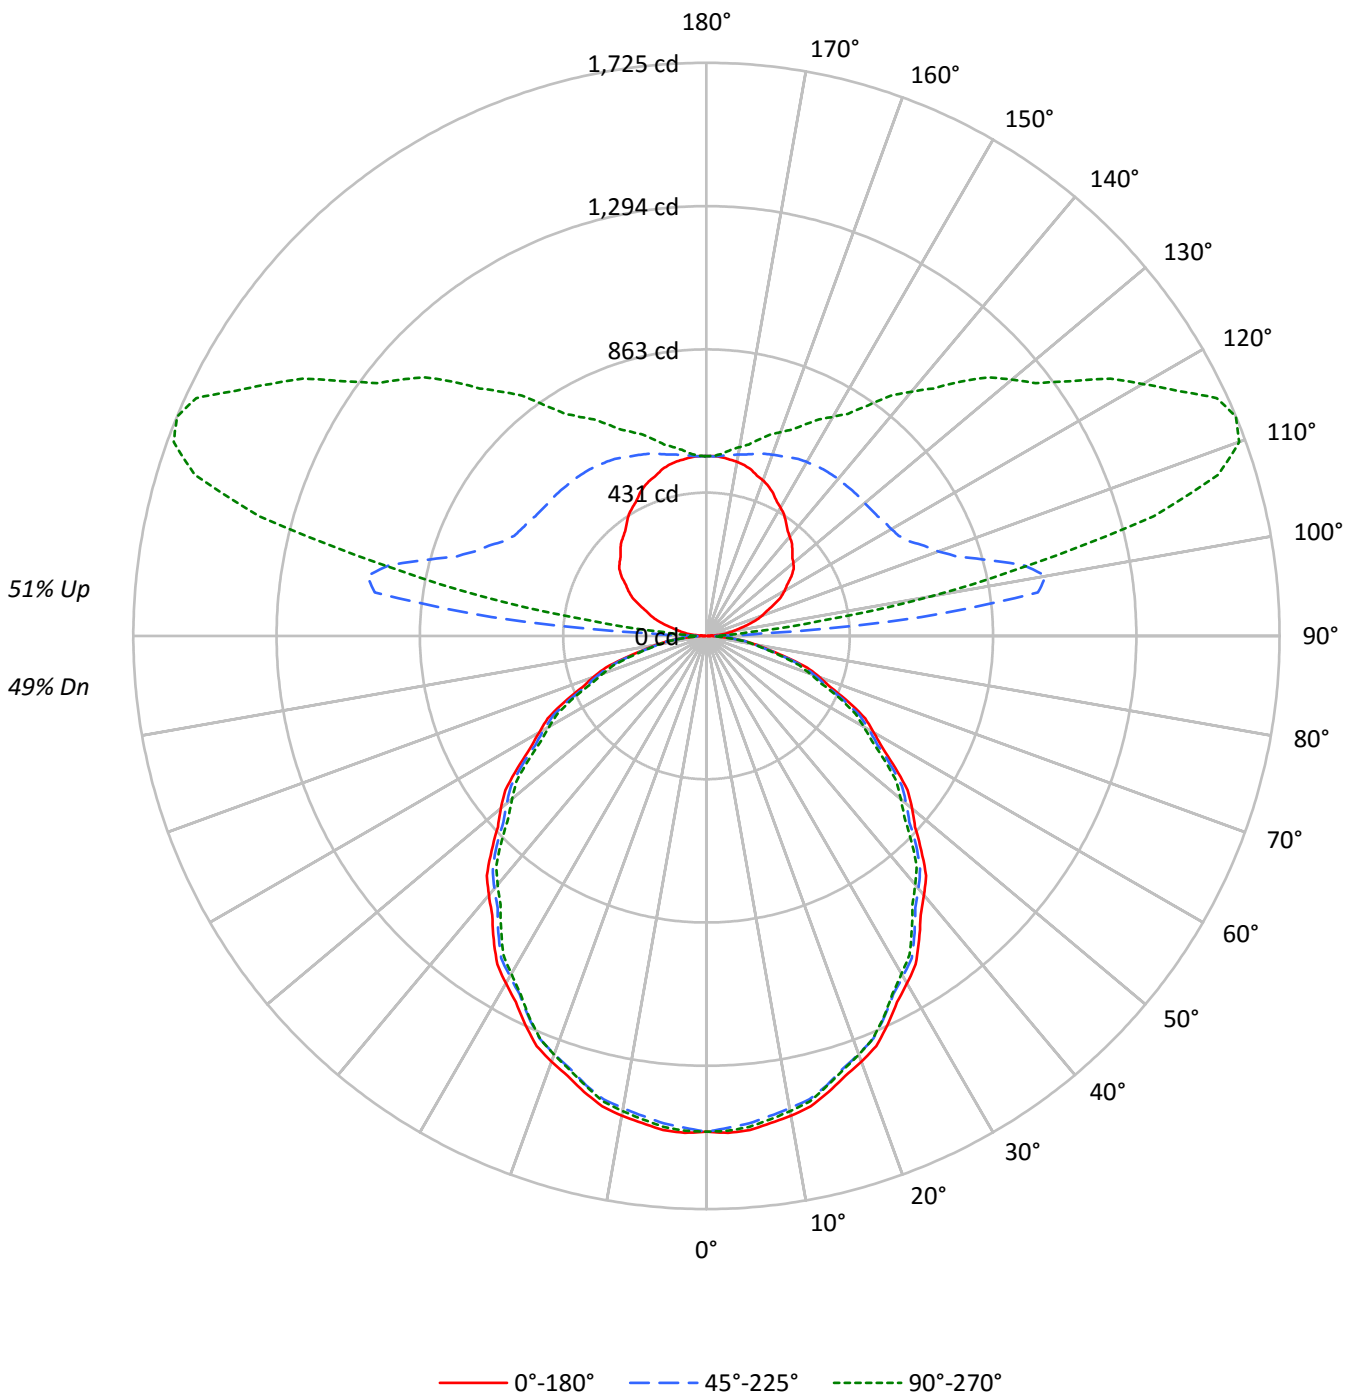



TEST NUMBER: P332044-830

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	83	83	83	68	68	68	55	55	55	49
1	97	93	89	86	90	86	83	80	72	70	68	60	58	57	49	47	46	41
2	89	81	75	70	81	75	70	65	63	59	56	53	50	47	43	41	39	34
3	81	71	64	58	74	66	60	54	56	51	47	47	43	40	38	35	33	29
4	74	63	55	49	68	58	52	46	50	44	40	41	37	34	34	31	29	25
5	68	56	48	42	62	52	45	40	44	39	35	37	33	30	30	27	25	22
6	63	50	42	36	57	47	40	34	40	34	30	34	29	26	28	24	22	19
7	58	46	38	32	53	42	35	30	36	31	27	31	26	23	25	22	19	17
8	54	41	34	28	49	38	31	27	33	27	24	28	24	20	23	20	17	15
9	50	38	30	25	46	35	28	24	30	25	21	26	21	18	21	18	16	14
10	47	35	27	23	43	32	26	21	28	23	19	24	20	17	20	17	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16060	16060	16060
5°	16134	15913	16024
10°	16027	15774	15872
15°	15840	15597	15624
20°	15621	15341	15356
25°	15327	15037	15007
30°	15003	14701	14588
35°	14666	14345	14160
40°	14313	13952	13735
45°	13922	13592	13259
50°	13534	13147	12782
55°	13024	12688	12301
60°	12510	12152	11765
65°	12055	11566	11207
70°	11383	10902	10414
75°	10405	10031	9603
80°	9385	8988	8901
85°	8238	7929	7595



TEST NUMBER: P332044-830

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	140.5	1.8
10°-20°	396.8	5.0
20°-30°	586.2	7.4
30°-40°	684.7	8.6
40°-50°	688.4	8.7
50°-60°	604.7	7.6
60°-70°	450.5	5.7
70°-80°	256.7	3.2
80°-90°	77.9	1.0
90°-100°	301.1	3.8
100°-110°	852.5	10.7
110°-120°	838.6	10.5
120°-130°	668.9	8.4
130°-140°	527.4	6.6
140°-150°	393.6	4.9
150°-160°	274.4	3.4
160°-170°	161.2	2.0
170°-180°	52.4	0.7
0°-30°	1123.5	14.1
0°-40°	1808.2	22.7
0°-60°	3101.3	39.0
0°-90°	3886.3	48.8
90°-120°	1992.1	25.0
90°-150°	3582.0	45.0
90°-180°	4070.0	51.2
0°-180°	7956.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1492	1492	1492	1492	1492	
5°	1493	1486	1473	1485	1483	141
15°	1421	1416	1400	1409	1402	401
25°	1290	1282	1266	1267	1264	594
35°	1116	1108	1092	1084	1078	698
45°	915	909	893	878	871	706
55°	694	692	676	662	656	621
65°	473	467	454	444	440	467
75°	250	245	241	235	231	267
85°	67	64	64	62	62	73
90°	2	13	27	31	32	6
95°	37	121	649	190	127	40
105°	127	188	880	1540	1393	135
115°	224	280	673	1477	1694	222
125°	312	368	629	1139	1336	277
135°	366	436	620	938	1083	283
145°	417	478	612	769	846	261
155°	474	511	592	673	702	218
165°	518	533	567	602	612	146
175°	540	540	544	552	551	51
180°	541	541	541	541	541	



TEST NUMBER: P332044-830

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0
2.5°	1497.0	1496.2	1495.2	1494.3	1493.5	1491.7	1489.2	1486.7	1484.2	1481.7	1483.9
5°	1493.2	1491.8	1490.3	1488.9	1487.5	1485.3	1482.1	1478.9	1475.8	1472.7	1475.6
7.5°	1478.6	1477.2	1475.7	1474.3	1472.9	1470.6	1467.4	1464.1	1460.8	1457.5	1460.1
10°	1466.3	1464.9	1463.4	1462.0	1460.6	1458.0	1454.3	1450.6	1446.9	1443.2	1445.8
12.5°	1449.8	1448.7	1447.5	1446.2	1445.1	1442.7	1439.3	1435.8	1432.3	1428.8	1430.7
15°	1421.4	1420.2	1419.1	1418.0	1416.8	1414.4	1410.7	1407.0	1403.3	1399.6	1401.8
17.5°	1388.3	1386.8	1385.3	1383.8	1382.3	1379.8	1376.0	1372.3	1368.7	1364.9	1366.5
20°	1363.7	1362.0	1360.3	1358.5	1356.8	1354.1	1350.4	1346.7	1343.0	1339.3	1340.4
22.5°	1336.0	1334.3	1332.6	1330.8	1329.1	1326.4	1322.7	1319.0	1315.3	1311.5	1312.5
25°	1290.5	1288.8	1287.1	1285.4	1283.6	1281.0	1277.2	1273.6	1269.9	1266.1	1266.4
27.5°	1242.1	1240.4	1238.7	1237.1	1235.4	1232.6	1228.6	1224.6	1220.6	1216.6	1216.8
30°	1207.1	1205.7	1204.3	1202.9	1201.5	1198.7	1194.8	1190.7	1186.8	1182.8	1182.8
32.5°	1172.2	1170.4	1168.5	1166.6	1164.7	1162.2	1159.1	1156.1	1153.0	1149.9	1148.3
35°	1116.1	1114.4	1112.7	1111.0	1109.2	1106.5	1102.8	1099.1	1095.4	1091.7	1090.0
37.5°	1058.6	1056.4	1054.2	1052.1	1049.9	1047.0	1043.2	1039.4	1035.7	1031.9	1029.8
40°	1018.6	1016.8	1015.1	1013.4	1011.7	1008.9	1004.8	1000.9	996.9	992.9	990.6
42.5°	978.5	976.6	974.7	972.7	970.8	967.8	963.8	959.9	955.8	951.9	949.6
45°	914.6	913.5	912.4	911.3	910.1	907.7	904.0	900.2	896.5	892.9	889.5
47.5°	851.3	849.6	848.0	846.3	844.7	842.1	838.7	835.2	831.7	828.2	824.8
50°	808.2	806.7	805.3	803.9	802.5	799.9	796.2	792.5	788.8	785.1	781.9
52.5°	763.0	762.0	761.1	760.2	759.1	756.7	752.8	748.9	744.9	740.9	738.3
55°	694.0	693.7	693.4	693.1	692.9	690.9	687.2	683.4	679.8	676.1	672.9
57.5°	628.3	627.4	626.4	625.5	624.4	622.5	619.5	616.5	613.6	610.7	607.8
60°	581.1	580.8	580.5	580.2	579.9	578.2	574.7	571.3	567.9	564.5	561.8
62.5°	539.0	538.3	537.5	536.8	536.1	534.0	530.6	527.2	523.8	520.3	517.7
65°	473.3	471.9	470.5	469.1	467.7	465.5	462.7	459.9	456.9	454.1	451.9
67.5°	403.9	402.6	401.3	400.1	398.8	397.1	394.9	392.8	390.6	388.4	386.4
70°	361.7	360.1	358.4	356.7	355.0	353.2	351.5	349.8	348.1	346.4	344.4
72.5°	317.6	316.4	315.1	313.9	312.6	311.0	309.1	307.2	305.2	303.2	301.5
75°	250.2	249.0	247.9	246.8	245.6	244.6	243.7	242.9	242.0	241.2	239.8
77.5°	190.4	189.7	189.1	188.5	187.8	187.0	186.1	185.0	184.0	182.9	182.0
80°	151.4	150.5	149.7	148.8	148.0	147.2	146.7	146.1	145.5	145.0	144.7
82.5°	113.4	113.2	113.1	112.9	112.7	112.5	112.4	112.4	112.3	112.2	111.6
85°	66.7	66.2	65.6	65.0	64.5	64.2	64.2	64.2	64.2	64.2	63.5
87.5°	27.1	26.9	26.7	26.6	26.4	26.3	26.8	27.2	27.6	28.1	27.6
90°	2.2	4.3	6.6	9.9	12.1	14.2	17.5	20.8	24.1	27.3	26.3
92.5°	13.6	20.2	29.3	37.9	47.1	63.3	92.0	139.1	185.3	168.4	127.1
95°	37.2	40.5	52.6	71.2	99.6	142.3	235.4	398.6	578.2	649.4	526.7
97.5°	63.5	64.6	74.0	90.2	118.3	164.5	253.4	437.3	736.8	1006.4	1076.7
100°	81.1	82.1	89.8	105.1	131.4	174.1	250.8	412.8	700.9	1037.1	1252.8
102.5°	99.4	101.4	108.2	122.6	146.3	185.5	254.3	391.8	648.3	980.1	1261.5
105°	127.1	130.4	136.9	150.1	170.8	204.8	263.9	376.7	583.7	880.4	1194.8
107.5°	156.4	159.7	166.0	178.9	198.4	230.0	281.9	375.6	542.5	792.4	1077.8
110°	177.4	180.7	186.2	198.2	216.8	247.5	296.8	380.0	526.7	742.4	1004.2



TEST NUMBER: P332044-830

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	196.7	200.0	205.5	217.4	236.1	265.9	311.7	388.8	518.0	709.2	940.3
115°	224.5	228.8	235.4	246.4	265.0	294.5	336.2	403.0	514.7	673.4	862.9
117.5°	252.3	257.3	262.8	272.9	293.7	321.1	362.2	421.8	516.7	652.4	816.2
120°	271.5	274.8	280.3	291.3	312.1	339.5	378.9	435.8	520.2	642.8	791.7
122.5°	288.2	291.5	297.0	308.8	328.8	357.9	396.4	449.0	526.3	636.7	771.6
125°	312.1	314.3	320.8	332.9	353.7	383.2	421.6	469.8	535.5	628.6	745.7
127.5°	330.3	333.6	341.7	353.9	376.9	406.5	443.5	486.9	546.0	624.6	723.0
130°	341.7	345.0	354.8	368.0	391.0	420.5	456.7	498.2	553.0	622.0	710.7
132.5°	350.4	354.6	365.3	381.1	404.1	432.8	468.1	508.8	558.3	621.1	699.4
135°	365.8	370.1	382.2	398.6	421.6	451.2	485.1	522.4	566.2	619.8	684.5
137.5°	380.2	384.8	396.6	414.2	437.0	464.3	496.9	532.4	571.5	617.4	671.5
140°	389.8	395.3	406.2	423.8	445.7	473.1	504.8	537.7	575.0	616.5	663.6
142.5°	400.4	405.0	416.8	432.5	454.5	480.1	511.0	542.9	577.6	614.8	656.6
145°	417.3	420.5	430.4	446.8	465.4	490.6	519.1	548.7	579.3	612.2	647.2
147.5°	434.3	436.3	445.9	460.1	478.2	499.5	525.7	552.1	579.3	608.0	638.0
150°	445.7	446.8	455.5	469.8	485.1	504.8	530.0	553.0	579.3	604.5	631.9
152.5°	457.1	457.3	466.1	478.5	492.1	511.0	532.6	554.8	576.6	600.1	624.9
155°	474.2	474.2	480.8	491.7	503.7	519.1	537.7	555.3	573.8	592.5	614.3
157.5°	487.8	488.6	493.9	503.5	513.8	525.7	540.5	556.3	570.1	585.7	602.5
160°	498.2	498.2	502.7	511.4	519.1	530.0	543.2	556.3	568.4	580.4	594.7
162.5°	506.1	506.1	509.6	516.7	523.5	532.6	544.0	555.4	564.9	575.1	586.7
165°	518.0	516.9	519.1	524.5	529.0	536.6	545.4	553.0	559.6	567.2	576.0
167.5°	527.0	525.7	526.7	530.9	534.0	538.8	545.2	551.3	554.3	559.4	565.7
170°	532.3	530.0	531.1	534.4	536.6	538.8	544.2	548.7	550.8	554.1	559.6
172.5°	535.7	534.4	534.6	537.1	538.4	539.7	544.2	547.8	548.2	549.7	553.5
175°	539.9	538.8	537.7	539.9	539.9	541.0	543.2	545.4	544.2	544.2	546.5
177.5°	541.9	541.0	540.1	541.0	541.0	541.0	541.9	543.6	541.9	541.0	541.9
180°	541.0	541.0	541.0	541.0	541.0	541.0	541.0	541.0	541.0	541.0	541.0



TEST NUMBER: P332044-830

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0
2.5°	1486.2	1488.6	1490.8	1491.9	1491.6	1491.4	1491.1	1490.9
5°	1478.4	1481.2	1484.1	1485.3	1484.7	1484.1	1483.6	1483.0
7.5°	1462.7	1465.3	1467.8	1469.0	1468.6	1468.3	1467.9	1467.5
10°	1448.3	1450.9	1453.5	1454.4	1453.9	1453.3	1452.7	1452.2
12.5°	1432.6	1434.5	1436.3	1437.1	1436.8	1436.4	1436.1	1435.8
15°	1404.1	1406.4	1408.7	1409.0	1407.3	1405.5	1403.8	1402.1
17.5°	1368.1	1369.7	1371.3	1371.8	1371.2	1370.6	1369.9	1369.3
20°	1341.5	1342.7	1343.9	1344.0	1343.1	1342.3	1341.4	1340.6
22.5°	1313.4	1314.3	1315.2	1315.1	1314.1	1313.0	1311.9	1310.8
25°	1266.7	1267.1	1267.3	1267.1	1266.1	1265.3	1264.4	1263.6
27.5°	1217.1	1217.3	1217.6	1217.1	1216.1	1214.9	1213.9	1212.8
30°	1182.8	1182.8	1182.8	1181.8	1179.8	1177.8	1175.8	1173.7
32.5°	1146.7	1145.2	1143.6	1142.2	1141.1	1140.0	1139.0	1137.8
35°	1088.3	1086.6	1084.9	1083.3	1081.9	1080.4	1079.0	1077.6
37.5°	1027.8	1025.8	1023.7	1022.2	1021.3	1020.4	1019.5	1018.6
40°	988.4	986.1	983.8	982.0	980.9	979.8	978.6	977.5
42.5°	947.3	945.0	942.7	941.0	939.9	938.8	937.6	936.5
45°	886.0	882.6	879.2	876.8	875.3	873.9	872.5	871.0
47.5°	821.4	818.1	814.7	812.5	811.2	809.9	808.7	807.4
50°	778.8	775.7	772.5	770.2	768.5	766.7	765.0	763.3
52.5°	735.6	732.9	730.3	728.0	726.3	724.6	722.9	721.2
55°	669.8	666.7	663.5	661.2	659.8	658.4	657.0	655.5
57.5°	605.0	602.3	599.5	597.2	595.6	593.9	592.3	590.6
60°	559.3	556.8	554.2	552.2	550.7	549.3	547.9	546.5
62.5°	515.2	512.6	510.0	508.3	507.3	506.3	505.4	504.4
65°	449.6	447.2	445.0	443.5	442.6	441.8	440.8	440.0
67.5°	384.5	382.5	380.5	378.9	377.7	376.5	375.2	374.1
70°	342.3	340.4	338.4	336.7	335.3	333.8	332.4	330.9
72.5°	299.7	297.9	296.1	294.9	294.2	293.4	292.8	292.0
75°	238.4	236.9	235.4	234.3	233.5	232.6	231.8	230.9
77.5°	181.0	180.0	179.1	178.6	178.6	178.6	178.6	178.6
80°	144.4	144.1	143.8	143.6	143.6	143.6	143.6	143.6
82.5°	111.1	110.6	110.1	109.7	109.4	109.2	109.1	108.8
85°	63.0	62.4	61.8	61.5	61.5	61.5	61.5	61.5
87.5°	27.6	27.6	27.6	27.9	27.7	27.9	28.1	27.9
90°	27.3	28.5	29.6	31.8	30.6	31.8	32.9	31.8
92.5°	92.2	73.1	64.6	58.9	56.9	53.6	54.8	52.8
95°	394.3	267.2	209.2	169.8	148.9	139.1	131.4	127.1
97.5°	982.7	787.1	645.9	514.9	434.1	384.8	355.2	345.8
100°	1291.1	1202.4	1074.3	918.8	808.1	728.2	685.5	686.6
102.5°	1393.6	1390.7	1316.1	1217.5	1131.4	1068.2	1032.5	1007.3
105°	1423.6	1533.1	1554.0	1525.5	1475.1	1433.5	1398.5	1393.0
107.5°	1337.3	1515.1	1611.1	1650.1	1651.0	1636.9	1625.1	1615.0
110°	1255.0	1456.5	1594.5	1671.1	1701.8	1710.5	1708.4	1706.2



TEST NUMBER: P332044-830

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1173.5	1379.4	1534.0	1632.6	1688.7	1715.8	1724.1	1724.6
115°	1065.5	1256.0	1417.0	1536.4	1618.5	1666.7	1688.7	1694.1
117.5°	987.3	1151.8	1296.4	1417.5	1503.2	1558.3	1589.9	1597.3
120°	946.1	1094.0	1225.4	1336.1	1422.5	1483.8	1510.1	1516.7
122.5°	913.7	1047.5	1169.3	1272.1	1349.0	1404.1	1433.0	1441.3
125°	870.6	990.0	1095.0	1182.7	1252.8	1301.0	1328.3	1336.1
127.5°	832.9	939.3	1034.2	1113.9	1176.4	1217.5	1242.3	1249.2
130°	809.3	907.9	996.6	1071.0	1129.1	1168.5	1191.5	1200.2
132.5°	787.4	878.1	960.6	1031.6	1086.1	1125.5	1145.9	1152.1
135°	757.8	835.6	906.7	969.1	1022.8	1055.6	1075.3	1083.1
137.5°	730.8	794.6	855.9	910.0	955.2	988.4	1005.0	1010.1
140°	715.1	770.9	823.5	870.6	912.2	942.9	960.4	959.3
142.5°	700.2	748.2	793.7	834.7	870.2	897.3	913.0	912.0
145°	682.2	718.4	753.5	785.1	812.6	835.6	844.3	846.5
147.5°	667.6	696.3	724.5	747.1	767.9	783.4	791.7	792.6
150°	657.0	682.2	705.2	726.0	742.4	754.5	761.1	761.1
152.5°	647.4	669.1	689.5	706.8	719.7	730.8	734.8	734.8
155°	632.9	650.4	666.9	680.0	689.9	698.7	700.9	701.9
157.5°	617.6	632.4	645.0	655.3	663.8	670.4	672.1	671.9
160°	608.9	620.9	631.9	639.5	647.2	653.7	653.7	652.7
162.5°	598.3	608.7	618.7	625.5	630.6	636.2	636.2	635.2
165°	584.8	591.4	599.0	604.5	608.9	613.2	612.2	612.2
167.5°	573.0	578.0	582.4	586.4	588.2	591.4	590.2	590.2
170°	565.1	568.4	572.7	575.0	576.0	578.2	577.1	577.1
172.5°	558.1	560.4	564.0	565.2	565.5	567.7	565.7	564.9
175°	548.7	549.7	552.0	552.0	552.0	553.0	552.0	550.8
177.5°	542.7	543.6	544.5	544.5	543.6	544.5	542.7	542.7
180°	541.0	541.0	541.0	541.0	541.0	541.0	541.0	541.0

(END OF REPORT)