

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831073

Luminaire Tested: S123DIP-S1000D1195U830-4F0-1E-UDD-G1

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P831073
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-9)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-S1000D1195U830-4F0-1E-UDD-G1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8211.0 lumens
Efficiency: N/A
Efficacy: 124.2 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 66.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P831073

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-G1

Luminous Intensity Polar Plot

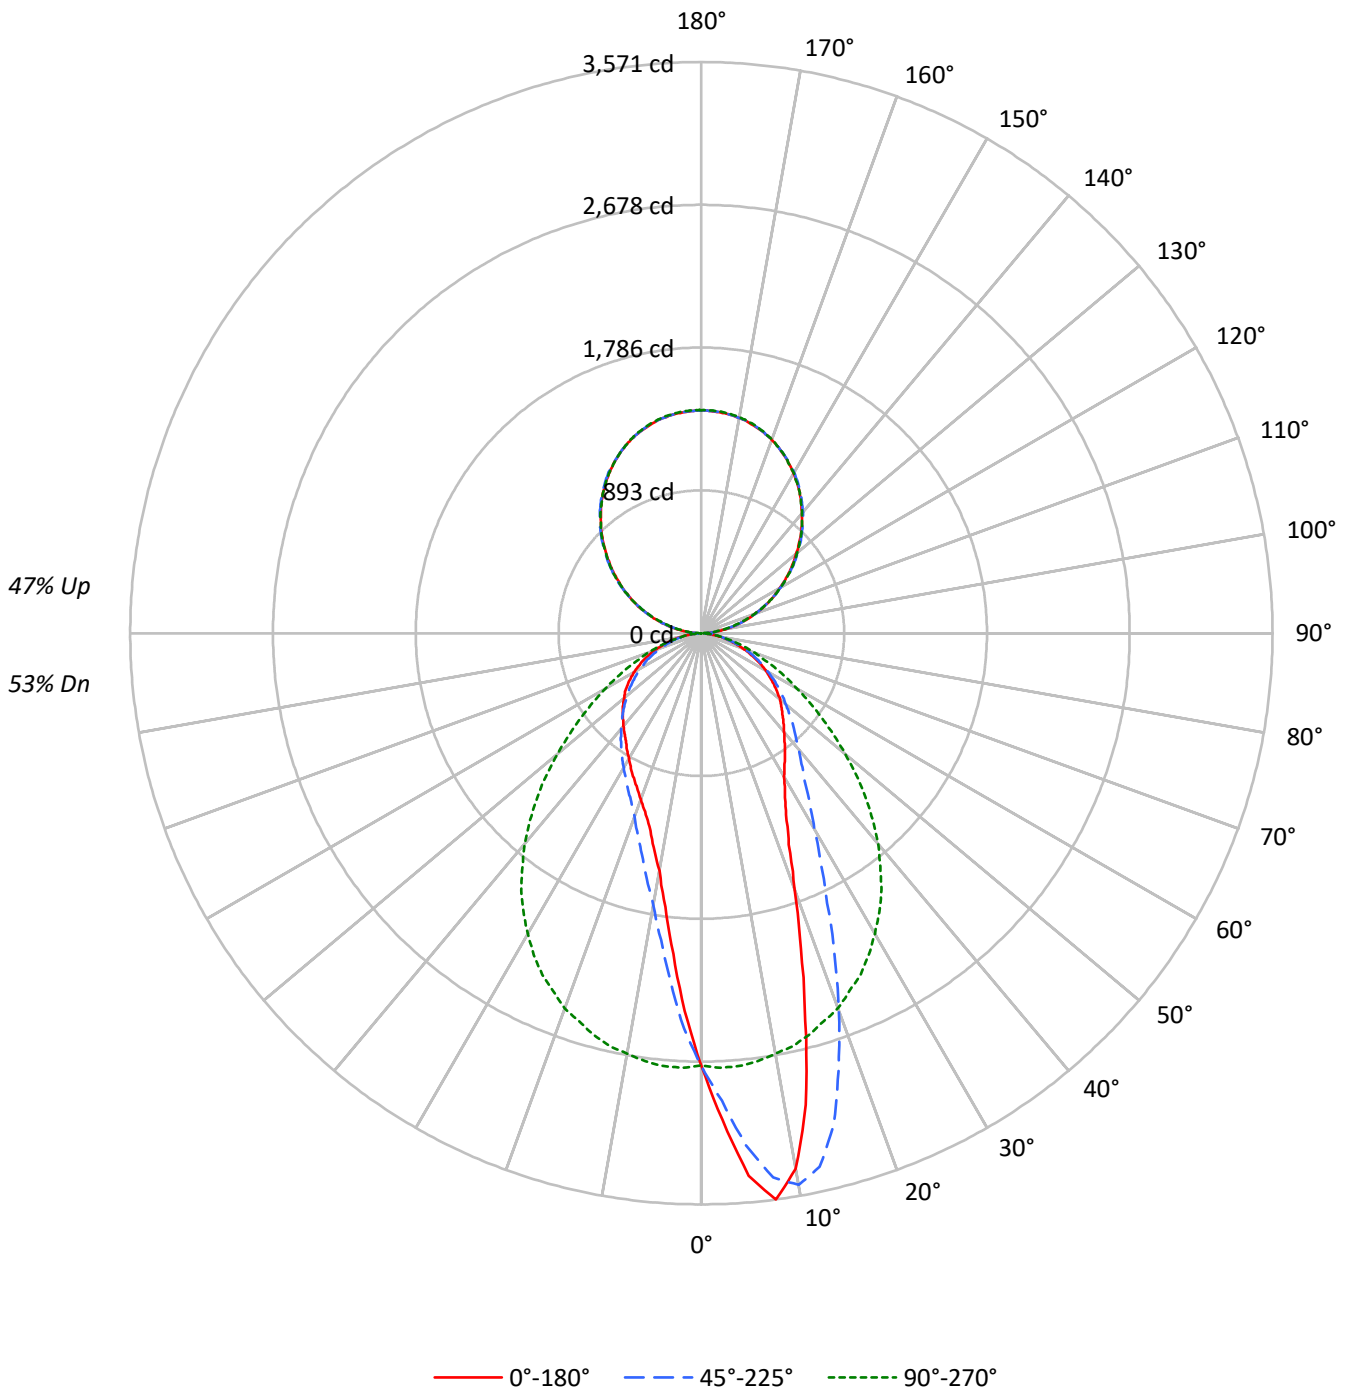



TEST NUMBER: P831073

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-G1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20				
RC	80					70					50					30				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	53		
1	99	95	91	88	92	88	85	82	75	73	71	64	62	60	53	52	51	46		
2	91	84	78	73	84	78	73	68	67	63	60	57	54	51	47	45	44	39		
3	83	74	67	61	77	69	63	58	59	55	51	51	47	44	42	40	38	34		
4	76	66	58	53	71	62	55	50	53	48	44	46	42	39	38	36	33	30		
5	70	59	51	46	65	55	48	43	48	43	39	41	37	34	35	32	30	26		
6	65	54	46	40	60	50	43	38	44	38	34	38	33	30	32	29	26	24		
7	61	49	41	36	56	46	39	34	40	34	30	35	30	27	30	26	24	21		
8	56	44	37	32	52	42	35	30	37	31	27	32	28	25	27	24	22	19		
9	53	41	34	29	49	38	32	27	34	29	25	30	25	22	26	22	20	18		
10	49	38	31	26	46	36	29	25	31	26	23	28	23	20	24	21	18	16		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	29096	29096	29096	29096	29096
5°	36798	34731	29356	23658	21740
10°	37154	38278	29161	18859	16479
15°	27984	35539	28962	15970	13936
20°	19498	28758	28593	13966	12659
25°	14867	22116	27962	12849	11873
30°	12862	17571	26956	12059	11241
35°	11934	14834	25796	11489	10796
40°	11297	13307	24164	10946	10645
45°	10922	12317	22092	10520	10578
50°	10734	11531	19639	10134	10523
55°	10335	10958	17231	9770	10569
60°	9965	10342	14852	9425	10396
65°	9360	9760	12811	9057	10190
70°	8645	9020	10895	8447	9593
75°	7827	8085	9337	7852	8763
80°	6453	7073	7389	6843	7389
85°	5113	5730	5422	5805	5891

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 25224 cd/sqm



TEST NUMBER: P831073

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-G1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	255.6	3.1
10°-20°	635.8	7.7
20°-30°	752.8	9.2
30°-40°	756.9	9.2
40°-50°	694.4	8.5
50°-60°	573.2	7.0
60°-70°	405.4	4.9
70°-80°	216.4	2.6
80°-90°	57.9	0.7
90°-100°	89.7	1.1
100°-110°	271.6	3.3
110°-120°	462.4	5.6
120°-130°	608.3	7.4
130°-140°	683.8	8.3
140°-150°	672.2	8.2
150°-160°	565.9	6.9
160°-170°	376.8	4.6
170°-180°	131.9	1.6
0°-30°	1644.1	20.0
0°-40°	2401.0	29.2
0°-60°	3668.6	44.7
0°-90°	4348.3	53.0
90°-120°	823.8	10.0
90°-150°	2788.1	34.0
90°-180°	3863.0	47.0
0°-180°	8211.0	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	2703	2703	2703	2703	2703	
5°	3406	3214	2717	2190	2012	324
15°	2511	3189	2599	1433	1251	694
25°	1252	1862	2354	1082	1000	591
35°	908	1129	1963	874	822	571
45°	718	809	1451	691	695	556
55°	551	584	918	521	563	493
65°	368	383	503	356	400	365
75°	188	194	224	189	211	198
85°	41	46	44	47	48	46
90°	33	26	1	26	33	18
95°	85	81	65	81	85	86
105°	261	258	246	258	261	276
115°	466	466	465	466	466	462
125°	674	682	681	682	674	602
135°	883	889	884	889	883	679
145°	1072	1078	1072	1078	1072	670
155°	1225	1229	1228	1229	1225	565
165°	1333	1334	1337	1334	1333	376
175°	1385	1386	1391	1386	1385	132
180°	1394	1394	1394	1394	1394	



TEST NUMBER: P831073

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1
2.5°	3046.8	3043.7	3040.5	3024.9	3009.2	3001.7	2994.1	2971.6	2949.0	2923.9	2898.8
5°	3405.6	3414.3	3423.1	3413.1	3403.1	3372.3	3341.6	3300.8	3260.1	3214.3	3168.5
7.5°	3571.1	3576.2	3581.2	3574.9	3568.6	3560.5	3552.3	3515.9	3479.6	3432.5	3385.5
10°	3399.3	3410.6	3421.9	3446.3	3470.8	3498.4	3526.0	3521.0	3515.9	3502.1	3488.4
12.5°	3021.7	3035.5	3049.3	3098.2	3147.2	3209.9	3272.6	3326.5	3380.5	3418.1	3455.7
15°	2511.2	2549.5	2587.7	2632.3	2676.8	2769.0	2861.2	2974.7	3088.2	3189.2	3290.2
17.5°	2068.4	2082.9	2097.3	2144.9	2192.6	2308.6	2424.7	2555.7	2686.8	2854.3	3021.7
20°	1702.2	1715.3	1728.5	1791.2	1853.9	1944.9	2035.8	2183.2	2330.6	2510.6	2690.6
22.5°	1430.0	1450.7	1471.4	1506.5	1541.6	1628.8	1716.0	1847.0	1978.1	2176.9	2375.7
25°	1251.8	1266.9	1281.9	1303.3	1324.6	1394.2	1463.8	1571.7	1679.6	1862.1	2044.6
27.5°	1130.2	1136.4	1142.7	1164.0	1185.4	1230.5	1275.7	1368.5	1461.3	1616.2	1771.1
30°	1034.8	1039.2	1043.6	1062.4	1081.3	1112.0	1142.7	1209.8	1276.9	1413.7	1550.4
32.5°	968.4	971.5	974.6	989.1	1003.5	1025.4	1047.4	1096.3	1145.2	1258.1	1371.0
35°	908.2	910.0	911.9	922.6	933.2	949.5	965.9	1002.9	1039.9	1128.9	1218.0
37.5°	855.5	858.0	860.5	866.8	873.0	887.5	901.9	931.4	960.8	1029.2	1097.6
40°	804.0	808.4	812.8	817.2	821.6	833.5	845.4	868.0	890.6	947.0	1003.5
42.5°	760.1	764.5	768.9	770.8	772.7	779.6	786.5	807.2	827.9	869.9	911.9
45°	717.5	719.4	721.3	723.1	725.0	730.7	736.3	754.5	772.7	809.1	845.4
47.5°	678.6	678.6	678.6	679.9	681.1	686.1	691.1	704.3	717.5	745.7	773.9
50°	641.0	641.0	641.0	639.1	637.2	640.3	643.5	653.5	663.6	688.6	713.7
52.5°	595.8	595.8	595.8	596.4	597.1	597.1	597.1	605.9	614.6	637.2	659.8
55°	550.7	553.2	555.7	553.8	551.9	553.2	554.4	560.1	565.7	583.9	602.1
57.5°	505.5	506.8	508.0	507.4	506.8	507.4	508.0	513.0	518.0	531.8	545.6
60°	462.9	462.9	462.9	461.6	460.3	461.6	462.9	465.4	467.9	480.4	493.0
62.5°	415.2	415.8	416.4	417.1	417.7	416.4	415.2	418.3	421.5	430.9	440.3
65°	367.5	368.2	368.8	370.7	372.5	371.3	370.0	373.2	376.3	383.2	390.1
67.5°	324.9	323.6	322.4	323.0	323.6	325.5	327.4	328.0	328.6	336.2	343.7
70°	274.7	276.0	277.2	276.6	276.0	276.6	277.2	279.1	281.0	286.6	292.3
72.5°	229.5	230.2	230.8	230.8	230.8	232.1	233.3	235.2	237.1	240.2	243.3
75°	188.2	188.2	188.2	189.4	190.7	191.3	191.9	191.9	191.9	194.4	196.9
77.5°	143.0	146.1	149.3	148.6	148.0	149.3	150.5	152.4	154.3	155.5	156.8
80°	104.1	104.1	104.1	104.7	105.4	107.2	109.1	110.4	111.6	114.1	116.7
82.5°	66.5	67.1	67.7	69.6	71.5	72.8	74.0	75.9	77.8	77.8	77.8
85°	41.4	40.1	38.9	40.1	41.4	42.6	43.9	44.5	45.2	46.4	47.7
87.5°	20.1	20.1	20.1	20.1	20.1	20.7	21.3	21.3	21.3	21.3	21.3
90°	32.9	32.4	31.9	31.4	30.9	30.2	29.2	28.2	27.3	26.3	23.1
92.5°	47.1	47.6	48.1	48.6	49.0	48.9	48.2	47.5	46.7	46.0	44.5
95°	85.4	85.4	85.4	85.4	85.4	84.9	84.0	83.0	82.0	81.0	79.1
97.5°	122.7	122.9	123.1	123.4	123.6	123.1	121.9	120.7	119.5	118.3	116.8
100°	166.5	166.0	165.5	165.0	164.5	163.9	163.2	162.4	161.7	161.0	159.8
102.5°	211.4	211.6	211.8	212.1	212.3	212.1	211.4	210.6	209.9	209.2	207.5
105°	260.6	260.2	259.7	259.2	258.7	258.4	258.4	258.4	258.4	258.4	256.3
107.5°	311.0	311.3	311.5	311.7	312.0	311.7	311.0	310.3	309.6	308.8	307.9
110°	362.5	363.0	363.5	363.9	364.4	364.2	363.2	362.2	361.3	360.3	359.8



TEST NUMBER: P831073

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	417.2	417.2	417.2	417.2	417.2	416.6	415.4	414.2	413.0	411.8	411.8
115°	466.5	466.8	467.0	467.3	467.5	467.5	467.3	467.0	466.8	466.5	467.0
117.5°	516.9	517.6	518.4	519.1	519.8	520.2	520.2	520.2	520.2	520.2	520.7
120°	570.6	571.0	571.5	572.0	572.5	572.9	573.1	573.4	573.6	573.8	575.1
122.5°	622.0	622.8	623.5	624.2	624.9	625.7	626.4	627.1	627.9	628.6	629.1
125°	673.5	674.5	675.4	676.4	677.4	678.4	679.3	680.3	681.3	682.3	682.7
127.5°	725.0	725.9	726.9	727.9	728.9	730.1	731.5	733.0	734.5	735.9	736.4
130°	775.3	777.1	778.8	780.5	782.2	783.5	784.5	785.4	786.4	787.4	788.1
132.5°	827.9	829.1	830.3	831.6	832.8	834.0	835.2	836.4	837.6	838.9	839.4
135°	882.7	883.2	883.6	884.1	884.6	885.3	886.3	887.3	888.3	889.2	889.5
137.5°	930.9	931.6	932.3	933.0	933.8	934.7	936.0	937.2	938.4	939.6	938.9
140°	977.9	979.6	981.4	983.1	984.8	985.7	986.0	986.2	986.5	986.7	986.5
142.5°	1026.1	1027.3	1028.6	1029.8	1031.0	1031.7	1032.0	1032.2	1032.5	1032.7	1032.2
145°	1072.1	1073.1	1074.1	1075.0	1076.0	1076.6	1076.9	1077.1	1077.4	1077.6	1076.9
147.5°	1113.7	1115.2	1116.7	1118.1	1119.6	1120.3	1120.3	1120.3	1120.3	1120.3	1119.6
150°	1153.2	1154.6	1156.1	1157.5	1159.0	1159.7	1159.7	1159.7	1159.7	1159.7	1159.2
152.5°	1191.5	1192.7	1193.9	1195.1	1196.4	1196.7	1196.2	1195.8	1195.3	1194.8	1194.5
155°	1225.4	1227.1	1228.8	1230.6	1232.3	1232.6	1231.6	1230.7	1229.7	1228.7	1228.5
157.5°	1257.2	1258.7	1260.1	1261.6	1263.0	1263.3	1262.3	1261.3	1260.4	1259.4	1259.1
160°	1287.9	1288.8	1289.8	1290.8	1291.8	1291.6	1290.4	1289.2	1288.0	1286.8	1286.8
162.5°	1310.9	1312.6	1314.3	1316.0	1317.7	1317.9	1316.7	1315.5	1314.3	1313.1	1312.8
165°	1332.8	1334.5	1336.2	1337.9	1339.6	1339.7	1338.2	1336.8	1335.3	1333.9	1333.9
167.5°	1352.5	1353.9	1355.4	1356.9	1358.3	1358.3	1356.9	1355.4	1353.9	1352.5	1352.2
170°	1366.7	1368.4	1370.1	1371.8	1373.5	1373.5	1371.8	1370.1	1368.4	1366.7	1366.7
172.5°	1377.7	1379.4	1381.1	1382.8	1384.5	1384.6	1383.1	1381.7	1380.2	1378.8	1378.8
175°	1385.3	1387.0	1388.7	1390.4	1392.1	1392.3	1390.8	1389.3	1387.9	1386.4	1386.4
177.5°	1389.7	1391.4	1393.1	1394.8	1396.5	1396.6	1395.2	1393.7	1392.3	1390.8	1390.8
180°	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1



TEST NUMBER: P831073

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1
2.5°	2891.3	2883.8	2856.2	2828.6	2797.2	2765.8	2742.6	2719.4	2684.9	2650.4	2622.2
5°	3133.4	3098.2	3039.9	2981.6	2902.6	2823.5	2770.2	2716.9	2645.4	2573.9	2516.9
7.5°	3325.3	3265.1	3183.5	3102.0	2998.5	2895.0	2797.2	2699.4	2590.2	2481.1	2392.0
10°	3447.6	3406.8	3312.7	3218.7	3080.1	2941.5	2804.7	2668.0	2527.5	2387.0	2269.1
12.5°	3459.5	3463.3	3376.7	3290.2	3133.4	2976.6	2810.4	2644.2	2467.3	2290.4	2153.1
15°	3354.8	3419.4	3371.7	3324.0	3166.0	3007.9	2803.5	2599.0	2395.2	2191.4	2032.7
17.5°	3160.3	3298.9	3305.8	3312.7	3154.7	2996.6	2770.2	2543.8	2313.0	2082.2	1915.4
20°	2895.0	3099.5	3169.7	3240.0	3111.4	2982.8	2739.5	2496.2	2237.8	1979.4	1804.4
22.5°	2624.1	2872.5	3001.0	3129.6	3034.3	2938.9	2679.9	2420.9	2148.1	1875.3	1697.8
25°	2315.5	2586.5	2784.0	2981.6	2923.3	2864.9	2609.7	2354.4	2064.0	1773.7	1592.4
27.5°	2046.5	2321.8	2560.1	2798.5	2785.9	2773.4	2520.0	2266.6	1969.3	1672.1	1497.1
30°	1806.9	2063.4	2330.0	2596.5	2627.2	2658.0	2413.4	2168.8	1870.9	1573.0	1404.2
32.5°	1594.9	1818.8	2104.8	2390.8	2451.0	2511.2	2290.4	2069.7	1774.9	1480.1	1317.7
35°	1421.2	1624.4	1910.4	2196.4	2271.6	2346.9	2155.0	1963.1	1675.8	1388.6	1233.7
37.5°	1267.5	1437.5	1716.6	1995.7	2087.9	2180.1	2008.2	1836.4	1567.3	1298.3	1155.9
40°	1140.2	1276.9	1533.4	1790.0	1896.6	2003.2	1861.5	1719.7	1464.5	1209.2	1078.1
42.5°	1033.6	1155.3	1387.9	1620.6	1722.9	1825.1	1705.3	1585.5	1358.5	1131.4	1011.6
45°	942.6	1039.9	1251.2	1462.6	1559.8	1657.0	1554.1	1451.3	1251.2	1051.1	939.5
47.5°	857.3	940.8	1121.4	1302.0	1388.6	1475.1	1394.8	1314.6	1145.2	975.9	874.9
50°	780.8	847.9	1006.0	1164.0	1239.3	1314.6	1243.7	1172.8	1033.6	894.4	806.5
52.5°	714.4	768.9	901.3	1033.6	1098.2	1162.8	1101.9	1041.1	930.7	820.3	743.8
55°	648.5	694.9	809.7	924.5	968.4	1012.3	965.2	918.2	829.1	740.1	675.5
57.5°	587.0	628.4	722.5	816.6	850.5	884.3	841.7	799.0	731.9	664.8	610.9
60°	526.8	560.7	639.1	717.5	738.2	758.9	724.4	689.9	642.9	595.8	547.5
62.5°	471.0	501.7	560.1	618.4	632.2	646.0	619.6	593.3	557.6	521.8	484.2
65°	413.3	436.5	484.2	531.8	540.6	549.4	526.2	503.0	476.0	449.1	421.5
67.5°	360.0	376.3	415.2	454.1	454.7	455.3	436.5	417.7	402.6	387.6	365.6
70°	307.9	323.6	349.3	375.1	375.7	376.3	361.3	346.2	334.9	323.6	307.3
72.5°	254.6	265.9	285.4	304.8	303.6	302.3	292.9	283.5	274.7	265.9	254.0
75°	206.3	215.7	228.9	242.1	238.3	234.6	229.5	224.5	217.0	209.5	202.0
77.5°	162.4	168.1	175.6	183.1	180.6	178.1	173.7	169.3	163.7	158.0	154.9
80°	119.2	121.7	126.7	131.7	130.5	129.2	124.2	119.2	117.9	116.7	112.3
82.5°	80.9	84.0	85.3	86.6	85.9	85.3	81.5	77.8	76.5	75.3	74.6
85°	48.3	48.9	49.5	50.2	48.3	46.4	45.2	43.9	43.9	43.9	43.3
87.5°	22.0	22.6	22.6	22.6	22.0	21.3	20.1	18.8	19.4	20.1	20.1
90°	20.0	16.8	13.6	10.8	8.4	6.0	3.5	1.1	3.5	6.0	8.4
92.5°	43.1	41.6	40.2	38.7	37.2	35.8	34.3	32.9	34.3	35.8	37.2
95°	77.1	75.2	73.3	71.4	69.7	68.0	66.3	64.6	66.3	68.0	69.7
97.5°	115.4	113.9	112.4	111.1	109.9	108.7	107.4	106.2	107.4	108.7	109.9
100°	158.5	157.3	156.1	154.8	153.3	151.9	150.4	148.9	150.4	151.9	153.3
102.5°	205.8	204.1	202.4	201.1	200.4	199.7	198.9	198.2	198.9	199.7	200.4
105°	254.1	251.9	249.7	248.3	247.9	247.4	246.9	246.4	246.9	247.4	247.9
107.5°	306.9	305.9	304.9	304.3	304.1	303.8	303.6	303.3	303.6	303.8	304.1
110°	359.3	358.8	358.3	357.9	357.4	356.9	356.4	355.9	356.4	356.9	357.4



TEST NUMBER: P831073

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	411.8	411.8	411.8	411.6	411.4	411.2	410.9	410.7	410.9	411.2	411.4
115°	467.5	468.0	468.5	468.3	467.6	466.9	466.2	465.4	466.2	466.9	467.6
117.5°	521.2	521.6	522.1	522.3	522.0	521.8	521.5	521.3	521.5	521.8	522.0
120°	576.3	577.5	578.7	578.6	577.1	575.7	574.2	572.7	574.2	575.7	577.1
122.5°	629.6	630.1	630.5	630.3	629.3	628.4	627.4	626.4	627.4	628.4	629.3
125°	683.2	683.7	684.2	684.1	683.4	682.6	681.9	681.2	681.9	682.6	683.4
127.5°	736.9	737.4	737.9	737.4	735.9	734.5	733.0	731.5	733.0	734.5	735.9
130°	788.9	789.6	790.3	789.7	787.8	785.8	783.9	781.9	783.9	785.8	787.8
132.5°	839.8	840.3	840.8	840.1	838.1	836.2	834.2	832.3	834.2	836.2	838.1
135°	889.7	890.0	890.2	889.6	888.1	886.7	885.2	883.8	885.2	886.7	888.1
137.5°	938.2	937.4	936.7	935.7	934.5	933.3	932.1	930.9	932.1	933.3	934.5
140°	986.2	986.0	985.7	985.0	983.8	982.6	981.4	980.1	981.4	982.6	983.8
142.5°	1031.7	1031.2	1030.8	1029.9	1028.7	1027.5	1026.3	1025.0	1026.3	1027.5	1028.7
145°	1076.1	1075.4	1074.7	1074.1	1073.6	1073.1	1072.6	1072.1	1072.6	1073.1	1073.6
147.5°	1118.9	1118.1	1117.4	1116.5	1115.6	1114.6	1113.6	1112.6	1113.6	1114.6	1115.6
150°	1158.8	1158.3	1157.8	1157.3	1156.8	1156.3	1155.8	1155.4	1155.8	1156.3	1156.8
152.5°	1194.3	1194.0	1193.8	1193.3	1192.6	1191.9	1191.1	1190.4	1191.1	1191.9	1192.6
155°	1228.2	1228.0	1227.8	1227.6	1227.6	1227.6	1227.6	1227.6	1227.6	1227.6	1227.6
157.5°	1258.9	1258.7	1258.4	1258.4	1258.7	1258.9	1259.1	1259.4	1259.1	1258.9	1258.7
160°	1286.8	1286.8	1286.8	1287.0	1287.5	1288.0	1288.5	1289.0	1288.5	1288.0	1287.5
162.5°	1312.6	1312.3	1312.1	1312.3	1313.1	1313.8	1314.5	1315.2	1314.5	1313.8	1313.1
165°	1333.9	1333.9	1333.9	1334.2	1335.0	1335.7	1336.4	1337.1	1336.4	1335.7	1335.0
167.5°	1352.0	1351.7	1351.5	1351.9	1352.8	1353.8	1354.8	1355.8	1354.8	1353.8	1352.8
170°	1366.7	1366.7	1366.7	1367.2	1368.2	1369.1	1370.1	1371.1	1370.1	1369.1	1368.2
172.5°	1378.8	1378.8	1378.8	1379.2	1380.2	1381.2	1382.2	1383.1	1382.2	1381.2	1380.2
175°	1386.4	1386.4	1386.4	1386.9	1387.9	1388.9	1389.8	1390.8	1389.8	1388.9	1387.9
177.5°	1390.8	1390.8	1390.8	1391.3	1392.3	1393.2	1394.2	1395.2	1394.2	1393.2	1392.3
180°	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1



TEST NUMBER: P831073

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1	2703.1
2.5°	2594.0	2569.5	2545.1	2526.3	2507.4	2475.5	2443.5	2436.0	2428.4	2417.8	2407.1
5°	2459.8	2399.6	2339.4	2285.4	2231.5	2189.5	2147.4	2119.9	2092.3	2072.2	2052.1
7.5°	2303.0	2212.7	2122.4	2058.4	1994.4	1933.6	1872.7	1853.3	1833.9	1807.5	1781.2
10°	2151.2	2051.5	1951.8	1868.4	1784.9	1725.4	1665.8	1641.9	1618.1	1584.9	1551.6
12.5°	2015.7	1906.6	1797.5	1713.4	1629.4	1571.7	1514.0	1479.5	1445.0	1426.2	1407.4
15°	1874.0	1757.3	1640.7	1562.9	1485.2	1433.1	1381.0	1350.9	1320.8	1302.6	1284.5
17.5°	1748.6	1633.2	1517.8	1443.1	1368.5	1320.8	1273.2	1246.8	1220.5	1206.7	1192.9
20°	1629.4	1516.5	1403.6	1330.9	1258.1	1219.2	1180.3	1163.4	1146.5	1135.2	1123.9
22.5°	1520.3	1409.3	1298.3	1236.2	1174.1	1142.7	1111.4	1099.4	1087.5	1078.1	1068.7
25°	1411.1	1312.1	1213.0	1160.3	1107.6	1081.9	1056.2	1044.2	1032.3	1022.9	1013.5
27.5°	1322.1	1227.4	1132.7	1087.5	1042.4	1022.3	1002.2	992.8	983.4	974.6	965.9
30°	1235.5	1150.9	1066.2	1027.3	988.4	970.2	952.1	942.6	933.2	925.1	916.9
32.5°	1155.3	1082.5	1009.8	974.0	938.3	923.2	908.2	896.9	885.6	879.3	873.0
35°	1078.7	1013.5	948.3	918.8	889.3	874.3	859.2	849.8	840.4	835.4	830.4
37.5°	1013.5	955.2	896.9	868.6	840.4	826.0	811.6	803.4	795.3	793.4	791.5
40°	947.0	896.9	846.7	819.1	791.5	779.0	766.4	761.4	756.4	755.1	753.9
42.5°	891.8	842.9	794.0	768.9	743.8	733.2	722.5	720.0	717.5	719.4	721.3
45°	827.9	787.1	746.3	723.1	699.9	691.1	682.4	680.5	678.6	682.4	686.1
47.5°	773.9	736.3	698.7	676.7	654.8	648.5	642.2	641.6	641.0	646.0	651.0
50°	718.7	682.4	646.0	628.4	610.9	605.2	599.6	601.5	603.3	611.5	619.6
52.5°	667.3	633.4	599.6	583.3	567.0	563.2	559.4	563.8	568.2	577.0	585.8
55°	610.9	580.1	549.4	536.9	524.3	520.6	516.8	525.6	534.4	542.5	550.7
57.5°	556.9	530.0	503.0	491.7	480.4	479.8	479.2	487.3	495.5	504.2	513.0
60°	499.2	476.7	454.1	445.3	436.5	437.8	439.0	448.4	457.8	464.7	471.6
62.5°	446.5	427.7	408.9	400.8	392.6	395.7	398.9	408.3	417.7	425.9	434.0
65°	393.9	378.2	362.5	356.9	351.2	355.6	360.0	368.2	376.3	382.0	387.6
67.5°	343.7	330.5	317.4	313.0	308.6	313.0	317.4	325.5	333.7	339.3	344.9
70°	291.0	280.3	269.7	266.5	263.4	268.4	273.4	280.3	287.2	292.9	298.5
72.5°	242.1	233.9	225.8	225.2	224.5	228.9	233.3	240.2	247.1	250.9	254.6
75°	194.4	190.0	185.6	185.0	184.4	188.8	193.2	196.9	200.7	203.8	207.0
77.5°	151.8	148.0	144.3	144.9	145.5	148.6	151.8	155.5	159.3	161.2	163.1
80°	107.9	106.6	105.4	106.6	107.9	110.4	112.9	115.4	117.9	119.2	120.4
82.5°	74.0	72.8	71.5	73.4	75.3	77.1	79.0	80.9	82.8	83.4	84.0
85°	42.6	44.5	46.4	46.4	46.4	47.0	47.7	48.3	48.9	48.3	47.7
87.5°	20.1	20.7	21.3	21.3	21.3	22.0	22.6	22.6	22.6	22.0	21.3
90°	10.8	13.6	16.8	20.0	23.1	26.3	27.3	28.2	29.2	30.2	30.9
92.5°	38.7	40.2	41.6	43.1	44.5	46.0	46.7	47.5	48.2	48.9	49.0
95°	71.4	73.3	75.2	77.1	79.1	81.0	82.0	83.0	84.0	84.9	85.4
97.5°	111.1	112.4	113.9	115.4	116.8	118.3	119.5	120.7	121.9	123.1	123.6
100°	154.8	156.1	157.3	158.5	159.8	161.0	161.7	162.4	163.2	163.9	164.5
102.5°	201.1	202.4	204.1	205.8	207.5	209.2	209.9	210.6	211.4	212.1	212.3
105°	248.3	249.7	251.9	254.1	256.3	258.4	258.4	258.4	258.4	258.4	258.7
107.5°	304.3	304.9	305.9	306.9	307.9	308.8	309.6	310.3	311.0	311.7	312.0
110°	357.9	358.3	358.8	359.3	359.8	360.3	361.3	362.2	363.2	364.2	364.4



TEST NUMBER: P831073

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	411.6	411.8	411.8	411.8	411.8	411.8	413.0	414.2	415.4	416.6	417.2
115°	468.3	468.5	468.0	467.5	467.0	466.5	466.8	467.0	467.3	467.5	467.5
117.5°	522.3	522.1	521.6	521.2	520.7	520.2	520.2	520.2	520.2	520.2	519.8
120°	578.6	578.7	577.5	576.3	575.1	573.8	573.6	573.4	573.1	572.9	572.5
122.5°	630.3	630.5	630.1	629.6	629.1	628.6	627.9	627.1	626.4	625.7	624.9
125°	684.1	684.2	683.7	683.2	682.7	682.3	681.3	680.3	679.3	678.4	677.4
127.5°	737.4	737.9	737.4	736.9	736.4	735.9	734.5	733.0	731.5	730.1	728.9
130°	789.7	790.3	789.6	788.9	788.1	787.4	786.4	785.4	784.5	783.5	782.2
132.5°	840.1	840.8	840.3	839.8	839.4	838.9	837.6	836.4	835.2	834.0	832.8
135°	889.6	890.2	890.0	889.7	889.5	889.2	888.3	887.3	886.3	885.3	884.6
137.5°	935.7	936.7	937.4	938.2	938.9	939.6	938.4	937.2	936.0	934.7	933.8
140°	985.0	985.7	986.0	986.2	986.5	986.7	986.5	986.2	986.0	985.7	984.8
142.5°	1029.9	1030.8	1031.2	1031.7	1032.2	1032.7	1032.5	1032.2	1032.0	1031.7	1031.0
145°	1074.1	1074.7	1075.4	1076.1	1076.9	1077.6	1077.4	1077.1	1076.9	1076.6	1076.0
147.5°	1116.5	1117.4	1118.1	1118.9	1119.6	1120.3	1120.3	1120.3	1120.3	1120.3	1119.6
150°	1157.3	1157.8	1158.3	1158.8	1159.2	1159.7	1159.7	1159.7	1159.7	1159.7	1159.0
152.5°	1193.3	1193.8	1194.0	1194.3	1194.5	1194.8	1195.3	1195.8	1196.2	1196.7	1196.4
155°	1227.6	1227.8	1228.0	1228.2	1228.5	1228.7	1229.7	1230.7	1231.6	1232.6	1232.3
157.5°	1258.4	1258.4	1258.7	1258.9	1259.1	1259.4	1260.4	1261.3	1262.3	1263.3	1263.0
160°	1287.0	1286.8	1286.8	1286.8	1286.8	1286.8	1288.0	1289.2	1290.4	1291.6	1291.8
162.5°	1312.3	1312.1	1312.3	1312.6	1312.8	1313.1	1314.3	1315.5	1316.7	1317.9	1317.7
165°	1334.2	1333.9	1333.9	1333.9	1333.9	1333.9	1335.3	1336.8	1338.2	1339.7	1339.6
167.5°	1351.9	1351.5	1351.7	1352.0	1352.2	1352.5	1353.9	1355.4	1356.9	1358.3	1358.3
170°	1367.2	1366.7	1366.7	1366.7	1366.7	1366.7	1368.4	1370.1	1371.8	1373.5	1373.5
172.5°	1379.2	1378.8	1378.8	1378.8	1378.8	1378.8	1380.2	1381.7	1383.1	1384.6	1384.5
175°	1386.9	1386.4	1386.4	1386.4	1386.4	1386.4	1387.9	1389.3	1390.8	1392.3	1392.1
177.5°	1391.3	1390.8	1390.8	1390.8	1390.8	1390.8	1392.3	1393.7	1395.2	1396.6	1396.5
180°	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1



TEST NUMBER: P831073

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	2703.1	2703.1	2703.1	2703.1
2.5°	2402.7	2398.3	2380.8	2363.2
5°	2037.1	2022.0	2017.0	2012.0
7.5°	1779.9	1778.7	1752.3	1726.0
10°	1553.5	1555.4	1531.6	1507.7
12.5°	1391.7	1376.0	1374.1	1372.3
15°	1270.0	1255.6	1253.1	1250.6
17.5°	1184.1	1175.3	1172.8	1170.3
20°	1118.9	1113.9	1109.5	1105.1
22.5°	1062.4	1056.2	1052.4	1048.6
25°	1007.9	1002.2	1001.0	999.7
27.5°	959.0	952.1	952.1	952.1
30°	912.5	908.2	906.3	904.4
32.5°	869.3	865.5	865.5	865.5
35°	828.5	826.6	824.1	821.6
37.5°	791.5	791.5	790.2	789.0
40°	755.7	757.6	757.6	757.6
42.5°	723.1	725.0	725.0	725.0
45°	689.3	692.4	693.7	694.9
47.5°	656.0	661.0	662.3	663.6
50°	623.4	627.2	627.8	628.4
52.5°	590.2	594.6	597.7	600.8
55°	555.1	559.4	561.3	563.2
57.5°	517.4	521.8	522.4	523.1
60°	476.0	480.4	481.7	482.9
62.5°	436.5	439.0	440.3	441.5
65°	391.4	395.1	397.6	400.1
67.5°	348.1	351.2	351.2	351.2
70°	299.8	301.0	302.9	304.8
72.5°	255.3	255.9	255.9	255.9
75°	208.2	209.5	210.1	210.7
77.5°	163.7	164.3	164.3	164.3
80°	119.8	119.2	119.2	119.2
82.5°	82.2	80.3	80.3	80.3
85°	47.0	46.4	47.0	47.7
87.5°	21.3	21.3	21.3	21.3
90°	31.4	31.9	32.4	32.9
92.5°	48.6	48.1	47.6	47.1
95°	85.4	85.4	85.4	85.4
97.5°	123.4	123.1	122.9	122.7
100°	165.0	165.5	166.0	166.5
102.5°	212.1	211.8	211.6	211.4
105°	259.2	259.7	260.2	260.6
107.5°	311.7	311.5	311.3	311.0
110°	363.9	363.5	363.0	362.5



TEST NUMBER: P831073

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	417.2	417.2	417.2	417.2
115°	467.3	467.0	466.8	466.5
117.5°	519.1	518.4	517.6	516.9
120°	572.0	571.5	571.0	570.6
122.5°	624.2	623.5	622.8	622.0
125°	676.4	675.4	674.5	673.5
127.5°	727.9	726.9	725.9	725.0
130°	780.5	778.8	777.1	775.3
132.5°	831.6	830.3	829.1	827.9
135°	884.1	883.6	883.2	882.7
137.5°	933.0	932.3	931.6	930.9
140°	983.1	981.4	979.6	977.9
142.5°	1029.8	1028.6	1027.3	1026.1
145°	1075.0	1074.1	1073.1	1072.1
147.5°	1118.1	1116.7	1115.2	1113.7
150°	1157.5	1156.1	1154.6	1153.2
152.5°	1195.1	1193.9	1192.7	1191.5
155°	1230.6	1228.8	1227.1	1225.4
157.5°	1261.6	1260.1	1258.7	1257.2
160°	1290.8	1289.8	1288.8	1287.9
162.5°	1316.0	1314.3	1312.6	1310.9
165°	1337.9	1336.2	1334.5	1332.8
167.5°	1356.9	1355.4	1353.9	1352.5
170°	1371.8	1370.1	1368.4	1366.7
172.5°	1382.8	1381.1	1379.4	1377.7
175°	1390.4	1388.7	1387.0	1385.3
177.5°	1394.8	1393.1	1391.4	1389.7
180°	1394.1	1394.1	1394.1	1394.1



TEST NUMBER: P831073

CATALOG NUMBER: S123DIP-S1000D1195U830-4F0-1E-UDD-G1

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.55	16.40	16.49	17.35	18.58	17.79	18.64	18.73	19.59	20.82
	3H	17.20	17.96	18.15	18.92	20.17	19.21	19.97	20.16	20.93	22.19
	4H	17.77	18.49	18.74	19.46	20.72	19.66	20.38	20.63	21.34	22.61
	6H	18.14	18.81	19.12	19.78	21.05	19.94	20.60	20.91	21.57	22.84
	8H	18.24	18.87	19.22	19.86	21.13	20.00	20.63	20.98	21.61	22.89
	12H	18.29	18.88	19.27	19.86	21.16	20.02	20.62	21.00	21.60	22.89
4H	2H	16.12	16.84	17.10	17.81	19.07	17.95	18.67	18.92	19.63	20.90
	3H	17.95	18.55	18.93	19.55	20.82	19.57	20.17	20.55	21.16	22.44
	4H	18.65	19.20	19.64	20.18	21.49	20.15	20.70	21.14	21.69	22.99
	6H	19.12	19.59	20.12	20.61	21.91	20.56	21.03	21.56	22.04	23.34
	8H	19.26	19.70	20.26	20.70	22.02	20.67	21.11	21.67	22.11	23.42
	12H	19.33	19.72	20.35	20.74	22.06	20.71	21.11	21.73	22.13	23.45
8H	4H	18.92	19.35	19.92	20.36	21.67	20.26	20.69	21.26	21.70	23.01
	6H	19.50	19.87	20.53	20.91	22.22	20.76	21.12	21.78	22.17	23.48
	8H	19.71	20.03	20.75	21.06	22.39	20.94	21.26	21.97	22.29	23.62
	12H	19.83	20.11	20.87	21.14	22.52	21.04	21.32	22.08	22.35	23.72
12H	4H	18.92	19.31	19.94	20.33	21.65	20.23	20.63	21.25	21.65	22.96
	6H	19.55	19.87	20.59	20.91	22.24	20.77	21.09	21.81	22.12	23.45
	8H	19.79	20.07	20.82	21.09	22.47	20.97	21.25	22.01	22.28	23.65